

Motor controllers CMMS-ST, for stepper motors

FESTO



Motor controllers CMMS-ST, for stepper motors

Key features

FESTO

Comparison of motor controllers				
Motor controller for motor type	CMMD-AS Servo motor	CMMS-AS Servo motor	CMM-AS Servo motor	CMMS-ST Stepper motor
Positioning records	2x 63	63	255	63
Measuring system	Incremental/absolute		Analogue/incremental/ absolute	Incremental
Extended I/O interface	4 working modes		Flexibly configurable	4 working modes
Notification of remaining distance	1 for n		Separately for all positions	1 for n
Torque reduction	No		Separately for all positions	No
Set linking	Linear		With branching	Linear
STO/SS1	To EN 61800-5-2		To EN 61800-5-2	To EN 61800-5-2

Performance characteristics

Compactness

- Small dimensions
 - Full integration of all components for controller and power section, including RS232 and CANopen interface
 - Integrated brake chopper
 - Integrated EMC filters
- Automatic actuation for a holding brake
 - Adheres to the current CE and EN standards without additional external measures (motor cable length of up to 15 m)

Motion control

- Can be operated as a torque, speed or position controller
 - Integrated positioning controller
 - Time-optimised (trapezoidal) or jerk-free (S-shaped) positioning
 - Absolute and relative movements
 - Point-to-point positioning with and without approximate positioning
- Position synchronisation
 - Electronic gear unit
 - 63 position sets
 - 8 travel profiles
 - Wide range of homing methods

Fieldbus interfaces

Integrated:



Optional:



Input/output

- Freely programmable I/Os
- High-resolution 12-bit analogue input
- Jog/teach mode
- Simple linking to a higher-level controller via I/O or fieldbus
- Synchronous operation
- Master/slave mode

Integrated sequence control

- Automatic sequence of position sets without a higher-level controller
- Linear and cyclic position sequences
- Adjustable delay times

Integrated safety functions

- The motor controller CMMS-ST support "Safe Torque off (STO)" and "Safe Stop 1 (SS1)" functions with protection against unexpected startup in accordance with EN 61800-5-2

- Protection against unexpected start-up
- Two-channel disconnection of the output stage
- Shorter response times in the event of an error

Interpolating multi-axis movement

- With a suitable controller, the CMMS-ST can perform path movements with interpolation via CANopen. The controller specifies setpoint position values in a fixed

time pattern to this end. In between, the servo positioning controller independently interpolates the data values between two data points.

PROFIBUS®, DeviceNet®, CANopen® is a registered trademark of its respective trademark holder in certain countries.

Motor controllers CMMS-ST, for stepper motors

FESTO

Key features


Performance characteristics

Servo mode

- Encoder option (closed loop), in other words no step losses, following errors are corrected

Travel program

- Linking of any number of position sets into a travel program
- Step criteria for the travel program possible via digital inputs, for example
 - MC – motion complete
 - I/O – digital inputs

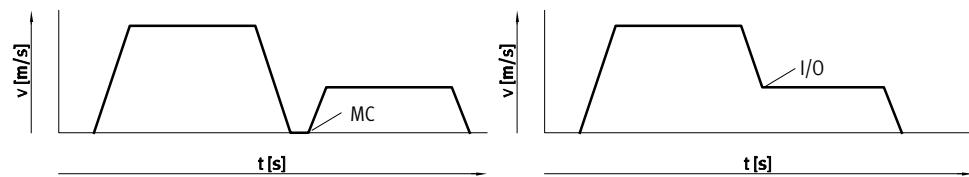

Library for EPLAN



EPLAN macros for fast and reliable planning of electrical projects in combination with motor controllers,

motors and cables. This enables a high level of planning reliability, standardisation of documentation,

no need to create symbols, graphics and master data.


Motor controllers CMMS-ST, for stepper motors

Key features

FESTO

FCT software – Festo Configuration Tool

Software platform for electric drives from Festo

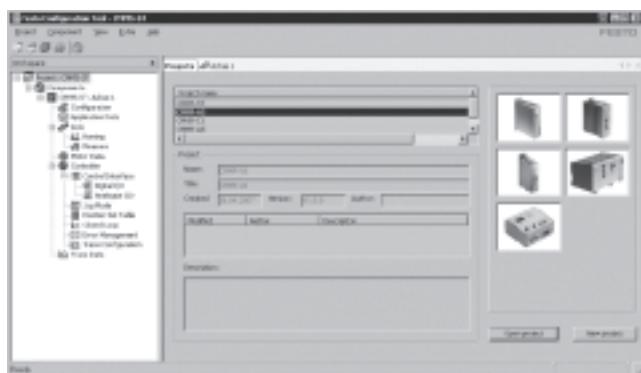

- All drives in a system can be managed and archived in a common project
- Project and data management for all supported device types
- Simple to use thanks to graphically-supported parameter entry
- Universal mode of operation for all drives
- Working offline at your desk or online at the machine

FHPP – Festo Handling and Positioning Profile


Optimised data profile

Festo has developed an optimised data profile, the “Festo Handling and Positioning Profile (FHPP)”, that is tailored to handling and positioning applications.

The FHPP data profile permits the actuation of Festo motor controllers, using a fieldbus interface, via standardised control and status bytes.

The following are defined, among others:


- Operating modes
- I/O data structure
- Parameter objects
- Sequence control

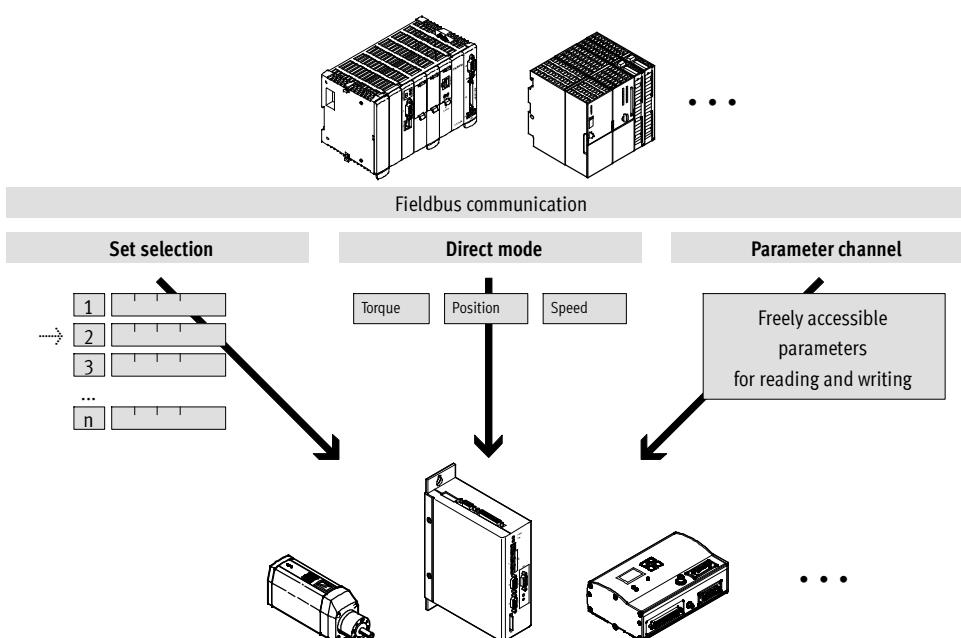

Motor controllers CMMS-ST, for stepper motors

FESTO

Type codes

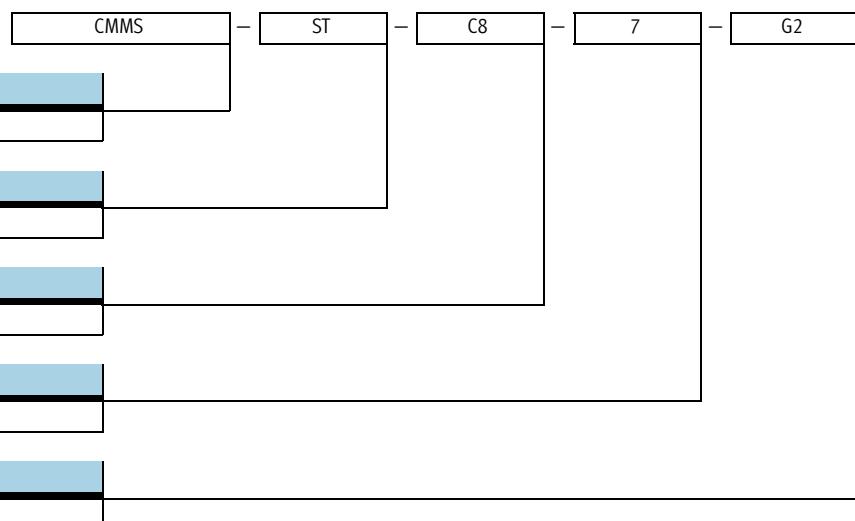

Motor controllers CMMS-ST, for stepper motors

Technical data

FESTO

Fieldbus interfaces

CANopen



DeviceNet



General technical data

Type of mounting	Screwed to a mounting plate
Operating mode	PWM MOSFET power amplifier
Motor actuation	Sinusoidal current impressing
Cycle rate [kHz]	Constant 50
Rotary position generator	Encoder
Display	7-segment display
Parameterisation interface	RS232 (9,600 ... 115,000 bits/s)
Encoder interface input	As speed/position specification for the slave drive in synchronous mode RS422
Encoder interface output	Setpoint specification for downstream slave drive
Brake resistor, integrated [Ω]	17
Pulse power of braking resistor [kVA]	0.5
Bus terminating resistor	Integrated
Impedance of setpoint input [kΩ]	20
Number of analogue outputs	1
Operating range of analogue outputs [V]	±10
Characteristics of digital logic outputs	Freely configurable in some cases
Number of analogue inputs	1
Operating range of analogue inputs [V]	±10
Mains filter	Integrated
Product weight [g]	900

Technical data – Fieldbus interface

Interfaces	I/O	CANopen	PROFIBUS DP	DeviceNet
Communication profile	–	DS301, FHPP	DP-V0 / FHPP	FHPP
	–	DS301, DSP402	–	
Max. fieldbus transmission rate [Mbit/s]	–	1	12	0.5
Interface	Integrated	■	■	–
	Optional	–	–	→ 10 ■

Motor controllers CMMS-ST, for stepper motors

FESTO

Technical data

Function blocks for PLC programming		Interfaces		
Programming software	Controller manufacturer	CANopen	PROFIBUS DP	DeviceNet
CoDeSys	Festo	■	■	■
	Beckhoff			
	Other manufacturers			
RSLogix5000	Rockwell Automation	—	—	■
Step 7	Siemens	—	■	—

Electrical data		
General		
Nominal current setting	Via software	
Max. peak current duration [s]	2	
Max. intermediate circuit voltage [V DC]	48	
Load supply		
Nominal voltage [V DC]	24 ... 48	
Nominal current [A]	8	
Peak current [A]	12	
Logic supply		
Nominal voltage [V DC]	24 ±20%	
Nominal current [A]	0.3	
Max. current of digital logic outputs [mA]	100	

Operating and environmental conditions		
Digital logic outputs	Not electrically separated	
Logic inputs	Electrically separated	
Protection class	IP20	
Protective function	I ² t monitoring Current monitoring Voltage failure detection Following error monitoring Temperature monitoring	
Ambient temperature [°C]	0 ... +50	
Storage temperature [°C]	-25 ... +70	
Relative humidity [%]	0 ... 90 (non-condensing)	
CE mark (see declaration of conformity)	To EU EMC Directive ¹⁾ To EU Machinery Directive	
Certification	c UL us - Listed (OL) C-Tick BIA	
Certificate issuing authority	BG MFS 09031	
Safety function	Safe Torque off (STO)	
Safety Integrity Level (SIL)	Safe Torque off (STO) / SIL 2	
Performance Level (PL)	Safe Torque off (STO) / category 3, performance level d	
Note on materials	RoHS-compliant	

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.


Motor controllers CMMS-ST, for stepper motors

Technical data

FESTO


View of motor controller

From the front

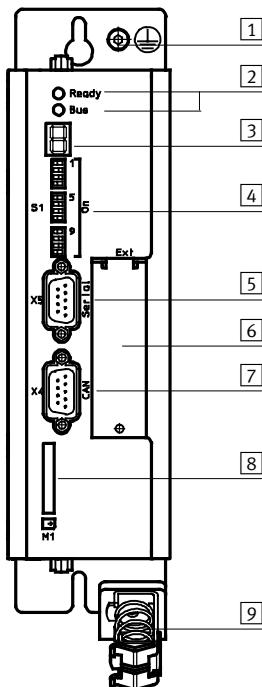


- [1] Earthing
- [2] Ready/bus LED
- [3] Status display
- [4] Fieldbus settings and boot loader
- [5] Interface: RS232/RS485
- [6] Technology module slot
- [7] Interface: CAN bus
- [8] SD memory card
- [9] Screened connection

From above

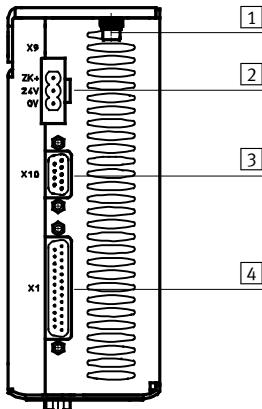

- [1] Earthing screw
- [2] Power supply
- [3] Incremental encoder interface (bidirectional)
- [4] I/O interface

From underneath

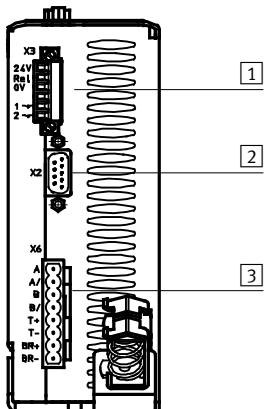


- [1] Safe stop
- [2] Increment encoder input for motor
- [3] Motor connection

Motor controllers CMMS-ST, for stepper motors

FESTO

Technical data


Installation clearance for motor controller

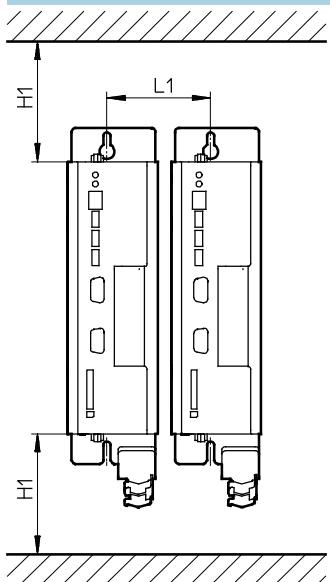

H1	L1
100	
	69

Dimensions

Download CAD data → www.festo.com

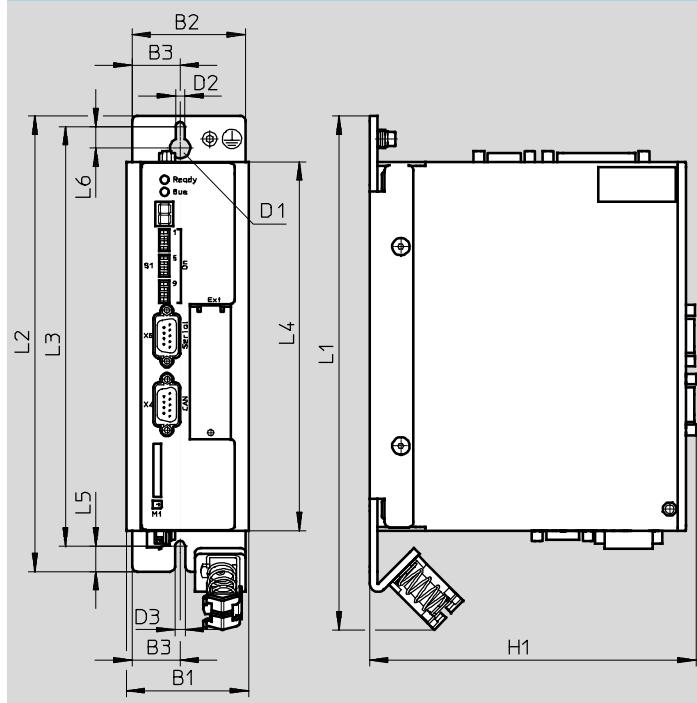

Type	B1	B2	B3	D1	D2	D3	H1
CMMS-ST	60	56	24	10	4.5	5	161


Type	L1	L2	L3	L4	L5	L6
CMMS-ST	252	224	206.25	181	12.5	15.75







Motor controllers CMMS-ST, for stepper motors

Technical data and accessories

FESTO

Ordering data		Part No.	Type
	The plug range NEKM (→ 10) and the operating package (→ 11) are included in the scope of delivery	572211	CMMS-ST-C8-7-G2

Accessories		Part No.	Type
Ordering data – Plug-in cards	Brief description		
	Interface, for PROFINET interface	547450	CAMC-PB
	Interface, for DeviceNet interface	547451	CAMC-DN
	Memory card, for data backup and firmware downloads	1436343	CAMC-M-S-F10-V1


Ordering data – Cables and plugs		Cable length [m]	Part No.	Type
	Control cable, for I/O interface to any controller	2.5	552254	NEBC-S1G25-K-2.5N-LE26
	Programming cable	1.5	160786	PS1-ZK11-NULMODEM-1,5M
	Encoder plug, for incremental encoder interface	–	564264	NECC-A-S-S1G9-C2M
	The plug range is included in the scope of delivery	–	547452	NEKM-C-1
	Plug for PROFIBUS interface	–	533780	FBS-SUB-9-WS-PB-K
	Plug for CANopen interface	–	533783	FBS-SUB-9-WS-CO-K
	Plug for DeviceNet interface	–	525635	FBSD-KL-2X5POL

Motor controllers CMMS-ST, for stepper motors

FESTO

Accessories

Ordering data – Power supply units

	Brief description	Input voltage range [V AC]	Nominal output voltage [V DC]	Nominal output current [A]	Part No.	Type	
	Power supply for motor controller	100 ... 240	24	5	547867	SVG-1/230VAC-24VDC-5A	
				10	547868	SVG-1/230VAC-24VDC-10A	
			48	5	542403	SVG-1/230VAC-48VDC-5A	
		400 ... 500		10	542404	SVG-1/230VAC-48VDC-10A	
				20	542405	SVG-3/400VAC-48VDC-20A	



- Note

If a common power supply unit is used to supply the power section and the control section, the voltage tolerances for the supply to the control

section cannot be maintained at high braking power. This can result in

Always use separate power supply units to supply the power section and the control section.

Ordering data – Software and documentation


	Brief description	Part No.	Type
	Operating package contains: – CD-ROM – with user documentation for CMMS-ST, in de, en, es, fr, it, sv – with FCT (Festo Configuration Tool) configuration software, in de, en – Brief description This package is included in the scope of delivery	573960	GSIB-CMMS-ST-G2-ML

Motor controllers CMMS-ST, for stepper motors

Accessories

FESTO

Ordering data – Documentation¹⁾

Language	Part No.	Type	Part No.	Type
for motor controller				Festo Handling and Positioning Profile (FHPP) for the motor controller family CMM...
	DE	573124	P.BE-CMMS-ST-G2-HW-DE	555695 P.BE-CMM-FHPP-SW-DE
	EN	573125	P.BE-CMMS-ST-G2-HW-EN	555696 P.BE-CMM-FHPP-SW-EN
	ES	573126	P.BE-CMMS-ST-G2-HW-ES	555697 P.BE-CMM-FHPP-SW-ES
	FR	573127	P.BE-CMMS-ST-G2-HW-FR	555698 P.BE-CMM-FHPP-SW-FR
	IT	573128	P.BE-CMMS-ST-G2-HW-IT	555699 P.BE-CMM-FHPP-SW-IT
	SV	573129	P.BE-CMMS-ST-G2-HW-SV	555700 P.BE-CMM-FHPP-SW-SV
for CANopen interface			for PROFIBUS interface	
DE	554351	P.BE-CMMS-FHPP-CO-SW-DE	554345	P.BE-CMMS-FHPP-PB-SW-DE
EN	554352	P.BE-CMMS-FHPP-CO-SW-EN	554346	P.BE-CMMS-FHPP-PB-SW-EN
ES	554353	P.BE-CMMS-FHPP-CO-SW-ES	554347	P.BE-CMMS-FHPP-PB-SW-ES
FR	554354	P.BE-CMMS-FHPP-CO-SW-FR	554348	P.BE-CMMS-FHPP-PB-SW-FR
IT	554355	P.BE-CMMS-FHPP-CO-SW-IT	554349	P.BE-CMMS-FHPP-PB-SW-IT
SV	554356	P.BE-CMMS-FHPP-CO-SW-SV	554350	P.BE-CMMS-FHPP-PB-SW-SV
for DeviceNet interface				
DE	554357	P.BE-CMMS-FHPP-DN-SW-DE		
EN	554358	P.BE-CMMS-FHPP-DN-SW-EN		
ES	554359	P.BE-CMMS-FHPP-DN-SW-ES		
FR	554360	P.BE-CMMS-FHPP-DN-SW-FR		
IT	554361	P.BE-CMMS-FHPP-DN-SW-IT		
SV	554362	P.BE-CMMS-FHPP-DN-SW-SV		

1) User documentation in paper form is not included in the scope of delivery