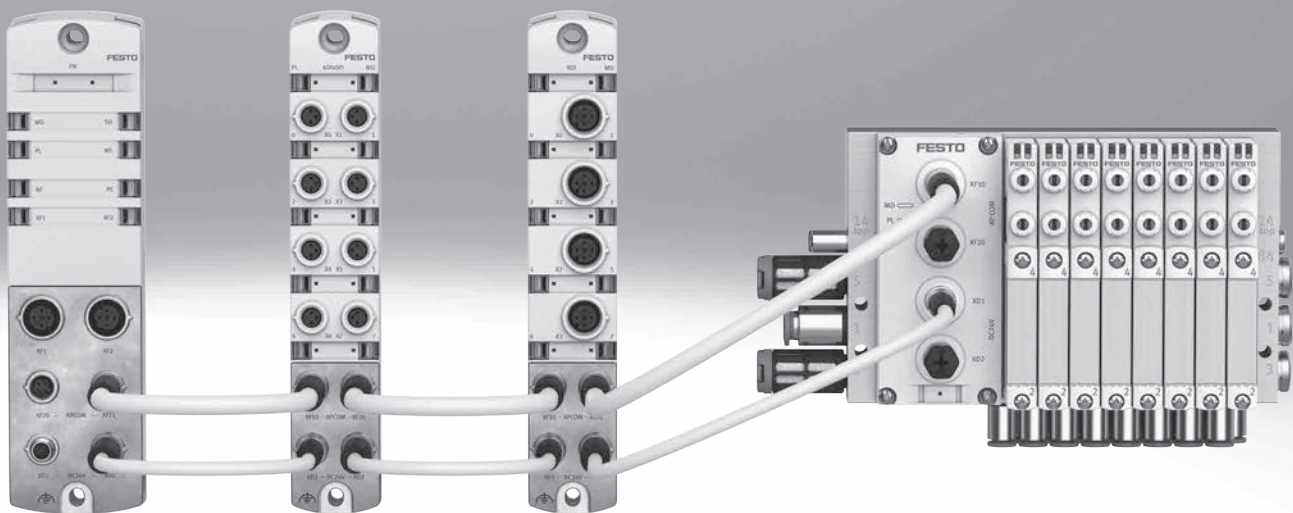
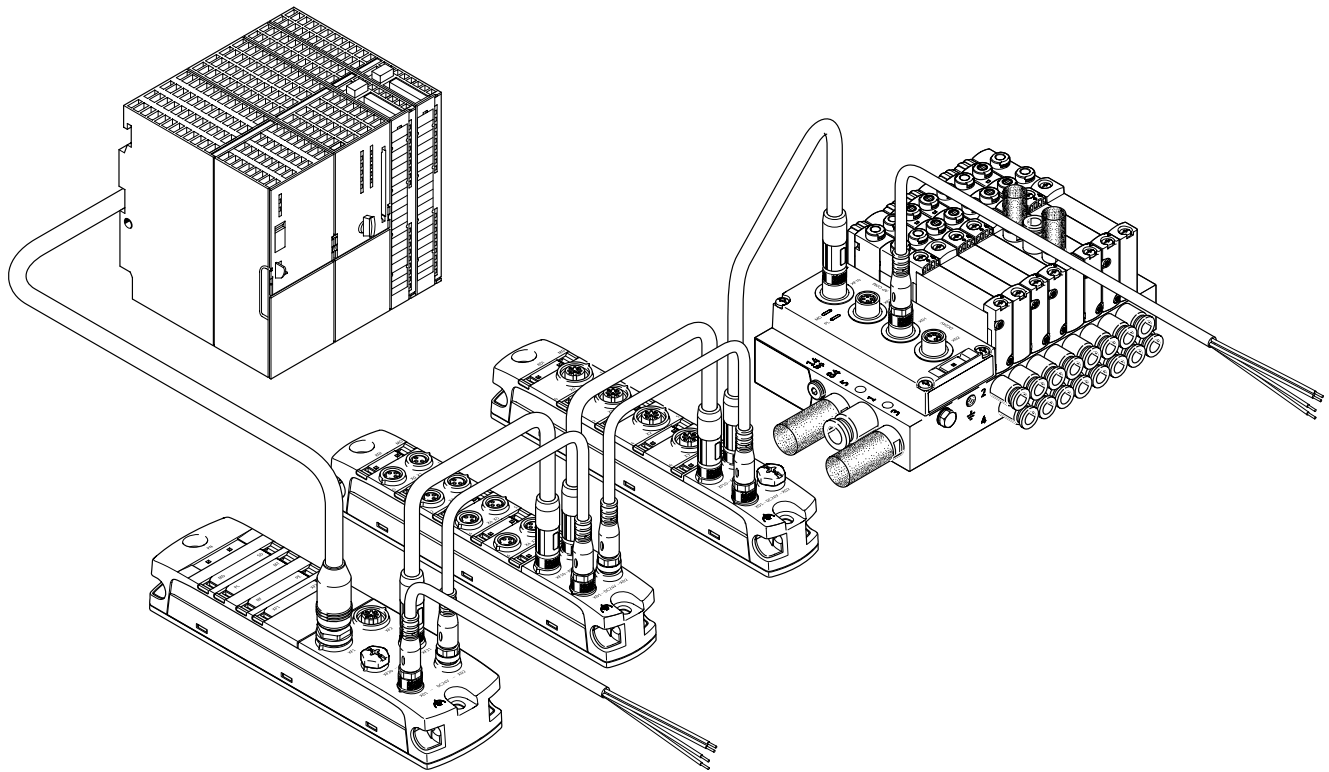


Automation system CPX-AP-I

FESTO



Key features



Key features

CPX-AP-I is a flexible, decentralised, compact and lightweight automation system with high degree of protection IP65/IP67.

The performance of the system with reference to future demands on the digital factory is future-proof and advantageous compared with a slow point-to-point connection.

The simple structure and high degree of scalability also equip the automation system CPX-AP-I for future applications:

- Extremely easy assembly
- Separate lines for communication and power supply to form voltage zones and for stable data transfer
- Potential isolation of output channels
- Digital electronic rating plate available

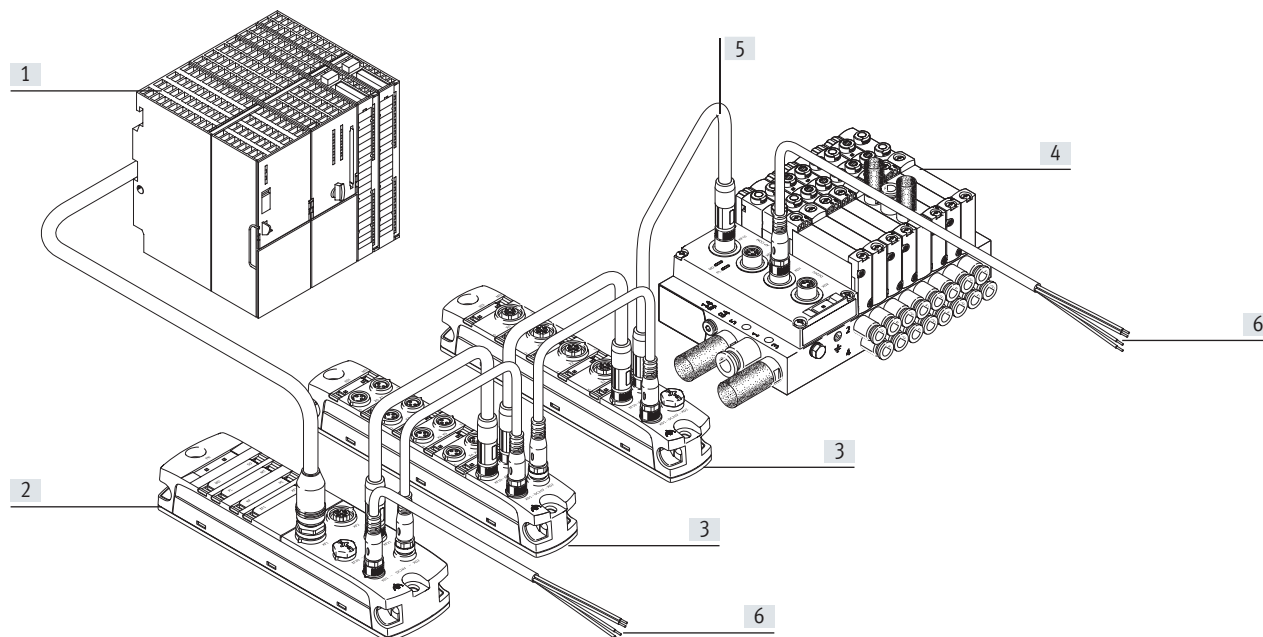
- Easy to update of firmware
- Simple maintenance access to the system via Ethernet
- Easy integration
- Realtime capability
- Up to 80 individual modules/valve terminals per bus interface
- Easy adaptation to different control systems by exchanging the bus interface
- Choice of M8 or M12 electrical connections
- Up to 50 m cable length between the modules

An automation system CPX-AP-I consists of a bus interface and at least one other module. System communication between the modules takes place via connecting cables. The process data is exchanged cyclically. The following modules types are available:

- Bus interface
- Input modules
- Input/output modules
- Interface to the valve terminal

Key features

Overview






[1] Higher-order controller
 [2] Bus interface for connecting the automation system CPX-AP-I to a higher-order controller via a standard bus protocol such as PROFINET

[3] Input module, output module or input/output module; allows sensors and actuators to be connected to the automation system CPX-AP-I. Up to 80 modules per bus interface possible

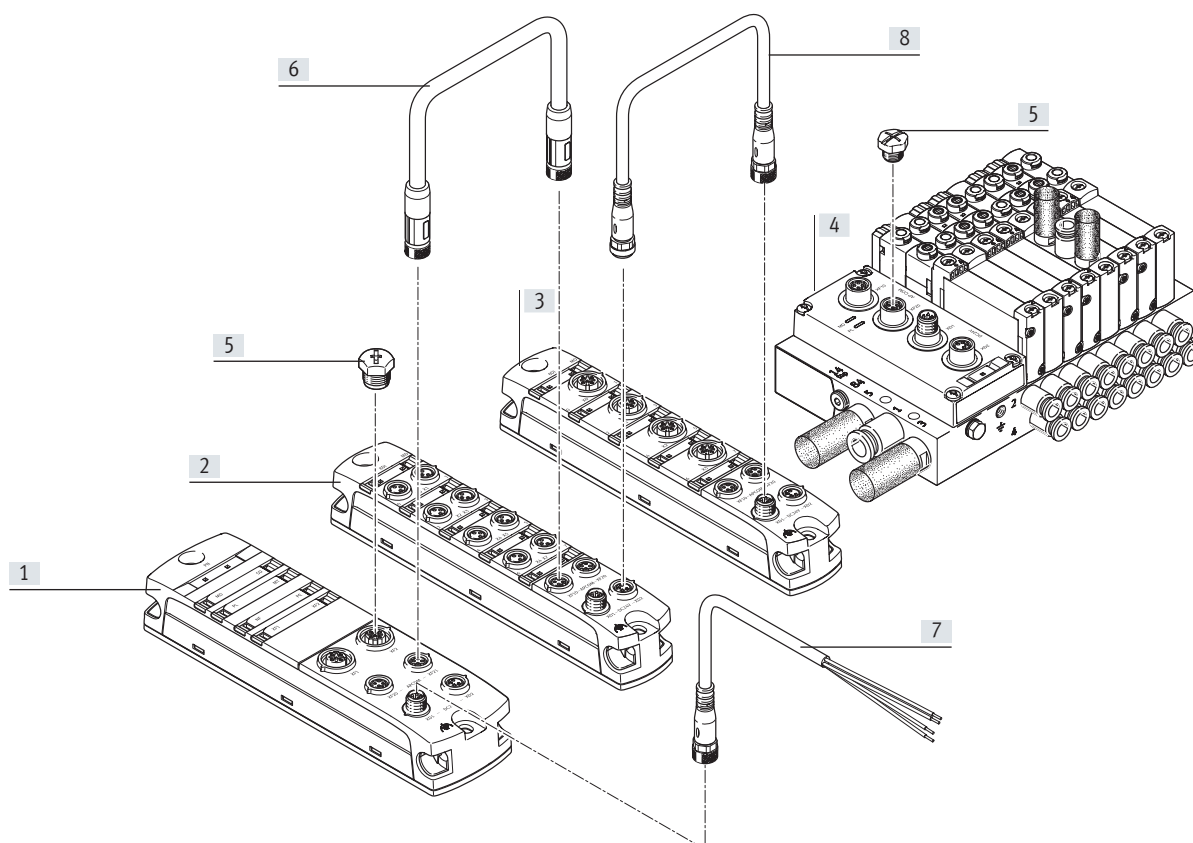
[4] Valve terminal with electrical interface for CPX-AP-I. Behaves like an output module within the automation system CPX-AP-I
 [5] Connecting cable for communication between the modules and the bus interface. The maximum line length from the bus interface to the module is 50 m

[6] Connecting cable for supplying power to the components of the automation system CPX-AP-I. Each module can be connected individually or a central supply is transmitted from module to module

Product range overview

Function	Version	Type	→ Page		
Bus interface		PROFINET	CPX-AP-I-PN-M12	- Control via PROFINET - Two PROFINET connections - Two connections for system communication - Two connections for power supply and transmission	10
		EtherCAT	CPX-AP-I-EC-M12	- Control via EtherCAT - Two EtherCAT connections - Two connections for system communication - Two connections for power supply and transmission	15
		EtherNet/IP	CPX-AP-I-EP-M12	- Control via EtherNet/IP - Two Ethernet connections - Two connections for system communication - Two connections for power supply and transmission	15
Input module		Digital			
		8 inputs	CPX-AP-I-8DI	- LED indicator - PNP (positive switching) - Characteristic curve of inputs according to IEC 61131-2, type 3 - Electrical connection M8x1, 3-pin - Electrical connection M12x1, 5-pin	25
Input/output module		Digital			
		4 inputs 4 outputs	CPX-AP-I-4DI4DO	- LED indicator - PNP (positive switching) - Characteristic curve of inputs according to IEC 61131-2, type 3 - Characteristic curve of outputs to IEC 61131-2, type 0.5 - Electrical connection M8x1, 3-pin - Electrical connection M12x1, 5-pin	30
Electrical interface for valve terminal		Valve terminal VTUG			
		12 or 24 valve positions - Up to 48 solenoid coils	VAEM-L1-S	- LED indicator 3 sizes (10 mm, 14 mm and 18 mm) 2x 3/2-way valves 3/2-way valves 5/2-way valves 5/3-way valves - Fixed-grid linkage 130 ... 1000 l/min flow rate	35

Peripherals overview



	Type	Description	→ Page/Internet
[1]	Bus interface CPX-AP-I-PN-M12 CPX-AP-I-EC-M12 CPX-AP-I-EP-M12	Connection of the CPX-AP-I to a higher-order controller	10 15 20
[2]	Module with M8 connections CPX-AP-I-8DI-M8-3P CPX-AP-I-4DI4DO-M8-3P	Digital input and input/output modules	25 30
[3]	Module with M12 connections CPX-AP-I-8DI-M12-5P CPX-AP-I-4DI4DO-M12-5P	Digital input and input/output modules	25 30
[4]	Electrical interface for valve terminal VAEM-L1-S	For valve terminal VTUG	35
[5]	Cover cap ISK-M8 ISK-M12	For sealing unused electrical connections, connection size M8 and M12	isk
[6]	Connecting cable NEBC	For connecting the modules for communication	nebc
[7]	Connecting cable NEBL	For connecting the power supply	nebl
[8]	Connecting cable NEBL	For power transmission from module to module	nebl

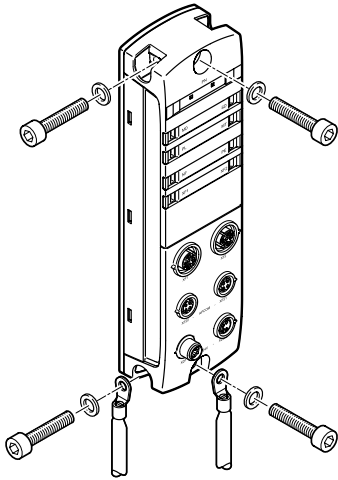
 Note

The connecting cables are specially designed for the requirements of the automation system CPX-AP-I. If variants other than those specified in the accessories are used, the correct function of the system cannot be guaranteed.

Key features – Assembly

Mounting

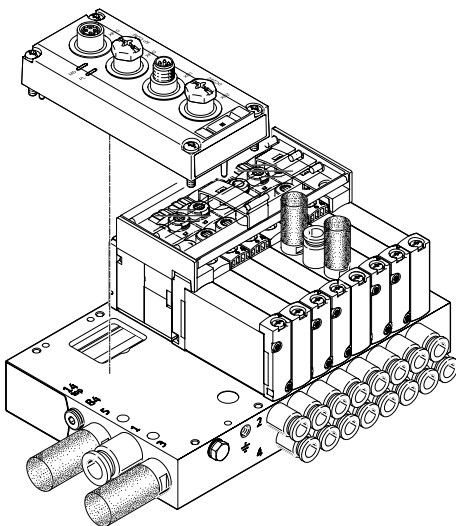
Mounting – Modules



The modules can be mounted on flat surfaces in almost any position using the mounting holes provided (with screws up to 4 mm in diameter). Secure mounting requires two screws with correctly sized washers (not included in the scope of delivery).

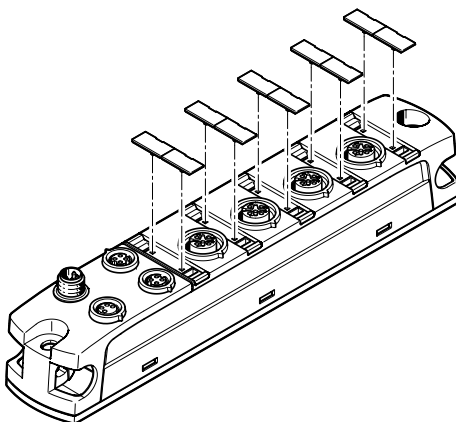
The mounting holes likewise include the earthing connection for the modules.

Mounting – Electrical interface



The electrical interfaces are mounted directly on the associated valve terminal. Options for wall mounting or H-rail mounting depend on the mounting options for the valve terminal in question.

Labels



All modules are supplied with the same, clip-on inscription labels.

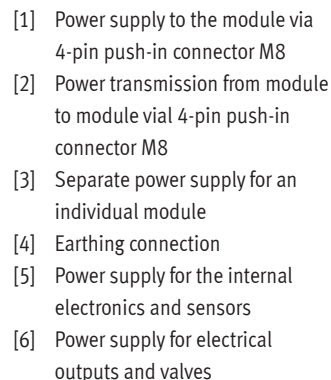
The inscription label is made up of two parts and can be divided into two smaller units if required.

Inscription templates can be downloaded from the Support Portal:

→ Internet: CPX-AP-I

In the “Software” area.

Power supply concept



All modules have the same connections for power supply, even when a module does not require all of these itself (e.g.: an input module also has connections for outputs and valves).

Key features – Diagnostics

System performance

Diagnostics

Detailed diagnostic functions are needed in order to quickly locate the causes of errors in the electrical installation and therefore reduce downtimes in production plants.
A basic distinction is made between on-the-spot diagnostics using LEDs and diagnostics using a bus interface.

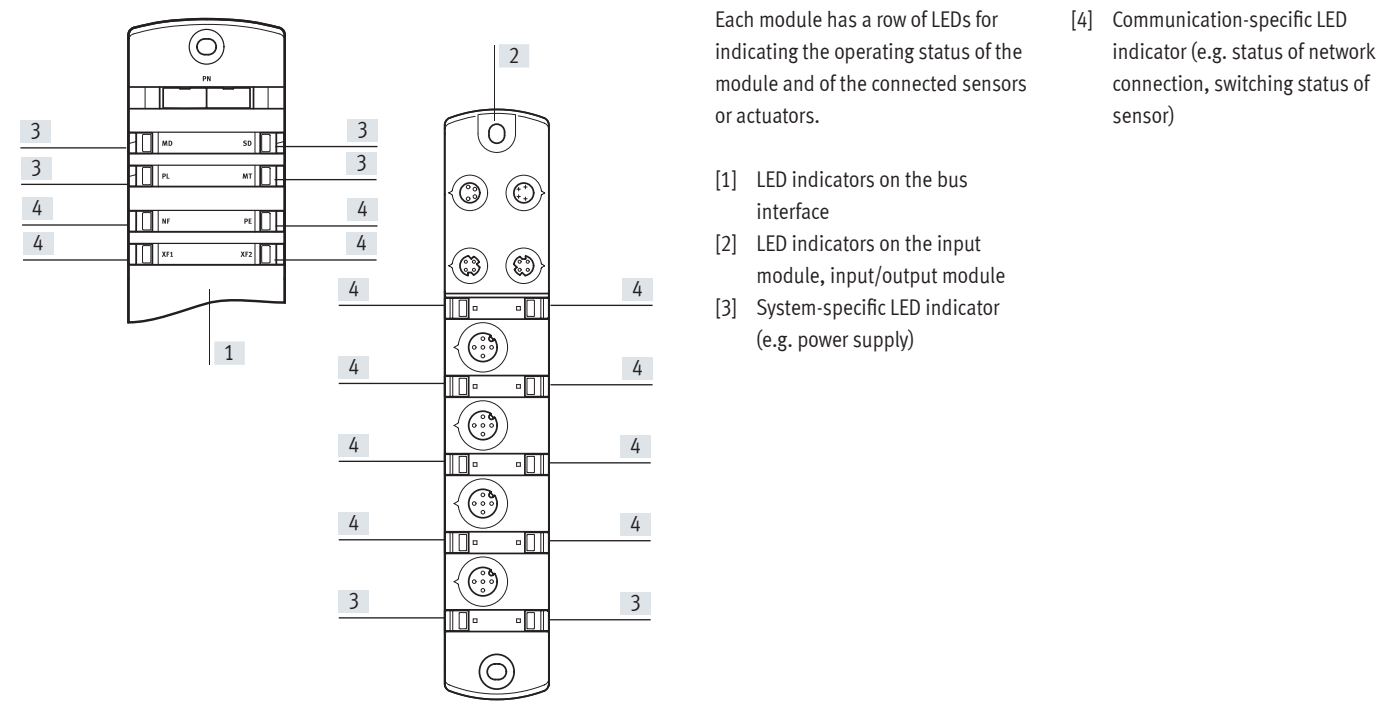
The automation system CPX-AP-I supports on-the-spot diagnostics using LED indicators on each module. This is separate from the connection area and therefore provides good visual access to status and diagnostic information.

Module and channel-specific diagnostics are supported, for example

- Undervoltage identification
- Short circuit detection

The diagnostic messages can be read out via the bus interface in the higher-order controller and visualised for the central recording and evaluation of error causes. This is done using the individual fieldbus-specific channels.

Indicator lights



Parameterisation

Various parameters are available for reading out information about the modules of the automation system CPX-AP-I and adapting the modules to the application situation.

The parameters are typically accessed by the higher-order controller.

Key features – Addressing

Addressing

The various CPX-AP-I modules occupy a different number of addresses within the CPX-AP-I system. The maximum address space for the bus interface depends on the performance of the fieldbus systems.

Maximum system configuration:

- 1 bus interface
- 80 input and/or input/output modules and/or electrical interfaces

The maximum system configuration can be limited in individual cases by exceeding the address space or limitations of the higher-order controller.

Addresses are allocated automatically. The bus interface is allocated the address "1", all other modules are assigned an address in increasing value from left to right, viewed from the bus interface. The modules of the first string (XF20) come first, then the modules of the second string (XF21).



Note

Please refer to the detailed description of the configuration/addressing rules in the technical data for the CPX-AP-I bus interface.

Overview – Address space for CPX-AP-I bus interface

	Protocol	Max. total Inputs	Outputs
CPX-AP-I-PN-M12	PROFINET	1024 bytes	1024 bytes
CPX-AP-I-EC-M12	EtherCAT	2048 bytes	2048 bytes
CPX-AP-I-EP-M12	EtherNet/IP	1324 bytes	1324 bytes



Note

The bandwidth of the bus interface can be restricted by the choice of module and the maximum number of modules.

Overview – Allocated addresses for CPX-AP-I modules

		Inputs [bytes]	Outputs [bytes]
CPX-AP-I-8DI-M8-3P	Digital input module, 8 inputs	1	–
CPX-AP-I-8DI-M12-5P	Digital input module, 8 inputs	1	–
CPX-AP-I-4DI4DO-M8-3P	Digital input/output module, 4 inputs/4 outputs	1	1
CPX-AP-I-4DI4DO-M12-5P	Digital input/output module, 4 inputs/4 outputs	1	1
VAEM-L1-S-12-AP	Electrical interface to valve terminal VTUG, 12 valve positions	–	3
VAEM-L1-S-24-AP	Electrical interface to valve terminal VTUG, 24 valve positions	–	6

Example CPX-AP-I-PN-M12 (PROFINET)

	Inputs [bytes]	Outputs [bytes]	Comments
26x CPX-AP-I-8DI-M8-3P	26	–	• The maximum number of modules is achieved with 80 CPX-AP-I modules • The available address space (1024 bytes) is not fully used up • No additional modules can be configured
45x CPX-AP-I-4DI4DO-M12-5P	45	45	
6x VAEM-L1-S-12-AP	–	18	
3x VAEM-L1-S-24-AP	–	18	
Allocated address space	71	81	

Data sheet – PROFINET Interface



Interface for operating the automation system CPX-AP-I on PROFINET. Data is transferred on the basis of the Ethernet standard and TCP/IP technology for communication in an industrial environment.



Bus connection

Communication with a higher-order controller takes place via PROFINET with real-time protocol (real time RT or isochronous real time IRT).

The bus connection is provided via two equivalent D-coded M12 sockets which meet Ethernet requirements.

The integrated switch supports star and line topology and enables the network to be divided into segments.

General technical data

Fieldbus interface

Protocol		PROFINET IRT
		PROFINET RT
Function		Bus connection incoming/outgoing
Transmission rate	[Mbps]	100
Type		Ethernet
Connection type		2 x socket
Connection technology		M12x1, D-coded to EN 61076-2-101
Number of pins/wires		4
Galvanic isolation		Yes
Max. address capacity outputs	[bytes]	1024
Max. address capacity inputs	[bytes]	1024

Communication interface

Protocol		AP-COM
Function		System communication XF10 IN / XF20 OUT
Connection type		2 x socket
Connection technology		M8x1, D-coded to EN 61076-2-114
Number of pins/wires		4
Screening		Yes

Data sheet – PROFINET interface

General data		
Configuration support		GSDML file
Maximum number of modules		80
Diagnostics via LED		Network error
		Individual module diagnostics
		Power supply, electronics/sensors
		Power supply load
		System diagnostics
Diagnostics via bus		Maintenance required
		Load overvoltage
		Load undervoltage
		Load switch-off
		Electronics/sensors overvoltage
		Electronics/sensors undervoltage
		Logic supply undervoltage
Diagnostics per internal communication		APDD invalid
		Communication to AP module interrupted
		Module error
		Short circuit/overload in sensor supply
		Short circuit/overload at output
Maximum cable length	[m]	50 system communication
Information on maximum cable length		Power supply according to nominal voltage
Reverse polarity protection		Yes

Technical data – Electrical components		
Nominal operating voltage for electronics/sensors	[V DC]	24
Nominal operating voltage, load	[V DC]	24
Permissible voltage fluctuations, electronics/sensors	[%]	±25
Permissible voltage fluctuations, load	[%]	±25
Note regarding operating voltage		SELV/PELV power supply units required
		Note voltage drop
Mains buffering	[ms]	10
Max. power supply	[A]	2x 4
		External fuse required
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 80
Intrinsic current consumption at nominal operating voltage for load	[mA]	Typically 5
Electrical connection, power supply		
Function		Incoming electronics/sensors and load
Connection type		Plug
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Electrical connection for power transmission		
Function		Outgoing electronics/sensors and load
Connection type		Socket
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4

Technical data – Mechanical components		
Type of mounting		With through-hole
Product weight	[g]	186
Dimensions W x L x H	[mm]	45 x 170 x 35
Tightening torque	[Nm]	1.2

Materials		
Housing		PA
		PC
		Nickel-plated, die-cast zinc
Note on materials		RoHS-compliant

Data sheet – PROFINET interface

Operating and environmental conditions		
Ambient temperature	[°C]	–20 ... +50
Storage temperature	[°C]	–40 ... +70
Corrosion resistance CRC ¹⁾		1
Relative humidity	[%]	5 ... 95
		Non-condensing
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾
KC mark		KC-EMV
Certification		RCM
Degree of protection		IP65
		IP67
Note on degree of protection		Unused connections sealed

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

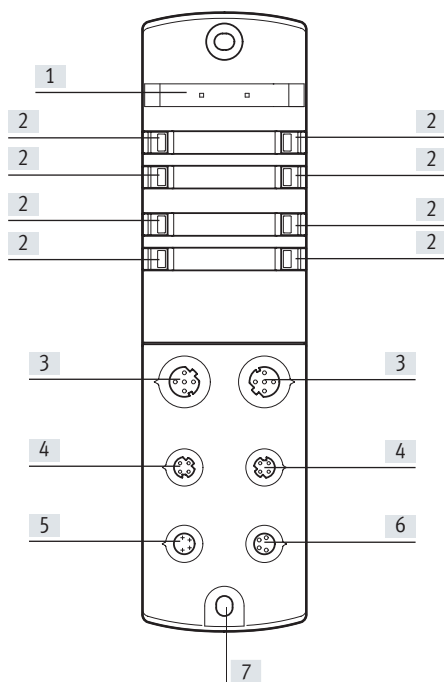
Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) Additional information available at www.festo.com/sp → Certificates.

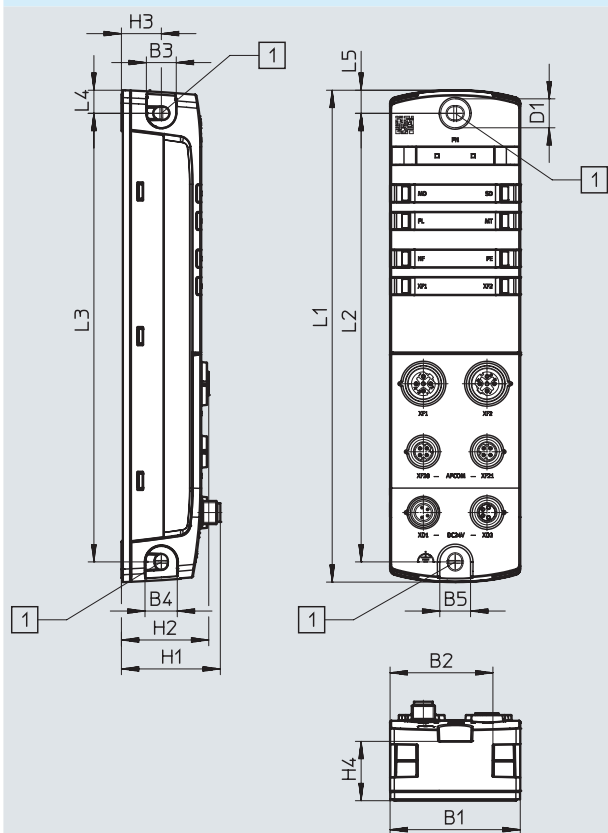
Connection components and indicator lights



- [1] Location for inscription label
- [2] LED indicators
- [3] Network connections 1 and 2, PROFINET
- [4] Communication interface
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission
- [7] Earthing connection

Data sheet – PROFINET interface


Dimensions




Download CAD data → www.festo.com


[1] Mounting hole for M4 screws

	B1	B2	B3	B4	B5	D1 Ø	H1	H2	H3	H4	L1	L2	L3	L4	L5
CPX-AP-I-PN-M12	45	35.5	10	11	11	10	34.2	30.2	13.8	20.5	170	155	155	8	8

Data sheet – PROFINET interface

Ordering data				Part no.		Type	
	PROFINET interface			8086607	CPX-AP-I-PN-M12		

Ordering data – Accessories								
Description				Part no.		Type		PE ¹⁾
Connecting cable								
	For communication interface	Straight plug, M8x1, 4-pin, D-coded	Straight plug, M8x1, 4-pin, D-coded	0.3 m	8082902	NEBC-D8G4-ES-0.3-N-S-D8G4-ET	1	
				0.5 m	8065123	NEBC-D8G4-ES-0.5-N-S-D8G4-ET	1	
				1.0 m	8065125	NEBC-D8G4-ES-1-N-S-D8G4-ET	1	
				2.0 m	8065127	NEBC-D8G4-ES-2-N-S-D8G4-ET	1	
				5.0 m	8065129	NEBC-D8G4-ES-5-N-S-D8G4-ET	1	
				7.5 m	8065131	NEBC-D8G4-ES-7.5-N-S-D8G4-ET	1	
				10.0 m	8065133	NEBC-D8G4-ES-10-N-S-D8G4-ET	1	
				15.0 m	8065135	NEBC-D8G4-ES-15-N-S-D8G4-ET	1	
	For power supply	Straight socket, M8 x 1, 4-pin, A-coded	Open cable end, 4-wire	5.0 m	8065110	NEBL-M8G4-E-5-N-LE4	1	
				7.5 m	8065113	NEBL-M8G4-E-7,5-N-LE4	1	
				10.0 m	8065117	NEBL-M8G4-E-10-N-LE4	1	
				15.0 m	8065121	NEBL-M8G4-E-15-N-LE4	1	
	For power transmission	Straight socket, M8 x 1, 4-pin, A-coded	Straight plug, M8 x 1, 4-pin, A-coded	0.3 m	8082904	NEBL-M8G4-E-0.3-N-M8G4	1	
				0.5 m	8065102	NEBL-M8G4-E-0.5-N-M8G4	1	
				1.0 m	8065104	NEBL-M8G4-E-1-N-M8G4	1	
				2.0 m	8065106	NEBL-M8G4-E-2-N-M8G4	1	
				5.0 m	8065108	NEBL-M8G4-E-5-N-M8G4	1	
				7.5 m	8065111	NEBL-M8G4-E-7.5-N-M8G4	1	
				10.0 m	8065115	NEBL-M8G4-E-10-N-M8G4	1	
				15.0 m	8065119	NEBL-M8G4-E-15-N-M8G4	1	

Inscription label					
	For modules CPX-AP-I	Size 6x 12.5 mm, 10 frames with 24 pieces each	8087174	ASLR-L-X4-612-P240	240

Cover cap					
	For sealing unused connections	For connection M8x1	177672	ISK-M8	10
		For connection M12x1	165592	ISK-M12	10

1) Packaging unit.

Data sheet – EtherCAT interface



Interface for operating the automation system CPX-AP-I on EtherCAT. Data is transferred on the basis of the Ethernet standard for communication in an industrial environment.



General technical data

Fieldbus interface		
Protocol		EtherCAT
Function		Bus connection incoming/outgoing
Transmission rate	[Mbps]	100
Type		Ethernet
Connection type		2 x socket
Connection technology		M12x1, D-coded to EN 61076-2-101
Number of pins/wires		4
Galvanic isolation		Yes
Max. address capacity outputs	[bytes]	2048
Max. address capacity inputs	[bytes]	2048
Communication interface		
Protocol		AP-COM
Function		System communication XF10 IN / XF20 OUT
Connection type		2 x socket
Connection technology		M8x1, D-coded to EN 61076-2-114
Number of pins/wires		4
Screening		Yes

Data sheet – EtherCAT interface

General data		
Configuration support		ESI file
Maximum number of modules		80
Diagnostics via LED		Individual module diagnostics
		EtherCAT RUN
		Power supply, electronics/sensors
		Power supply load
		System diagnostics
Diagnostics via bus		Maintenance required
		Load switch-off
		Load overvoltage
		Load undervoltage
		Electronics/sensors overvoltage
		Electronics/sensors undervoltage
		APDD invalid
Diagnostics per internal communication		Communication to AP module interrupted
		Module error
		Short circuit/overload in sensor supply
		Short circuit/overload at output
Maximum cable length	[m]	50 system communication
Information on maximum cable length		Power supply according to nominal voltage
Reverse polarity protection		Yes
Technical data – Electrical components		
Nominal operating voltage for electronics/sensors	[V DC]	24
Nominal operating voltage, load	[V DC]	24
Permissible voltage fluctuations, electronics/sensors	[%]	±25
Permissible voltage fluctuations, load	[%]	±25
Note regarding operating voltage		SELV/PELV power supply units required
		Note voltage drop
Mains buffering	[ms]	10
Max. power supply	[A]	2x 4
		External fuse required
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 90
Intrinsic current consumption at nominal operating voltage for load	[mA]	Typically 5
Electrical connection, power supply		
Function		Incoming electronics/sensors and load
Connection type		Plug
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Electrical connection for power transmission		
Function		Outgoing electronics/sensors and load
Connection type		Socket
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Technical data – Mechanical components		
Type of mounting		With through-hole
Product weight	[g]	186
Dimensions W x L x H	[mm]	45 x 170 x 35
Tightening torque	[Nm]	1.2
Materials		
Housing		PA
		PC
		Nickel-plated, die-cast zinc
Note on materials		RoHS-compliant

Data sheet – EtherCAT interface

Operating and environmental conditions		
Ambient temperature	[°C]	–20 ... +50
Storage temperature	[°C]	–40 ... +70
Corrosion resistance CRC ¹⁾		1
Relative humidity	[%]	5 ... 95
		Non-condensing
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾
KC mark		KC-EMV
Certification		RCM
Degree of protection		IP65
		IP67
Note on degree of protection		Unused connections sealed

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

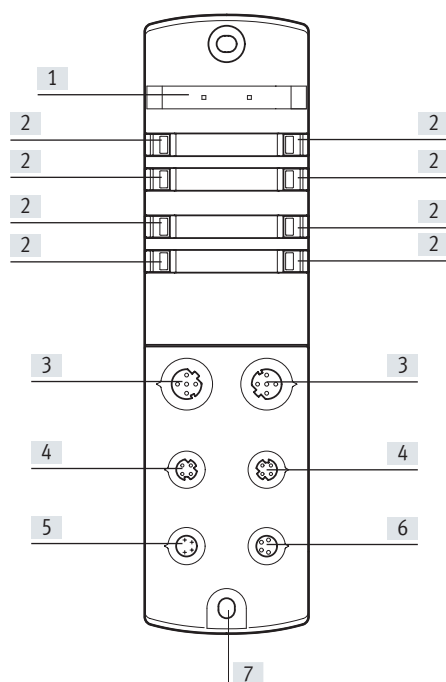
Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

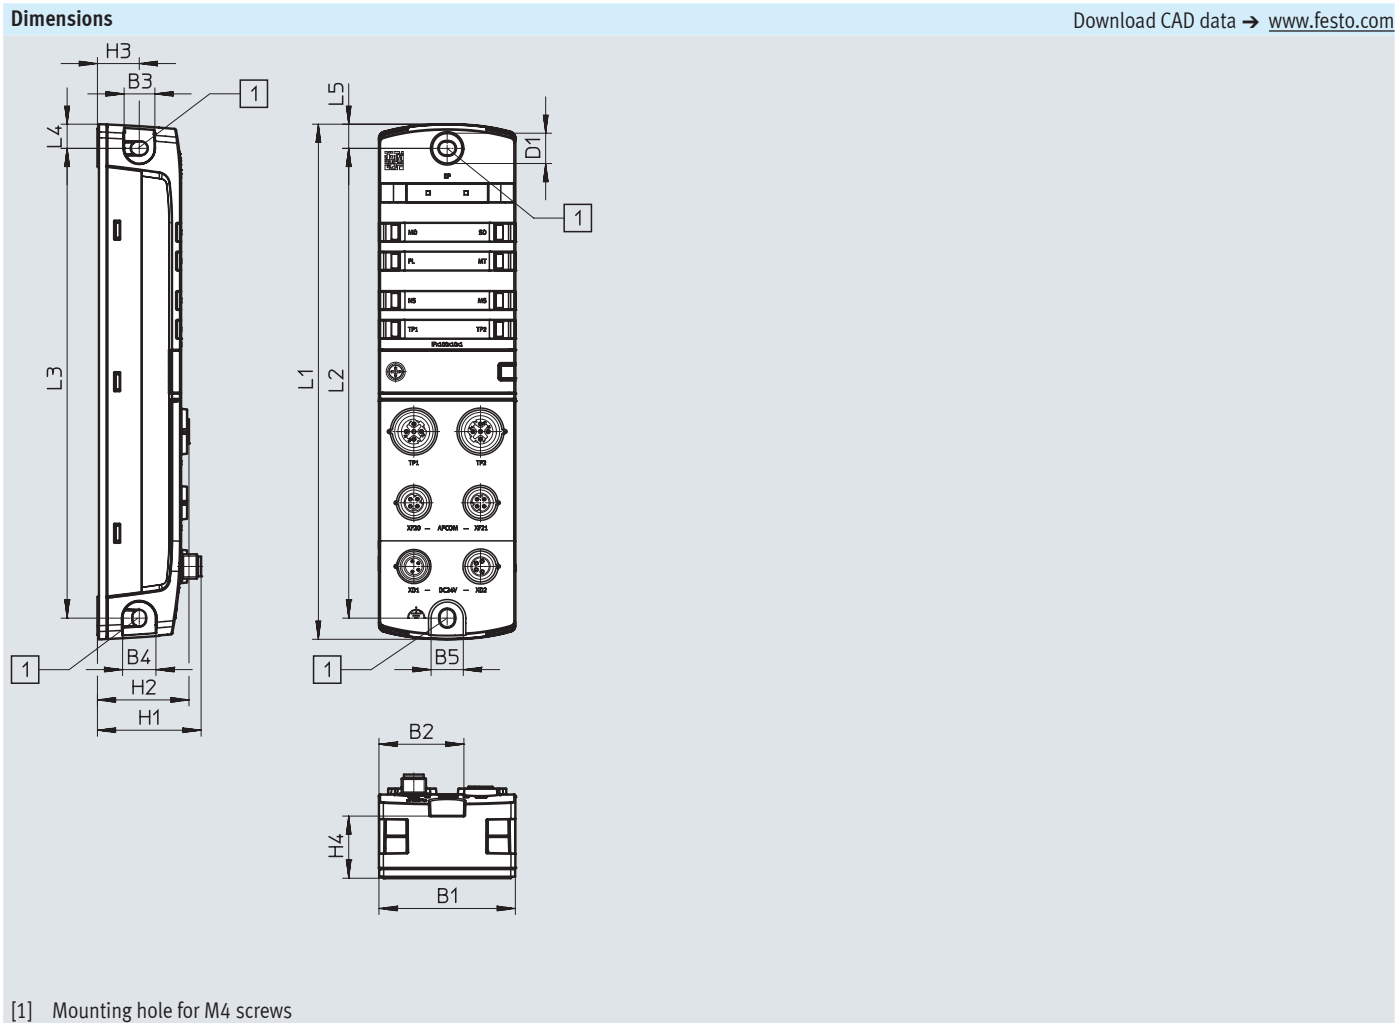
3) Additional information available at www.festo.com/sp → Certificates.

Connection components and indicator lights




- [1] Location for inscription label
- [2] LED indicators
- [3] Network connections 1 and 2, EtherCAT
- [4] Communication interface
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission
- [7] Earthing connection




Data sheet – EtherCAT interface




	B1	B2	B3	B4	B5	D1 Ø	H1	H2	H3	H4	L1	L2	L3	L4	L5
CPX-AP-I-EC-M12	45	35.5	10	11	11	10	34.2	30.2	13.8	20.5	170	155	155	8	8

Data sheet – EtherCAT interface

Ordering data				Part no.	Type
	EtherCAT interface			8086609	CPX-AP-I-EC-M12

Ordering data – Accessories							
Description				Part no.	Type	PE ¹⁾	
Connecting cable							
	For communication interface	Straight plug, M8x1, 4-pin, D-coded	Straight plug, M8x1, 4-pin, D-coded	0.3 m	8082902	NEBC-D8G4-ES-0.3-N-S-D8G4-ET	1
				0.5 m	8065123	NEBC-D8G4-ES-0.5-N-S-D8G4-ET	1
				1.0 m	8065125	NEBC-D8G4-ES-1-N-S-D8G4-ET	1
				2.0 m	8065127	NEBC-D8G4-ES-2-N-S-D8G4-ET	1
				5.0 m	8065129	NEBC-D8G4-ES-5-N-S-D8G4-ET	1
				7.5 m	8065131	NEBC-D8G4-ES-7.5-N-S-D8G4-ET	1
				10.0 m	8065133	NEBC-D8G4-ES-10-N-S-D8G4-ET	1
				15.0 m	8065135	NEBC-D8G4-ES-15-N-S-D8G4-ET	1
	For power supply	Straight socket, M8 x 1, 4-pin, A-coded	Open cable end, 4-wire	5.0 m	8065110	NEBL-M8G4-E-5-N-LE4	1
				7.5 m	8065113	NEBL-M8G4-E-7,5-N-LE4	1
				10.0 m	8065117	NEBL-M8G4-E-10-N-LE4	1
				15.0 m	8065121	NEBL-M8G4-E-15-N-LE4	1
	For power transmission	Straight socket, M8 x 1, 4-pin, A-coded	Straight plug, M8 x 1, 4-pin, A-coded	0.3 m	8082904	NEBL-M8G4-E-0.3-N-M8G4	1
				0.5 m	8065102	NEBL-M8G4-E-0.5-N-M8G4	1
				1.0 m	8065104	NEBL-M8G4-E-1-N-M8G4	1
				2.0 m	8065106	NEBL-M8G4-E-2-N-M8G4	1
				5.0 m	8065108	NEBL-M8G4-E-5-N-M8G4	1
				7.5 m	8065111	NEBL-M8G4-E-7.5-N-M8G4	1
				10.0 m	8065115	NEBL-M8G4-E-10-N-M8G4	1
				15.0 m	8065119	NEBL-M8G4-E-15-N-M8G4	1

Inscription label					
	For modules CPX-AP-I	Size 6x 12.5 mm, 10 frames with 24 pieces each	8087174	ASLR-L-X4-612-P240	240

Cover cap					
	For sealing unused connections	For connection M8x1	177672	ISK-M8	10
		For connection M12x1	165592	ISK-M12	10

1) Packaging unit.

Data sheet – EtherNet/IP interface

EtherNet/IP™

Interface for operating the automation system CPX-AP-I in an Ethernet network using the protocols EtherNet/IP or Modbus/TCP. Data is transmitted on the basis of Industrial Ethernet.

**General technical data**

Fieldbus interface	
Protocol	EtherNet/IP
Function	Bus connection incoming/outgoing
Transmission rate	[Mbps] 100
Type	Ethernet
Connection type	2 x socket
Connection technology	M12x1, D-coded to EN 61076-2-101
Number of pins/wires	4
Galvanic isolation	Yes
Max. address capacity outputs	[bytes] 1324
Max. address capacity inputs	[bytes] 1324
Communication interface	
Protocol	AP-COM
Function	System communication XF10 IN / XF20 OUT
Connection type	2 x socket
Connection technology	M8x1, D-coded to EN 61076-2-114
Number of pins/wires	4
Screening	Yes

Data sheet – EtherNet/IP interface

General data		
Configuration support		EDS file
Maximum number of modules		80
Diagnostics via LED		Individual module diagnostics
		Network status Ethernet/IP
		Power supply, electronics/sensors
		Power supply load
		System diagnostics
Diagnostics via bus		Maintenance required
		Load switch-off
		Load overvoltage
		Load undervoltage
		Electronics/sensors overvoltage
		Electronics/sensors undervoltage
Diagnostics per internal communication		APDD invalid
		Communication to AP module interrupted
		Module error
		Short circuit/overload at output
Maximum cable length	[m]	50 system communication
		Power supply according to nominal voltage
Information on maximum cable length		
Reverse polarity protection		Yes

Technical data – Electrical components		
Nominal operating voltage for electronics/sensors	[V DC]	24
Nominal operating voltage, load	[V DC]	24
Permissible voltage fluctuations, electronics/sensors	[%]	±25
Permissible voltage fluctuations, load	[%]	±25
Note regarding operating voltage		SELV/PELV power supply units required
		Note voltage drop
Mains buffering	[ms]	10
Max. power supply	[A]	2x 4
		External fuse required
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 90
Intrinsic current consumption at nominal operating voltage for load	[mA]	Typically 5
Electrical connection, power supply		
Function		Incoming electronics/sensors and load
Connection type		Plug
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Electrical connection for power transmission		
Function		Outgoing electronics/sensors and load
Connection type		Socket
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4

Technical data – Mechanical components		
Type of mounting		With through-hole
Product weight	[g]	194
Dimensions W x L x H	[mm]	45 x 170 x 35
Tightening torque	[Nm]	1.2

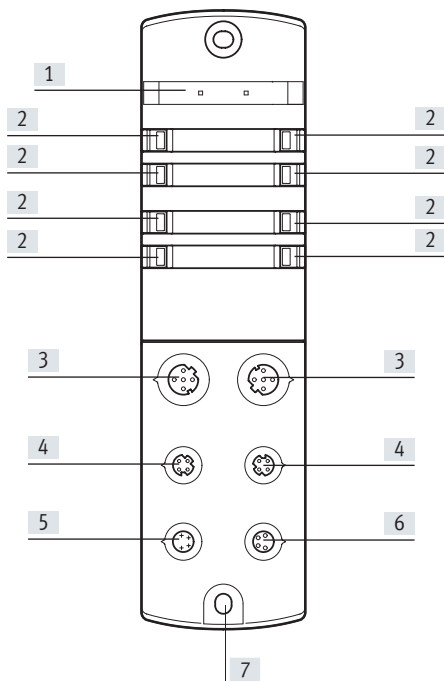
Materials	
Housing	PA
	PC
	Nickel-plated, die-cast zinc
Note on materials	RoHS-compliant

Data sheet – EtherNet/IP interface

Operating and environmental conditions		
Ambient temperature	[°C]	–20 ... +50
Storage temperature	[°C]	–40 ... +70
Corrosion resistance CRC ¹⁾		1
Relative humidity	[%]	5 ... 95
		Non-condensing
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾
KC mark		KC-EMV
Certification		RCM
Degree of protection		IP65
		IP67
Note on degree of protection		Unused connections sealed

- 1) Corrosion resistance class CRC 1 to Festo standard FN 940070
Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).
- 2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
- 3) Additional information available at www.festo.com/sp → Certificates.

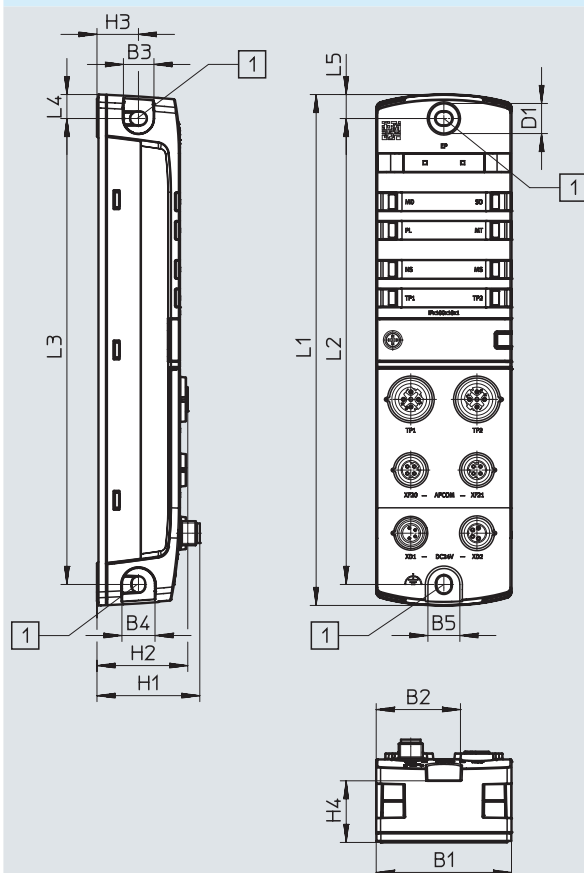
Connection components and indicator lights



- [1] Location for inscription label
- [2] LED indicators
- [3] Network connections 1 and 2, EtherNet/IP
- [4] Communication interface
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission
- [7] Earthing connection

Data sheet – EtherNet/IP interface


Dimensions




Download CAD data → www.festo.com


[1] Mounting hole for M4 screws

	B1	B2	B3	B4	B5	D1 Ø	H1	H2	H3	H4	L1	L2	L3	L4	L5
CPX-AP-I-EP-M12	45	35.5	10	11	11	10	34.2	30.2	13.8	20.5	170	155	155	8	8

Data sheet – EtherNet/IP interface

Ordering data					Part no.	Type
	EtherNet/IP interface				8086610	CPX-AP-I-EP-M12

Ordering data – Accessories							
Description				Part no.	Type	PE ¹⁾	
Connecting cable							
	For communication interface	Straight plug, M8x1, 4-pin, D-coded	Straight plug, M8x1, 4-pin, D-coded	0.3 m	8082902	NEBC-D8G4-ES-0.3-N-S-D8G4-ET	1
				0.5 m	8065123	NEBC-D8G4-ES-0.5-N-S-D8G4-ET	1
				1.0 m	8065125	NEBC-D8G4-ES-1-N-S-D8G4-ET	1
				2.0 m	8065127	NEBC-D8G4-ES-2-N-S-D8G4-ET	1
				5.0 m	8065129	NEBC-D8G4-ES-5-N-S-D8G4-ET	1
				7.5 m	8065131	NEBC-D8G4-ES-7.5-N-S-D8G4-ET	1
				10.0 m	8065133	NEBC-D8G4-ES-10-N-S-D8G4-ET	1
				15.0 m	8065135	NEBC-D8G4-ES-15-N-S-D8G4-ET	1
	For power supply	Straight socket, M8 x 1, 4-pin, A-coded	Open cable end, 4-wire	5.0 m	8065110	NEBL-M8G4-E-5-N-LE4	1
				7.5 m	8065113	NEBL-M8G4-E-7,5-N-LE4	1
				10.0 m	8065117	NEBL-M8G4-E-10-N-LE4	1
				15.0 m	8065121	NEBL-M8G4-E-15-N-LE4	1
	For power transmission	Straight socket, M8 x 1, 4-pin, A-coded	Straight plug, M8 x 1, 4-pin, A-coded	0.3 m	8082904	NEBL-M8G4-E-0.3-N-M8G4	1
				0.5 m	8065102	NEBL-M8G4-E-0.5-N-M8G4	1
				1.0 m	8065104	NEBL-M8G4-E-1-N-M8G4	1
				2.0 m	8065106	NEBL-M8G4-E-2-N-M8G4	1
				5.0 m	8065108	NEBL-M8G4-E-5-N-M8G4	1
				7.5 m	8065111	NEBL-M8G4-E-7.5-N-M8G4	1
				10.0 m	8065115	NEBL-M8G4-E-10-N-M8G4	1
				15.0 m	8065119	NEBL-M8G4-E-15-N-M8G4	1

Inscription label					
	For modules CPX-AP-I	Size 6x 12.5 mm, 10 frames with 24 pieces each	8087174	ASLR-L-X4-612-P240	240

Cover cap					
	For sealing unused connections	For connection M8x1	177672	ISK-M8	10
		For connection M12x1	165592	ISK-M12	10

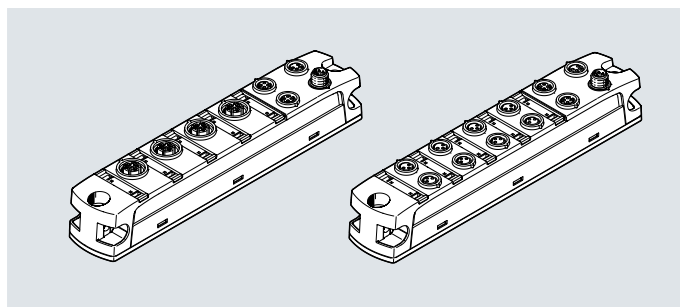
1) Packaging unit.

Data sheet – Digital input modules

Function

Digital input modules facilitate the connection of electric sensors to IEC 61131-2 type 3 (inductive, capacitive) having an operating voltage of 24 V DC.

- Input modules for 24 V DC operating voltage
- Connection M8x1 3-pin or M12x1 5-pin
- Status and error indication via LED



General technical data			
Type	CPX-AP-I-8DI-M8-3P		CPX-AP-I-8DI-M12-5P
Number of inputs	8		
Electrical connection, input			
Function	Digital input		
Connection type	8x socket		4x socket
Connection technology	M8x1, A-coded to EN 61076-2-104		M12x1, A-coded to EN 61076-2-101
Number of pins/wires	3		5
Input switching logic	PNP (positive switching)		
	2-wire sensors to IEC 61131-2		
	3-wire sensors to IEC 61131-2		
Characteristic curve of inputs	To IEC 61131-2, type 3		
Switching level	[V]	Signal 0: ≤5	
	[V]	Signal 1: ≥11	
Fuse protection inputs (short circuit)	Internal electronic fuse per module		
Input debounce time	[ms]	0.1	
	[ms]	3	
	[ms]	10	
	[ms]	20	
Communication interface			
Protocol	AP-COM		
Function	System communication XF10 IN / XF20 OUT		
Connection type	2 x socket		
Connection technology	M8x1, D-coded to EN 61076-2-114		
Number of pins/wires	4		
Screening	Yes		
General data			
Electrical isolation between channel and internal communication	Yes		
Electrical isolation between channels	No		
Diagnostics via LED	Individual module diagnostics		
	Status per channel		
Diagnostics per internal communication	Short circuit/overload in sensor supply		
	Electronics/sensors overvoltage		
	Electronics/sensors undervoltage		
Maximum cable length	[m]	30 inputs	
	[m]	50 system communication	
Information on maximum cable length	Power supply according to nominal voltage		
Reverse polarity protection	Yes		

Data sheet – Digital input modules

Technical data – Electrical components		
Nominal operating voltage for electronics/sensors	[V DC]	24
Permissible voltage fluctuations, electronics/sensors	[%]	±25
Note regarding operating voltage		Note voltage drop SELV/PELV power supply units required
Mains buffering	[ms]	10
Max. power supply	[A]	2x 4
		External fuse required
Max. residual current of inputs per module	[A]	1.8
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 32
Electrical connection, power supply		
Function		Incoming electronics/sensors and load
Connection type		Plug
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Electrical connection for power transmission		
Function		Outgoing electronics/sensors and load
Connection type		Socket
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Technical data – Mechanical components		
Type of mounting		With through-hole
Product weight	[g]	126
Dimensions W x L x H	[mm]	30 x 170 x 35
Tightening torque	[Nm]	1.2
Materials		
Housing		PA
		PC
		Nickel-plated, die-cast zinc
Note on materials		RoHS-compliant
Operating and environmental conditions		
Ambient temperature	[°C]	–20 ... +50
Storage temperature	[°C]	–40 ... +70
Corrosion resistance CRC ¹⁾		1
Relative humidity	[%]	5 ... 95
		Non-condensing
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾
KC mark		KC-EMV
Certification		RCM
Degree of protection		IP65
		IP67
Note on degree of protection		Unused connections sealed

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

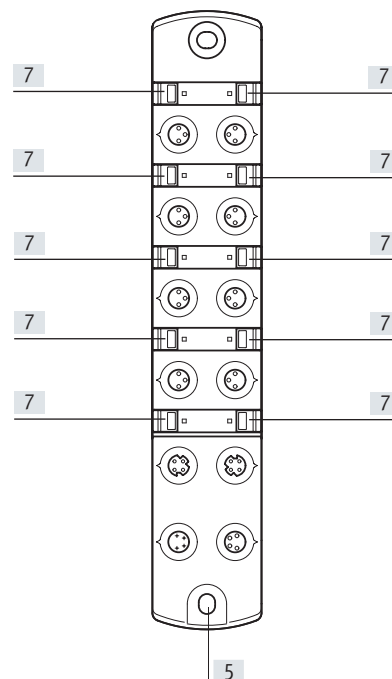
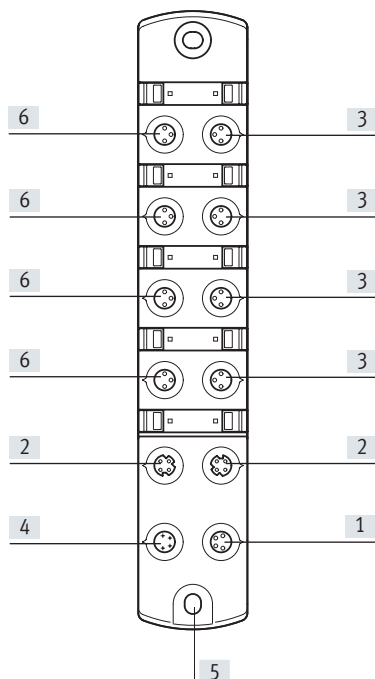
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) Additional information available at www.festo.com/sp → Certificates.

Data sheet – Digital input modules

Connection components and indicator lights



- [1] Electrical connection, power transmission
- [2] Communication interface

- [3] Electrical connection, inputs
- [4] Electrical connection, power supply

- [5] Earthing connection
- [6] Location for inscription label

- [7] LED indicators

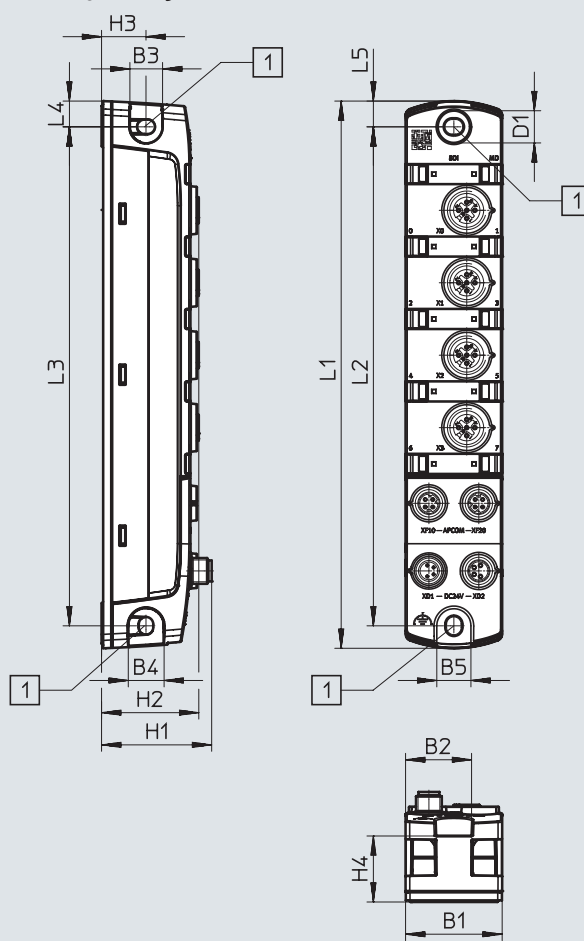
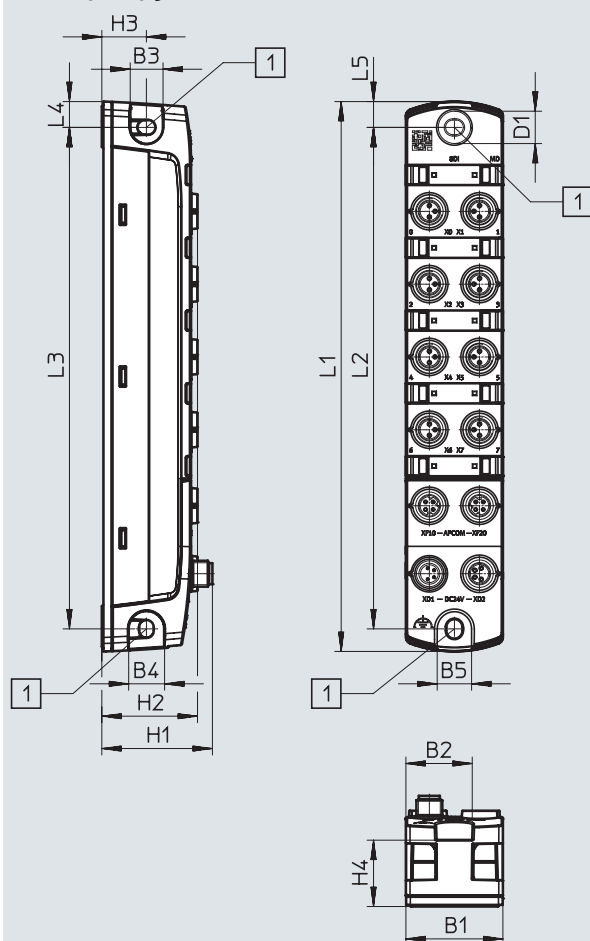
Data sheet – Digital input modules

Dimensions

Download CAD data → www.festo.com

CPX-AP-I-8DI-M8-3P



CPX-AP-I-8DI-M12-5P







[1] Mounting hole for M4 screws

	B1	B2	B3	B4	B5	D1 Ø	H1	H2	H3	H4	L1	L2	L3	L4	L5
CPX-AP-I-8DI-M8-3P	30	20.5	10	11	11	10	34.2	29.6	13.8	20.5	170	155	155	8	8
CPX-AP-I-8DI-M12-5P	30	20.5	10	11	11	10	34.2	30.2	13.8	20.5	170	155	155	8	8

Data sheet – Digital input modules

Ordering data			Part no.	Type
	Digital input module	Electrical connection input 8x socket, 3-pin, M8x1	8086600	CPX-AP-I-8DI-M8-3P
		Electrical connection input 4x socket, 5-pin, M12x1	8086602	CPX-AP-I-8DI-M12-5P

Ordering data – Accessories								
Description				Part no.	Type	PE ¹⁾		
Connecting cable								
	For communication interface	Straight plug, M8x1, 4-pin, D-coded	Straight plug, M8x1, 4-pin, D-coded	0.3 m	8082902	NEBC-D8G4-ES-0.3-N-S-D8G4-ET	1	
				0.5 m	8065123	NEBC-D8G4-ES-0.5-N-S-D8G4-ET	1	
				1.0 m	8065125	NEBC-D8G4-ES-1-N-S-D8G4-ET	1	
				2.0 m	8065127	NEBC-D8G4-ES-2-N-S-D8G4-ET	1	
				5.0 m	8065129	NEBC-D8G4-ES-5-N-S-D8G4-ET	1	
				7.5 m	8065131	NEBC-D8G4-ES-7.5-N-S-D8G4-ET	1	
				10.0 m	8065133	NEBC-D8G4-ES-10-N-S-D8G4-ET	1	
				15.0 m	8065135	NEBC-D8G4-ES-15-N-S-D8G4-ET	1	
	For power supply	Straight socket, M8 x 1, 4-pin, A-coded	Open cable end, 4-wire	5.0 m	8065110	NEBL-M8G4-E-5-N-LE4	1	
				7.5 m	8065113	NEBL-M8G4-E-7,5-N-LE4	1	
				10.0 m	8065117	NEBL-M8G4-E-10-N-LE4	1	
				15.0 m	8065121	NEBL-M8G4-E-15-N-LE4	1	
	For power transmission	Straight socket, M8 x 1, 4-pin, A-coded	Straight plug, M8 x 1, 4-pin, A-coded	0.3 m	8082904	NEBL-M8G4-E-0.3-N-M8G4	1	
				0.5 m	8065102	NEBL-M8G4-E-0.5-N-M8G4	1	
				1.0 m	8065104	NEBL-M8G4-E-1-N-M8G4	1	
				2.0 m	8065106	NEBL-M8G4-E-2-N-M8G4	1	
				5.0 m	8065108	NEBL-M8G4-E-5-N-M8G4	1	
				7.5 m	8065111	NEBL-M8G4-E-7.5-N-M8G4	1	
				10.0 m	8065115	NEBL-M8G4-E-10-N-M8G4	1	
				15.0 m	8065119	NEBL-M8G4-E-15-N-M8G4	1	
Inscription label								
	For modules CPX-AP-I	Size 6x 12.5 mm, 10 frames with 24 pieces each	8087174	ASLR-L-X4-612-P240	240			
Cover cap								
	For sealing unused connections	For connection M8x1	177672	ISK-M8	10			
		For connection M12x1	165592	ISK-M12	10			

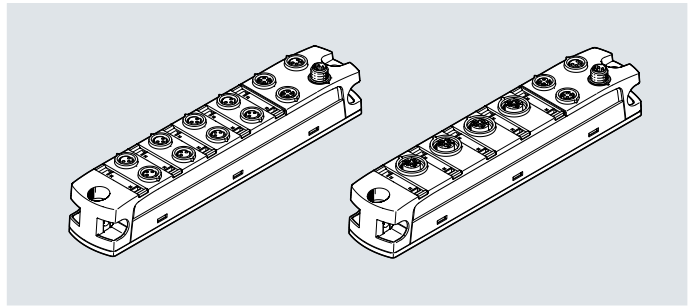
1) Packaging unit.

Data sheet – Digital input/output modules

Function

Digital input/output modules facilitate the connection of electric sensors to IEC 61131-2 type 3 (inductive, capacitive) and of electrical consumers to IEC 1131-2 type 0.5 with an operating voltage of 24 V DC.

- Input/output modules for 24 V DC operating voltage
- Connection M8x1 3-pin or M12x1 5-pin
- Status and error indication via LED

**General technical data**

Type	CPX-AP-I-4DI4DO-M8-3P		CPX-AP-I-4DI4DO-M12-5P
Number of inputs	4		
Number of outputs	4		
Electrical connection, input			
Function	Digital input		
Connection type	4x socket	2x socket	
Connection technology	M8x1, A-coded to EN 61076-2-104	M12x1, A-coded to EN 61076-2-101	
Number of pins/wires	3	5	
Input switching logic	PNP (positive switching)		
	2-wire sensors to IEC 61131-2		
	3-wire sensors to IEC 61131-2		
Characteristic curve of inputs	To IEC 61131-2, type 3		
Switching level	[V]	Signal 0: ≤5	
	[V]	Signal 1: ≥11	
Fuse protection inputs (short circuit)	Internal electronic fuse per module		
Input debounce time	[ms]	0.1	
	[ms]	3	
	[ms]	10	
	[ms]	20	
Electrical isolation of inputs between channel and internal communication	Yes		
Electrical isolation of inputs between channels	No		
Electrical connection output			
Function	Digital output		
Connection type	4x socket	2x socket	
Connection technology	M8x1, A-coded to EN 61076-2-104	M12x1, A-coded to EN 61076-2-101	
Number of pins/wires	3	5	
Switching logic at outputs	PNP (positive switching)		
Characteristic curve of outputs	To IEC 61131-2, type 0.5		
Output delay with resistive load	[μs]	Signal change from 0 to 1: <200	
	[μs]	Signal change from 1 to 0: <200	
Fuse protection outputs (short circuit)	Internal electronic fuse per channel		
Electrical isolation of outputs between channel and internal communication	Yes		
Electrical isolation of outputs between channels	No		
Communication interface			
Protocol	AP-COM		
Function	System communication XF10 IN / XF20 OUT		
Connection type	2 x socket		
Connection technology	M8x1, D-coded to EN 61076-2-114		
Number of pins/wires	4		
Screening	Yes		

Data sheet – Digital input/output modules

General data		
Diagnostics via LED		Individual module diagnostics
		Status per channel
		Power supply load
Diagnostics per internal communication		Load overvoltage
		Load undervoltage
		Load switch-off
		Short-circuit/overload output signal
		Electronics/sensors overvoltage
		Electronics/sensors undervoltage
Maximum cable length		Short circuit/overload in sensor supply
	[m]	30 outputs
	[m]	30 inputs
	[m]	50 system communication
Information on maximum cable length		Power supply according to nominal voltage
Reverse polarity protection		Yes

Technical data – Electrical components		
Nominal operating voltage for electronics/sensors	[V DC]	24
Nominal operating voltage, load	[V DC]	24
Permissible voltage fluctuations, electronics/sensors	[%]	±25
Permissible voltage fluctuations, load	[%]	±25
Note regarding operating voltage		Note voltage drop
		SELV/PELV power supply units required
Mains buffering	[ms]	10
Max. power supply	[A]	2x 4
		External fuse required
Max. power supply per channel	[A]	0.5
Max. residual current of inputs per module	[A]	1.8
Max. residual current of outputs per module	[A]	2
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 35
Intrinsic current consumption at nominal operating voltage for load	[mA]	Typically 10
Electrical connection, power supply		
Function		Incoming electronics/sensors and load
Connection type		Plug
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4
Electrical connection for power transmission		
Function		Outgoing electronics/sensors and load
Connection type		Socket
Connection technology		M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4

Technical data – Mechanical components		
Type of mounting		With through-hole
Product weight	[g]	129
Dimensions W x L x H	[mm]	30 x 170 x 35
Tightening torque	[Nm]	1.2

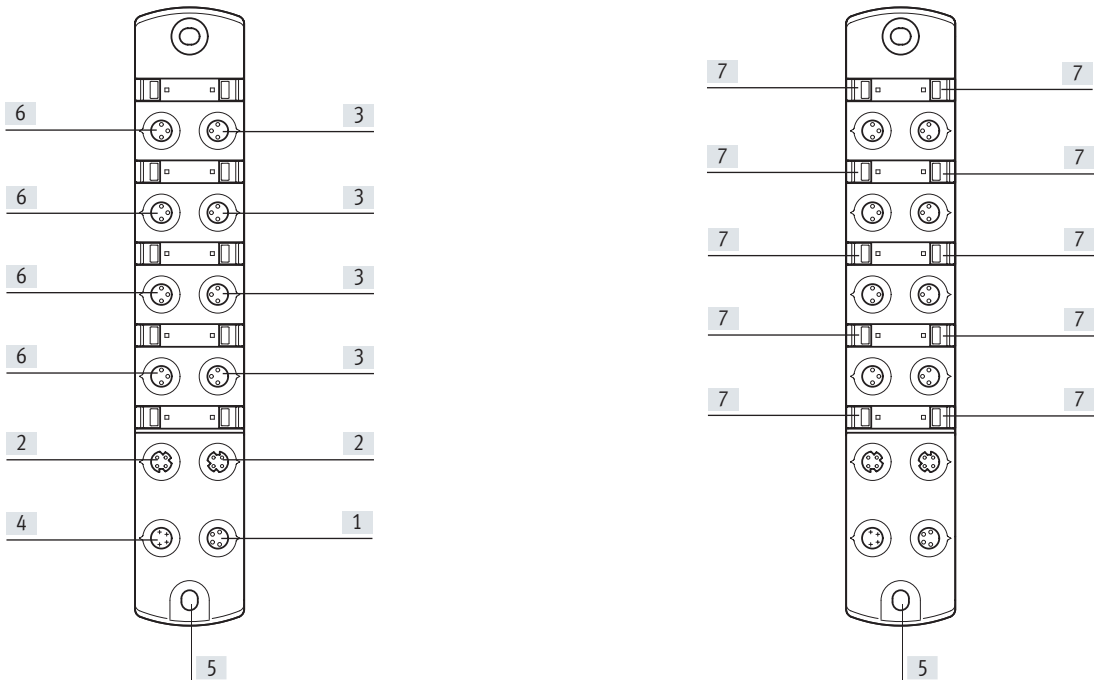
Materials	
Housing	PA
	PC
	Nickel-plated, die-cast zinc
Note on materials	RoHS-compliant

Data sheet – Digital input/output modules

Operating and environmental conditions		
Ambient temperature	[°C]	–20 ... +50
Storage temperature	[°C]	–40 ... +70
Corrosion resistance CRC ¹⁾		1
Relative humidity	[%]	5 ... 95
		Non-condensing
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾
KC mark		KC-EMV
Certification		RCM
Degree of protection		IP65
		IP67
Note on degree of protection		Unused connections sealed

- 1) Corrosion resistance class CRC 1 to Festo standard FN 940070
Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).
- 2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
- 3) Additional information available at www.festo.com/sp → Certificates.

Connection components and indicator lights



- [1] Electrical connection, power transmission

[2] Communication interface
- [3] Electrical connection, inputs/ outputs

[4] Electrical connection, power supply
- [5] Earthing connection

[6] Location for inscription label
- [7] LED indicators

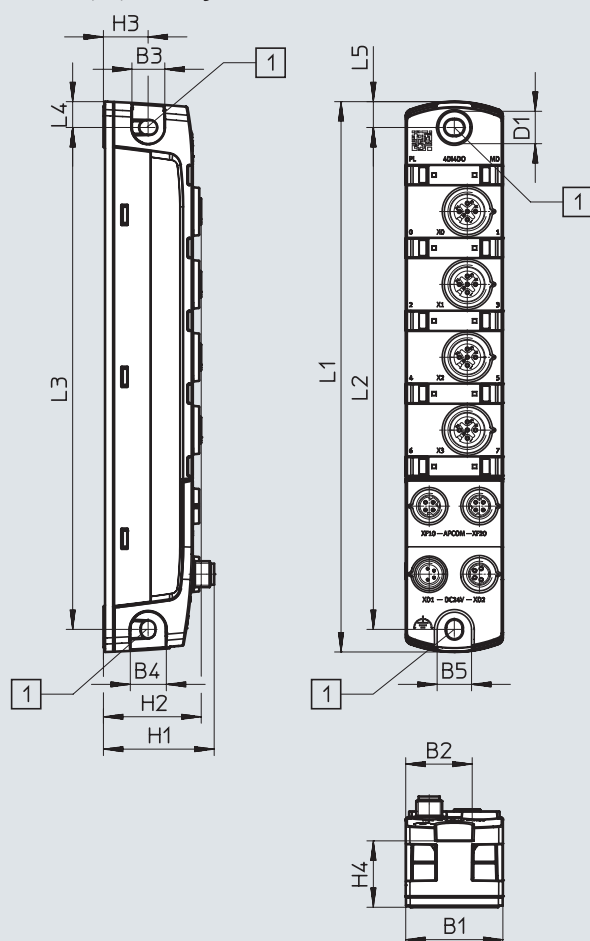
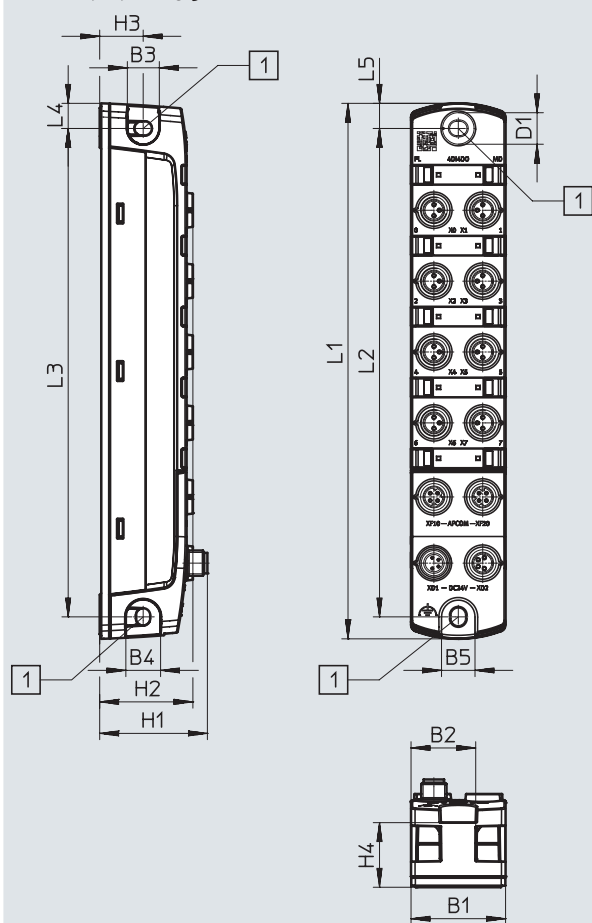
Data sheet – Digital input/output modules

Dimensions

Download CAD data → www.festo.com

CPX-AP-I-4DI4DO-M8-3P



CPX-AP-I-4DI4DO-M12-5P







[1] Mounting hole for M4 screws

	B1	B2	B3	B4	B5	D1 Ø	H1	H2	H3	H4	L1	L2	L3	L4	L5
CPX-AP-I-4DI4DO-M8-3P	30	20.5	10	11	11	10	34.2	29.6	13.8	20.5	170	155	155	8	8
CPX-AP-I-4DI4DO-M12-5P	30	20.5	10	11	11	10	34.2	30.2	13.8	20.5	170	155	155	8	8

Data sheet – Digital input/output modules

Ordering data			Part no.	Type
	Digital input/output module	- Electrical connection input 4x socket, 3-pin, M8x1 - Electrical connection output 4x socket, 3-pin, M8x1	8086601	CPX-AP-I-4DI4DO-M8-3P
		- Electrical connection input 2x socket, 5-pin, M12x1 - Electrical connection output 2x socket, 5-pin, M12x1	8086603	CPX-AP-I-4DI4DO-M12-5P

Ordering data – Accessories							
Description				Part no.	Type	PE ¹⁾	
Connecting cable							
	For communication interface	Straight plug, M8x1, 4-pin, D-coded	Straight plug, M8x1, 4-pin, D-coded	0.3 m	8082902	NEBC-D8G4-ES-0.3-N-S-D8G4-ET	1
				0.5 m	8065123	NEBC-D8G4-ES-0.5-N-S-D8G4-ET	1
				1.0 m	8065125	NEBC-D8G4-ES-1-N-S-D8G4-ET	1
				2.0 m	8065127	NEBC-D8G4-ES-2-N-S-D8G4-ET	1
				5.0 m	8065129	NEBC-D8G4-ES-5-N-S-D8G4-ET	1
				7.5 m	8065131	NEBC-D8G4-ES-7.5-N-S-D8G4-ET	1
				10.0 m	8065133	NEBC-D8G4-ES-10-N-S-D8G4-ET	1
				15.0 m	8065135	NEBC-D8G4-ES-15-N-S-D8G4-ET	1
	For power supply	Straight socket, M8 x 1, 4-pin, A-coded	Open cable end, 4-wire	5.0 m	8065110	NEBL-M8G4-E-5-N-LE4	1
				7.5 m	8065113	NEBL-M8G4-E-7,5-N-LE4	1
				10.0 m	8065117	NEBL-M8G4-E-10-N-LE4	1
				15.0 m	8065121	NEBL-M8G4-E-15-N-LE4	1
	For power transmission	Straight socket, M8 x 1, 4-pin, A-coded	Straight plug, M8 x 1, 4-pin, A-coded	0.3 m	8082904	NEBL-M8G4-E-0.3-N-M8G4	1
				0.5 m	8065102	NEBL-M8G4-E-0.5-N-M8G4	1
				1.0 m	8065104	NEBL-M8G4-E-1-N-M8G4	1
				2.0 m	8065106	NEBL-M8G4-E-2-N-M8G4	1
				5.0 m	8065108	NEBL-M8G4-E-5-N-M8G4	1
				7.5 m	8065111	NEBL-M8G4-E-7.5-N-M8G4	1
				10.0 m	8065115	NEBL-M8G4-E-10-N-M8G4	1
				15.0 m	8065119	NEBL-M8G4-E-15-N-M8G4	1
Inscription label							
	For modules CPX-AP-I	Size 6x 12.5 mm, 10 frames with 24 pieces each	8087174	ASLR-L-X4-612-P240	240		
Cover cap							
	For sealing unused connections	For connection M8x1	177672	ISK-M8	10		
		For connection M12x1	165592	ISK-M12	10		

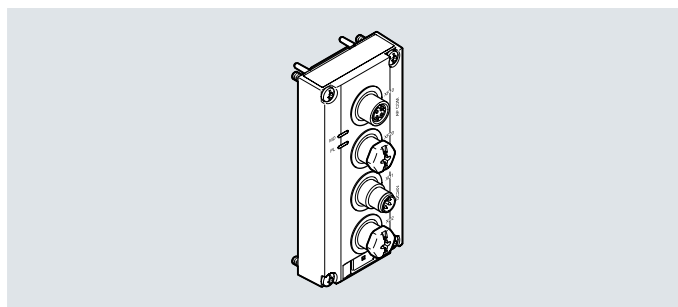
1) Packaging unit.

Data sheet – Electrical interface for valve terminal VTUG

Function

The electrical interface facilitates a valve terminal VTUG to be operated as a component of the automation system CPX-AP-I.

- Indication of status and error messages via LED indicators
- Up to 24 valve positions with up to 48 solenoid coils
- Separate load voltage supply for the connected valves; can be disconnected separately
- Short-circuit disconnection



General technical data		
Type	VAEM-L1-S-12-AP	VAEM-L1-S-24-AP
Maximum number of valve positions	12	24
Maximum number of solenoid coils	24	48
Communication interface		
Protocol	AP-COM	
Function	System communication XF10 IN / XF20 OUT	
Connection type	2 x socket	
Connection technology	M8x1, D-coded to EN 61076-2-114	
Number of pins/wires	4	
Screening	Yes	
General data		
Module parameters	Configuration of voltage monitoring load supply PL	
	Response in error state	
Diagnostics via LED	Individual module diagnostics	
	Power supply load	
Diagnostics per internal communication	Electronics/sensors overvoltage	
	Electronics/sensors undervoltage	
	Load overvoltage	
	Load undervoltage	
	Load switch-off	
Maximum cable length	[m]	50 system communication

Data sheet – Electrical interface for valve terminal VTUG

Technical data – Electrical components			
Type		VAEM-L1-S-12-AP	VAEM-L1-S-24-AP
Nominal operating voltage for electronics/sensors	[V DC]	24	24
Permissible voltage fluctuations, electronics/sensors	[%]	±25	±25
Nominal operating voltage, load	[V DC]	24	24
Permissible voltage fluctuations, load	[%]	±10	±10
Note regarding operating voltage		SELV/PELV power supply units required	SELV/PELV power supply units required
		Note voltage drop	Note voltage drop
Mains buffering	[ms]	10	10
Mains buffering of load	[ms]	3	3
Maximum power supply		2 x 4 A (external fuse required)	2 x 4 A (external fuse required)
Fuse protection (short circuit)		Internal electronic fuse per channel	Internal electronic fuse per channel
Protection against direct and indirect contact		PELV	PELV
		SELV	SELV
Reverse polarity protection		Yes	Yes
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 34	Typically 34
Intrinsic current consumption at nominal operating voltage for load	[mA]	Typically 16	Typically 22
Electrical connection, power supply			
Function		Incoming electronics/sensors and load	Incoming electronics/sensors and load
Connection type		Plug	Plug
Connection technology		M8x1, A-coded to EN 61076-2-104	M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4	4
Electrical connection for power transmission			
Function		Outgoing electronics/sensors and load	Outgoing electronics/sensors and load
Connection type		Socket	Socket
Connection technology		M8x1, A-coded to EN 61076-2-104	M8x1, A-coded to EN 61076-2-104
Number of pins/wires		4	4

Data sheet – Electrical interface for valve terminal VTUG

Technical data – Mechanical components		
Type of mounting		Screwed on
Connection position		Top
Product weight	[g]	76
Dimensions W x L x H	[mm]	42 x 91 x 30
Materials		
Housing		Reinforced PA
Threaded sleeve		Nickel-plated brass
Note on materials		RoHS-compliant
Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +60
Corrosion resistance CRC ¹⁾		2
Relative humidity	[%]	5 ... 95
		Non-condensing
Nominal altitude of use		≤ 2000 m NHN
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾
KC mark		KC-EMV
Degree of protection		IP65
		IP67
Note on degree of protection		In assembled state
		Unused connections sealed

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

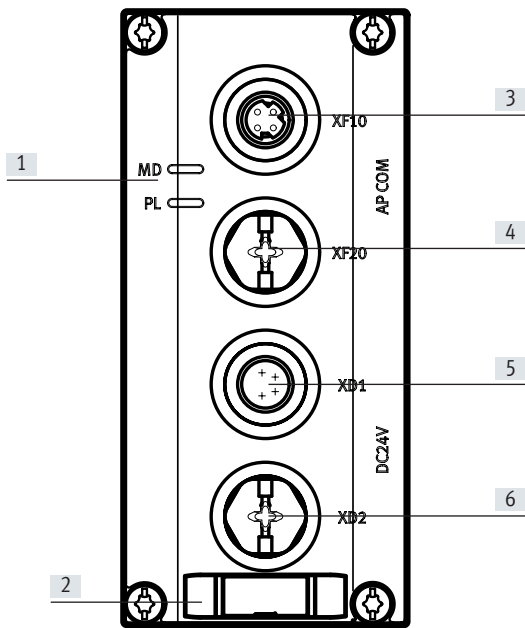
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) Additional information available at www.festo.com/sp → Certificates.

Data sheet – Electrical interface for valve terminal VTUG

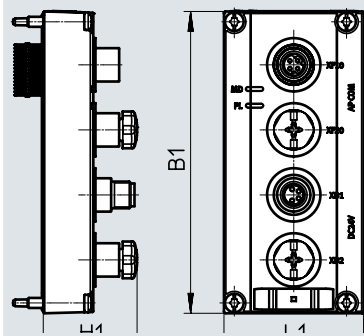
Connection components and indicator lights



- [1] LED indicators
- [2] Location for inscription label
- [3] Communication interface
- [4] Communication interface 2
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission


Dimensions




Download CAD data → www.festo.com




	B1	H1	L1
VAEM-L1-S-12-AP	90.5	28.1	41.8
VAEM-L1-S-24-AP	90.5	28.1	41.8

Data sheet – Electrical interface for valve terminal VTUG

Ordering data					Part no.	Type
	Electrical interface for valve terminal VTUG		12 valve positions	8081922	VAEM-L1-S-12-AP	
			24 valve positions	8081923	VAEM-L1-S-24-AP	

Ordering data – Accessories							
Description				Part no.	Type	PE ¹⁾	
Connecting cable							
	For communication interface	Straight plug, M8x1, 4-pin, D-coded	Straight plug, M8x1, 4-pin, D-coded	0.3 m	8082902	NEBC-D8G4-ES-0.3-N-S-D8G4-ET	1
				0.5 m	8065123	NEBC-D8G4-ES-0.5-N-S-D8G4-ET	1
				1.0 m	8065125	NEBC-D8G4-ES-1-N-S-D8G4-ET	1
				2.0 m	8065127	NEBC-D8G4-ES-2-N-S-D8G4-ET	1
				5.0 m	8065129	NEBC-D8G4-ES-5-N-S-D8G4-ET	1
				7.5 m	8065131	NEBC-D8G4-ES-7.5-N-S-D8G4-ET	1
				10.0 m	8065133	NEBC-D8G4-ES-10-N-S-D8G4-ET	1
				15.0 m	8065135	NEBC-D8G4-ES-15-N-S-D8G4-ET	1
	For power supply	Straight socket, M8 x 1, 4-pin, A-coded	Open cable end, 4-wire	5.0 m	8065110	NEBL-M8G4-E-5-N-LE4	1
				7.5 m	8065113	NEBL-M8G4-E-7,5-N-LE4	1
				10.0 m	8065117	NEBL-M8G4-E-10-N-LE4	1
				15.0 m	8065121	NEBL-M8G4-E-15-N-LE4	1
	For power transmission	Straight socket, M8 x 1, 4-pin, A-coded	Straight plug, M8 x 1, 4-pin, A-coded	0.3 m	8082904	NEBL-M8G4-E-0.3-N-M8G4	1
				0.5 m	8065102	NEBL-M8G4-E-0.5-N-M8G4	1
				1.0 m	8065104	NEBL-M8G4-E-1-N-M8G4	1
				2.0 m	8065106	NEBL-M8G4-E-2-N-M8G4	1
				5.0 m	8065108	NEBL-M8G4-E-5-N-M8G4	1
				7.5 m	8065111	NEBL-M8G4-E-7.5-N-M8G4	1
				10.0 m	8065115	NEBL-M8G4-E-10-N-M8G4	1
15.0 m	8065119	NEBL-M8G4-E-15-N-M8G4	1				

Inscription label					
	For modules CPX-AP-I	Size 6x 12.5 mm, 10 frames with 24 pieces each	8087174	ASLR-L-X4-612-P240	240

Cover cap					
	For sealing unused connections	For connection M8x1	177672	ISK-M8	10

1) Packaging unit.

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalnepantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us

www.festo.com/socialmedia



www.festo.com

Subject to change