


Guided drives DGRF-C, clean design

FESTO

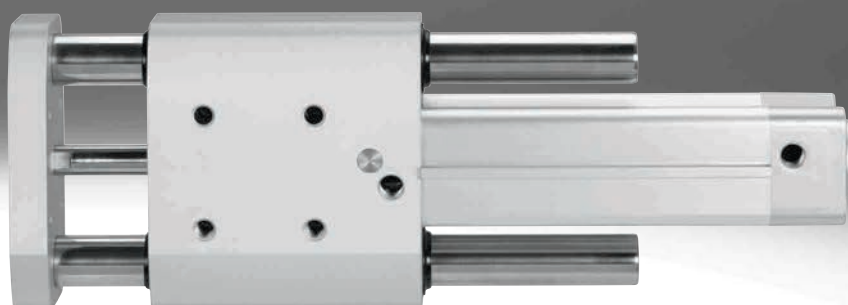

Key features and product range overview

At a glance


- The guided drive is used wherever hygiene, ease of cleaning and resistance are important, predominantly in dry and splash zones in the food and packaging industry.
- Corrosion-resistant in harsh environmental conditions
- Easy-to-clean design
- NSF H1-compliant lubrication
- Resistant to conventional cleaning agents
- For hygiene reasons, the threads on the end caps should be sealed with suitable plug screws
- With a dry-running seal (A3), the drive will continue to function reliably even if the lubricant has been washed away due to frequent cleaning.

Areas of application:


- Bottling systems in the beverage industry
 - Labelling and palletising machines
- Milk processing
 - Filling ice cream and yoghurt containers, etc.
- Meat processing
- Confectionery production
- Production of baked goods
- Packaging industry
 - Food, pharmaceuticals, cosmetics, chemicals, beverages and tobacco

Mounting options


From underneath

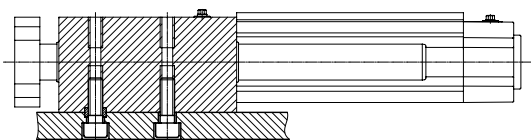



From above

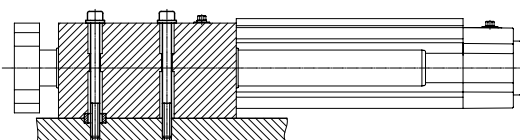

On the yoke plate

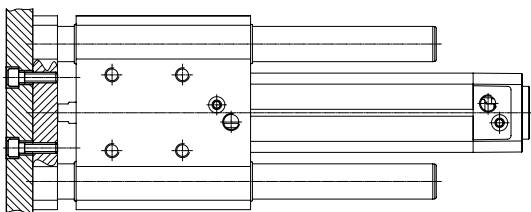


Product range overview


Function	Type	Piston diameter	Stroke	Cushioning			Position sensing	Mounting rail	Unlubricated operation A3
				P	PPV	PPS			
Double-acting	DGRF-C-GF	20, 25	10 ... 400	■	–	–	–	–	■
		32	10 ... 400	■	■	■	■	■	■
		40, 50, 63	10 ... 400	–	■	■	■	■	■

Peripherals overview

Piston diameter 20, 25

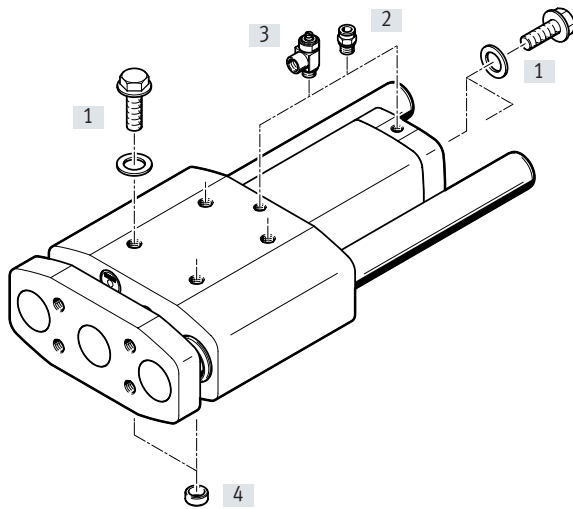

Piston diameter 32, 40, 50, 63

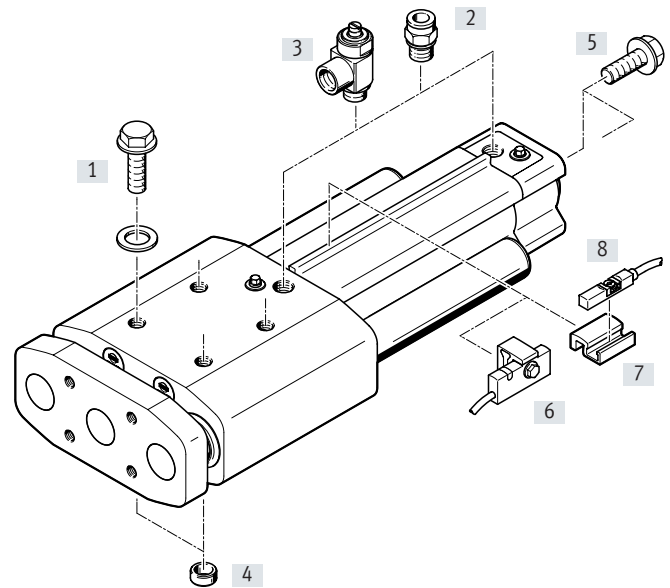

Accessories		Description	DGRF-...-			→ Page/ Internet
			P	PPV	PPS	
[1]	Plug screw DAMD	- For sealing unused mounting threads - Screws are not included in the scope of delivery of the drive - Cover plate is included in scope of delivery of the screw	■	■	■	15
[2]	Push-in fitting NPQH/CRQS/CRQSL/NPQP	For connecting compressed air tubing with standard O.D.	■	■	■	13
[3]	One-way flow control valve CRGRLA/VFOH	For regulating speed	■	■	■	14
[4]	Centring sleeve ZBH	- For centring the guided drive - Two centring sleeves included in the scope of delivery	■	■	■	15
[5]	Plug screw DAMD	- For sealing unused mounting threads - Screws are not included in the scope of delivery of the drive	■	■	■	15
[6]	Proximity sensor SMT-C1	- For sensing the piston rod position - Proximity sensor is fitted on the sensor mounting rail	■	■	■	12
[7]	Mounting kit SMB-8-C	- For fitting the proximity sensor CRSMT-8M - Mounting kit is fitted on the sensor mounting rail	—	■ ¹⁾	■	12
[8]	Proximity sensor CRSMT-8M	For sensing the piston rod position	—	■ ¹⁾	■	12

1) Possible when ordering drives from 02/2014 (series E2).

Type codes

001	Series	
DGRF	Guided drive, double-acting, clean design	

002	Product version	
C	Easy-to-clean design	

003	Guide	
GF	Plain bearing	

004	Piston diameter	
20	20	
25	25	
32	32	
40	40	
50	50	
63	63	

005	Stroke	
...	10 ... 400	

006	Cushioning	
P	Elastic cushioning rings/plates on both sides	
PPS	Pneumatic cushioning, self-adjusting at both ends	
PPV	Pneumatic cushioning, adjustable at both ends	


007	Position sensing	
	None	
A	For proximity sensor	

008	Sensor mounting, external	
	None	
R	Mounting rail for sensors	


009	Scraper variant	
	None	
A3	For unlubricated operation	

Data sheet


P cushioning



PPV cushioning



PPS cushioning




Ø - Diameter
20 ... 63 mm

— - Stroke length
10 ... 400 mm



www.festo.com

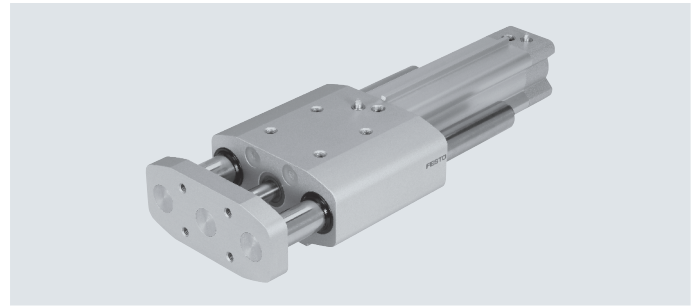

General technical data

Piston diameter		20	25	32	40	50	63
Pneumatic connection		M5	M5	G1/8	G1/4	G1/4	G3/8
Mode of operation		Double-acting					
Design		Guide					
		Guide rods with yoke					
Guide		Plain-bearing guide					
Cushioning	P	Elastic cushioning rings at both ends			–		
	PPV	–		Pneumatic cushioning, adjustable at both ends			
	PPS	–		Pneumatic cushioning, self-adjusting at both ends			
Cushioning length	[mm]	–		20	20	22	22
Position sensing	–			Via proximity sensor			
Type of mounting	With through-hole						
	Via female thread						
Mounting position		Any					
Torsional backlash ¹⁾	[°]	0.13	0.11	0.10	0.09	0.07	0.06

1) Retracted state, without load

Operating and environmental conditions

Piston diameter		20	25	32		40	50	63
Variant				P	PPV/PPS			
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]						
Note on the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)						
Operating pressure	[bar]	2.5 ... 10		2 ... 10	2 ... 12	2 ... 12		1.5 ... 12
	A3 [bar]	2 ... 10			2 ... 12	1.5 ... 12		
Ambient temperature	[°C]	-20 ... +80						
Food-safe ¹⁾		→ Supplementary information on materials						
Corrosion resistance class CRC ²⁾		3						

1) Additional information is available at www.festo.com/sp → Certificates.

2) Corrosion resistance class CRC 3 to Festo standard FN 940070

High corrosion stress. Outdoor exposure under moderate corrosive conditions. Externally visible parts with primarily functional surface requirements which are in direct contact with a normal industrial environment.

Data sheet

Forces [N] and impact energy [J]						
Piston diameter	20	25	32	40	50	63
Theoretical force at 6 bar, advancing	189	295	483	754	1178	1870
Theoretical force at 6 bar, retracting	141	247	415	633	990	1682
Max. impact energy in the end positions with P cushioning	0.2	0.3	0.4	–	–	–

Permissible impact velocity:

$$v = \sqrt{\frac{2 \cdot E}{m_1 + m_2}}$$

Maximum permissible mass:

$$m_2 = \frac{2 \cdot E}{v^2} - m_1$$

 $v_{perm.}$

E

 m_1
 m_2

Permissible impact velocity

Max. impact energy

Moving mass (drive)

Moving payload




Note

These specifications represent the maximum values that can be achieved. The maximum permissible impact energy must be observed.

Weight [g]						
Piston diameter	20	25	32	40	50	63
Variant			P	PPV/PPS		
Product weight with 0 mm stroke	885	1199	2090	2305	3000	4800
Additional weight per 10 mm stroke	52	55	80	78	90	140
Moving mass with 0 mm stroke	417	486	902	904	1065	1792
Moving mass per 10 mm stroke	38	38	58	58	65	102

Materials


Sectional view

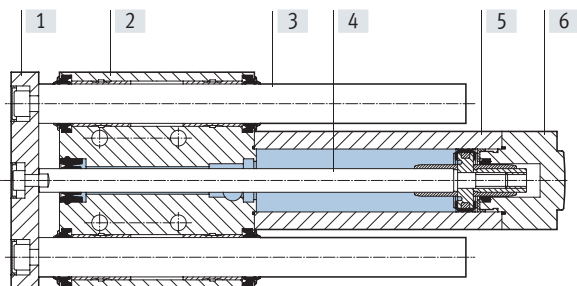

Guided drive	
[1] Yoke plate	Anodised wrought aluminium alloy
[2] Housing	Anodised wrought aluminium alloy
[3] Guide rod	High-alloy stainless steel
[4] Piston rod	High-alloy stainless steel
[5] Cylinder barrel	Anodised wrought aluminium alloy
[6] Cover	
DGRF...-20/-25/-32-P	Anodised wrought aluminium alloy
DGRF...-32-PPV/-PPS	Coated die-cast aluminium
DGRF...-40/-50/-63	Coated die-cast aluminium
– Seal	
DGRF...	TPE-U (PUR) media seal (modified for resistance to hydrolysis and cleaning)
DGRF...-A3	PE
Note on materials	RoHS-compliant


Data sheet

Max. effective load F as a function of stroke l





- Load data is based on a distance from the centre of gravity of XS = 50 mm
- Load data can be requested for larger distances

[1] Centre of gravity of payload

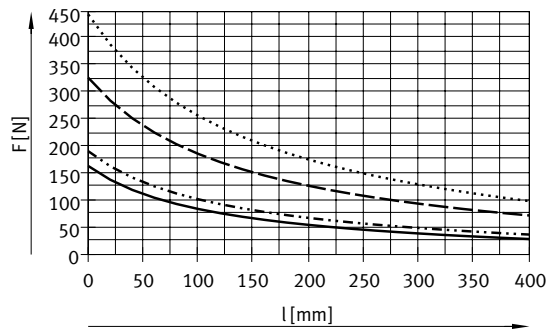

— Ø 20
 Ø 25
 --- Ø 32/40
 - · - · - Ø 50/63

Max. torque load M as a function of stroke l

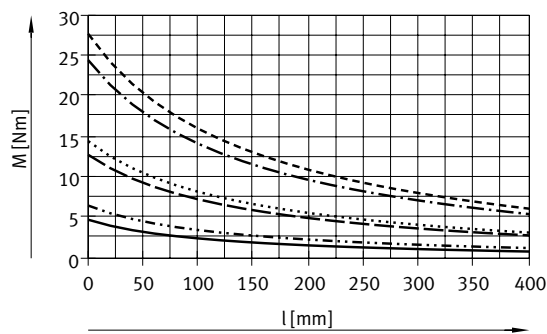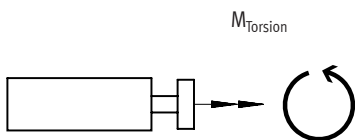


— Ø 20
 Ø 25
 --- Ø 32
 - · - · - Ø 40
 --- Ø 50
 --- Ø 63

Data sheet

Deflection of the piston rod

Deflection f_1 due to bearing clearance as a function of stroke l

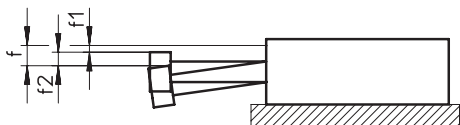


$$f = f_1 + f_2$$

f = Total deflection of the piston rod

f_1 = Deflection due to bearing clearance


f_2 = Deflection due to transverse load

Deflection f_1 ,
due to bearing clearance as a function of stroke l

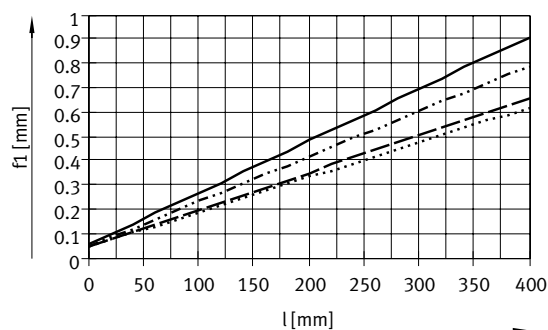

— $\varnothing 20$
 $\varnothing 25$
 - - - $\varnothing 32/40$
 - · - · - $\varnothing 50/63$

Deflection f_2 ,
due to payload F and rigidity c as a function of stroke l

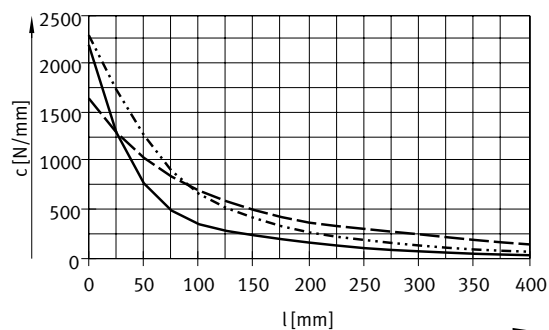


— $\varnothing 20/25$
 $\varnothing 32/40$
 - - - $\varnothing 50/63$
 - · - · - $\varnothing 20$

End-position sensing

With proximity sensor SMT-C1

A minimum stroke is required to be able to sense both end positions at the cylinder.

- [1] Position of the proximity sensor within the housing.




Piston diameter	32	40	50	63
Minimum stroke x [mm]	35	35	35	30

With mounting kit SMB-8-C and proximity sensor CRSMT-8M

A minimum stroke is required to be able to sense both end positions at the cylinder.

- [1] Position of the proximity sensor within the housing.




Piston diameter	32	40	50	63
Minimum stroke x [mm]	30	30	30	30

Data sheet

Dimensions

Download CAD data → www.festo.com

DGRF...-P – Elastic cushioning rings at both ends

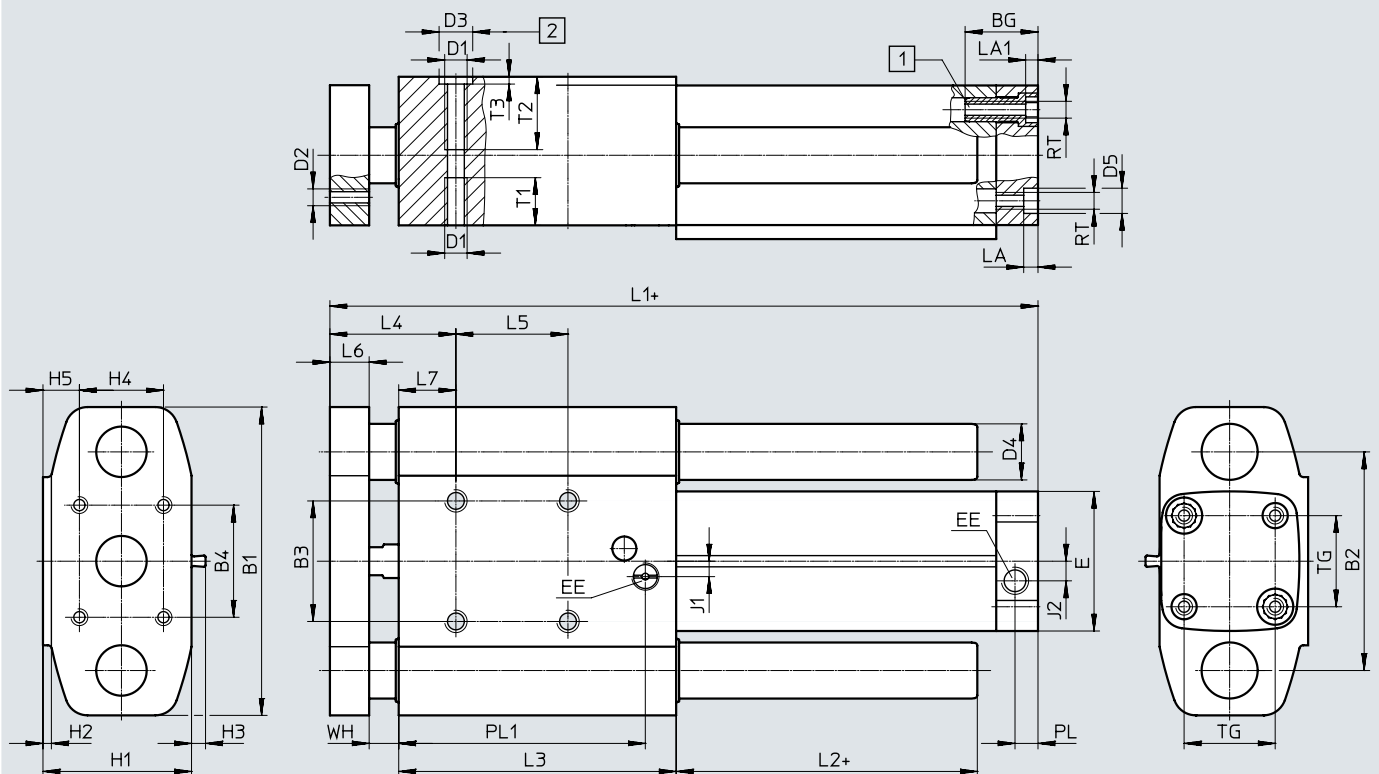

+ = plus stroke length

[1] Socket head screw with female thread

[2] Centring holes for centring sleeve ZBH

∅	BG	B1	B2	B3 ²⁾	B4	D1	D2	D3 ³⁾	D4	D5	E	EE
[mm]								∅ H7	∅	∅ F9		
20	19.5	83	58	30	30	M6	M5	9	16	9	37	M5
25	19.5	95	68	35	40	M6	M6	9	16	9	42	M5
32	26	110	78	43	40	M8	M6	12	20	9	50	G1/8

∅	H1	H2	H3 ¹⁾	H4	H5	J1	J2	L1	L2	L3	L4	L5
[mm]												
20	39	2	–	20	10.5	0	0	115 +1.4/-0.8	7	68	40 +1/-0.9	30
25	44	2	–	20	13	0	0	126 +1.4/-0.8	7	77	40 +1/-0.9	40
32	53	3	5	30	13	5.5	7	152.8 ±1.1	7.4	99	45 +0.9/-1	40

∅	L6	L7	LA	LA1	PL	PL1	RT	T1	T2	T3	TG	WH
[mm]												
20	12	18	4.9	4.6	6	62	M5	13	20	2.1	22	10 +0.5/-0.7
25	12	18	4.9	4.6	6	71	M5	13	25	2.1	26	10 +0.5/-0.7
32	14	20.4	5.1	4.6	8.2	88	M6	17	26	2.6	32.5	10.7 +0.3/-0.9

1) Only in combination with sensor mounting rail (DGRF-32...-R)

2) Tolerance between the centring holes ±0.02 mm

3) Two centring sleeves included in the scope of delivery


Data sheet

Dimensions

Download CAD data → www.festo.com

DGRF-...-PPV – Pneumatic cushioning, adjustable at both ends,

DGRF-...-PPS – Pneumatic cushioning, self-adjusting at both ends

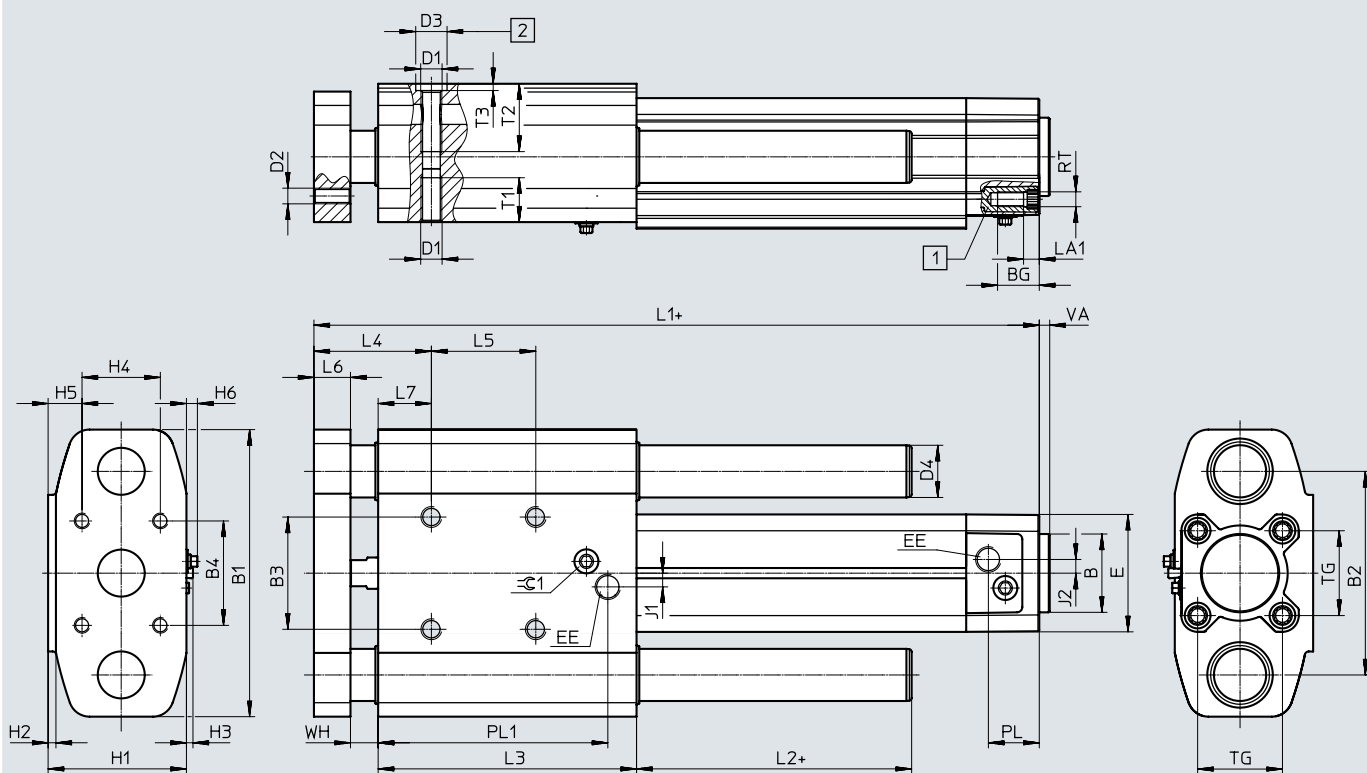

+ = plus stroke length

[1] Socket head screw with female thread

[2] Centring holes for centring sleeve ZBH

∅	B	BG	B1	B2	B3 ²⁾	B4	D1	D2	D3 ³⁾	D4	E	EE	H1	H2
[mm]	∅ d11								∅ H7	∅				
32	30	16	110	78	43	40	M8	M6	12	20	45	G1/8	53	3
40	35	16	120	88	51	50	M8	M6	12	20	54	G1/4	61	3
50	40	17	148	110	64	60	M8	M8	12	25	64	G1/4	73	3
63	45	17	162	125	80	80	M10	M8	12	25	75	G3/8	84	3

∅	H3 ¹⁾	H4	H5	H6	J1	J2	L1	L2	L3	L4	L5
[mm]											
32	2.5	30	13	5.6	5.3	5.3	177.6 +1.9/-1.2	7.4	99	45 +1.5/-1.1	40
40	3	30	17	5.6	4	4	183.5 +1.9/-1.3	7.5	99	45 +1.5/-1.1	40
50	2	40	18	7.5	5.5	5.5	193.5 +1.7/-1.3	7.7	105	50 +1.3/-1.2	40
63	2	40	23.5	9.3	6.3	6.3	207.3 +1.7/-1.3	7.5	105	50 +1.3/-1.2	40

∅	L6	L7	LA1	PL	PL1	RT	T1	T2	T3	TG	VA	WH	⊙ 1
[mm]													
32	14	20.4	5.6	19.5	88	M6	17	26	2.6	32.5	4	10.6 +1/-0.9	4
40	14	20.5	5.6	22.5	83	M6	17	26	2.6	38	4	10.5 ±1/-1	4
50	16	22.7	6.1	22.5	89	M8	17	20	2.6	46.5	4	11.3 +0.8/-1	4
63	20	18.5	6.1	27.5	88	M8	17	24	2.6	56.5	4	11.5 +0.8/-1	4

1) Only in combination with sensor mounting rail (DGRF-...-R)

2) Tolerance between the centring holes ±0.02 mm

3) Two centring sleeves included in the scope of delivery

Ordering data – Modular product system

Ordering table									
Size	20	25	32	40	50	63	Condi- tions	Code	Enter code
Module no.	562216	562217	563366	562219	562220	562221			
Function	Guided drive							DGRF	DGRF
Product version	Easy-to-clean design							-C	-C
Guide	Plain-bearing guide							-GF	-GF
Piston diameter [mm]	20	25	32	40	50	63		-...	
Stroke [mm]	10 ... 400							-...	
Cushioning	Elastic cushioning rings at both ends			–				-P	
	–		Pneumatic cushioning, adjustable at both ends					-PPV	
	–		Pneumatic cushioning, self-adjusting at both ends					-PPS	
Position sensing	–		Via proximity sensor				[1]	A	
Sensor mounting, external	–		Mounting rail for proximity sensor				[1]	-R	
Wiper variant	Standard								
	For unlubricated operation							-A3	


[1] A, R Always present with piston diameter 32 ... 63.

Accessories

Permissible with DGRF-...-PPV¹⁾/-PPS:


Ordering data – Proximity sensor for T-slot, magneto-resistive

Data sheets → Internet: smt

	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type
N/O contact						
	Inserted in the slot from above, flush with the mounting kit	PNP	Cable, 3-wire	5.0	574380	CRSMT-8M-PS-24V-K-5.0-OE
			Cable, 3-wire	10.0	574381	CRSMT-8M-PS-24V-K-10.0-OE
			Plug M8x1, 3-pin	0.3	574383	CRSMT-8M-PS-24V-K-0.3-M8D
			Plug M12x1, 3-pin	0.3	574382	CRSMT-8M-PS-24V-K-0.3-M12

1) Possible when ordering drives from 02/2014 (series E2).


Ordering data – Mounting kit

	Description	Part no.	Type
	For fitting the proximity sensor CRSMT-8M on the mounting rail	1806790	SMB-8-C

Permissible with DGRF-...-P/-PPV/-PPS:



Ordering data – Proximity sensor for T-slot, magneto-resistive

Data sheets → Internet: smt

	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type
N/O contact						
	Fitted on the mounting rail	PNP	Cable, 3-wire	5.0	571339	SMT-C1-PS-24V-K-5.0-OE
			Plug M8x1, 3-pin	0.3	571342	SMT-C1-PS-24V-K-0.3-M8D
			Plug M12x1, 3-pin	0.3	571341	SMT-C1-PS-24V-K-0.3-M12

Ordering data – Connecting cables for SMT-C1-...

Data sheets → Internet: nebu

	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541363	NEBU-M12G5-K-2.5-LE3
			5	541364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541367	NEBU-M12W5-K-2.5-LE3
			5	541370	NEBU-M12W5-K-5-LE3


Accessories

Ordering data – Push-in fittings						Data sheets → Internet: qs					
	Connection Thread	Tubing O.D.	Material	Weight [g]	Part no.	Type	PU ²⁾				
With external hex											
	M5	4	High-alloy stainless steel	4.2	1857681	NPCK-C-D-M5-K4	1				
	G1/8	6		14.1	1366257	NPCK-C-D-G18-K6					
		8		13.4	1490383	NPCK-C-D-G18-K8					
		G1/4		8	28.85	1691701		NPCK-C-D-G14-K8			
	10			32.9	1489336	NPCK-C-D-G14-K10					
	G3/8			10	51.15	1489614		NPCK-C-D-G38-K10			
	M5	4	Nickel-plated brass, with sealing ring	5.8	578334	NPQH-D-M5-Q4-P10	10				
	G1/8	6		11.2	578335	NPQH-D-M5-Q6-P10					
		4		6.3	578338	NPQH-D-G18-Q4-P10					
		6		9.2	578339	NPQH-D-G18-Q6-P10					
		8		11.9	578340	NPQH-D-G18-Q8-P10					
	G1/4	6		13.1	578341	NPQH-D-G14-Q6-P10					
		8		14.1	578342	NPQH-D-G14-Q8-P10					
		10		17.5	578343	NPQH-D-G14-Q10-P10					
	G3/8	8		20.6	578345	NPQH-D-G38-Q8-P10					
		10		22.7	578346	NPQH-D-G38-Q10-P10					
		12		29.8	578347	NPQH-D-G38-Q12-P10					
				M5	4	Stainless steel		6.0	162860	CRQS-M5-4 ¹⁾	1
R1/8	6		8.4	162861	CRQS-M5-6 ¹⁾						
	4		8.7	132643	CRQS-1/8-4						
	6		9.9	162862	CRQS-1/8-6						
	8		12	162863	CRQS-1/8-8						
R1/4	6		18	132644	CRQS-1/4-6						
	8		18	162864	CRQS-1/4-8						
	10		22	162865	CRQS-1/4-10						
R3/8	10		29	162866	CRQS-3/8-10						
	12		37	162867	CRQS-3/8-12						
			R1/8	4	Polypropylene		2.5	133041	NPQP-D-R18-Q4-FD-P10	10	
			G1/8	6			3.0	133043	NPQP-D-R18-Q6-FD-P10		
8		4.5		133045		NPQP-D-R18-Q8-FD-P10					
R1/4		6		3.5		133044	NPQP-D-R14-Q6-FD-P10				
		8	4.5	133046		NPQP-D-R14-Q8-FD-P10					
		10	7.0	133047		NPQP-D-R14-Q10-FD-P10					
R3/8		10	8.0	133048		NPQP-D-R38-Q10-FD-P10					
		12	12.0	133049		NPQP-D-R38-Q12-FD-P10					
With internal hex											
	M5	4	Nickel-plated brass, with sealing ring	4.5	578370	NPQH-DK-M5-Q4-P10	10				
	G1/8	6		8.8	578371	NPQH-DK-M5-Q6-P10					
		4		6.2	578374	NPQH-DK-G18-Q4-P10					
		6		9.1	578375	NPQH-DK-G18-Q6-P10					
		8		12.8	578376	NPQH-DK-G18-Q8-P10					
	G1/4	8		14.4	578377	NPQH-DK-G14-Q8-P10					
		10		18.6	578378	NPQH-DK-G14-Q10-P10					
		G3/8		12	28.2	578379		NPQH-DK-G38-Q12-P10			
		M5	4	Stainless steel	5	132328	CRQS-M5-4-I ¹⁾	1			
	R1/8	6	7.7		132329	CRQS-M5-6-I ¹⁾					
		6	8.4		132330	CRQS-1/8-6-I					
		8	12		132331	CRQS-1/8-8-I					
		R1/4	8		15	132332	CRQS-1/4-8-I				
	10		21		132333	CRQS-1/4-10-I					
	R3/8	10	24		132334	CRQS-3/8-10-I					

1) With sealing ring

2) Packaging unit

Accessories

Ordering data – Push-in L-fittings						Data sheets → Internet: qs	
	Connection Thread	Tubing O.D.	Material	Weight [g]	Part no.	Type	PU ²⁾
With external hex							
	M5	4	Nickel-plated brass, with sealing ring	8.9	578276	NPQH-L-M5-Q4-P10	10
		6		12.2	578277	NPQH-L-M5-Q6-P10	
	G1/8	4		16.3	578280	NPQH-L-G18-Q4-P10	
		6		19.3	578281	NPQH-L-G18-Q6-P10	
		8		22.2	578282	NPQH-L-G18-Q8-P10	
	G1/4	6		22.4	578283	NPQH-L-G14-Q6-P10	
		8		25.8	578284	NPQH-L-G14-Q8-P10	
		10		33.1	578285	NPQH-L-G14-Q10-P10	
		12		59.6	578286	NPQH-L-G14-Q12-P10	
	G3/8	8		36.7	578287	NPQH-L-G38-Q8-P10	
		10		38.2	578288	NPQH-L-G38-Q10-P10	
		12		58.2	578289	NPQH-L-G38-Q12-P10	
	M5	4	Stainless steel	12	162870	CRQSL-M5-4 ¹⁾	1
		6		18	162871	CRQSL-M5-6 ¹⁾	
	R1/8	4		14	132598	CRQSL-1/8-4	
		6		19	162872	CRQSL-1/8-6	
		8		26	162873	CRQSL-1/8-8	
	R1/4	6		26	132599	CRQSL-1/4-6	
		8		30	162874	CRQSL-1/4-8	
		10		42	162875	CRQSL-1/4-10	
		12		49	162876	CRQSL-3/8-10	
	R3/8	10		49	162876	CRQSL-3/8-10	
		12		65	162877	CRQSL-3/8-12	
		12		65	162877	CRQSL-3/8-12	
	R1/8	4	Polypropylene	4.0	133051	NPQP-L-R18-Q4-FD-P10	10
		6		5.0	133053	NPQP-L-R18-Q6-FD-P10	
		8		7.0	133055	NPQP-L-R18-Q8-FD-P10	
	R1/4	6		5.5	133054	NPQP-L-R14-Q6-FD-P10	
		8		7.5	133056	NPQP-L-R14-Q8-FD-P10	
		10		12	133057	NPQP-L-R14-Q10-FD-P10	
		12		13	133058	NPQP-L-R38-Q10-FD-P10	
	R3/8	10		13	133058	NPQP-L-R38-Q10-FD-P10	
		12		18	133059	NPQP-L-R38-Q12-FD-P10	
		12		18	133059	NPQP-L-R38-Q12-FD-P10	

1) With sealing ring

2) Packaging unit

Ordering data – One-way flow control valves					Data sheets → Internet: crgla	
	Connection Thread	For push-in fitting	Material	Part no.	Type	PU ¹⁾
	M5	CRQS/CRQSL/CRQST, QS	Electropolished stainless steel casting	161403	CRGRLA-M5-B	1
	G1/8			161404	CRGRLA-1/8-B	
	G1/4			161405	CRGRLA-1/4-B	
	G3/8			161406	CRGRLA-3/8-B	
	G1/8	Push-in connector is integrated	Nickel-plated brass	578797	VFOH-LE-A-G18-Q4	1
				578798	VFOH-LE-A-G18-Q6	
				578799	VFOH-LE-A-G18-Q8	
	G1/4			578800	VFOH-LE-A-G14-Q8	
				578801	VFOH-LE-A-G14-Q10	

1) Packaging unit

Accessories

Ordering data – Plastic tubing, standard O.D.

Data sheets → Internet: tubing

		Type
	Approved for use in the food zone and resistant to hydrolysis	PUN-H
	Good resistance to chemicals and hydrolysis	PLN
	Pneumatic tubing with resistance to high temperatures and chemicals	PFAN

Ordering data – Plug screws, corrosion-resistant

	For ø	Description	Part no.	Type	PU ¹⁾
For mounting thread on the guide					
	20, 25	With cover plate	543715	DAMD-P-M6-12-R1	4
	32, 40, 50		543716	DAMD-P-M8-16-R1	
	63		543717	DAMD-P-M10-16-R1	
For mounting thread on the end cap					
	20, 25	With cover plate	543714	DAMD-P-M5-10-R1	4
	32 ²⁾		543715	DAMD-P-M6-12-R1	
	32 ³⁾ , 40	–	1355016	DAMD-PS-M6-12-R1	
	50, 63		650121	DAMD-PS-M8-16-R1	

1) Packaging unit

2) For drives with P cushioning

3) For drives with PPV/PPS cushioning

Ordering data – Centring sleeves

Data sheets → Internet: zbh

	For Ø	Part no.	Type	PU ¹⁾
	20, 25	150927	ZBH-9	10
	32, 40, 50, 63	189653	ZBH-12	

1) Packaging unit

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalnepantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us

[f](#) [t](#) [in](#) [You Tube](#)

www.festo.com/socialmedia



www.festo.com

Subject to change