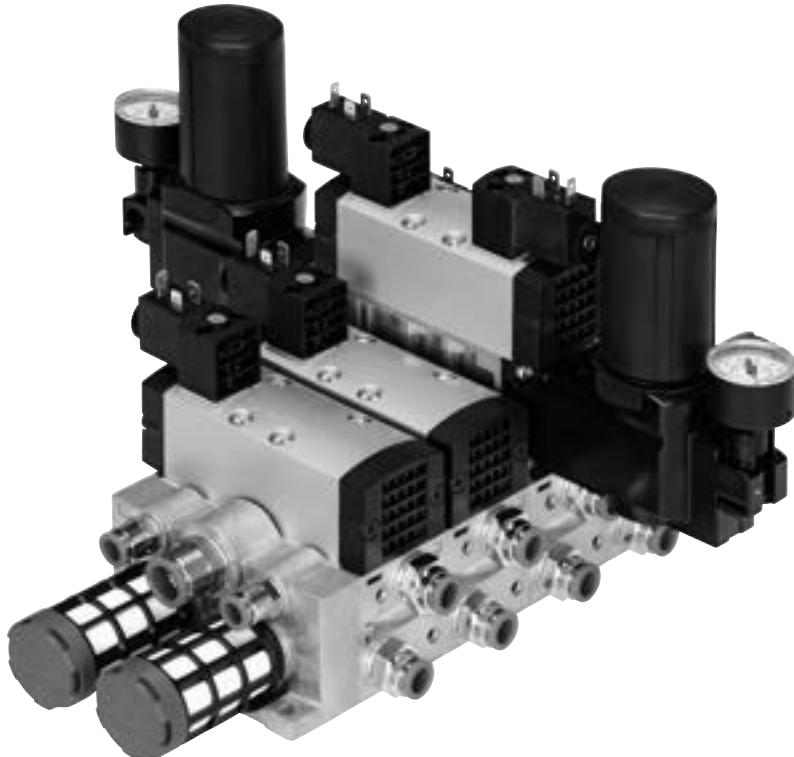


Standards-based valves, to ISO 5599-1

FESTO




Key features



Innovative	Flexible	Reliable	Easy to install
<ul style="list-style-type: none">• High-performance valves in a sturdy metal housing• Individual electrical connection via square plug sockets or centrally for each valve via round plug sockets• Valve replacement under pressure possible using vertical pressure shut-off plate• Reverse operation• Vacuum operation	<ul style="list-style-type: none">• Modular system offering a range of configuration options• Conversions and extensions are possible at any time• Integration of innovative function modules possible<ul style="list-style-type: none">– Pressure regulator plate– Throttle plate– Vertical pressure shut-off plate– Vertical supply plate• Vertical supply plates permit a flexible air supply and variable pressure zones• Wide range of valve functions• Extensive operating voltage range from 12 V DC to 230 V AC	<ul style="list-style-type: none">• Sturdy and durable metal components<ul style="list-style-type: none">– Valves– Horizontally linked sub-bases– Vertically stacked sub-bases• Fast troubleshooting thanks to LED in the plug socket or illuminating seal• LED integrated in the valve with the round plug variant• Reliable servicing thanks to valves that can be replaced quickly and easily• Manual override• Durable thanks to tried-and-tested piston spool valves	<ul style="list-style-type: none">• Plug-in pressure gauges on the pressure regulator plate

Key features

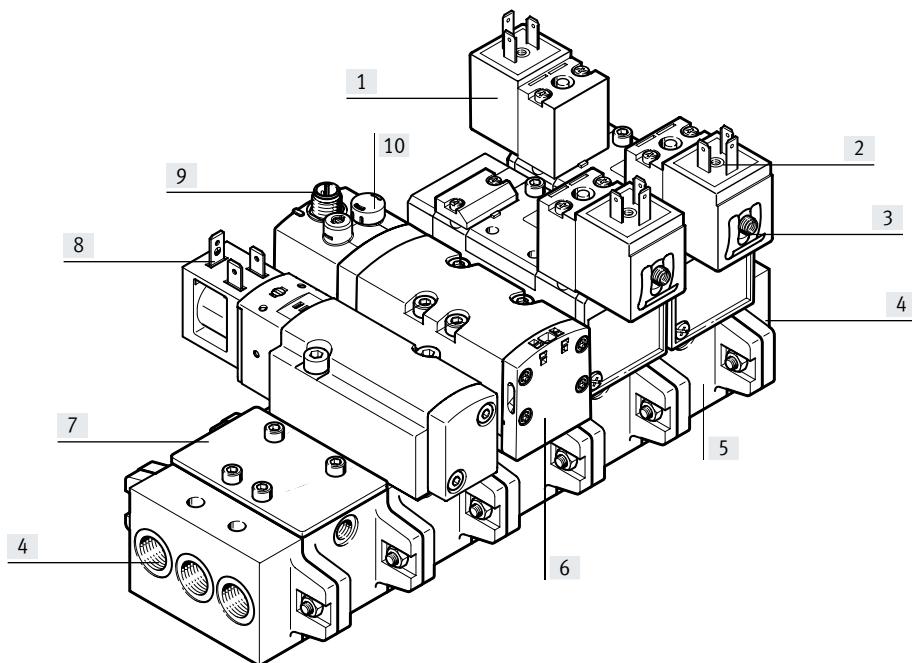Simple valve manifold assembly



- [1] Pilot valve with port pattern to ISO 15218
- [2] Various voltages
- [3] Armature tube for plug-on solenoid coils
- [4] End plate
- [5] Manifold sub-base
- [6] Various valve functions
- [7] Cover plate for vacant/expansion position
- [8] Electrical connection type B to industry standard (11 mm)
- [9] 3-pin round plug
- [10] Manual override

Equipment options

2x 2/2-way valve, single solenoid

- Normally closed
- Normally closed,
vacuum operation possible
at port 3 and 5

Operation with external pilot air supply

- For vacuum applications
- For working pressures lower than 3 bar
- For significant pressure fluctuations in the power section. Power unit and pneumatic control unit are isolated
- For heavily lubricated air in the power section
- For manifolds where the pressure zones are created via ducts 3 and 5 (not possible with 2x 3/2-way valves)
- For manifolds or pressure zones that are equipped with reversible 2x 3/2-way valves (valves on request)

2x 3/2-way valve, single solenoid

- Normally open
- normally closed
- 1x normally open, 1x normally closed
- Reverse operation possible

Operation with internal pilot air supply

- For small pressure fluctuations in the power section
- For using pressure regulator plates in a vertical stacking construction, also in reverse operation
- As a low-cost solution

5/2-way valve

- Single solenoid, mechanical or pneumatic spring return
- Double solenoid
- Double solenoid, with dominant signal at port 14

Reverse operation with compressed air supply via ducts 3 and 5

- Pressure zone separation via ducts 3 and 5
 - Example: duct 3 vacuum, duct 5 ejector pulse
 - Example: duct 3 high pressure for advancing the piston rod of a double-acting cylinder. Duct 5 low pressure for retracting the piston rod with low energy consumption
- 2x 3/2-way valves used as 5/4-way valve with controllable overlap and pressure zone separation with the reversible variant

5/3-way valve

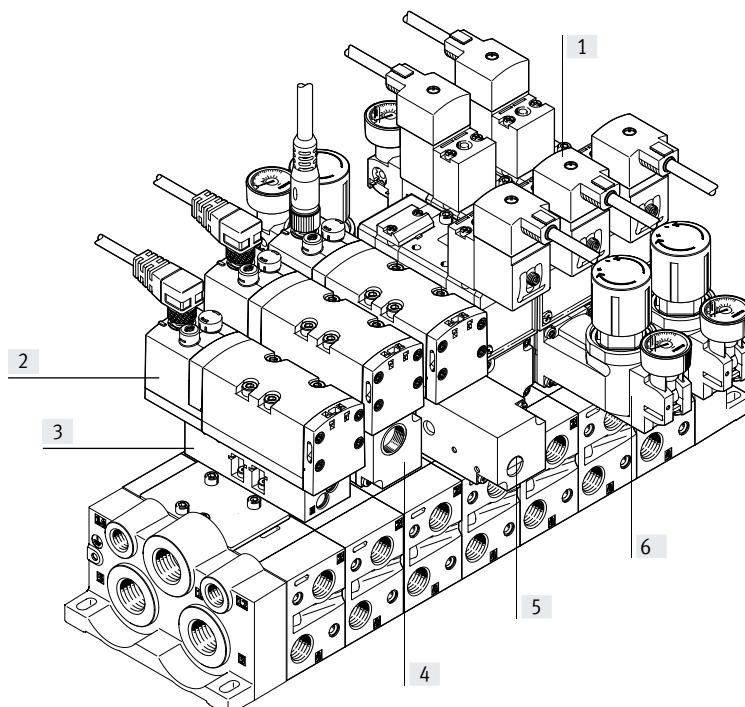
- Mid-position pressurised
- Mid-position closed
- Mid-position exhausted

Reverse operation with a pressure regulator plate, compressed air supply via duct 1

- Reversible pressure regulator combined with a reversible 2x 3/2-way valve regulates outputs 2 and 4
 - AB regulator for each of outputs 2 and 4
 - A regulator for output 4
 - B regulator for output 2
- Reversible pressure regulators are in the control position immediately after the power supply is switched on
 - Adjustment possible at all times
 - Dynamic response characteristics
 - Reduced regulator load because the supply pressure is maintained when the valve is switched
 - Not exhausted via the regulator

Key features

Valve manifold assembly with vertical stacking



- [1] Solenoid valve with individual pilot valves and port pattern to ISO 15218, can be connected using square plug sockets
- [2] Solenoid valve with central round plug
- [3] Throttle plate for adjusting the speed of the drive
- [4] Vertical supply plate as separate compressed air supply for a valve
- [5] Vertical pressure shut-off plate for replacing solenoid valves during operation
- [6] Pressure regulator for adjusting the force of the actuated drive

Vertical stacking function

Pressure regulator

- Single variant to regulate the pressure in duct 4 or 2 or 1 at the valve
- Dual variant to regulate the pressure in ducts 4 and 2 individually
- As reversible version with ducts 1 and 3/5 swapped internally
- With pressure gauge connection

Throttle plate

- Designed with two throttle valves, at which the exhaust air flow rate at ducts 5 or 3 can be adjusted.
- The movement of the drive is initiated and the required speed is set via the throttle plate using the manual override on the valve.


Vertical pressure shut-off plate

- Equipped with a switch via which the compressed air supply can be shut off. As a result, components mounted on the vertical pressure shut-off plate (e.g. a valve) can be replaced without switching off the overall air supply.
- If the control chain has a redundant connection, the cycle can continue even in the case of a cyclical control system.

Vertical supply plate


- As additional air supply for a valve
- Separates the valve from duct 1 of the manifold sub-base
- To supply an additional pressure zone

Valves with solenoid coil MSN1/MSF




The directional control valve has a pilot control to ISO 15218. The solenoid coil plugged onto the armature tube can be chosen in different designs and operating voltages.

Valves with square plug type B to industry standard




The electrical connection is established via a standardised plug with plug pattern type B, industry standard, 24 V DC.

Valves with central plug M12



The electrical connection is established via a standardised M12 plug, 24 V DC (EN 61076-2-101).


Valves with individual plug M12x1



The electrical connection is established via a standardised M12 plug, 24 V DC (2-pin or 4-pin to VDMA).


Key features

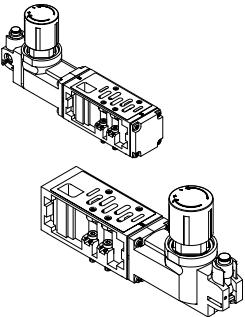Pressure regulator with one regulated duct




- For pressure regulation at the supply input duct 1. The set pressure is identical for ducts 2 and 4
- For pressure regulation at working port 4
 - The pressure regulator for reverse operation is supplied via duct 1 of the manifold sub-base and supplies duct 5 on the valve
 - The valve is exhausted via duct 1 to ducts 3 and 5 of the manifold sub-base
- For pressure regulation at working port 2
 - In reverse operation duct 3 is supplied

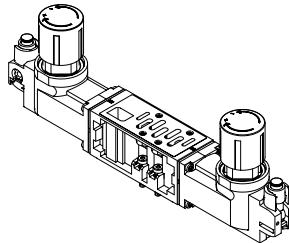Pressure regulator with 2 regulated ducts




- For pressure regulation at working ports 4 and 2
- The pressure regulators for reverse operation are supplied via duct 1 of the manifold sub-base and supply ducts 5 and 3 on the valve
- The directional control valve is exhausted via duct 1 to ducts 3 and 5 of the manifold sub-base.

Vertical supply plate




- As intermediate supply
 - For one valve
 - To supply an additional pressure zone
- Can be equipped with a valve

Throttle plate



- Exhaust air flow control valves in ducts 3 and 5
- The throttle plates act as supply-air flow control for pressure zones that are created via ducts 3 and 5

Vertical pressure shut-off plate



- A switch activated with a slotted screwdriver shuts off duct 1:
- The throttle plates, pressure regulators or valves positioned above it can be replaced
 - Other components of the control chain such as drives, for example, can be replaced once the valve has been exhausted

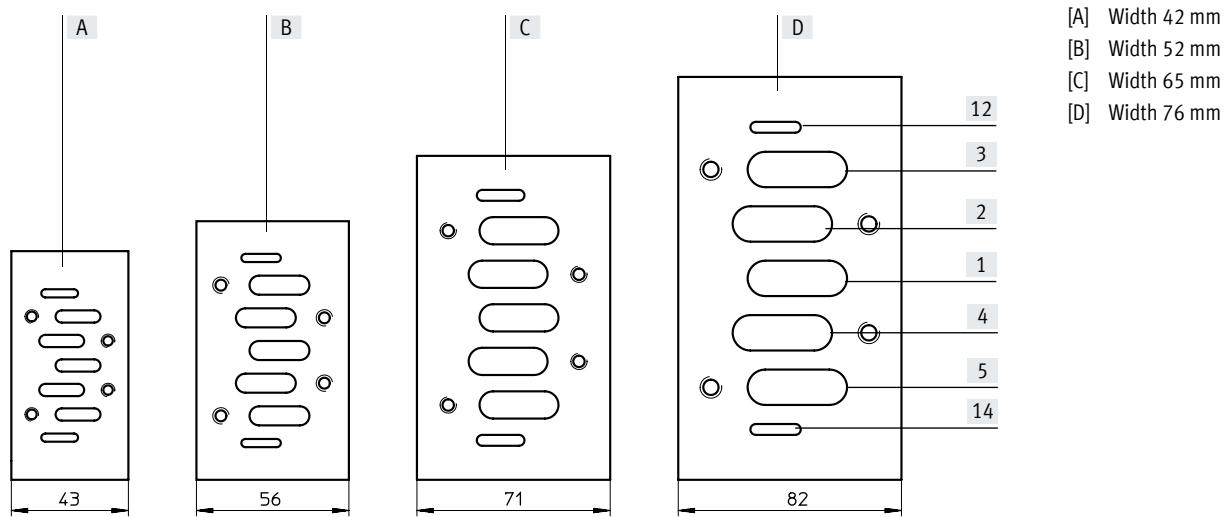
Pressure gauge



Plugs into the pressure regulators

Key features

Port pattern on sub-base to ISO 5599-1



Sub-base port identifications

Duct	Function	Description
[14]	Control unit	Pilot air supply for pilot valves 12 and 14
[5]	Power unit	Exhaust port
[4]	Power unit	Working port
[1]	Power unit	Working air supply port
[2]	Power unit	Working port
[3]	Power unit	Exhaust port
[12]	Control unit	Exhaust port for pilot air supply

Key features

Pilot air supply

The pneumatic supply ports are located on the right and left end plates and on the supply plates.

The ports differ for the following types of pilot air supply:

- Internal pilot air supply
- External pilot air supply

The port for the external pilot air supply is on the right and left end plates. Internal pilot air supply takes place in the valve itself and the ports for pilot air supply are not provided on the end plates.

-  - **Note**

If a gradual pressure build-up is required in the system by using a soft-start valve, then external pilot air should be selected whereby the pilot pressure is already applied at the point of switch-on.

Internal pilot air supply

Internal pilot air supply can be selected if the working pressure is between 2 and 10 bar, 3 and 10 bar, 2 and 16 bar or 3 and 16 bar, depending on the valve.

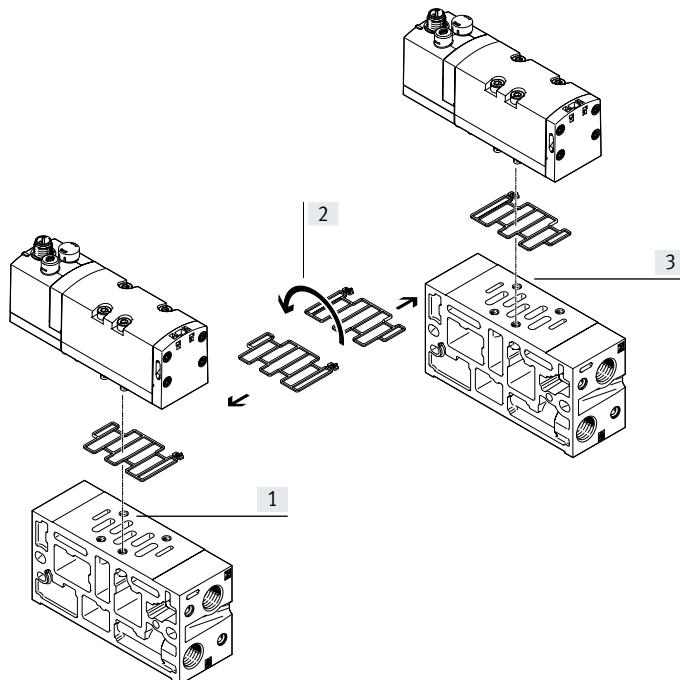
In this case the pilot air supply is branched from the compressed air supply 1 using an internal connection in the valve.

External pilot air supply

If the supply pressure is less than 2 or 3 bar, you must operate your valve manifold assembly VSVA using external pilot air supply.

The pilot air supply is then supplied via ports 12 and 14 on the end plates.

Using the seals with ducted/unducted pilot exhaust air



- [1] Ducted pilot air exhaust
- [2] Turning the seal 180°
- [3] Unducted pilot air exhaust (as supplied)

Valve manifold assemblies VSVA are delivered with unducted pilot air exhaust. By turning the seal between the valve and manifold block, exhaust air (pilot air) can be diverted into pilot duct 12 and can thus be ducted and silenced (see illustration).

Key features

Pilot air supply via end plates		Description
Left end plate (graphical illustration)		
		<p>Internal pilot air supply</p> <ul style="list-style-type: none"> Pilot air supply is branched within the valve from port 1 Port 12 is not available Port 14 is not available Exhaust air via ports 3 and 5 Pilot exhaust air via port 12
		<p>External pilot air supply</p> <ul style="list-style-type: none"> Pilot air supply via ports 12 and 14 Exhaust air via ports 3 and 5 Unducted pilot exhaust air
		<p>External pilot air supply, ducted pilot exhaust air</p> <ul style="list-style-type: none"> Pilot air supply via port 14 Exhaust air via ports 3 and 5 Pilot exhaust air via port 12 For valves with central plug M12, 3-pin
Right end plate (graphical representation)		
		<p>Internal pilot air supply</p> <ul style="list-style-type: none"> Pilot air supply is branched within the valve from port 1 Port 12 is not available Port 14 is not available Exhaust air via ports 3 and 5 Pilot exhaust air via port 12
		<p>External pilot air supply</p> <ul style="list-style-type: none"> Pilot air supply via ports 12 and 14 Exhaust air via ports 3 and 5 Unducted pilot exhaust air
		<p>External pilot air supply, ducted pilot exhaust air</p> <ul style="list-style-type: none"> Pilot air supply via port 14 Exhaust air via ports 3 and 5 Pilot exhaust air via port 12 For valves with central plug M12, 3-pin

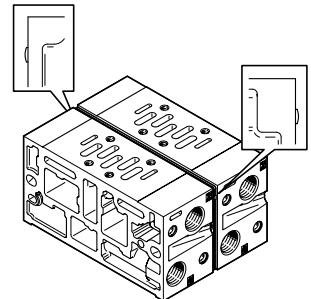
Key features

Creating pressure zones and separating exhaust air

The valve manifold assembly VSVA offers a number of options for creating pressure zones if different working pressures are required. Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by appropriate duct separation.

Compressed air is supplied and exhausted via the end plates and supply plates. The position of the supply plates and duct separations can be freely selected.

Duct separations are integrated ex-works as per your order. Duct separations can be distinguished by their coding, even when the valve manifold assembly is assembled.




Creating pressure zones

Separating seal

Coding	Sample image	Coding	Basic representation	Description
			<pre> 3 ─── 5 ─── 12 ─── 14 ─── 1 ─ ─ </pre>	<p>Duct 1 separate</p> <ul style="list-style-type: none"> • Different supply pressure for each pressure zone • Supply pressure for each pressure zone can be switched off separately
			<pre> 3 ─ ─ 5 ─ ─ 12 ─── 14 ─── 1 ─── </pre>	<p>Ducts 3 and 5 separated</p> <ul style="list-style-type: none"> • The valves (for different pressure zones) do not affect each other via the exhaust ducts
			<pre> 3 ─── 5 ─── 12 ─ ─ 14 ─ ─ 1 ─── </pre>	<p>Ducts 12 and 14 separated</p> <ul style="list-style-type: none"> • Different pilot pressure for each supply zone • Operation with internal and external pilot air supply possible according to pressure zone • Pilot pressure for each pressure zone can be switched off separately
			<pre> 3 ─ ─ 5 ─ ─ 12 ─ ─ 14 ─ ─ 1 ─── </pre>	<p>Ducts 1, 3 and 5 separated</p> <ul style="list-style-type: none"> • Different supply pressure for each pressure zone • The valves (for different pressure zones) do not affect each other via the exhaust ducts • Supply pressure for each pressure zone can be switched off separately
			<pre> 3 ─ ─ 5 ─ ─ 12 ─ ─ 14 ─ ─ 1 ─ ─ </pre>	<p>Ducts 1, 3, 5, 12 and 14 separated</p> <ul style="list-style-type: none"> • Different supply pressure for each pressure zone • Supply pressure for each pressure zone can be switched off separately • The valves (for different pressure zones) do not affect each other via the exhaust ducts • Different pilot pressure for each supply zone • Operation with internal and external pilot air supply possible according to pressure zone • Pilot pressure for each pressure zone can be switched off separately

Key features

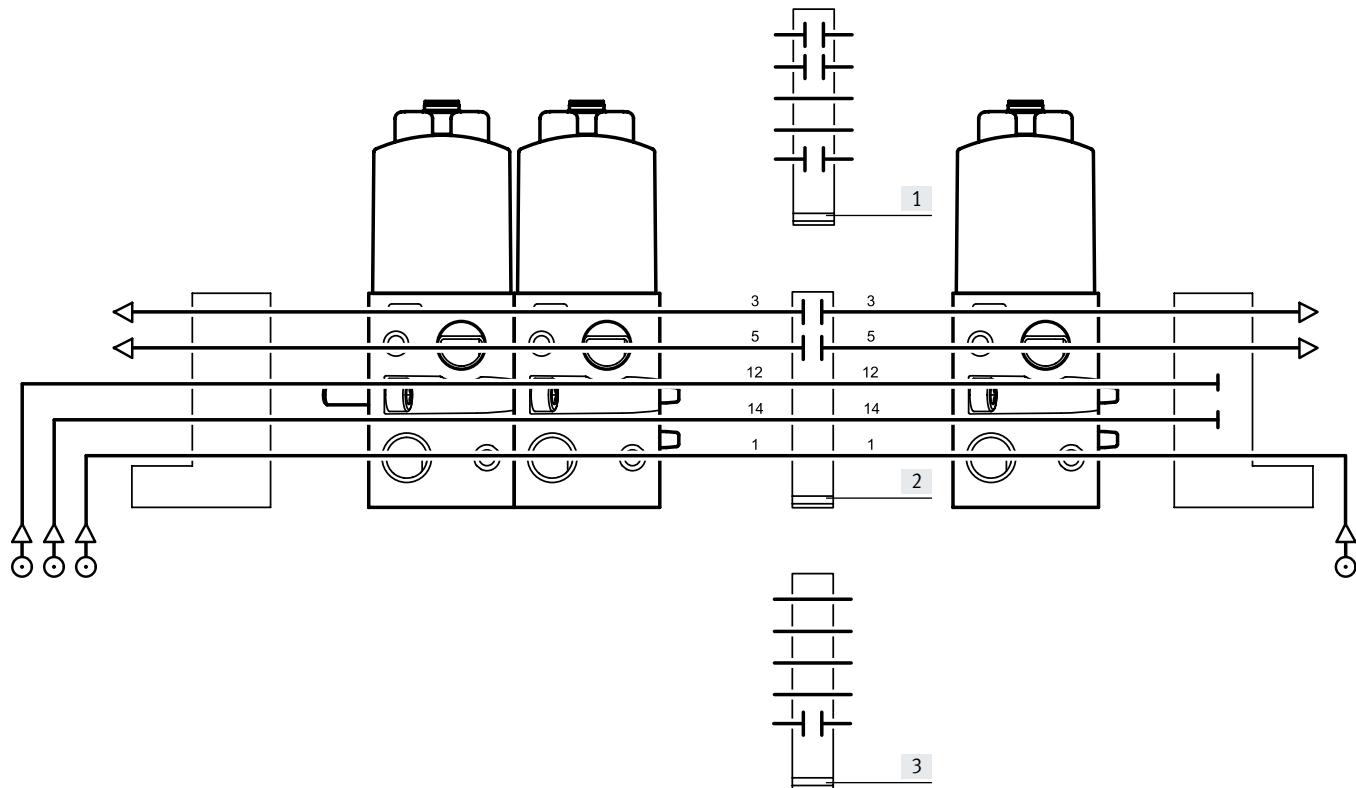Examples: Creating pressure zones



[1] Pressure zone separation in ducts 1, 3 and 5. Pressure supply and exhausting via the respective end plate for each of the two pressure zones. Pilot air is supplied jointly via the left end plate.

Potential benefit:

- Two different supply pressures
- The valves do not affect each other via the exhaust ducts

[2] Pressure zone separation in ducts 3 and 5. The pressure for both pressure zones is supplied jointly via the end plates. Each of the two pressure zones is exhausted separately via the respective end plate. Pilot air is supplied jointly via the left end plate.

Potential benefit:

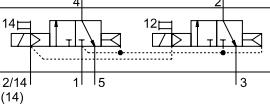








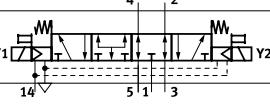




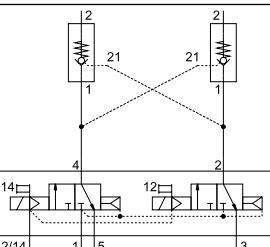






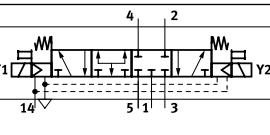



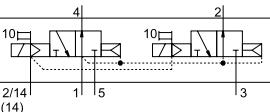








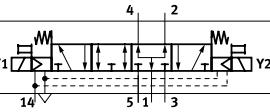




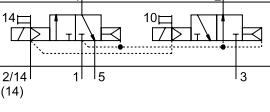




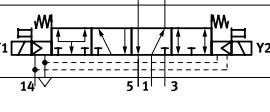


- The valves do not affect each other via the exhaust ducts

[3] Pressure zone separation in duct 1. Pressure supply via the respective end plate for each of the two pressure zones. Both pressure zones are exhausted jointly via the end plates. Pilot air supplied jointly via the left end plate.




Potential benefit:

- Two different supply pressures


Key features

Use of 2x 3/2-way valve as 5/4-way valve																						
Code	Symbol	Table of values			Equivalent circuit symbol		Function															
K		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>			Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> • Normally exhausted • The double-acting drive connected to ducts 2 and 4 is unpressurised when the valve is in the normal position and can be moved by an external force • If there is a signal at Y1(14) and Y2(12), there is pressure at ducts 2 and 4 	
Y1	Y2	A																				
0	0																					
0	1																					
1	0																					
1	1																					
		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>			Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> • Normally closed (by combining valve code K and two piloted check valves) • The piloted check valves connected to ducts 2 and 4 are unpressurised when the valve is in the normal position and the pressures in the drive close the check valves leak-tight • The drive remains stationary when the forces are in equilibrium • Leaks can only occur via the drive seals • If there is a signal at Y1(14) and Y2(12), the pressure at ducts 2 and 4 is the same 	
Y1	Y2	A																				
0	0																					
0	1																					
1	0																					
1	1																					
N		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>			Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> • Normally open • The double-acting drive connected to ducts 2 and 4 is supplied with the same pressure at both ends when the valve is in the normal position and remains stationary when the forces are balanced • If there is a signal at Y1(10) and Y2(10), ducts 2 and 4 are exhausted, the drive is unpressurised and can be moved by an external force 	
Y1	Y2	A																				
0	0																					
0	1																					
1	0																					
1	1																					
H		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>			Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> • Normally open to duct 2 • The double-acting drive connected to ducts 2 and 4 is supplied with pressure via duct 2 when the valve is in the normal position. Duct 4 is exhausted. When the system is in its initial position, the drive is thus in a clearly defined position, as would also be the case with a 5/2-way single solenoid valve • If there is a signal at Y1(14) and Y2(10), duct 2 is exhausted and there is pressure at duct 4. The drive leaves the initial position • A closed circuit can be created with this 2x 3/2-way valve by combining it with piloted check valves. However, this is then selected by an active signal at Y2(10). 	
Y1	Y2	A																				
0	0																					
0	1																					
1	0																					
1	1																					








Product range overview

Function	Type	Valve function	Flow rate Valve [l/min]	Operating voltage	→ Page/ Internet
Width 42 mm	Valve with armature tube for solenoid coil MSN				
Working port G1/4		MN1H-5/2	5/2-way single solenoid valve	1200	12 V DC, 24 V DC, 24 V AC, 110 V AC, 230 V AC
		JMN1	5/2-way double solenoid valve	1200	
		MN1H-5/3	5/3-way solenoid valve, mid-position valve	1200	
Valve with armature tube for solenoid coil MSF					
		MFH-5/2	5/2-way single solenoid valve	1200	12 V DC, 24 V DC, 42 V DC, 24 V AC, 42 V AC, 48 V AC, 110 V AC, 120 V AC, 230 V AC, 240 V AC
		JMF	5/2-way double solenoid valve	1200	
		MFH-5/3	5/3-way solenoid valve, mid-position valve	1200	
Valve with square plug type B to industry standard					
		VSVA-B-M52...A1	5/2-way valve, single solenoid	1342	24 V DC
		VSVA-B-B52...A1	5/2-way valve, double-solenoid	1341	
		VSVA-B-P53...A1	5/3-way valve, mid-position valve	1289	
Valve with central plug M12, 3-pin					
		VSVA-B-T22	2x 2/2-way single solenoid valve	1300	24 V DC
		VSVA-B-T32	2x 3/2-way single solenoid valve	1100	
		VSVA-B-M52	5/2-way single solenoid valve	1300	
		VSVA-B-B52	5/2-way double solenoid valve	1300	
		VSVA-B-D52	5/2-way double solenoid valve	1300	
		VSVA-B-P53	5/3-way solenoid valve, mid-position valve	1300	
Valve with individual plug M12					
		MDH-5/2	5/2-way single solenoid valve	1200	24 V DC, 42 V AC, 110 V AC, 230 V AC
		JMD	5/2-way double solenoid valve	1200	
		MDH-5/3	5/3-way solenoid valve, mid-position valve	1200	
Pneumatic valve					
		VL-5/2	5/2-way pneumatic valve, monostable	1200	-
		J	5/2-way pneumatic valve, bistable	1200	
		VL-5/3	5/3-way pneumatic valve, mid-position valve	1200	

Product range overview

Function	Type	Valve function	Flow rate Valve [l/min]	Operating voltage	→ Page/ Internet
Width 52 mm					
Working port G3/8	Valve with armature tube for solenoid coil MSN		MN1H-5/2 5/2-way single solenoid valve	2300	12 V DC, 24 V DC, 24 V AC, 110 V AC, 230 V AC 30
	JMN1 5/2-way double solenoid valve		2300		
	MN1H-5/3 5/3-way solenoid valve, mid-position valve		2300		
Valve with armature tube for solenoid coil MSF					
		MFH-5/2 5/2-way single solenoid valve	2300	12 V DC, 24 V DC, 42 V DC, 24 V AC, 42 V AC, 48 V AC, 110 V AC, 120 V AC, 230 V AC, 240 V AC	42
	JMF 5/2-way double solenoid valve		2300		
	MFH-5/3 5/3-way solenoid valve, mid-position valve		2300		
Valve with central plug M12, 3-pin					
		VSVA-B-T22 2x 2/2-way single solenoid valve	2800	24 V DC	59
	VSVA-B-T32 2x 3/2-way single solenoid valve		2200		
	VSVA-B-M52 5/2-way single solenoid valve		2800		
	VSVA-B-B52 5/2-way double solenoid valve		2800		
	VSVA-B-D52 5/2-way double solenoid valve		2800		
	VSVA-B-P53 5/3-way solenoid valve, mid-position valve		2700		
Valve with individual plug M12					
		MDH-5/2 5/2-way single solenoid valve	2300	24 V DC, 42 V AC, 110 V AC, 230 V AC	72
	JMD 5/2-way double solenoid valve		2300		
	MDH-5/3 5/3-way solenoid valve, mid-position valve		2300		
Pneumatic valve					
		VL-5/2 5/2-way pneumatic valve, monostable	2300	-	92
	J 5/2-way pneumatic valve, bistable		2300		
	VL-5/3 5/3-way pneumatic valve, mid-position valve		2300		

Product range overview

Function	Type	Valve function	Flow rate Valve [l/min]	Operating voltage	→ Page/ Internet
Width 65 mm		Valve with armature tube for solenoid coil MSN			
Working port G1/2		MN1H-5/2	5/2-way single solenoid valve	4500	12 V DC, 24 V DC, 24 V AC, 110 V AC, 230 V AC
	JMN1	5/2-way double solenoid valve	4500		
	MN1H-5/3	5/3-way solenoid valve, mid-position valve	4000		
		Valve with armature tube for solenoid coil MSF			
		MFH-5/2	5/2-way single solenoid valve	4500	12 V DC, 24 V DC, 42 V DC, 24 V AC, 42 V AC, 48 V AC, 110 V AC, 120 V AC, 230 V AC, 240 V AC
	JMF	5/2-way double solenoid valve	4500		
	MFH-5/3	5/3-way solenoid valve, mid-position valve	4000		
		Valve with central plug M12, 4-pin			
		MEBH-5/2	5/2-way single solenoid valve	4500	24 V DC
	JMEB	5/2-way double solenoid valve	4500		
	MEBH-5/3	5/3-way solenoid valve, mid-position valve	4000		
		Valve with individual plug M12			
		MDH-5/2	5/2-way single solenoid valve	4500	24 V DC, 42 V AC, 110 V AC, 230 V AC
	JMD	5/2-way double solenoid valve	4500		
	MDH-5/3	5/3-way solenoid valve, mid-position valve	4000		
		Pneumatic valve			
		VL-5/2	5/2-way pneumatic valve, monostable	4500	-
	J	5/2-way pneumatic valve, bistable	4500		
	VL-5/3	5/3-way pneumatic valve, mid-position valve	4100		
Width 76 mm		Valve with individual plug M12			
Working port G3/4		MDH-5/2	5/2-way single solenoid valve	6000	24 V DC, 42 V AC, 110 V AC, 230 V AC
	JMD	5/2-way double solenoid valve	6000		
	MDH-5/3	5/3-way solenoid valve, mid-position valve	4800		
		Pneumatic valve			
		VL-5/2	5/2-way pneumatic valve, monostable	6000	-
	J	5/2-way pneumatic valve, bistable	6000		
	VL-5/3	5/3-way pneumatic valve, mid-position valve	4800		

Type codes for valves with round plug

001	Series	
VSPA	Standards-based valve to ISO 5599-1	
002	Directional control valve type	
B	Sub-base valve	
003	Valve function	
T22C	2x2/2-way valve, normally closed	
T32U	2x3/2-way valve, normally open	
T32F	2x3/2-way valve, normally open, reversible	
T32C	2x3/2-way valve, normally closed	
T32N	2x3/2-way valve, normally closed, reversible	
T32H	2x3/2-way valve, 1x normally closed, 1x normally open	
T32W	2x3/2-way valve, 1x normally closed, 1x normally open, reversible	
M52	5/2-way valve, single solenoid/monostable	
B52	5/2-way valve, double solenoid/bistable	
D52	5/2-way valve, double solenoid/bistable, dominant signal	
P53U	5/3-way valve, mid-position pressurised	
P53E	5/3-way valve, mid-position exhausted	
P53C	5/3-way valve, mid-position closed	
004	Reset method for monostable/single solenoid valves	
	None	
A	Pneumatic spring	
M	Mechanical spring	
005	Pilot air	
	Internal	
Z	External	
006	Manual override	
H	Non-detenting	
D	Non-detenting, detenting	
007	Pneumatic connection	
A2	18 mm (02) ISO 15407-1/-2	
A1	26 mm (01) ISO 15407-1/-2	
D1	42 mm (1) ISO 5599-1/-2	
D2	52 mm (2) ISO 5599-1/-2	
008	Nominal operating voltage	
1	24 V DC	
009	Electrical connection	
R2	Central connector M8	
R5	Central plug M12	
010	Display	
L	LED	

Standards-based valves to ISO 5599-1


Type codes for valves with square plug type B to industry standard

001	Series		007	Manual override	
VSVA	Standards-based valve VSVA			None	
002	Directional control valve type		D	Non-detenting, detenting	
B	Sub-base valve		H	Non-detenting	
003	Design principle		008	Pneumatic connection	
	Piston spool		A2	18 mm (02) ISO 15407-1/-2	
K	Piston spool with sealing ring		A1	26 mm (01) ISO 15407-1/-2	
004	Valve function		D1	42 mm (1) ISO 5599-1/-2	
T22C	2x2/2-way valve, normally closed		009	Nominal operating voltage	
T32U	2x3/2-way valve, normally open			None	
T32F	2x3/2-way valve, normally open, reversible		1	24 V DC	
T32C	2x3/2-way valve, normally closed		1A	24 V AC/50-60 Hz	
T32N	2x3/2-way valve, normally closed, reversible		2A	110 V AC/50-60 Hz	
T32H	2x3/2-way valve, 1x normally closed, 1x normally open		3A	230 V AC/50-60 Hz	
T32W	2x3/2-way valve, 1x normally closed, 1x normally open, reversible		5	12 V DC	
B52	5/2-way valve, double solenoid/bistable		010	Electrical connection	
M52	5/2-way valve, single solenoid/monostable		B2	Connection pattern type B, industry standard	
D52	5/2-way valve, double solenoid/bistable, dominant signal		C1	Plug pattern type C, to EN 175301-803	
P53U	5/3-way valve, mid-position pressurised		P1	Interface for pilot valve size 15 mm to ISO 15218 (CNOMO)	
P53E	5/3-way valve, mid-position exhausted		R3	Individual plug M12, to EN 61076-2-101	
P53C	5/3-way valve, mid-position closed		011	Position sensing	
005	Reset method for monostable/single solenoid valves			None	
	None		APC	Proximity sensor, PNP with open cable ends	
A	Pneumatic spring		APP	Proximity sensor, PNP with M8 plug	
M	Mechanical spring		APX	Proximity sensor, PNP with cable and plug M12	
006	Pilot air		ANC	Proximity sensor, NPN with open cable end	
	Internal		ANP	Proximity sensor, NPN with plug M8	
Z	External				

Peripherals overview

Valve on individual sub-base

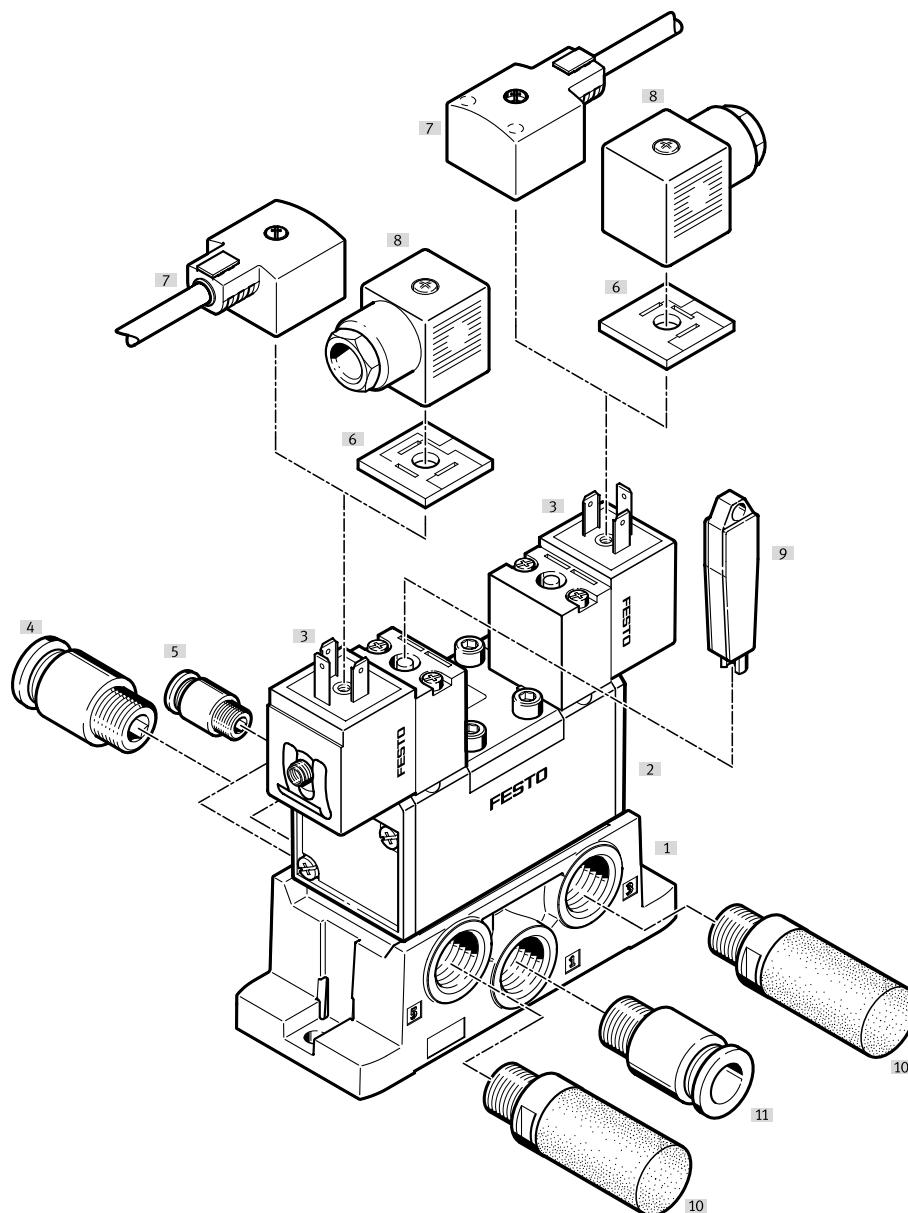Solenoid valve with solenoid coil MSN1




Individual components

	Type	Brief description	→ Page/ Internet
[1]	Sub-base	VABS-S1...	Pneumatic ports on the side
	Individual sub-base	NAS...	Pneumatic ports on the side
	NAU...		Pneumatic ports underneath
[2]	Solenoid valve	MN1H...	Solenoid valve with solenoid coil, port pattern to ISO 5599-1, corresponding solenoid coils → page 139
[3]	Solenoid coil	MSN1...	Solenoid coil
[4]	Push-in fitting	QS...	For connecting tubing with standard O.D.
[5]	Push-in fitting	QS...	For connecting tubing with standard O.D.
[6]	Illuminating seal	M...-LD	For displaying the signal status
[7]	Connecting cable	KMC..., NEBV...	With LED or without LED
[8]	Plug socket	MSSD...	For self-assembly
[9]	Manual override	AHB...	Tool for detenting manual override
[10]	Silencer	U...	For fitting in exhaust ports
[11]	Push-in fitting	QS...	For connecting tubing with standard O.D.

Peripherals overview

Valve on individual sub-base

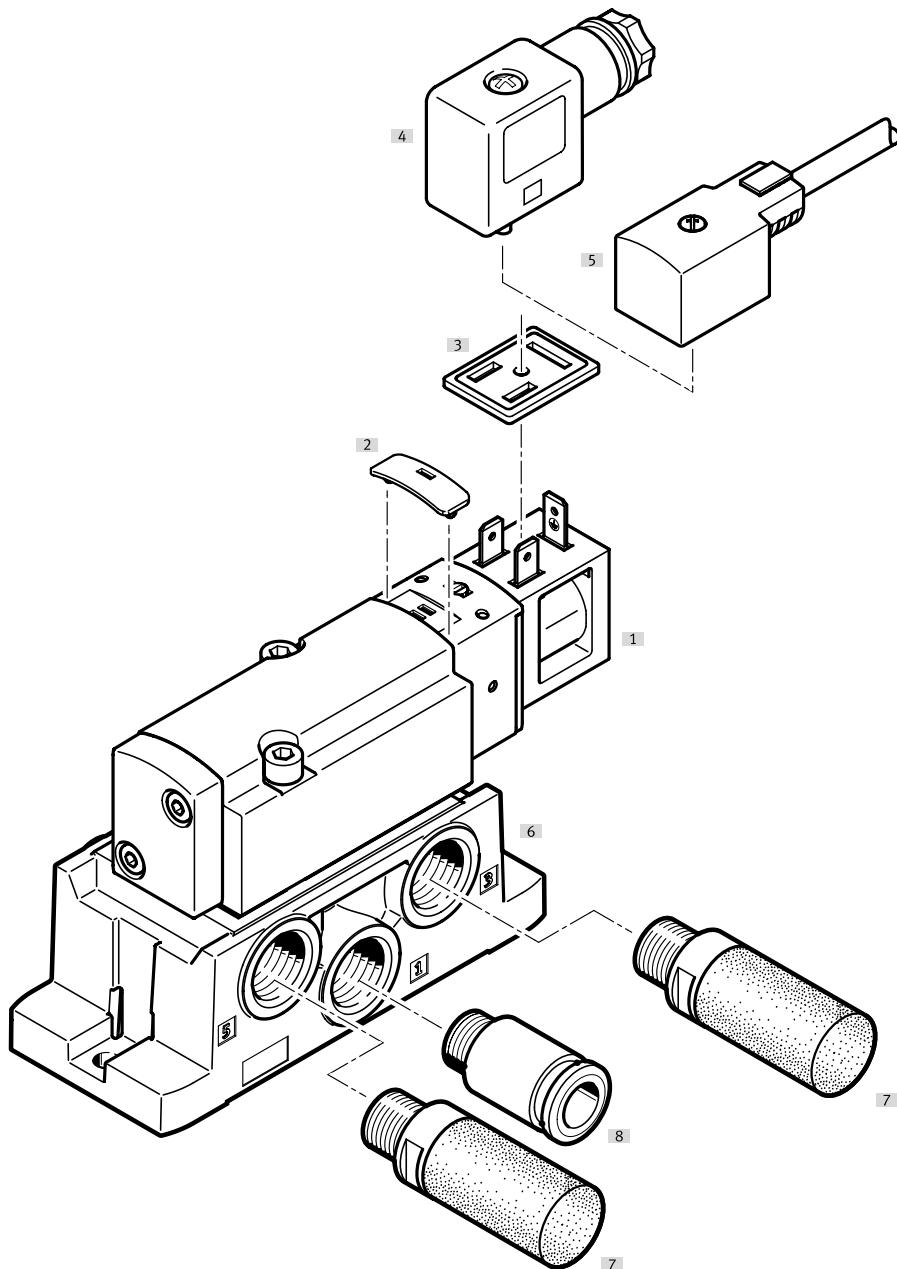Solenoid valve with central plug M12, 3-pin




Individual components		Type	Brief description	→ Page/ Internet
[1]	Solenoid valve	VSPA-BK...	Solenoid valve with square plug type B to industry standard, port pattern to ISO 5599-1	50
[2]	Cover cap	VAMC-...	For manual override, non-detenting or covered	138
[3]	Illuminating seal	MF-LD	For displaying the signal status	137
[4]	Plug socket	MSSD-F...	For self-assembly	137
[5]	Connecting cable	KMF-...	–	137
[6]	Sub-base	VABS-S1...	Pneumatic ports on the side	104
	Individual sub-base	NAS-...	Pneumatic ports on the side	104
		NAU-...	Pneumatic ports underneath	107
[7]	Silencer	U-...	For fitting in exhaust ports	silencer
[8]	Push-in fitting	QS-...	For connecting tubing with standard O.D.	qs

Peripherals overview

Valve on individual sub-base

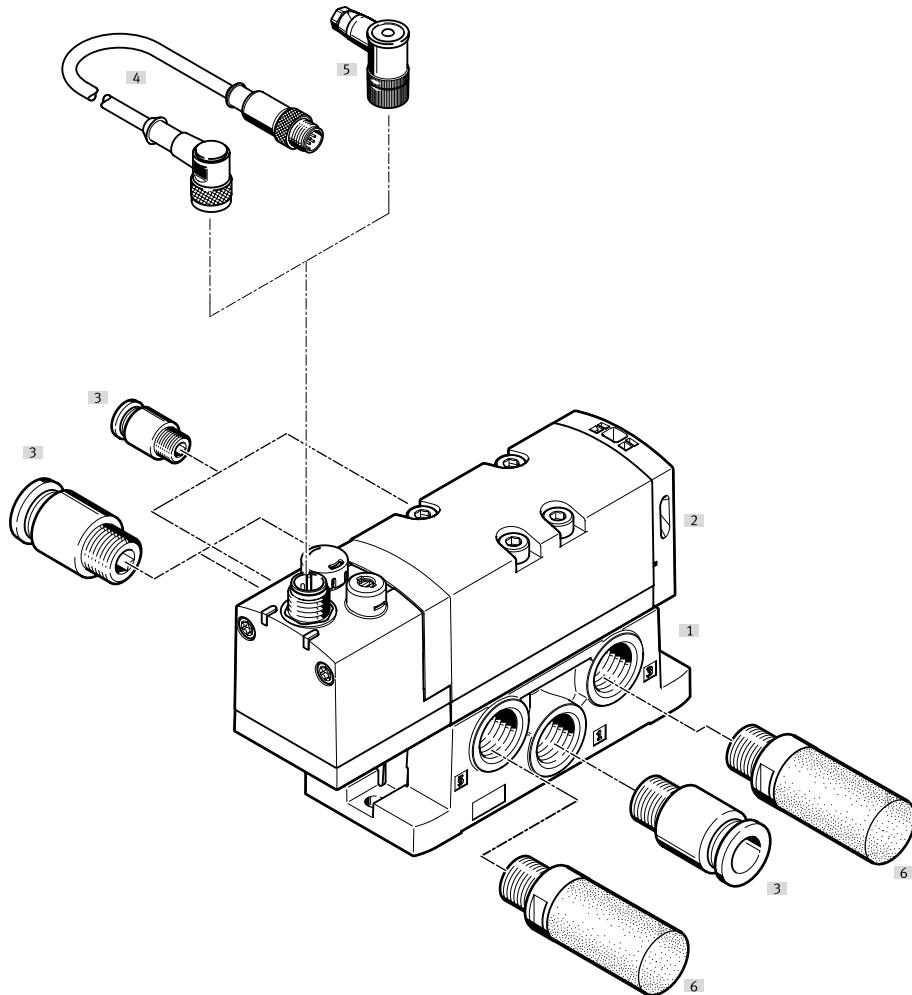
Solenoid valve with central plug M12, 3-pin



Individual components		Type	Brief description	→ Page/ Internet
[1]	Sub-base	VABS-S1-...	Pneumatic ports on the side	104
	Individual sub-base	NAS-...	Pneumatic ports on the side	104
		NAU-...	Pneumatic ports underneath	107
[2]	Solenoid valve	VSPA-B...	Solenoid valve with central plug M12, 3-pin, port pattern to ISO 5599-1	54
[3]	Push-in fitting	QS-...	For connecting tubing with standard O.D.	qs
[4]	Connecting cable	NEBU-...	–	138
[5]	Plug socket	SIE-...	For self-assembly	138
[6]	Silencer	U-...	For fitting in exhaust ports	silencer

Peripherals overview

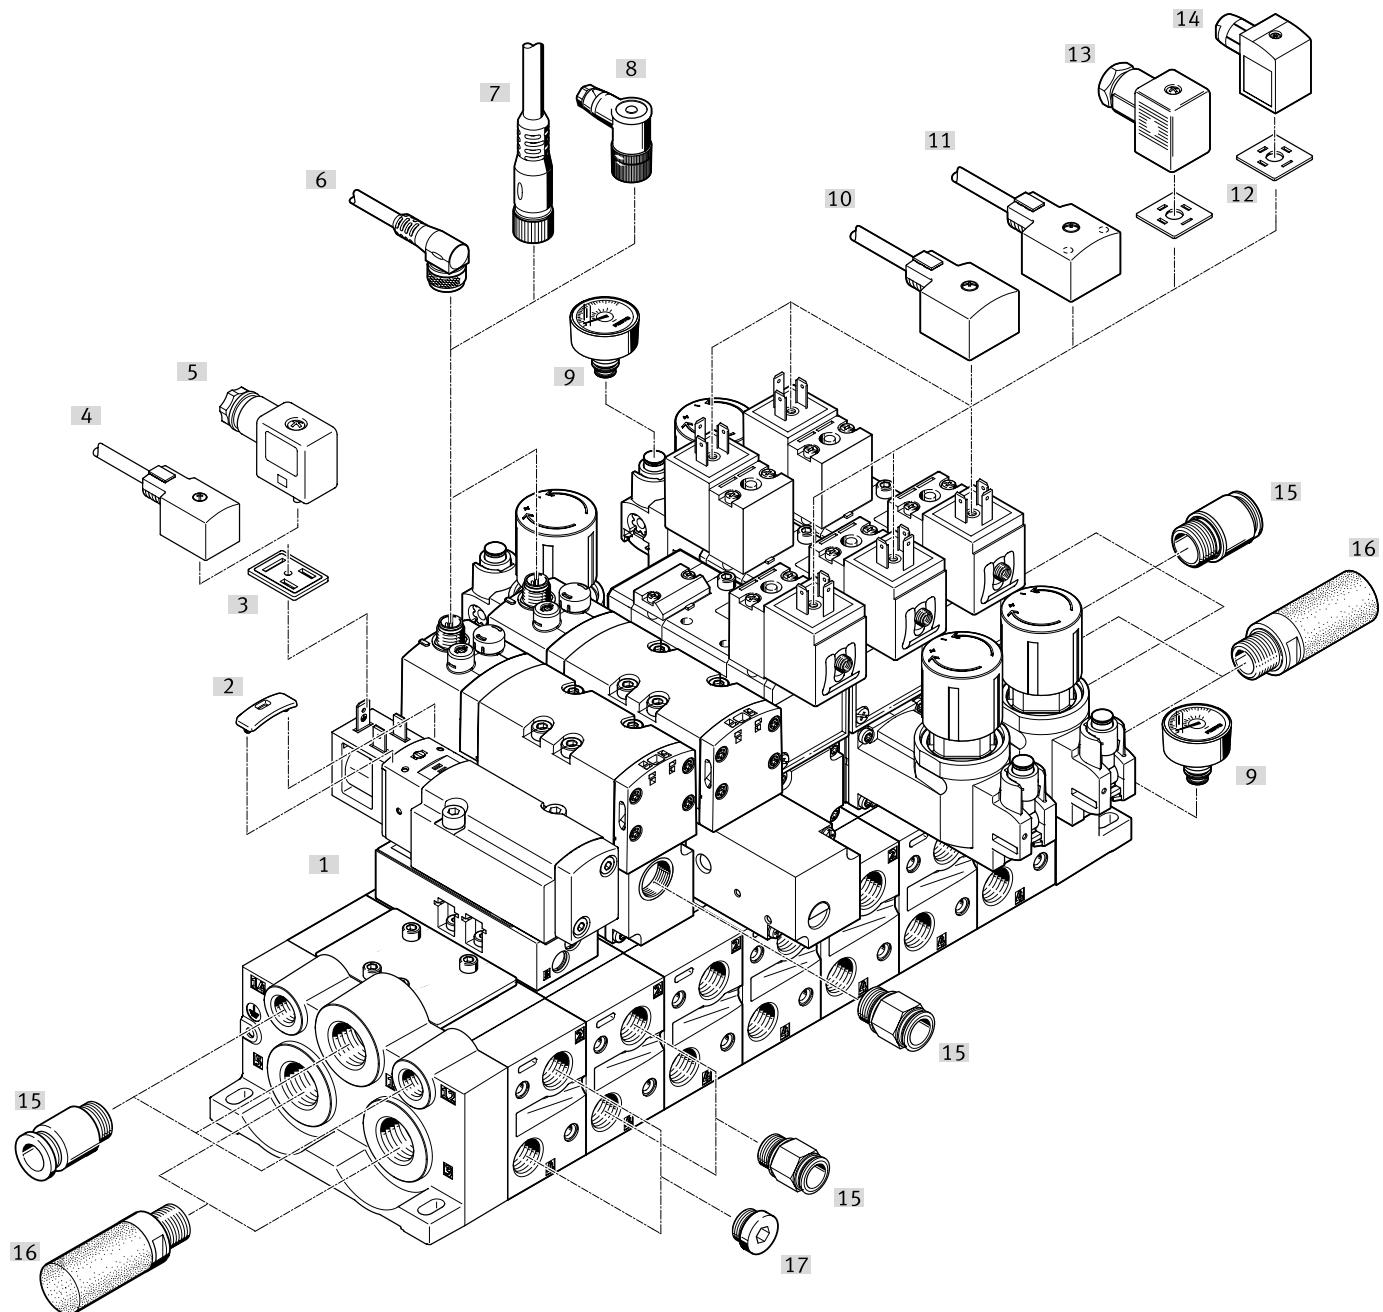Accessories




Peripherals overview

Individual components		Type	Brief description	→ Page/ Internet
[1]	Solenoid valve	MN1H-...	Solenoid valve with solenoid coil, port pattern to ISO 5599-1, corresponding solenoid coils → page 139	26
		VSVA-BK...	Solenoid valve with square plug type B to industry standard, port pattern to ISO 5599-1	50
		VSVA-B...	Solenoid valve with central plug M12, 3-pin, port pattern to ISO 5599-1	54
[2]	Cover cap	VAMC-...	For manual override, non-detenting or covered	138
[3]	Illuminating seal	MF-LD	For displaying the signal status	137
[4]	Connecting cable	KMF-1...	With LED	137
[5]	Socket	MSSD-F	Connection pattern type B, industry standard	137
[6]	Connecting cable	NEBU-...	Angled socket, M12x1, 5-pin	138
[7]	Connecting cable	NEBU-...	Straight socket, M12x1, 5-pin	138
[8]	Socket	SIE-...	For self-assembly	138
[9]	Pressure gauge	PAGN-...	With push-in connector	138
[10]	Connecting cable	KMC-..., NEBV-...	Without LED	137
[11]	Connecting cable	KMC-...LED, NEBV-...	With LED	137
[12]	Illuminating seal	M...-LD	For displaying the signal status	137
[13]	Socket	MSSD-C-M16	With screw terminal connection	137
[14]	Socket	MSSD-CS-M16	With insulation displacement connection	137
[15]	Push-in fitting	QS-...	For connecting tubing with standard O.D.	qs
[16]	Silencer	U-...	For fitting in exhaust ports	silencer
[17]	Blanking plug	B-...	For sealing ports that are not required	b

System overview

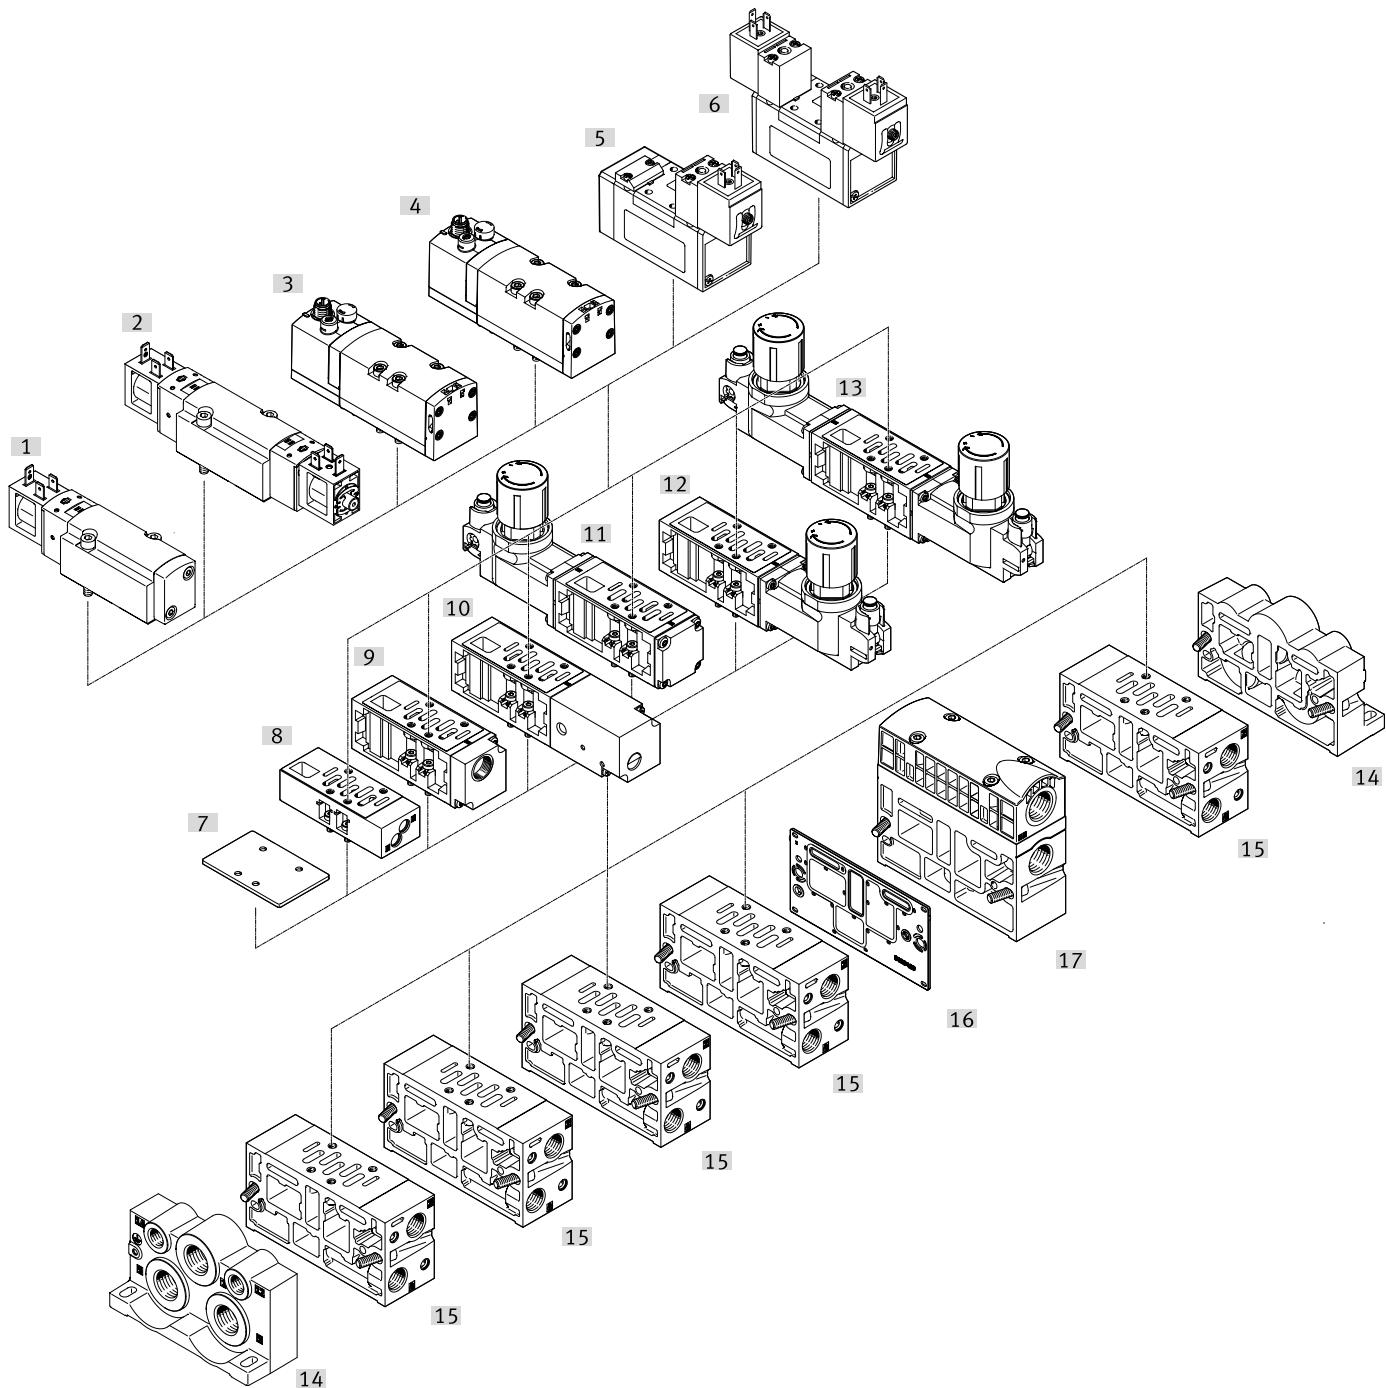Manifold assembly




System overview

Individual components		Type	Brief description	→ Page/ Internet
[1]	Solenoid valve	VSVA-BK...	Solenoid valve with square plug type B to industry standard, port pattern to ISO 5599-1	50
[2]				
[3]	Solenoid valve	VSVA-...	With central plug M12, 3-pin	54
[4]		MEBH-...	With central plug M12, 4-pin	64
		JMEBH-...	With central plug M12, 4-pin	64
		JMEBDH-...	With central plug M12, 4-pin	64
[5]	Solenoid valve	MN1H-...	With armature tube for solenoid coil MSN1	26
[6]		JMN1H-...	With armature tube for solenoid coil MSN1	26
		JMN1DH-...	With armature tube for solenoid coil MSN1	26
		MFH-...	With armature tube for solenoid coil MSF	38
		JMFH-...	With armature tube for solenoid coil MSF	38
		JMFDH-...	With armature tube for solenoid coil MSF	38
		MDH-...	With solenoid coil MD with round plug M12x1	68
		JMDH-...	With solenoid coil MD with round plug M12x1	68
		JMDDH-...	With solenoid coil MD with round plug M12x1	68
[7]	Cover plate	NDV-...	For sealing unused manifold sub-bases	119
[8]	Throttle plate	VABF-S1-...-F1B1-C	Restricts the flow of exhaust air in ducts 3 and 5	123
		GRO-ZP-...	Restricts the flow of exhaust air in ducts 3 and 5	123
[9]	Vertical supply plate	VABF-S1-...-P1A3-G38	Alternative compressed air supply for port 1 of the mounted valve	126
[10]	Vertical pressure shut-off plate	VABF-S1-...-L1D1-C	For blocking duct 1 and duct 14 upstream of a valve	128
[11]	Regulator plate	VABF-S1-...-R...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
[12]				
[13]		LR-ZP-...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
[14]	End plate	VABE-S1-...	With ports for air supply 1 and exhausts 3 and 5 and pilot air supply 12 and 14	116
[15]	Manifold sub-base	VABV-S1-...	With ports 2 and 4 underneath	109
[16]	Duct separation	VABD-S1-1...	For sealing ducts 1, 3, 5, 12 and 14 between end plate and manifold sub-base, e.g. to create pressure zones	120
[17]	Supply plate	VABF-S1-1...	With ports for air supply 1 and exhausts 3 and 5	111

System overview

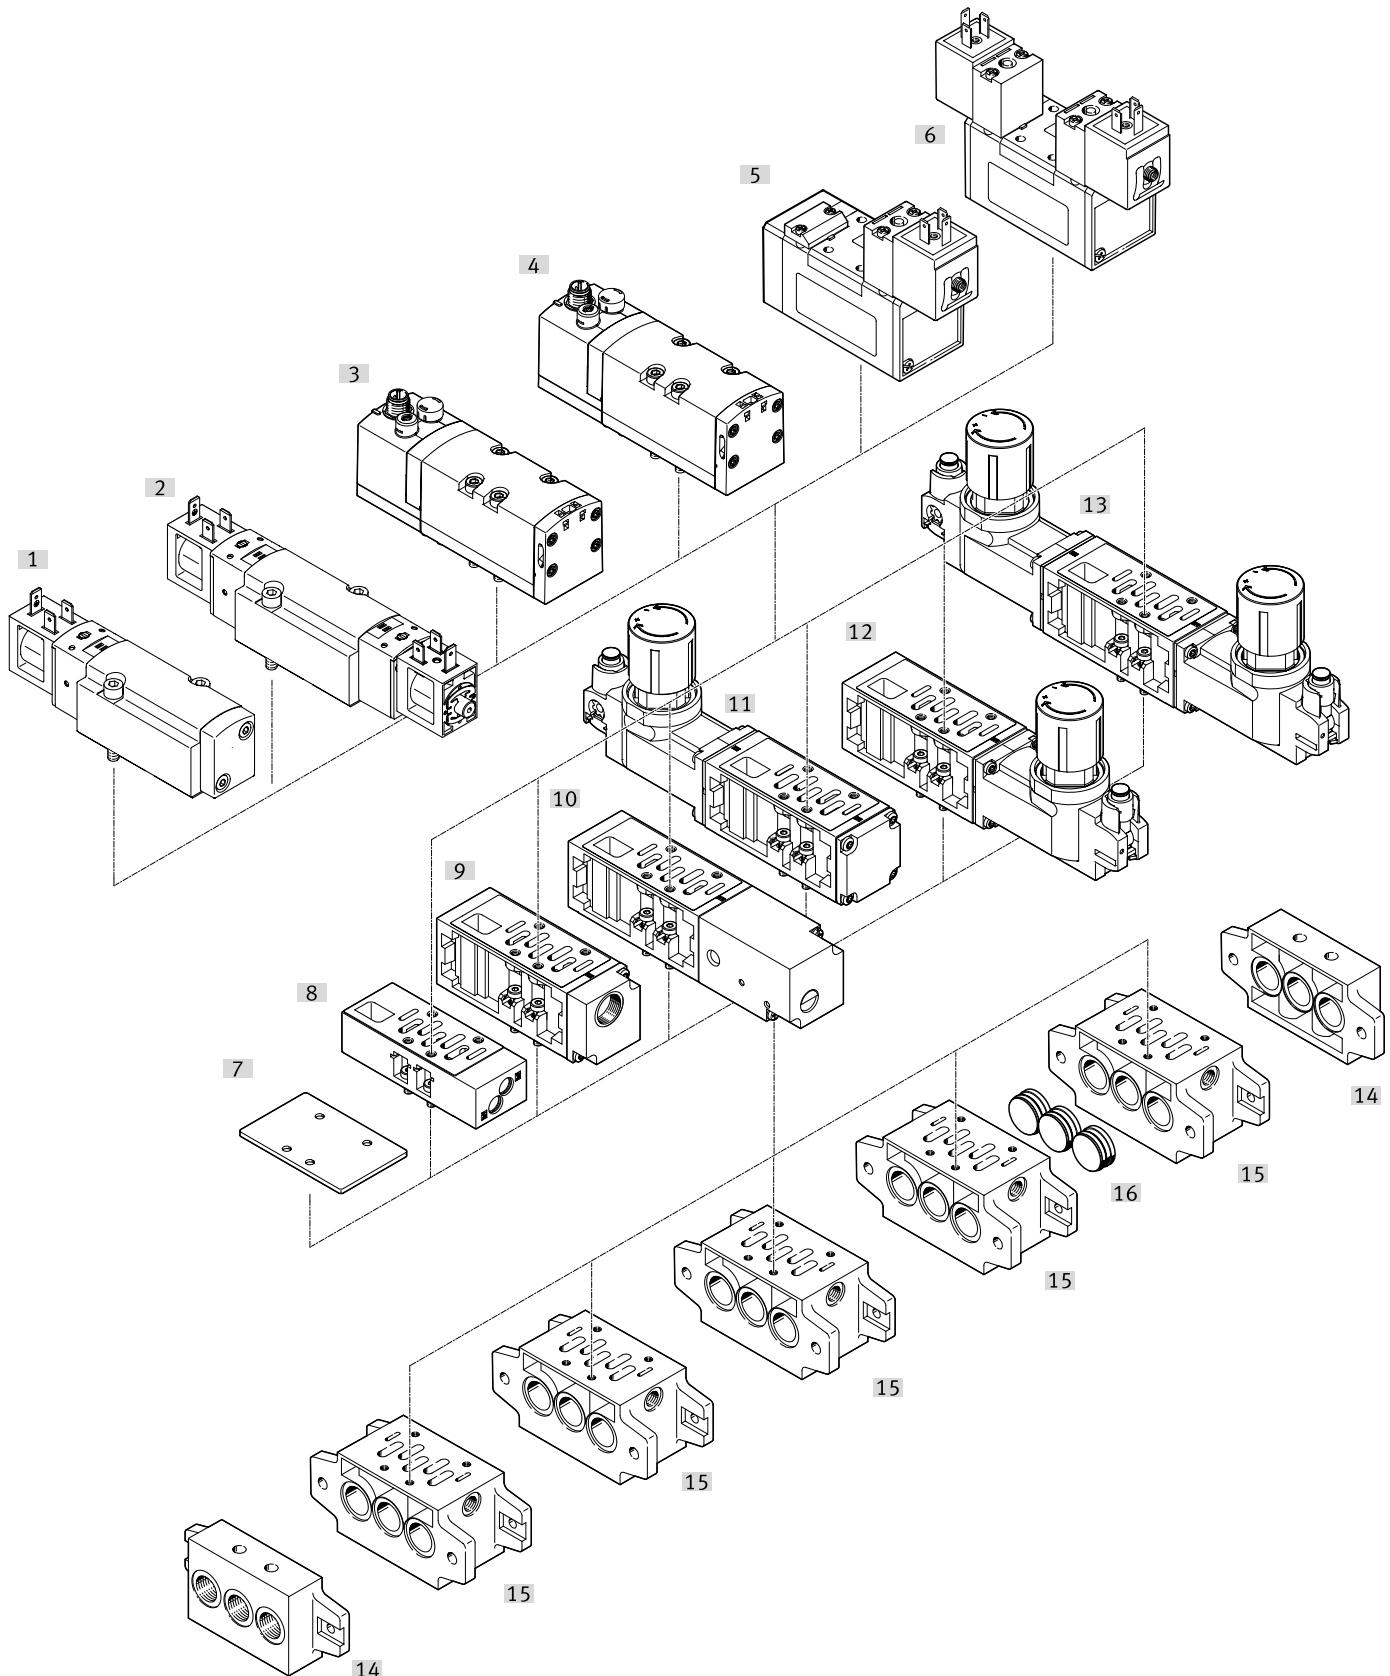Manifold assembly




System overview

Individual components		Type	Brief description	→ Page/ Internet
[1]	Solenoid valve	VSVA-BK...	Solenoid valve with square plug type B to industry standard, port pattern to ISO 5599-1	50
[2]				
[3]	Solenoid valve	VSVA-...	With central plug M12, 3-pin	54
[4]		MEBH-...	With central plug M12, 4-pin	64
		JMEBH-...	With central plug M12, 4-pin	64
		JMEBDH-...	With central plug M12, 4-pin	64
[5]	Solenoid valve	MN1H-...	With armature tube for solenoid coil MSN1	26
[6]		JMN1H-...	With armature tube for solenoid coil MSN1	26
		JMN1DH-...	With armature tube for solenoid coil MSN1	26
		MFH-...	With armature tube for solenoid coil MSF	38
		JMFH-...	With armature tube for solenoid coil MSF	38
		JMFDH-...	With armature tube for solenoid coil MSF	38
		MDH-...	With solenoid coil MD with round plug M12x1	68
		JMDH-...	With solenoid coil MD with round plug M12x1	68
		JMDDH-...	With solenoid coil MD with round plug M12x1	68
[7]	Cover plate	NDV-...	For sealing unused manifold sub-bases	119
[8]	Throttle plate	VABF-S1....F1B1-C	Restricts the flow of exhaust air in ducts 3 and 5	123
		GRO-ZP-...	Restricts the flow of exhaust air in ducts 3 and 5	123
[9]	Vertical supply plate	VABF-S1....P1A3-G38	Alternative compressed air supply for port 1 of the mounted valve	126
[10]	Vertical pressure shut-off plate	VABF-S1....L1D1-C	For blocking duct 1 and duct 14 upstream of a valve	128
[11]	Regulator plate	VABF-S1....R...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
[12]				
[13]		LR-ZP-...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
[14]	End plate kit	NEV-...	With ports for air supply 1 and exhausts 3 and 5	115
[15]	Manifold sub-base	NAV-...	With ports 2 and 4 underneath	109
[16]	Isolating disc	NSC-...	For sealing ducts 1, 3, 5 between end plate and manifold sub-base, e.g. to create pressure zones	119

Datasheet – Width 42 mm

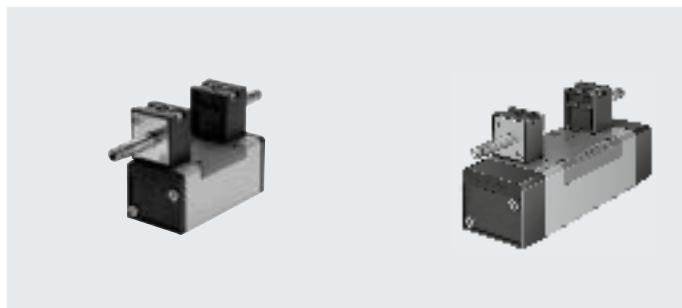-  - Flow rate
1200 l/min



General technical data	
Design	Piston spool
Sealing principle	Soft
Actuation type	Electrical
Type of control	Piloted
Flow direction	With external pilot air supply With internal pilot air supply
	Reversible Not reversible
Exhaust air function	Can be throttled
Manual override	Non-detenting, detenting via accessory
Type of mounting	On sub-base, via through-hole
Mounting position	Any
Nominal width	[mm] 8
Overlap	Positive overlap
Width	[mm] 42
Grid dimension	[mm] 43
Pneumatic connections	Sub-base size 1 to ISO 5599-1
Noise level	[dB (A)] 85
Conforms to standard	ISO 5599-1
Certification	c UL us - Recognized (OL)
Maritime classification ¹⁾	See certificate

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Flow rates				
Valve function	5/2-way valve, single solenoid	5/2-way valve, double solenoid	5/3-way valve	
Standard nominal flow rate	[l/min] 1200			

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MN1H-5/2-D-1-C	23	32	—	—
	MN1H-5/2-D-1-S-C	23	32	—	—
	MN1H-5/2-D-1-FR-C	17	39	—	—
	MN1H-5/2-D-1-FR-S-C	17	39	—	—
5/2-way valve, double solenoid	JMN1H-5/2-D-1-C	—	—	18	—
	JMN1H-5/2-D-1-S-C	—	—	18	—
	JMN1DH-5/2-D-1-C	—	—	18	15
	JMN1DH-5/2-D-1-S-C	—	—	18	15
5/3-way valve	MN1H-5/3G-D-1-C	20	44	—	—
	MN1H-5/3G-D-1-S-C	20	44	—	—
	MN1H-5/3E-D-1-C	20	46	—	—
	MN1H-5/3E-D-1-S-C	20	46	—	—
	MN1H-5/3B-D-1-C	20	46	—	—
	MN1H-5/3B-D-1-S-C	20	46	—	—

Datasheet – Width 42 mm


Operating and environmental conditions		Pneumatic spring	Mechanical spring
Reset method			
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium		Lubricated operation possible (required for further operation)	
Operating pressure	Internal pilot air supply External pilot air supply	[bar] [bar]	2 ... 10 -0.9 ... +16
Pilot pressure		[bar]	3 ... 10 -0.9 ... +16
Ambient temperature		[°C]	-5 ... +50
Temperature of medium		[°C]	-5 ... +50
Safety data			
Max. positive test pulse with 0 signal		[μs]	3700
Max. negative test pulse with 1 signal		[μs]	4600
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance		Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6	
Electrical data			
Electrical connection		Via N1 coil, to be ordered separately	
Degree of protection to EN 60529		IP65	
Materials			
Housing		Die-cast aluminium	
Seals		HNBR, NBR	
Note on materials		RoHS-compliant	

Datasheet – Width 42 mm

Dimensions


Download CAD data → www.festo.com

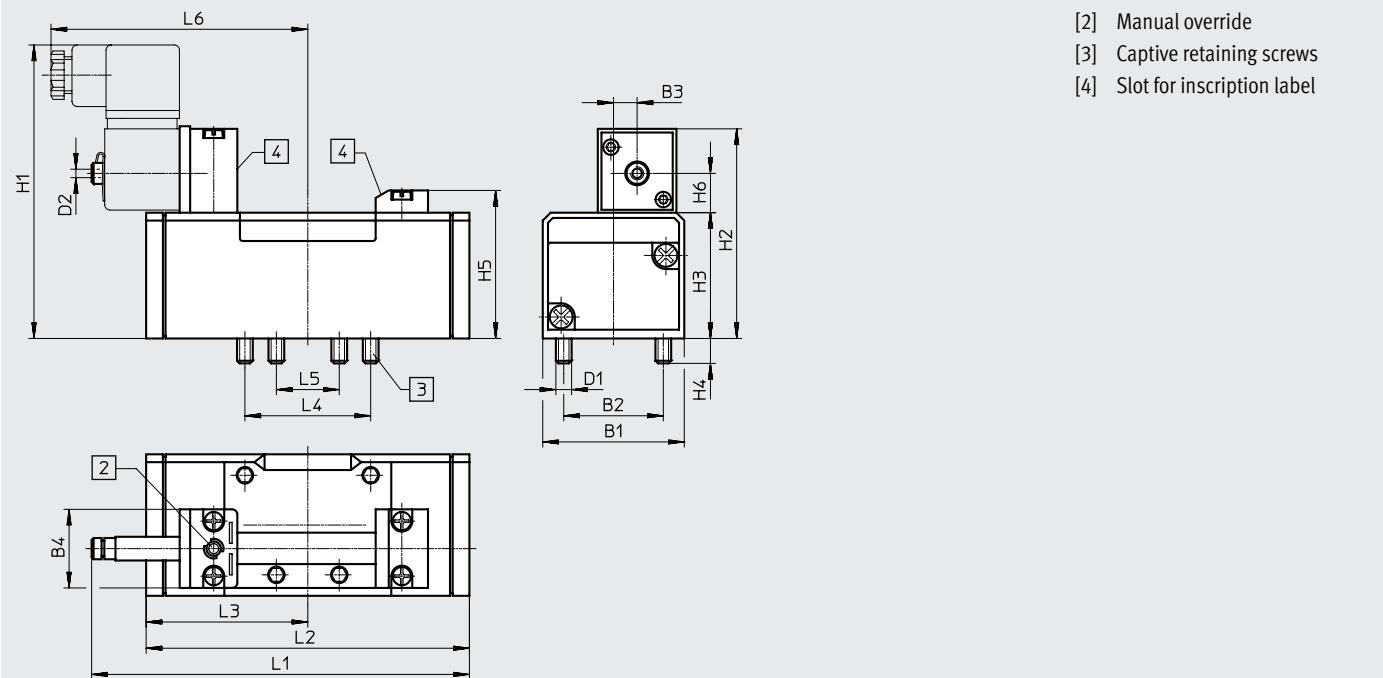5/2-way single solenoid valves















Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
MN1H-5/2- ...	42	28	6	30	M5	M5	106	74	38	9	46.5	15.3	117.5	87.6	43.8	36	18	89
MN1H-5/2- ...-FR- ...													128	98				

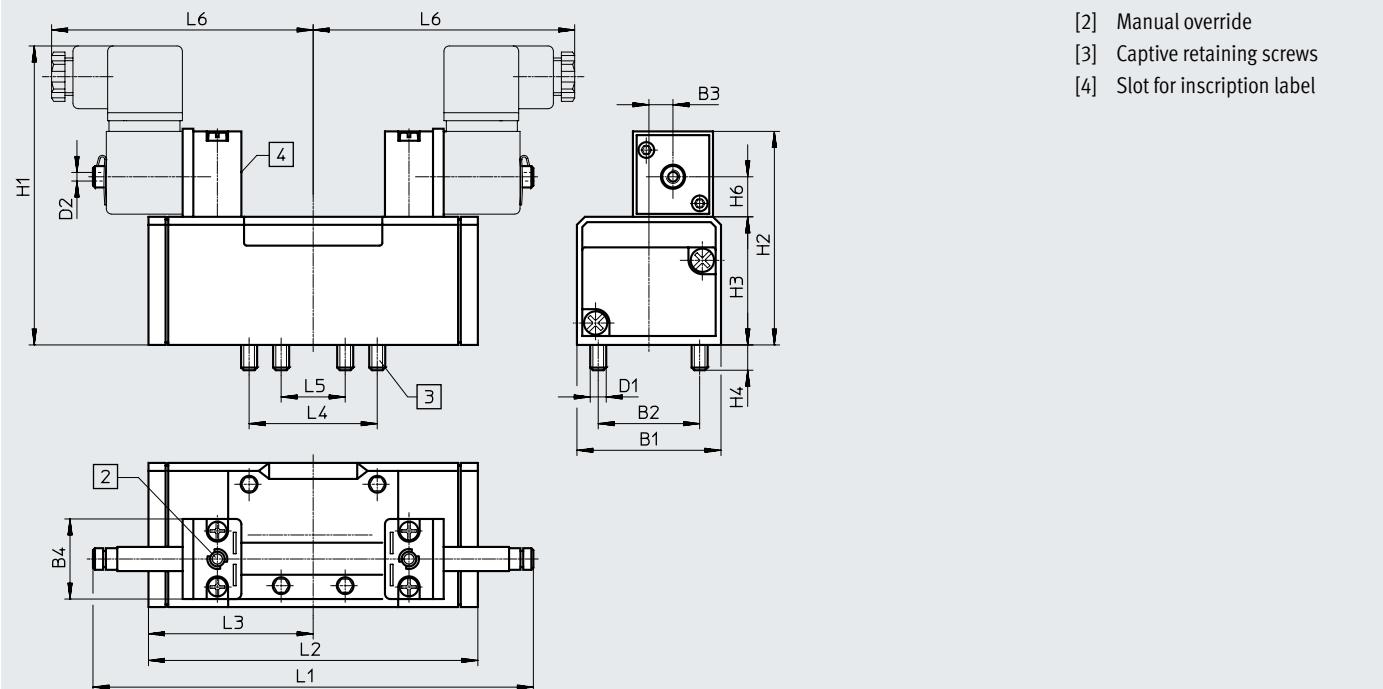5/2-way double solenoid valves, 5/3-way valves



Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
JMN1H-5/2- ...	42	28	6	30	M5	M5	106	74	38	9	46.5	15.3	147.3	87.6	43.8	36	18	89
JMN1DH-5/2- ...														87.6				
MN1H-5/3...																	108.4	


Ordering data – Width 42 mm

Ordering data – Valves with armature tube for solenoid coil MSN1 ¹⁾		Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve					
	Pneumatic spring return	Internal	450	159688	MN1H-5/2-D-1-C
	Pneumatic spring return	External	450	159686	MN1H-5/2-D-1-S-C
	Mechanical spring return	Internal	450	159687	MN1H-5/2-D-1-FR-C
	Mechanical spring return	External	450	159716	MN1H-5/2-D-1-FR-S-C
5/2-way valve, double solenoid					
	-	Internal	610	159690	JMN1H-5/2-D-1-C
	-	External	610	159689	JMN1H-5/2-D-1-S-C
	With dominant signal at 14	Internal	610	159691	JMN1DH-5/2-D-1-C
	With dominant signal at 14	External	610	159717	JMN1DH-5/2-D-1-S-C
5/3-way valve					
	Normally closed, mechanical spring return	Internal	650	159681	MN1H-5/3G-D-1-C
	Normally closed, mechanical spring return	External	650	159680	MN1H-5/3G-D-1-S-C
	Exhausted in normal position, mechanical spring return	Internal	650	159683	MN1H-5/3E-D-1-C
	Exhausted in normal position, mechanical spring return	External	650	159682	MN1H-5/3E-D-1-S-C
	Normally open, mechanical spring return	Internal	650	159685	MN1H-5/3B-D-1-C
	Normally open, mechanical spring return	External	650	159684	MN1H-5/3B-D-1-S-C

1) Solenoid coils → page 136

Datasheet – Width 52 mm

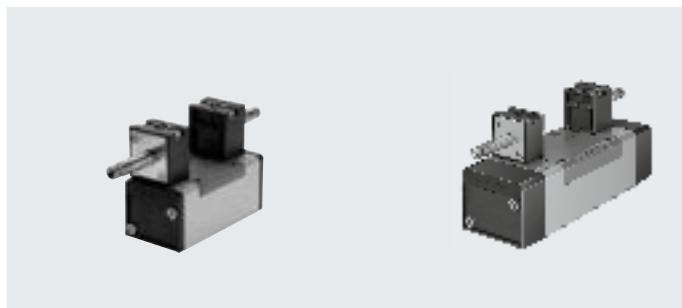-  - Flow rate
2300 l/min



General technical data	
Design	Piston spool
Sealing principle	Soft
Actuation type	Electrical
Type of control	Piloted
Flow direction	With external pilot air supply With internal pilot air supply
	Reversible
	Not reversible
Exhaust air function	Can be throttled
Manual override	Non-detenting, detenting via accessory
Type of mounting	On sub-base, with through-hole and screw
Mounting position	Any
Nominal width [mm]	11.5
Overlap	Positive overlap
Width [mm]	52
Grid dimension [mm]	56
Pneumatic connections	Sub-base size 2 to ISO 5599-1
Noise level [dB (A)]	85
Conforms to standard	ISO 5599-1
Certification	c UL us - Recognized (OL)
Maritime classification ¹⁾	See certificate

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Flow rates		5/2-way valve, single solenoid	5/2-way valve, double solenoid	5/3-way valve
Valve function		5/2-way valve, single solenoid	5/2-way valve, double solenoid	5/3-way valve
Standard nominal flow rate [l/min]		2300		

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MN1H-5/2-D-2-C	46	69	–	–
	MN1H-5/2-D-2-S-C	43	62	–	–
	MN1H-5/2-D-2-FR-C	24	62	–	–
	MN1H-5/2-D-2-FR-S-C	24	62	–	–
5/2-way valve, double solenoid	JMN1H-5/2-D-2-C	–	–	21	–
	JMN1H-5/2-D-2-S-C	–	–	21	–
	JMN1DH-5/2-D-2-C	–	–	24	21
	JMN1DH-5/2-D-2-S-C	–	–	24	21
5/3-way valve	MN1H-5/3G-D-2-C	33	82	–	–
	MN1H-5/3G-D-2-S-C	33	82	–	–
	MN1H-5/3E-D-2-C	36	84	–	–
	MN1H-5/3E-D-2-S-C	36	84	–	–
	MN1H-5/3B-D-2-C	35	78	–	–
	MN1H-5/3B-D-2-S-C	35	78	–	–

Datasheet – Width 52 mm


Operating and environmental conditions		Pneumatic spring	Mechanical spring
Reset method			
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)		
Operating pressure	Internal pilot air supply	[MPa]	0.2 ... 1
		[bar]	2 ... 10
	External pilot air supply	[MPa]	-0.09 ... +1.6
		[bar]	-0.9 ... +16
Pilot pressure	[bar]	2 ... 10	3 ... 10
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	
Safety data			
Max. positive test pulse with 0 signal	[µs]	3700	
Max. negative test pulse with 1 signal	[µs]	4600	
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance		Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6	
Electrical data			
Electrical connection		Via N1 coil, to be ordered separately	
Degree of protection to EN 60529		IP65	
Materials			
Housing		Die-cast aluminium	
Seals		HNBR, NBR	
Note on materials		RoHS-compliant	
LABS (PWIS) conformity		VDMA24364-B1/B2-L	

Datasheet – Width 52 mm

Dimensions


Download CAD data → www.festo.com

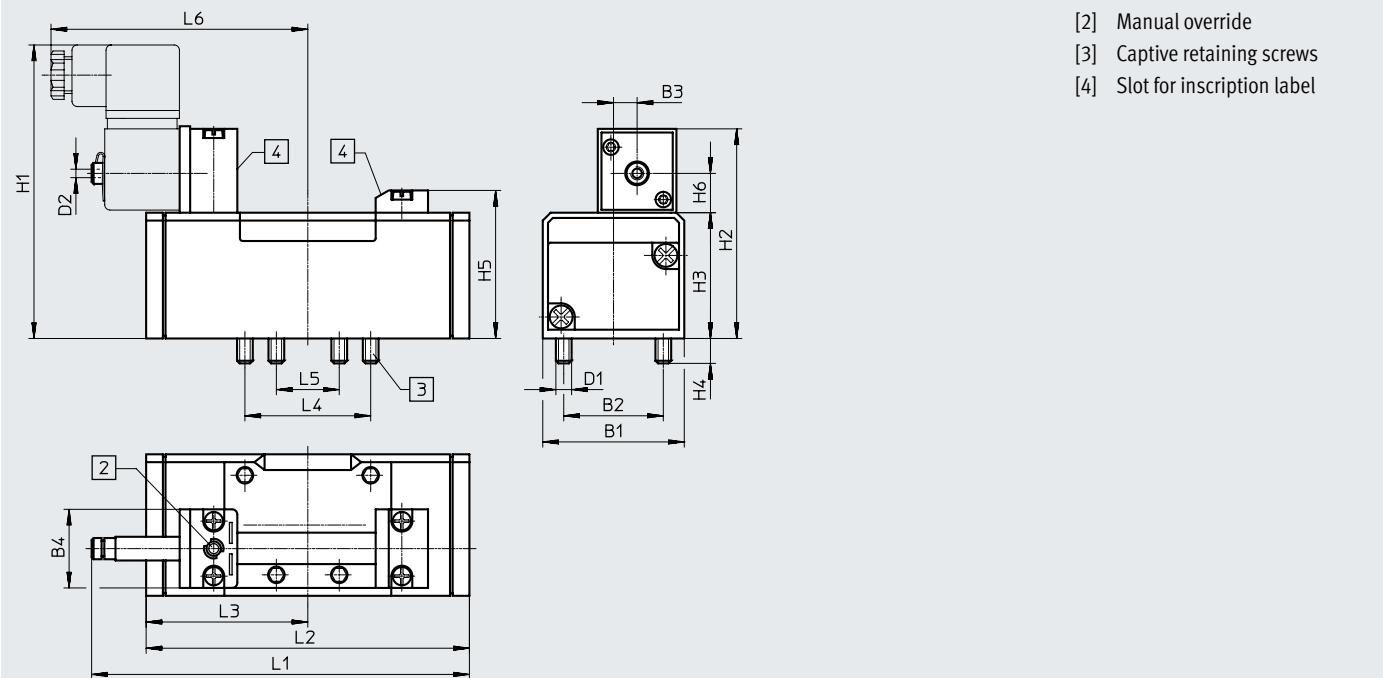5/2-way single solenoid valves



Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
MN1H-5/2- ...	54	38	9	30	M6	M5	116	84	48	9.5	56.5	15.3	147.6	123.4	61.7	48	24	98
MN1H-5/2- ...-FR- ...													161.5	140.7				

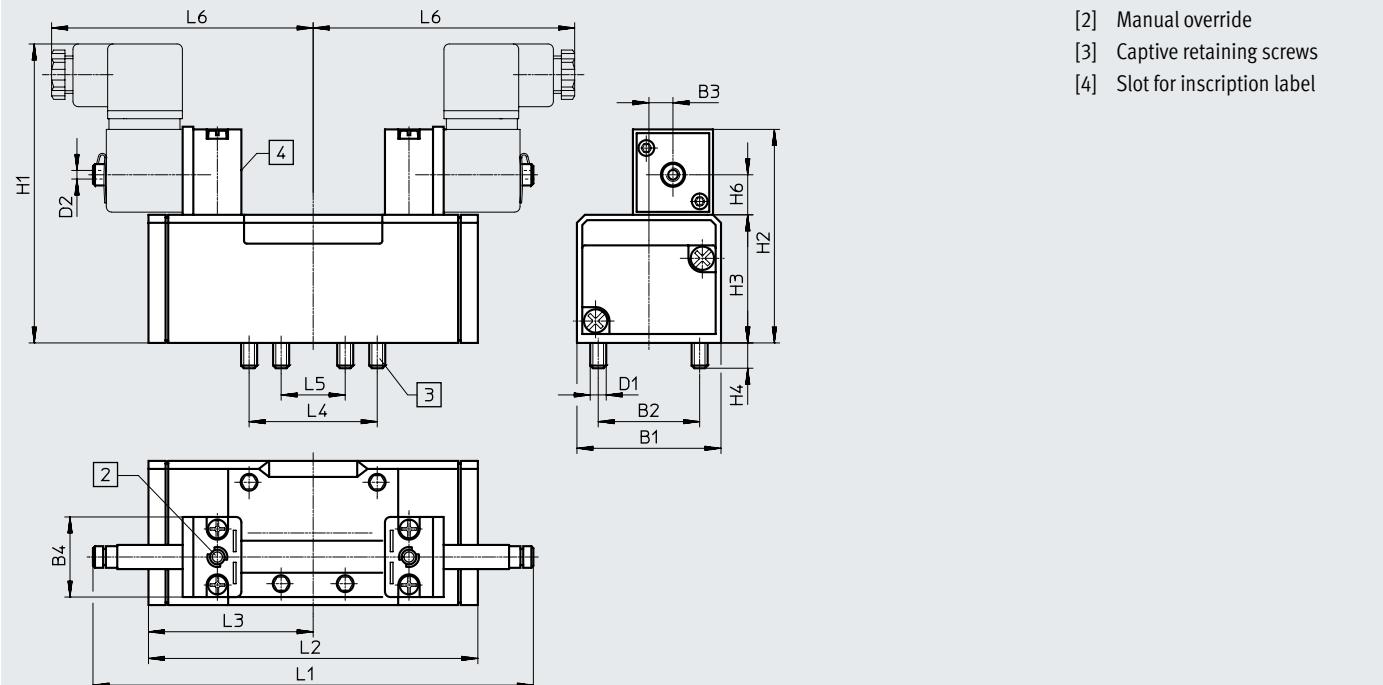5/2-way double solenoid valves, 5/3-way valves



Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
JMN1H-5/2- ...	54	38	9	30	M6	M5	116	84	48	9.5	56.5	15.3	165	123.4	61.7	48	24	98
JMN1DH-5/2- ...														123.4	61.7			
MN1H-5/3...														158	79			


Ordering data – Width 52 mm

Ordering data – Valves with armature tube for solenoid coil MSN1 ¹⁾		Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid					
	Pneumatic spring return	Internal	710	159700	MN1H-5/2-D-2-C
	Pneumatic spring return	External	710	159698	MN1H-5/2-D-2-S-C
	Mechanical spring return	Internal	710	159699	MN1H-5/2-D-2-FR-C
	Mechanical spring return	External	710	159718	MN1H-5/2-D-2-FR-S-C
5/2-way valve, double solenoid					
	-	Internal	940	159702	JMN1H-5/2-D-2-C
	-	External	940	159701	JMN1H-5/2-D-2-S-C
	With dominant signal at 14	Internal	940	159703	JMN1DH-5/2-D-2-C
	With dominant signal at 14	External	940	159719	JMN1DH-5/2-D-2-S-C
5/3-way valve					
	Normally closed, mechanical spring return	Internal	940	159693	MN1H-5/3G-D-2-C
	Normally closed, mechanical spring return	External	940	159692	MN1H-5/3G-D-2-S-C
	Exhausted in normal position, mechanical spring return	Internal	940	159695	MN1H-5/3E-D-2-C
	Exhausted in normal position, mechanical spring return	External	940	159694	MN1H-5/3E-D-2-S-C
	Normally open, mechanical spring return	Internal	940	159697	MN1H-5/3B-D-2-C
	Normally open, mechanical spring return	External	940	159696	MN1H-5/3B-D-2-S-C

1) Solenoid coils → page 136

Datasheet – Width 65 mm

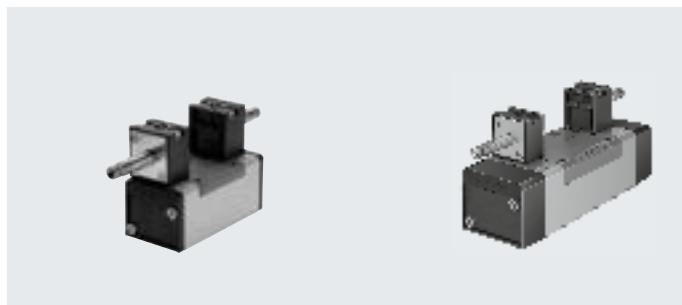-  Flow rate
4600 l/min

**General technical data**

Design	Piston spool		
Sealing principle	Soft		
Actuation type	Electrical		
Type of control	Piloted		
Flow direction	With external pilot air supply	Reversible	
	With internal pilot air supply	Not reversible	
Exhaust air function	Can be throttled		
Manual override	Non-detenting, detenting via accessory		
Type of mounting	On sub-base, with through-hole and screw		
Mounting position	Any		
Nominal width	[mm]	14.5	
Overlap	Positive overlap		
Width	[mm]	65	
Grid dimension	[mm]	71	
Pneumatic connections	Sub-base size 3 to ISO 5599-1		
Noise level	[dB (A)]	85	
Conforms to standard	ISO 5599-1		
Certification	With internal pilot air supply	c UL us - Recognized (OL)	
Maritime classification ¹⁾	See certificate		

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Flow rates

Valve function	[l/min]	5/2-way valve	5/3-way valve		
			Normally closed	Normally exhausted	Normally open
Standard nominal flow rate	4500	4100	4600	4000	

Datasheet – Width 65 mm


Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)			
5/2-way valve, single solenoid	MN1H-5/2-D-3-C	49	71	–	–			
	MN1H-5/2-D-3-S-C	49	71	–	–			
	MN1H-5/2-D-3-FR-C	33	74	–	–			
	MN1H-5/2-D-3-FRS-C	33	74	–	–			
5/2-way valve, double solenoid	JMN1H-5/2-D-3-C	–	–	21	–			
	JMN1H-5/2-D-3-S-C	–	–	21	–			
	JMN1DH-5/2-D-3-C	–	–	24	21			
	JMN1DH-5/2-D-3-S-C	–	–	24	21			
5/3-way valve	MN1H-5/3G-D-3-C	33	82	–	–			
	MN1H-5/3G-D-3-S-C	33	82	–	–			
	MN1H-5/3E-D-3-C	36	84	–	–			
	MN1H-5/3E-D-3-S-C	36	84	–	–			
	MN1H-5/3B-D-3-C	35	78	–	–			
	MN1H-5/3B-D-3-S-C	35	78	–	–			
Operating and environmental conditions								
Reset method		Pneumatic spring		Mechanical spring				
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]						
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]						
Note on the operating/pilot medium								
Operating pressure	Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1				
		[bar]	2 ... 10	3 ... 10				
	External pilot air supply	[MPa]	-0.09 ... +1.6	-0.09 ... +1.6				
		[bar]	-0.9 ... +16	-0.9 ... +16				
Pilot pressure		[bar]	2 ... 10	3 ... 10				
Ambient temperature		[°C]	-5 ... +50					
Temperature of medium		[°C]	-5 ... +50					
Safety data								
Max. positive test pulse with 0 signal		[μs]	3700					
Max. negative test pulse with 1 signal		[μs]	4600					
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27						
Vibration resistance		Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6						
Electrical data								
Electrical connection		Via N1 coil, to be ordered separately						
Degree of protection to EN 60529		IP65						
Materials								
Housing		Die-cast aluminium						
Seals		HNBR, NBR						
Note on materials		RoHS-compliant						

Datasheet – Width 65 mm

Dimensions

Download CAD data → www.festo.com

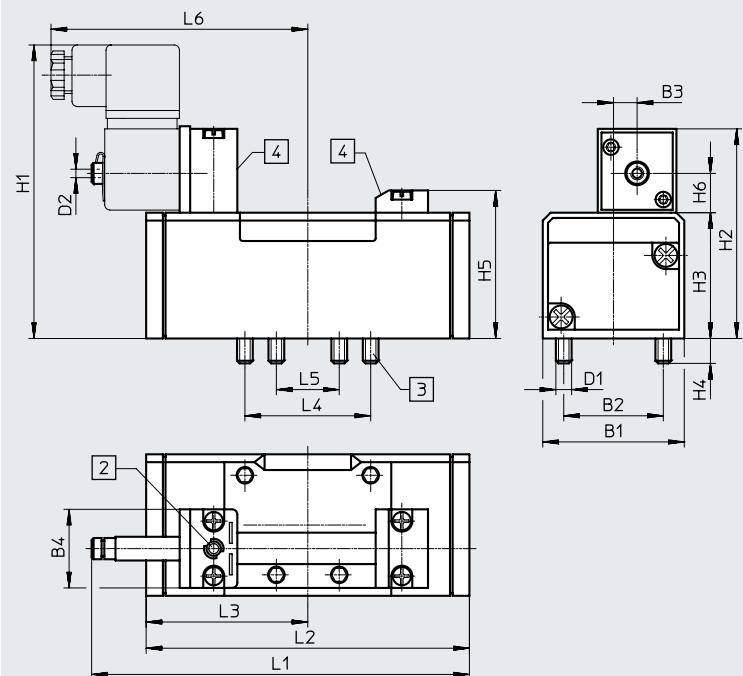
5/2-way valves, single solenoid



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
MN1H-5/2- ...	65	48	12	30	M8	M5	123	87.3	55	12	63.5	15.3	169	145.4	72.7	64	32	109
MN1H-5/2- ...-FR- ...													184.8	164.7				













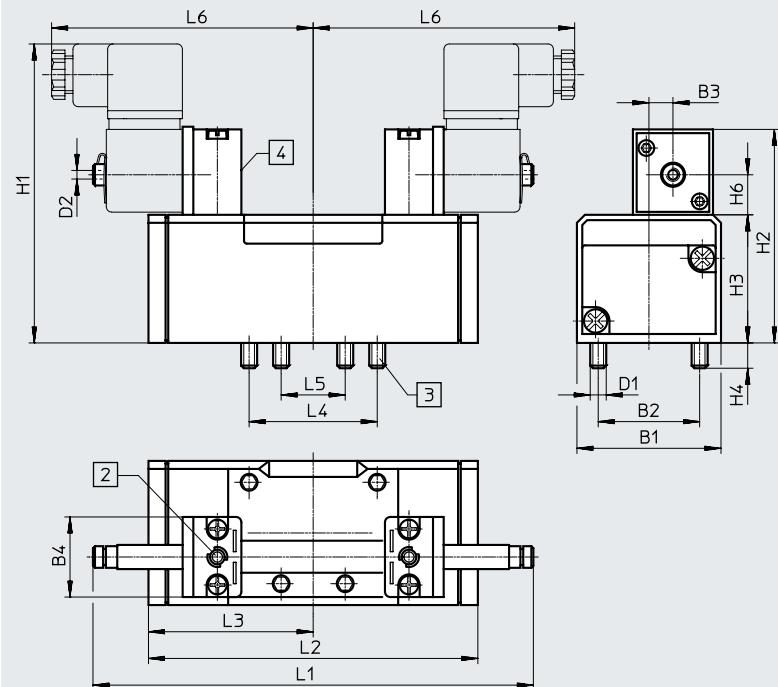
5/2-way double solenoid valves, 5/3-way valves



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6		
JMN1H-5/2- ...	65	48	12	30	M8	M5	123	87.3	55	12	-	15.3	185.7	145.4	72.7	64	32	109		
JMN1DH-5/2- ...											-			145.4	72.7					
MN1H-5/3...											63.5			184	92					


Ordering data – Width 65 mm

Ordering data – Valves with armature tube for solenoid coil MSN1 ¹⁾		Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid					
	Pneumatic spring return	Internal	1000	159712	MN1H-5/2-D-3-C
	Pneumatic spring return	External	1000	159710	MN1H-5/2-D-3-S-C
	Mechanical spring return	Internal	1000	159711	MN1H-5/2-D-3-FR-C
	Mechanical spring return	External	1000	160896	MN1H-5/2-D-3-FR-S-C
5/2-way valve, double solenoid					
	-	Internal	1090	159714	JMN1H-5/2-D-3-C
	-	External	1090	159713	JMN1H-5/2-D-3-S-C
	With dominant signal at 14	Internal	1090	159715	JMN1DH-5/2-D-3-C
	With dominant signal at 14	External	1090	160897	JMN1DH-5/2-D-3-S-C
5/3-way valve					
	Normally closed, mechanical spring return	Internal	1170	159705	MN1H-5/3G-D-3-C
	Normally closed, mechanical spring return	External	1170	159704	MN1H-5/3G-D-3-S-C
	Exhausted in normal position, mechanical spring return	Internal	1170	159707	MN1H-5/3E-D-3-C
	Exhausted in normal position, mechanical spring return	External	1170	159706	MN1H-5/3E-D-3-S-C
	Normally open, mechanical spring return	Internal	1170	159709	MN1H-5/3B-D-3-C
	Normally open, mechanical spring return	External	1170	159708	MN1H-5/3B-D-3-S-C

1) Solenoid coils → page 136

Datasheet – Width 42 mm

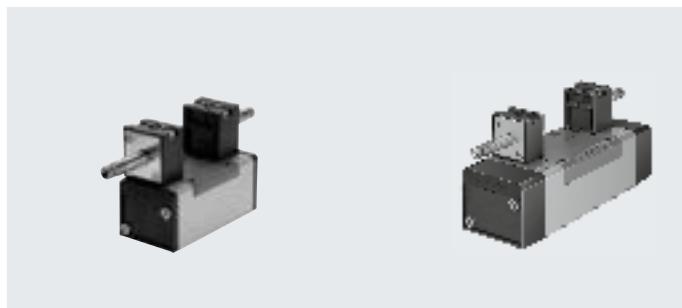-  - Flow rate
1200 l/min



General technical data		MFH- ... -C, JMF- ... -C	MFH- ... -EX, JMF- ... -EX
Type			
Design	Piston spool	Piston spool	
Sealing principle	Soft	Soft	
Actuation type	Electrical	Electrical	
Type of control	Piloted	Piloted	
Flow direction	With external pilot air supply	Reversible	Reversible
	With internal pilot air supply	Not reversible	Not reversible
Exhaust air function		Can be throttled	Can be throttled
Manual override		Non-detenting, detenting via accessory	Non-detenting, detenting via accessory
Type of mounting	On sub-base, via through-hole		
Mounting position	Any	Any	
Nominal width	[mm]	8	8
Overlap		Positive overlap	Positive overlap
Width	[mm]	42	42
Grid dimension	[mm]	43	43
Pneumatic connections		Sub-base size 1 to ISO 5599-1	Sub-base size 1 to ISO 5599-1
Noise level	[dB (A)]	85	85
Conforms to standard		ISO 5599-1	ISO 5599-1
Maritime classification ¹⁾		See certificate	–

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Flow rates			
Valve function	5/2-way valve, single solenoid	5/2-way valve, double solenoid	5/3-way valve
Standard nominal flow rate	[l/min]	1200	

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MFH-5/2...	23	35	–	–
	MFH-5/2-D-1-FR...	16	45	–	–
5/2-way valve, double solenoid	JMFH-...	–	–	16	–
	JMFDH-...	–	–	16	13
5/3-way valve	MFH-5/3G-D-1-C	18	35	–	–
	MFH-5/3G-D-1-C-EX	18	35	–	–
	MFH-5/3G-D-1-S-C	18	36	–	–
	MFH-5/3G-D-1-S-C-EX	18	36	–	–
	MFH-5/3E-D-1-C	18	36	–	–
	MFH-5/3E-D-1-C-EX	18	36	–	–
	MFH-5/3E-D-1-S-C	18	36	–	–
	MFH-5/3E-D-1-S-C-EX	18	36	–	–
	MFH-5/3B-D-1-C	18	36	–	–
	MFH-5/3B-D-1-C-EX	18	36	–	–
	MFH-5/3B-D-1-S-C	18	36	–	–
	MFH-5/3B-D-1-S-C-EX	18	36	–	–

Datasheet – Width 42 mm

ATEX	
Type	MFH- ... -EX, JMFH- ... -EX, JMFDH- ... -EX
ATEX category for gas	II 2G
Type of (ignition) protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex h IIIC T105°C Db
Explosion ambient temperature [°C]	-5 <= Ta <= +40
Explosion protection certification outside EU	EPL Db (GB) EPL Gb (GB)
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for explosions

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and environmental conditions	
Reset method	Pneumatic spring Mechanical spring
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)
Operating pressure	Internal pilot air supply [bar] 2 ... 10 3 ... 10 External pilot air supply [bar] -0.9 ... +16 -0.9 ... +16
Pilot pressure	[bar] 2 ... 10 3 ... 10
Ambient temperature	[°C] -5 ... +40
Temperature of medium	[°C] -10 ... +60 [°C] -5 ... +40 (MFH- ... -EX, JMFH- ... -EX, JMFDH- ... -EX)

Safety data	
Max. positive test pulse with 0 signal	[μs] 2200
Max. negative test pulse with 1 signal	[μs] 3700
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

Electrical data	
Electrical connection	Via F coil, to be ordered separately
Degree of protection to EN 60529	IP65


Materials	
Housing	Die-cast aluminium
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Datasheet – Width 42 mm

Dimensions

Download CAD data → www.festo.com

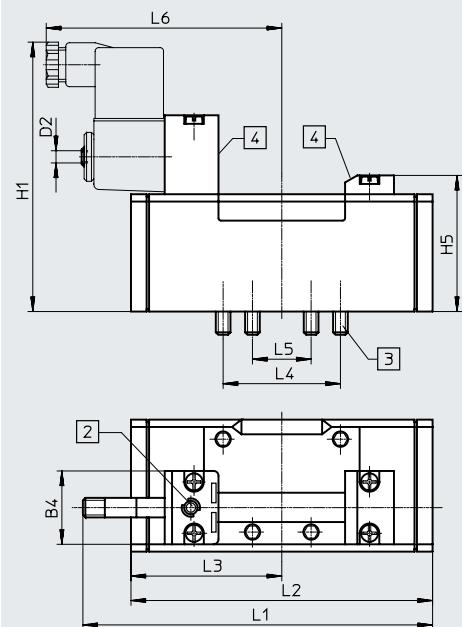
5/2-way valves, single solenoid



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
MFH-5/2- ...	42	28	6	30	M5	M5	100	70.3	38	9	46.5	13.5	115	87.6	43.8	36	18	89
MFH-5/2- ... -FR- ...													125.6	98				

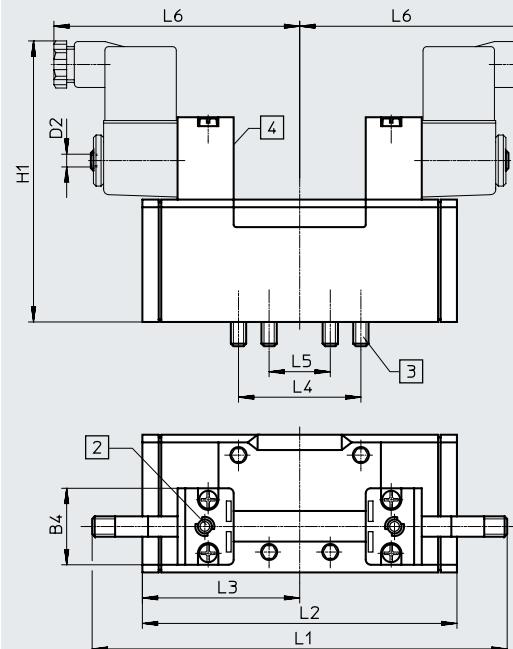5/2-way double solenoid valves, 5/3-way valves



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
JMFH-5/2- ...	42	28	6	30	M5	M5	100	70.3	38	9	-	13.5	142.6	87.6	43.8	36	18	89
JMFHD-5/2- ...														87.6	43.8			
MFH-5/3...														108.4	54.2			


Ordering data – Width 42 mm

Ordering data – Valves with armature tube for solenoid coil MSF ¹⁾		Description	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid						
	Pneumatic spring return	Internal	390	-	150981	MFH-5/2-D-1-C
				ATEX category → page 39	535954	MFH-5/2-D-1-C-EX
	Pneumatic spring return	External	390	-	152562	MFH-5/2-D-1-S-C
				ATEX category → page 39	535957	MFH-5/2-D-1-S-C-EX
	Mechanical spring return	Internal	390	-	151016	MFH-5/2-D-1-FR-C
				ATEX category → page 39	535960	MFH-5/2-D-1-FR-C-EX
	Mechanical spring return	External	390	-	188510	MFH-5/2-D-1-FR-S-C
5/2-way valve, double solenoid						
	-	Internal	490	-	150980	JMFH-5/2-D-1-C
				ATEX category → page 39	535963	JMFH-5/2-D-1-C-EX
	-	External	490	-	152563	JMFH-5/2-D-1-S-C
				ATEX category → page 39	535966	JMFH-5/2-D-1-S-C-EX
	With dominant signal at 14	Internal	490	-	151019	JMFHD-5/2-D-1-C
				ATEX category → page 39	536071	JMFHD-5/2-D-1-C-EX
5/3-way valve						
	Normally closed, mechanical spring return	Internal	520	-	150982	MFH-5/3G-D-1-C
				ATEX category → page 39	535969	MFH-5/3G-D-1-C-EX
	Normally closed, mechanical spring return	External	520	-	152564	MFH-5/3G-D-1-S-C
				ATEX category → page 39	535972	MFH-5/3G-D-1-S-C-EX
	Normally exhausted, mechanical spring return	Internal	520	-	150983	MFH-5/3E-D-1-C
				ATEX category → page 39	535975	MFH-5/3E-D-1-C-EX
	Normally exhausted, mechanical spring return	External	520	-	152565	MFH-5/3E-D-1-S-C
				ATEX category → page 39	535978	MFH-5/3E-D-1-S-C-EX
	Normally open, mechanical spring return	Internal	520	-	150984	MFH-5/3B-D-1-C
				ATEX category → page 39	535981	MFH-5/3B-D-1-C-EX
	Normally open, mechanical spring return	External	520	-	152566	MFH-5/3B-D-1-S-C
				ATEX category → page 39	535984	MFH-5/3B-D-1-S-C-EX

1) Solenoid coils → page 136

Datasheet – Width 52 mm

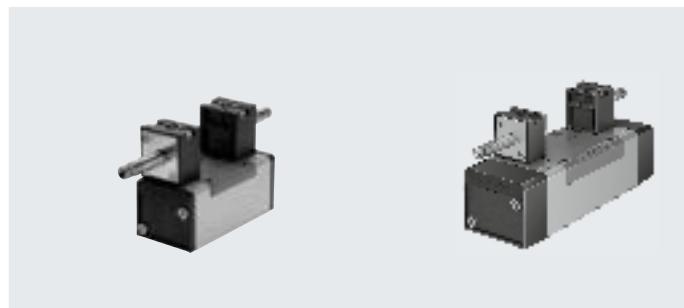-  - Flow rate
2300 l/min



General technical data		MFH- ... -C, JMF- ... -C	MFH- ... -EX, JMF- ... -EX
Type			
Design	Piston spool	Piston spool	
Sealing principle	Soft	Soft	
Actuation type	Electrical	Electrical	
Type of control	Piloted	Piloted	
Flow direction	With external pilot air supply	Reversible	Reversible
	With internal pilot air supply	Not reversible	Not reversible
Exhaust air function		Can be throttled	Can be throttled
Manual override		Non-detenting, detenting via accessory	Non-detenting, detenting via accessory
Type of mounting	On sub-base, with through-hole and screw		
Mounting position		Any	Any
Nominal width	[mm]	11.5	11.5
Overlap		Positive overlap	Positive overlap
Width	[mm]	52	52
Grid dimension	[mm]	56	56
Pneumatic connections		Sub-base size 2 to ISO 5599-1	Sub-base size 2 to ISO 5599-1
Noise level	[dB (A)]	85	85
Conforms to standard		ISO 5599-1	ISO 5599-1
Maritime classification ¹⁾		See certificate	–

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Flow rates				
Valve function		5/2-way valve, single solenoid	5/2-way valve, double solenoid	5/3-way valve
Standard nominal flow rate	[l/min]	2300		

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MFH-5/2...	48	71	–	–
	MFH-5/2-D-2-FR...	27	73	–	–
5/2-way valve, double solenoid	JMFH...	–	–	18	–
	JMFDH...	–	–	18	18
5/3-way valve	MFH-5/3G...	33	63	–	–
	MFH-5/3E...	35	67	–	–
	MFH-5/3B...	35	69	–	–

Datasheet – Width 52 mm

ATEX	
Type	MFH- ... -EX, JMFH- ... -EX, JMFDH- ... -EX
ATEX category for gas	II 2G
Type of (ignition) protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex h IIIC T105°C Db
Explosion ambient temperature [°C]	-5 <= Ta <= +40
Explosion protection certification outside EU	EPL Db (GB) EPL Gb (GB)
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for explosions

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and environmental conditions																	
Reset method	Pneumatic spring Mechanical spring																
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]																
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]																
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)																
Operating pressure	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Internal pilot air supply</td> <td style="width: 10%; text-align: right;">[MPa]</td> <td style="width: 40%;">0.2 ... 1</td> <td style="width: 20%;">0.3 ... 1</td> </tr> <tr> <td></td> <td style="text-align: right;">[bar]</td> <td>2 ... 10</td> <td>3 ... 10</td> </tr> <tr> <td></td> <td style="text-align: right;">External pilot air supply</td> <td style="text-align: right;">[MPa]</td> <td style="text-align: right;">-0.09 ... +1.6</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">[bar]</td> <td style="text-align: right;">-0.9 ... +16</td> </tr> </table>	Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1		[bar]	2 ... 10	3 ... 10		External pilot air supply	[MPa]	-0.09 ... +1.6			[bar]	-0.9 ... +16
Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1														
	[bar]	2 ... 10	3 ... 10														
	External pilot air supply	[MPa]	-0.09 ... +1.6														
		[bar]	-0.9 ... +16														
Pilot pressure	[bar] 2 ... 10 3 ... 10																
Ambient temperature	[°C] -5 ... +40																
Temperature of medium	[°C] -10 ... +60																

Safety data		
Max. positive test pulse with 0 signal	[µs]	2200
Max. negative test pulse with 1 signal	[µs]	3700
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6	

Electrical data	
Electrical connection	Via F coil, to be ordered separately
Degree of protection to EN 60529	IP65



Materials	
Housing	Die-cast aluminium
Seals	HNBR, NBR
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet – Width 52 mm

Dimensions

Download CAD data → www.festo.com

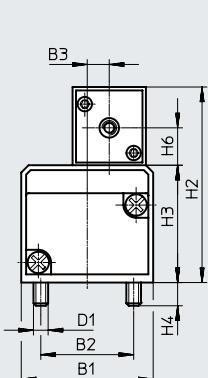
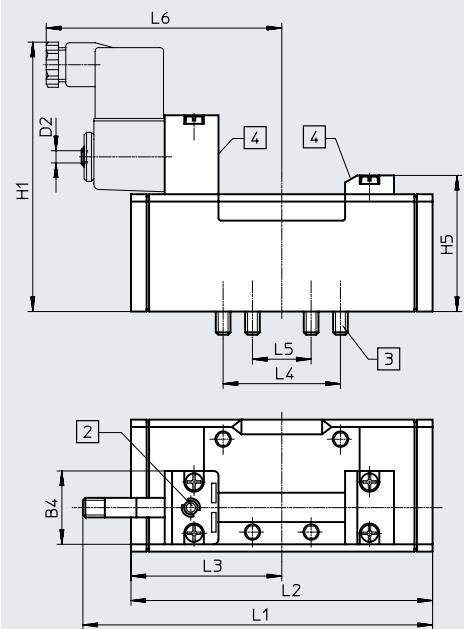
5/2-way valve, single solenoid



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
MFH-5/2- ...	54	38	9	30	M6	M5	110	80.3	48	9.5	56.5	13.5	142	123.4	61.7	48	24	98
MFH-5/2- ... -FR- ...													159.4	140.7				











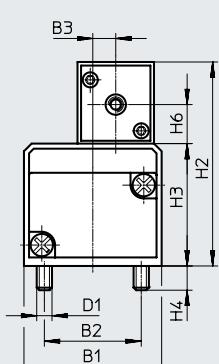
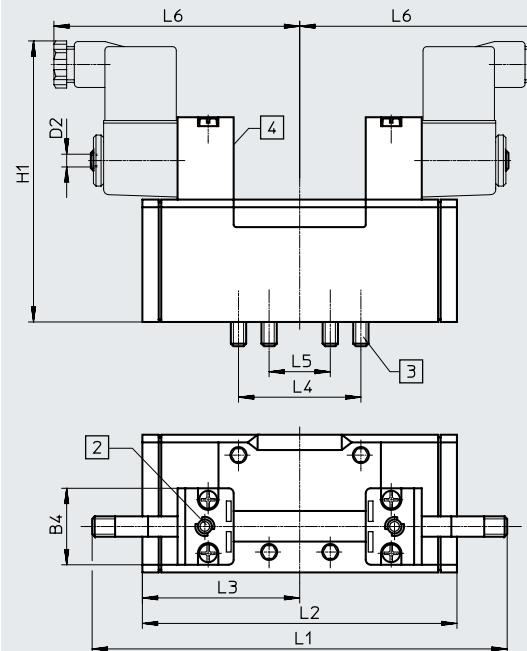
5/2-way double solenoid valves, 5/3-way valves



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
JMFH-5/2- ...	54	38	9	30	M6	M5	110	80.3	48	9.5	–	13.5	160.4	123.4	61.7	48	24	97
JMDH-5/2- ...													160.4	123.4	61.7			97
MFH-5/3...													160	158	79			98


Ordering data – Width 52 mm

Ordering data – Valves with armature tube for solenoid coil MSF ¹⁾		Description	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid						
 14 4 2 12 5 1 3	Pneumatic spring return	Internal	650	–	151851	MFH-5/2-D-2-C
				ATEX category → page 43	535955	MFH-5/2-D-2-C-EX
 14 4 2 12 14 5 1 3	Pneumatic spring return	External	650	–	151022	MFH-5/2-D-2-S-C
				ATEX category → page 43	535958	MFH-5/2-D-2-S-C-EX
 14 4 2 12 5 1 3	Mechanical spring return	Internal	650	–	151709	MFH-5/2-D-2-FR-C
				ATEX category → page 43	535961	MFH-5/2-D-2-FR-C-EX
5/2-way valve, double solenoid						
 14 4 2 12 5 1 3	–	Internal	820	–	151852	JMFH-5/2-D-2-C
				ATEX category → page 43	535964	JMFH-5/2-D-2-C-EX
 14 4 2 12 14 5 1 3 12	–	External	820	–	151023	JMFH-5/2-D-2-S-C
				ATEX category → page 43	535967	JMFH-5/2-D-2-S-C-EX
 14 4 2 12 5 1 3	With dominant signal at 14	Internal	820	–	151853	JMFH-5/2-D-2-C
				ATEX category → page 43	536072	JMFH-5/2-D-2-C-EX
5/3-way valve						
 14 4 2 12 5 1 3	Normally closed, mechanical spring return	Internal	820	–	151854	MFH-5/3G-D-2-C
				ATEX category → page 43	535970	MFH-5/3G-D-2-C-EX
 14 4 2 12 14 5 1 3 12	Normally closed, mechanical spring return	External	820	–	151024	MFH-5/3G-D-2-S-C
				ATEX category → page 43	535973	MFH-5/3G-D-2-S-C-EX
 14 4 2 12 5 1 3	Normally exhausted, mechanical spring return	Internal	820	–	151855	MFH-5/3E-D-2-C
				ATEX category → page 43	535976	MFH-5/3E-D-2-C-EX
 14 4 2 12 14 5 1 3 12	Normally exhausted, mechanical spring return	External	820	–	151025	MFH-5/3E-D-2-S-C
				ATEX category → page 43	535979	MFH-5/3E-D-2-S-C-EX
 14 4 2 12 5 1 3	Normally open, mechanical spring return	Internal	820	–	151856	MFH-5/3B-D-2-C
				ATEX category → page 43	535982	MFH-5/3B-D-2-C-EX
 14 4 2 12 14 5 1 3 12	Normally open, mechanical spring return	External	820	–	151026	MFH-5/3B-D-2-S-C
				ATEX category → page 43	535985	MFH-5/3B-D-2-S-C-EX

1) Solenoid coils → page 136

Datasheet – Width 65 mm

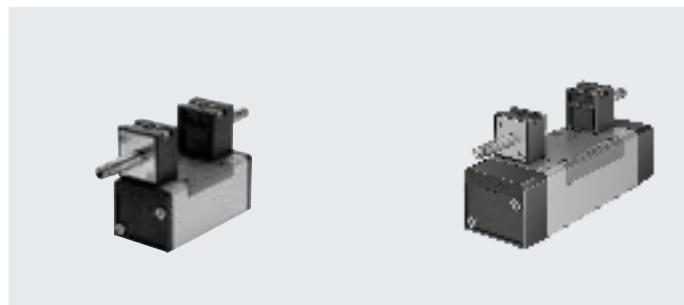-  Flow rate
Up to 4600 l/min



General technical data		MFH- ... -C, JMF- ... -C	MFH- ... -EX, JMF- ... -EX
Type			
Design	Piston spool	Piston spool	
Sealing principle	Soft	Soft	
Actuation type	Electrical	Electrical	
Type of control	Piloted	Piloted	
Flow direction	With external pilot air supply	Reversible	Reversible
	With internal pilot air supply	Not reversible	Not reversible
Exhaust air function		Can be throttled	Can be throttled
Manual override		Non-detenting, detenting via accessory	Non-detenting, detenting via accessory
Type of mounting	On sub-base, with through-hole and screw		
Mounting position		Any	Any
Nominal width	[mm]	14.5	14.5
Overlap		Positive overlap	Positive overlap
Width	[mm]	65	65
Grid dimension	[mm]	71	71
Pneumatic connections		Sub-base size 3 to ISO 5599-1	Sub-base size 3 to ISO 5599-1
Noise level	[dB (A)]	85	85
Conforms to standard		ISO 5599-1	ISO 5599-1
Maritime classification ¹⁾		See certificate	–

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Flow rates	Valve function	5/2-way valve	5/3-way valve		
			Normally closed	Normally exhausted	Normally open
Standard nominal flow rate	[l/min]	4500	4100	4600	4000

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MFH-5/2...	60	66	–	–
	MFH-5/2-D-1-FR...	28	79	–	–
5/2-way valve, double solenoid	JMFH-...	–	–	18	–
	JMFDH-...	–	–	18	18
5/3-way valve	MFH-5/3G...	36	77	–	–
	MFH-5/3E...	37	78	–	–
	MFH-5/3B...	36	75	–	–

Datasheet – Width 65 mm

ATEX	
Type	MFH- ... -EX, JMFH- ... -EX, JMFDH- ... -EX
ATEX category for gas	II 2G
Type of (ignition) protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex h IIIC T105°C Db
Explosion ambient temperature [°C]	-5 <= Ta <= +40
Explosion protection certification outside EU	EPL Db (GB) EPL Gb (GB)
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for explosions

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and environmental conditions																	
Reset method	Pneumatic spring Mechanical spring																
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]																
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]																
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)																
Operating pressure	<table> <tr> <td>Internal pilot air supply</td> <td>[MPa]</td> <td>0.2 ... 1</td> <td>0.3 ... 1</td> </tr> <tr> <td></td> <td>[bar]</td> <td>2 ... 10</td> <td>3 ... 10</td> </tr> <tr> <td>External pilot air supply</td> <td>[MPa]</td> <td>-0.09 ... +1.6</td> <td>-0.09 ... +1.6</td> </tr> <tr> <td></td> <td>[bar]</td> <td>-0.9 ... +16</td> <td>-0.9 ... +16</td> </tr> </table>	Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1		[bar]	2 ... 10	3 ... 10	External pilot air supply	[MPa]	-0.09 ... +1.6	-0.09 ... +1.6		[bar]	-0.9 ... +16	-0.9 ... +16
Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1														
	[bar]	2 ... 10	3 ... 10														
External pilot air supply	[MPa]	-0.09 ... +1.6	-0.09 ... +1.6														
	[bar]	-0.9 ... +16	-0.9 ... +16														
Pilot pressure	[bar] 2 ... 10 3 ... 10																
Ambient temperature	[°C] -5 ... +40																
Temperature of medium	[°C] -10 ... +60																

Safety data	
Max. positive test pulse with 0 signal	[µs] 2200
Max. negative test pulse with 1 signal	[µs] 3700
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

Electrical data	
Electrical connection	Via F coil, to be ordered separately
Degree of protection to EN 60529	IP65



Materials	
Housing	Die-cast aluminium
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Datasheet – Width 65 mm

Dimensions

Download CAD data → www.festo.com

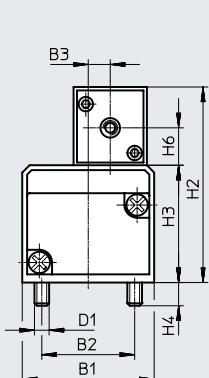
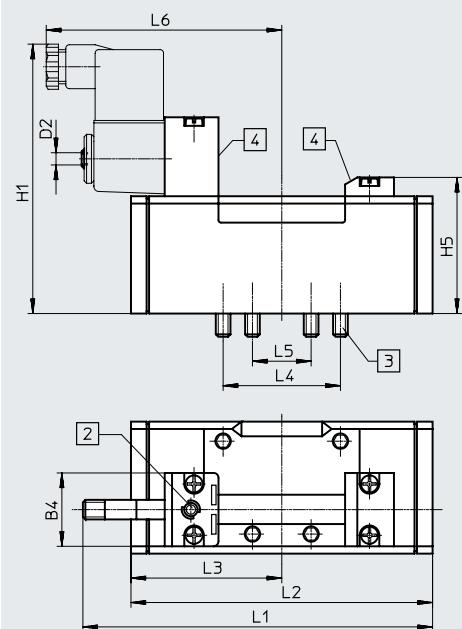
5/2-way valve, single solenoid



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
MFH-5/2- ...	65	48	12	30	M8	M5	117	87.3	55	12	63.5	13.5	163	145.4	72.7	64	32	109
MFH-5/2- ... -FR- ...													182	164.7				










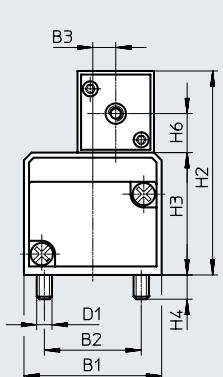
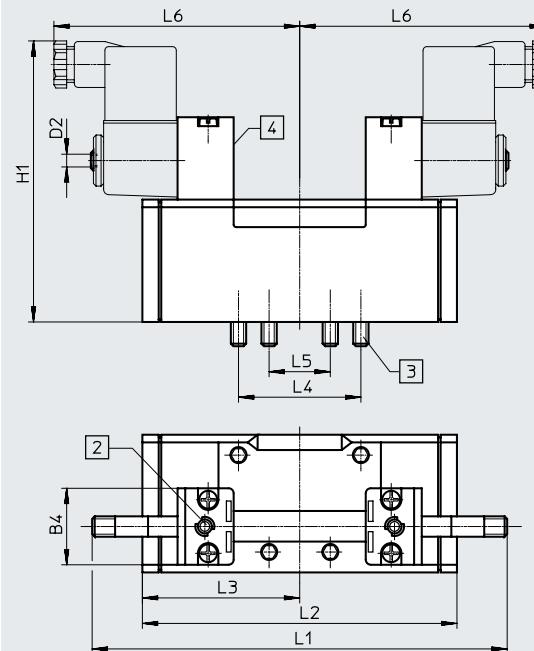
5/2-way double solenoid valves, 5/3-way valves



- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6
JMFH-5/2- ...	65	48	12	30	M8	M5	117	87.3	55	12	-	13.5	181	145.4	72.7	64	32	109
JMDH-5/2- ...														145.4	72.7			
MFH-5/3...														184	92			

Ordering data – Width 65 mm

Ordering data – Valves with armature tube for solenoid coil MSF ¹⁾		Description	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid						
	Pneumatic spring return	Internal	960	–	151870	MFH-5/2-D-3-C
				ATEX category → page 47	535956	MFH-5/2-D-3-C-EX
	Pneumatic spring return	External	960	–	151032	MFH-5/2-D-3-S-C
				ATEX category → page 47	535959	MFH-5/2-D-3-S-C-EX
	Mechanical spring return	Internal	960	–	151711	MFH-5/2-D-3-FR-C
				ATEX category → page 47	535962	MFH-5/2-D-3-FR-C-EX
5/2-way valve, double solenoid						
	–	Internal	1060	–	151871	JMFH-5/2-D-3-C
				ATEX category → page 47	535965	JMFH-5/2-D-3-C-EX
	–	External	1060	–	151033	JMFH-5/2-D-3-S-C
				ATEX category → page 47	535968	JMFH-5/2-D-3-S-C-EX
	With dominant signal at 14	Internal	1060	–	151872	JMFH-5/2-D-3-C
				ATEX category → page 47	536073	JMFH-5/2-D-3-C-EX
5/3-way valve						
	Normally closed, mechanical spring return	Internal	1040	–	151873	MFH-5/3G-D-3-C
				ATEX category → page 47	535971	MFH-5/3G-D-3-C-EX
	Normally closed, mechanical spring return	External	1040	–	151034	MFH-5/3G-D-3-S-C
				ATEX category → page 47	535974	MFH-5/3G-D-3-S-C-EX
	Normally exhausted, mechanical spring return	Internal	1040	–	151874	MFH-5/3E-D-3-C
				ATEX category → page 47	535977	MFH-5/3E-D-3-C-EX
	Normally exhausted, mechanical spring return	External	1040	–	151035	MFH-5/3E-D-3-S-C
				ATEX category → page 47	535980	MFH-5/3E-D-3-S-C-EX
	Normally open, mechanical spring return	Internal	1040	–	151875	MFH-5/3B-D-3-C
				ATEX category → page 47	535983	MFH-5/3B-D-3-C-EX
	Normally open, mechanical spring return	External	1040	–	151036	MFH-5/3B-D-3-S-C
				ATEX category → page 47	535986	MFH-5/3B-D-3-S-C-EX

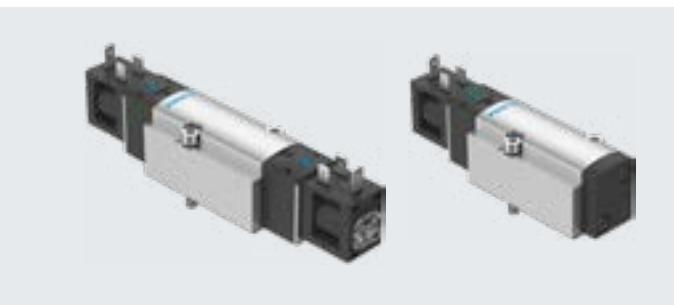
1) Solenoid coils → page 136

Solenoid valves VSVA, with square plug type B to industry standard

Datasheet – Width 38 mm

-  Flow rate
Max. 1343 l/min

-  Voltage
24 V DC



General technical data				
Valve function	5/2-way, single solenoid	5/2-way, double solenoid	5/3-way, exhausted	
Reset method	Pneumatic spring	Mechanical spring	–	
Design	Piston spool with sealing ring			
Overlap	Negative overlap			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Pilot air supply	Internal			
Flow direction	Not reversible			
Exhaust air function	Can be throttled			
Manual override	Non-detenting; detenting			
Type of mounting	On sub-base			
Mounting position	Any			
Nominal width [mm]	6.3			
Valve size [mm]	42			
Width [mm]	38			
Grid dimension [mm]	43			
Pneumatic port	1, 2, 3, 4, 5	Sub-base size 1 to ISO 5599-1		
Port for venting hole	Not ducted			
b value	0.26	0.26	0.26	
Cvalue [l/sbar]	5.87	5.88	5.91	
Maximum assembly torque for valve mounting [Nm]	5			
Product weight [g]	321	324	400	
Conforms to standard	ISO 5599-1			
ISO code	151	152	155	
157				

Flow rates			
Valve function	5/2-way, single solenoid	5/2-way, double solenoid	5/3-way, exhausted
Reset method	Pneumatic spring	Mechanical spring	–
Flow rate of valve [l/min]	1342	1343	1341
Flow rate of valve on individual sub-base [l/min]	1341	1342	1341
Flow rate of pneumatically linked valve [l/min]	1313	1313	1313
Standard nominal flow rate [l/min]	1200	1200	1200

Switching times			
Valve function	5/2-way, single solenoid	5/2-way, double solenoid	5/3-way, exhausted
Reset method	Pneumatic spring	Mechanical spring	–
Switching time on [ms]	17.3	19.9	–
Switching time off [ms]	20.7	20.9	–
Switching time changeover [ms]	–	–	10.5
			18.9

Datasheet – Width 38 mm

Safety data		
Max. positive test pulse with 0 signal	[µs]	2500
Max. negative test pulse with 1 signal	[µs]	1100
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Operating and environmental conditions		
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium		Lubricated operation possible (required for further operation)
Operating pressure	[MPa]	0.3 ... 0.8
	[bar]	3 ... 8
Ambient temperature	[°C]	-5 ... +50
Temperature of medium	[°C]	-5 ... +50
Corrosion resistance class CRC ¹⁾		1 - Low corrosion stress

1) For additional information www.festo.com/x/topic/crc

Electrical data		
Electrical connection		Form B
		To industry standard (11 mm)
Nominal operating voltage	[V DC]	24
Characteristic coil data		24 V DC: 3.3 W
Permissible voltage fluctuations	[%]	±10
Duty cycle	[%]	100
Degree of protection		IP65
		With plug socket
		To IEC 60529
Signal status indication		Via accessories

Materials		
Housing		Wrought aluminium alloy
Seals		NBR, HNBR
Piston spool		Wrought aluminium alloy
Screws		Galvanised steel
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364 zone III

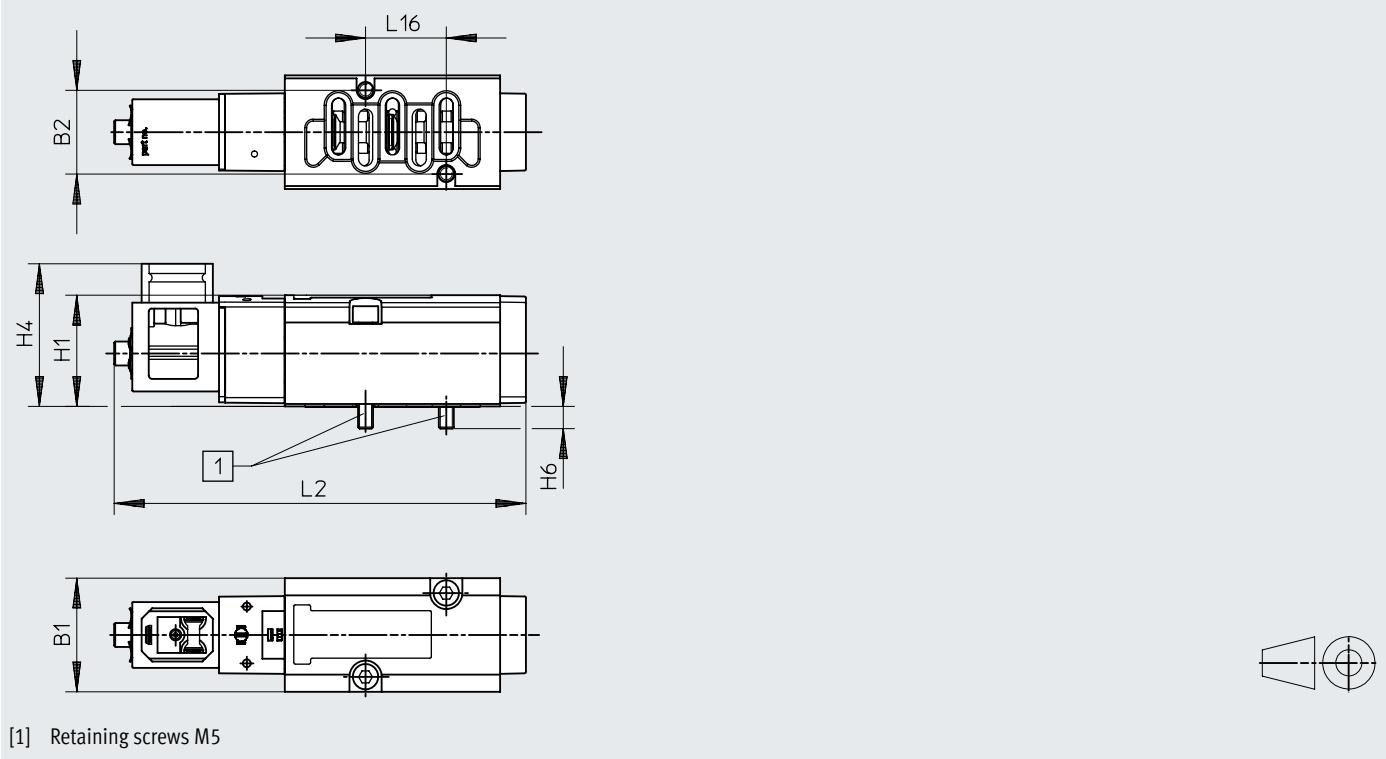
Solenoid valves VSVA, with square plug type B to industry standard

Datasheet – Width 38 mm

Dimensions

Download CAD data → www.festo.com

5/2-way valve, single solenoid




Type	B1	B2	H1	H4	H6	L2	L16
VSVA-BK-M52...	38	28	37.2	47.7	7.5	137.6	27

Datasheet – Width 38 mm

Dimensions

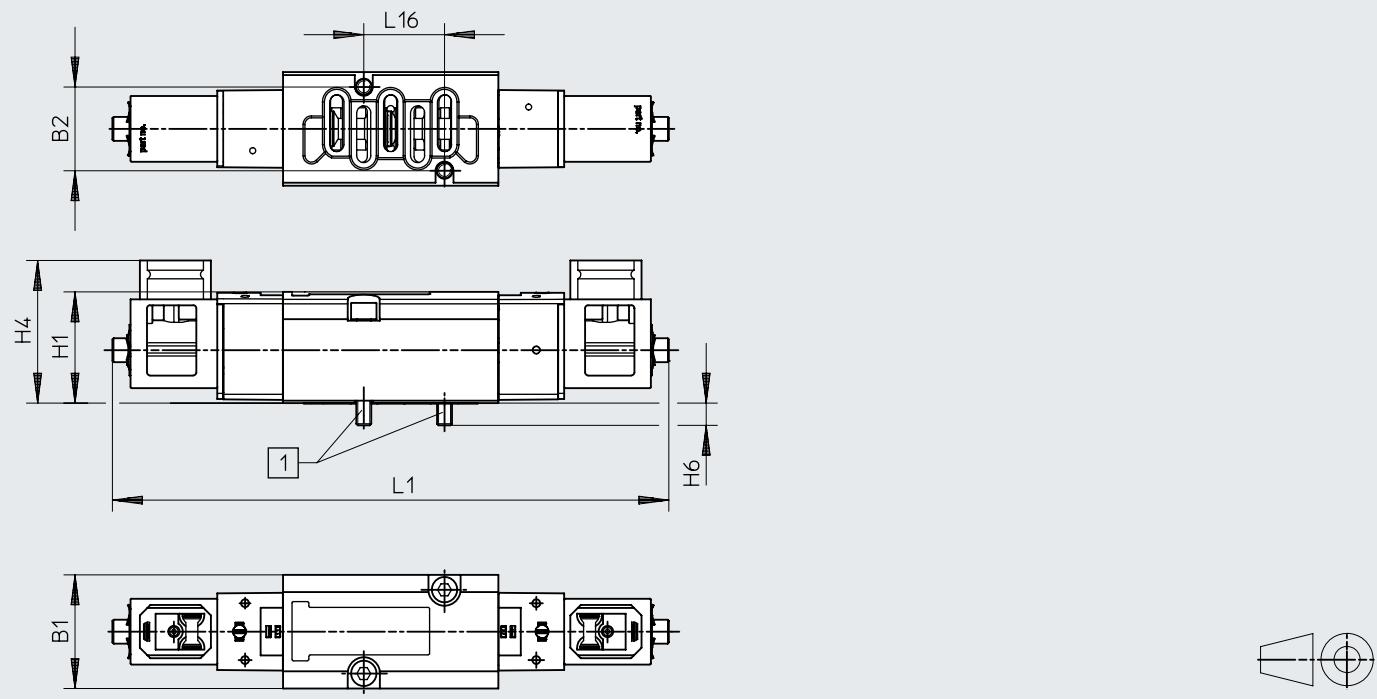5/2-way double solenoid valve and 5/3-way solenoid valve

Download CAD data → www.festo.com

Type	B1	B2	H1	H4	H6	L1	L16
VSVA-BK-B52...	38	28	37.2	47.7	7.5	186.1	27
VSVA-BK-P53...							

Code	Circuit symbol	Part no.	Type		
5/2-way valve, single solenoid					
-		Mechanical spring	Internal pilot air supply	8166594	VSVA-BK-M52-MD-D1-1B2
-		Pneumatic spring	Internal pilot air supply	8166593	VSVA-BK-M52-AD-D1-1B2
5/2-way valve, double solenoid					
-		-	Internal pilot air supply	8166592	VSVA-BK-B52-D-D1-1B2
5/3-way solenoid valve					
-		Normally exhausted	Internal pilot air supply	8166595	VSVA-BK-P53E-D-D1-1B2

Datasheet – Width 42 mm

-  - Flow rate
Up to 1300 l/min

-  - Voltage
24 V DC



General technical data

Design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Exhaust air function	Can be throttled, externally or via vertically stacked throttle plate			
Manual override	Non-detenting, detenting			
Type of mounting	On sub-base			
Mounting position	Any			
Nominal width [mm]	11			
Overlap	Positive overlap			
Width [mm]	42			
Grid dimension [mm]	43			
Pneumatic connections	Sub-base size 1 to ISO 5599-1			
Conforms to standard	ISO 5599-1			
Certification	c UL us – Recognized (OL)			

Flow rates

Valve function	2/2-way valve	3/2-way valve	5/2-way valve	5/3-way valve
Standard nominal flow rate [l/min]	1300	1100	1300	1300
Valve	1600	1600	2000	1900
Valve on individual sub-base	1400	1200	1400	1400
Valve, pneumatically linked	1300	1100	1300	1400

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 2/2-way valve	VSVA-B-T22...	20	38	–	–
2x 3/2-way valve	VSVA-B-T32...	20	38	–	–
2x 3/2-way valve, reversible	VSVA-B-T32...	34	28	–	–
5/2-way valve, single solenoid	VSVA-B-M52-A...	27	45	–	–
	VSVA-B-M52-M...	22	60	–	–
5/2-way valve, double solenoid	VSVA-B-B52...	–	–	16	–
	VSVA-B-D52...	–	–	–	19
5/3-way valve	VSVA-B-P53...	22	65	–	–


Datasheet – Width 42 mm

Operating and environmental conditions					
Valve function	2x 2/2-way valve	2x 3/2-way valve	2x 3/2-way valve, reversible	5/2-way valve	5/3-way valve
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)				
Operating pressure	Internal pilot air supply [MPa]	0.3 ... 1	0.3 ... 1	-	0.3 ... 1
	[bar]	3 ... 10	3 ... 10	-	3 ... 10
External pilot air supply	[MPa]	0.3 ... 1	0.3 ... 1	-0.09 ... +1	-0.09 ... +1.6
	[bar]	3 ... 10	3 ... 10	-0.9 ... +10	-0.9 ... +16
Pilot pressure	[MPa]	0.3 ... 1			
	[bar]	3 ... 10			
Ambient temperature	[°C]	-5 ... +50			
Relative humidity	[%]	0 ... 90			
Safety data					
Valve function	2x 3/2-way valve	5/2-way valve	5/2-way valve, with dominant signal at 14	5/3-way valve	
Max. positive test pulse with 0 signal	[μs]	1600	1400	1600	1400
Max. negative test pulse with 1 signal	[μs]	1100	900	1100	900
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27				
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6				
Electrical data					
Valve function	2x 2/2-way valve	2x 3/2-way valve	5/2-way valve	5/3-way valve	
Electrical connection	Central plug, round design M12x1, 3-pin				
Signal status indication	LED				
Characteristic coil data	Voltage [V DC]	24			
	Power [W]	1.3	1.3	1.6	1.6
Permissible voltage fluctuations	[%]	±10			
Duty cycle	[%]	100			
Degree of protection to EN 60529	IP65, NEMA4 (in combination with a plug socket)				
Materials					
Housing	PA				
Seals	NBR, FPM				
Screws	Galvanised steel				
Note on materials	RoHS-compliant				
LABS (PWIS) conformity	VDMA24364-B1/B2-L				
Product weight					
2x 2/2-way valve	[g]	442			
2x 3/2-way valve	[g]	442			
5/2-way valve, single solenoid	[g]	426			
5/2-way valve, double solenoid	[g]	439			
5/3-way valve	[g]	456			


Datasheet – Width 42 mm

Pilot pressure $p_{12/14}$ as a function of working pressure p_1

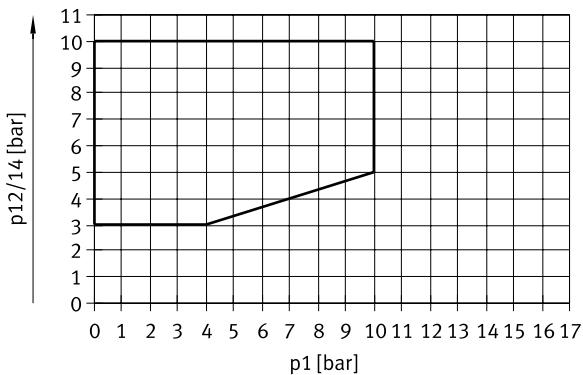2x 2-way valve and 2x 3/2-way valve



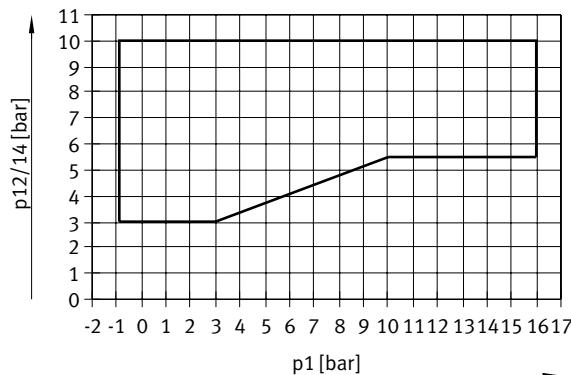
5/2-way valve and 5/3-way valve, external pilot air supply




Protective circuit

Each solenoid coil VSVA is provided with a spark arresting protective circuit and protected against polarity reversal.

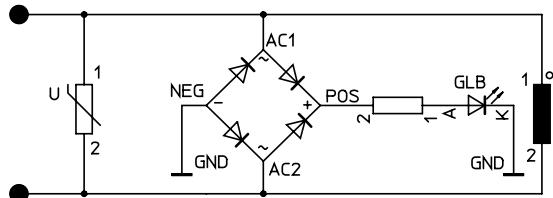24 V DC version




M12x1 – Pin allocation on the valve



- 2 Signal (+) Solenoid 12
- 3 com (-)
- 4 Signal (+) Solenoid 14

Dimensions

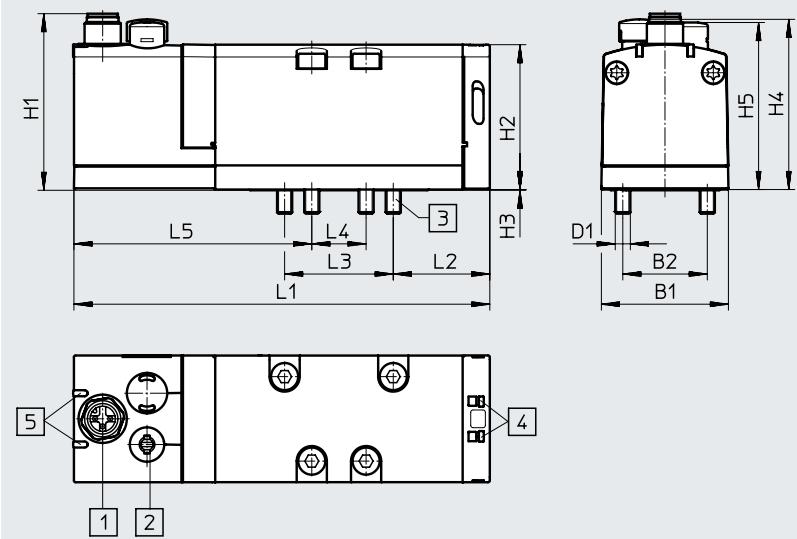Download CAD data → www.festo.com



[1] Plug, 3-pin

[2] Manual override

[3] Captive screws M5x48

[4] Slot for inscription label

[5] LED

Type	B1	B2	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5
VSVA-BD1-1R5L	42	28	M5	58.3	48	0.25	46.6	55.3	137.8	32	36	18	69.3

Ordering data – Width 42 mm

Ordering data	Description	Flow direction	Pilot air supply	Part no.	Type
2x 2/2-way valve					
	2x normally closed, pneumatic spring return	Not reversible	Internal	Order via online configurator → Internet: vsva	
	2x normally closed, pneumatic spring return	Not reversible	External		
	2x normally closed, vacuum operation possible at 3 and 5, pneumatic spring return	Reversible	Internal		
2x 3/2-way valve					
	2x normally closed, pneumatic spring return	Not reversible	Internal	561359	VSVA-B-T32C-AD-D1-1R5L
	2x normally closed, pneumatic spring return	Not reversible	External	561369	VSVA-B-T32C-AZD-D1-1R5L
	2x normally open, pneumatic spring return	Not reversible	Internal	561360	VSVA-B-T32U-AD-D1-1R5L
	2x normally open, pneumatic spring return	Not reversible	External	561370	VSVA-B-T32U-AZD-D1-1R5L
	1x normally closed, 1x normally open, pneumatic spring return	Not reversible	Internal	561361	VSVA-B-T32H-AD-D1-1R5L
	1x normally closed, 1x normally open, pneumatic spring return	Not reversible	External	561371	VSVA-B-T32H-AZD-D1-1R5L
2x 3/2-way valve, reversible					
	2x normally closed, pneumatic spring return	Reversible	External	Order via online configurator → Internet: vsva	
	2x normally open, pneumatic spring return	Reversible	External		
	1x normally closed, 1x normally open, pneumatic spring return	Reversible	External		


Ordering data – Width 42 mm

Ordering data	Description	Flow direction	Pilot air supply	Part no.	Type
5/2-way valve, single solenoid					
	Pneumatic spring return	Not reversible	Internal	561362	VSVA-B-M52-AD-D1-1R5L
	Mechanical spring return	Not reversible	Internal	561363	VSVA-B-M52-MD-D1-1R5L
	Pneumatic spring return	Reversible	External	561372	VSVA-B-M52-AZD-D1-1R5L
	Mechanical spring return	Reversible	External	561373	VSVA-B-M52-MZD-D1-1R5L
5/2-way valve, double solenoid					
	Dominance at 1st signal	Not reversible	Internal	561364	VSVA-B-B52-D-D1-1R5L
	Dominance at 1st signal	Reversible	External	561374	VSVA-B-B52-ZD-D1-1R5L
	With dominant signal at 14	Not reversible	Internal	561365	VSVA-B-D52-D-D1-1R5L
	With dominant signal at 14	Reversible	External	561375	VSVA-B-D52-ZD-D1-1R5L
5/3-way valve					
	Normally closed, mechanical spring return	Not reversible	Internal	561366	VSVA-B-P53C-D-D1-1R5L
	Normally closed, mechanical spring return	Reversible	External	561376	VSVA-B-P53C-ZD-D1-1R5L
	Normally open, mechanical spring return	Not reversible	Internal	561368	VSVA-B-P53U-D-D1-1R5L
	Normally open, mechanical spring return	Reversible	External	561378	VSVA-B-P53U-ZD-D1-1R5L
	Exhausted in normal position, mechanical spring return	Not reversible	Internal	561367	VSVA-B-P53E-D-D1-1R5L
	Exhausted in normal position, mechanical spring return	Reversible	External	561377	VSVA-B-P53E-ZD-D1-1R5L

Datasheet – Width 52 mm

-  - Flow rate
Up to 2800 l/min

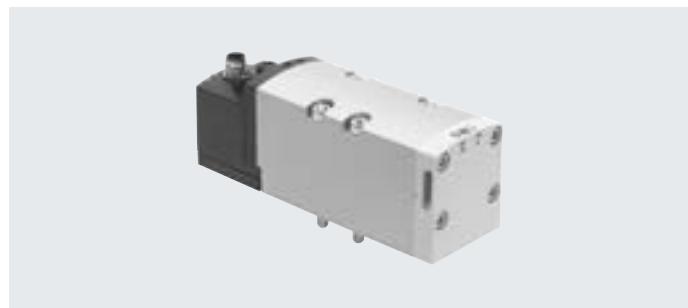-  - Voltage
24 V DC

**General technical data**

Design	Piston spool
Sealing principle	Soft
Actuation type	Electrical
Type of control	Piloted
Exhaust air function	Can be throttled, externally or via vertically stacked throttle plate
Manual override	Non-detenting, detenting
Type of mounting	On sub-base
Mounting position	Any
Nominal width	[mm] 15
Overlap	Positive overlap
Width	[mm] 52
Grid dimension	[mm] 59
Pneumatic connections	Sub-base size 2 to ISO 5599-1
Conforms to standard	ISO 5599-1
Certification	c CSA us (OL) c UL us – Recognized (OL) C-Tick

Flow rates

Valve function	2/2-way valve	3/2-way valve	5/2-way valve	5/3-way valve
Standard nominal flow rate	[l/min] 2800	2200	2800	2700
Valve	4000	3000	4000	3600
Valve on individual sub-base	2400	2000	2400	2300
Valve, pneumatically linked	2800	2200	2800	2700

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 2/2-way valve	VSVA-B-T22...	14	35	–	–
2x 3/2-way valve	VSVA-B-T32...	20	35	–	–
2x 3/2-way valve, reversible	VSVA-B-T32...	30	30	–	–
5/2-way valve, single solenoid	VSVA-B-M52-A...	40	45	–	–
	VSVA-B-M52-M...	20	60	–	–
5/2-way valve, double solenoid	VSVA-B-B52...	–	–	18	–
	VSVA-B-D52...	–	–	–	18
5/3-way valve	VSVA-B-P53...	23	60	–	–

Standards-based valves to ISO 5599-1, central plug M12, 3-pin

Datasheet – Width 52 mm

Operating and environmental conditions		2x 2/2-way valve	2x 3/2-way valve	2x 3/2-way valve, reversible	5/2-way valve	5/3-way valve
Valve function		Compressed air to ISO 8573-1:2010 [7:4:4]				
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]				
Pilot medium		Lubricated operation possible (required for further operation)				
Operating pressure	Internal pilot air supply [MPa]	0.3 ... 1	0.3 ... 1	-	0.3 ... 1	0.3 ... 1
	[bar]	3 ... 10	3 ... 10	-	3 ... 10	3 ... 10
	External pilot air supply [MPa]	0.3 ... 1	0.3 ... 1	-0.09 ... +1	-0.09 ... +1.6	-0.09 ... +1.6
	[bar]	3 ... 10	3 ... 10	-0.9 ... +10	-0.9 ... +16	-0.9 ... +16
Pilot pressure		0.3 ... 1				
		[bar]				
Ambient temperature		-5 ... +50				
Relative humidity		0 ... 90				
CE marking (see declaration of conformity)		To EU EMC Directive ¹⁾				
UKCA marking (see declaration of conformity) ¹⁾		To UK EMC regulations				
		To UK RoHS regulations				
KC marking		KC EMC				

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety data	
Max. positive test pulse with 0 signal	[μs]
Max. negative test pulse with 1 signal	[μs]
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Electrical data							
Electrical connection	Central plug, round design M12x1, 3-pin						
Signal status indication	LED						
Characteristic coil data	<table> <tr> <td>Voltage</td><td>[V DC]</td><td>24</td></tr> <tr> <td>Power</td><td>[W]</td><td>4.6</td></tr> </table>	Voltage	[V DC]	24	Power	[W]	4.6
Voltage	[V DC]	24					
Power	[W]	4.6					
Permissible voltage fluctuations	[%]						
Nominal pick-up current per solenoid coil	[mA]						
Nominal current with current reduction	[mA]						
Time until current reduction	[ms]						
Duty cycle	[%]						
Degree of protection to EN 60529	IP65, NEMA4 (in combination with a plug socket)						

Materials	
Housing	Die-cast aluminium, PA
Seals	HNBR, NBR, FPM
Screws	Galvanised steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L



Product weight	
2x 2/2-way valve	[g]
2x 3/2-way valve	[g]
5/2-way valve, single solenoid	[g]
5/2-way valve, double solenoid	[g]
5/3-way valve	[g]

Datasheet – Width 52 mm

Pilot pressure p12/14 as a function of working pressure p1

2x 2/2-way valve and 2x 3/2-way valve

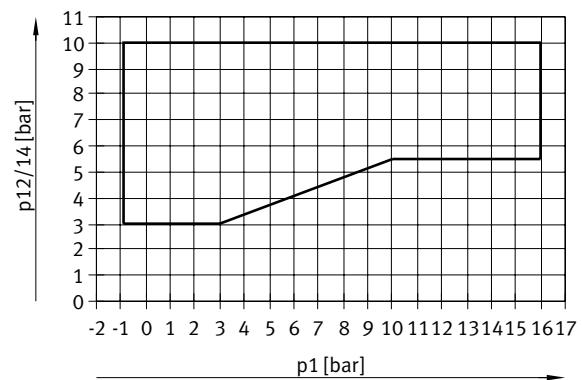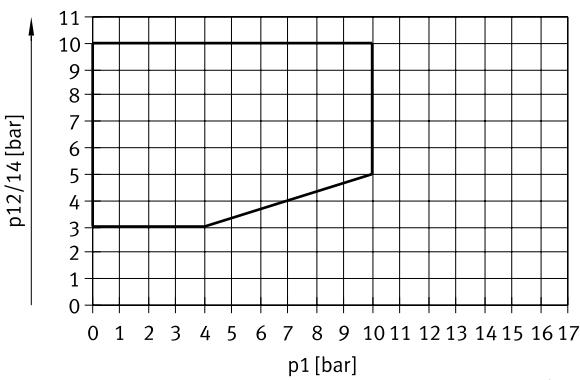
5/2-way valve and 5/3-way valve, external pilot air supply



Protective circuit


Each solenoid coil VSVA is provided with a spark arresting protective circuit and protected against polarity reversal.

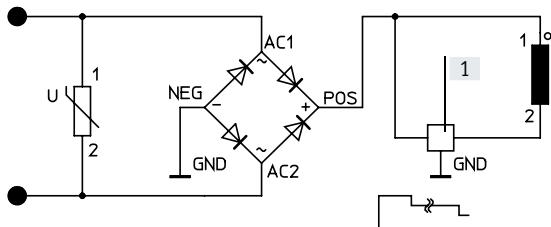24 V DC version





[1] Holding current reduction

M12x1 – Pin allocation on the valve



- 2 Signal (+) Solenoid 12
- 3 com (-)
- 4 Signal (+) Solenoid 14

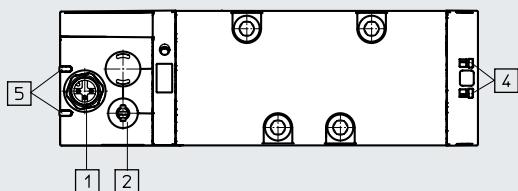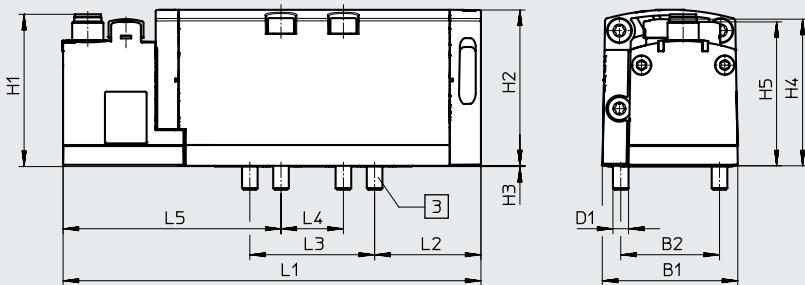Dimensions

Download CAD data → www.festo.com

- [1] Plug, 3-pin
- [2] Manual override












[3] Captive screws M6x60

[4] Slot for inscription label













[5] LED

Type	B1	B2	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5
VSVA-B ...-D2-1R5L	52	38	M6	58.3	60	0.3	56.4	55.3	160.7	40.9	48	24	64.3

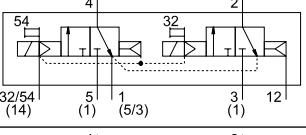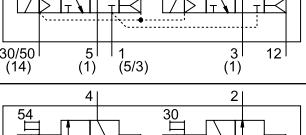Ordering data – Width 52 mm

Ordering data	Description	Flow direction	Pilot air supply	Part no.	Type
2x 2/2-way valve					
	2x normally closed, pneumatic spring return	Not reversible	Internal	Order via online configurator → Internet: vsva	
	2x normally closed, pneumatic spring return	Not reversible	External		
2x 3/2-way valve					
	2x normally closed, pneumatic spring return	Not reversible	Internal	566990	VSVA-B-T32C-AD-D2-1R5L
	2x normally closed, pneumatic spring return	Not reversible	External	567000	VSVA-B-T32C-AZD-D2-1R5L
	2x normally open, pneumatic spring return	Not reversible	Internal	566991	VSVA-B-T32U-AD-D2-1R5L
	2x normally open, pneumatic spring return	Not reversible	External	567001	VSVA-B-T32U-AZD-D2-1R5L
	1x normally closed, 1x normally open, pneumatic spring return	Not reversible	Internal	566992	VSVA-B-T32H-AD-D2-1R5L
	1x normally closed, 1x normally open, pneumatic spring return	Not reversible	External	567002	VSVA-B-T32H-AZD-D2-1R5L
2x 3/2-way valve, reversible					
	2x normally closed, pneumatic spring return	Reversible	External	Order via online configurator → Internet: vsva	
	2x normally open, pneumatic spring return	Reversible	External		
	1x normally closed, 1x normally open, pneumatic spring return	Reversible	External		


Ordering data – Width 52 mm

Ordering data		Description	Flow direction	Pilot air supply	Part no.	Type
5/2-way valve, single solenoid						
	Pneumatic spring return	Not reversible	Internal		566993	VSVA-B-M52-AD-D2-1R5L
	Pneumatic spring return	Reversible	External		567003	VSVA-B-M52-AZD-D2-1R5L
	Mechanical spring return	Not reversible	Internal		566994	VSVA-B-M52-MD-D2-1R5L
	Mechanical spring return	Reversible	External		567004	VSVA-B-M52-MZD-D2-1R5L
5/2-way valve, double solenoid						
	Dominance at 1st signal	Not reversible	Internal		566995	VSVA-B-B52-D-D2-1R5L
	Dominance at 1st signal	Reversible	External		567005	VSVA-B-B52-ZD-D2-1R5L
	With dominant signal at 14	Not reversible	Internal		566996	VSVA-B-D52-D-D2-1R5L
	With dominant signal at 14	Reversible	External		567006	VSVA-B-D52-ZD-D2-1R5L
5/3-way valve						
	Normally closed, mechanical spring return	Not reversible	Internal		566997	VSVA-B-P53C-D-D2-1R5L
	Normally closed, mechanical spring return	Reversible	External		567007	VSVA-B-P53C-ZD-D2-1R5L
	Normally open, mechanical spring return	Not reversible	Internal		566999	VSVA-B-P53U-D-D2-1R5L
	Normally open, mechanical spring return	Reversible	External		567009	VSVA-B-P53U-ZD-D2-1R5L
	Exhausted in normal position, mechanical spring return	Not reversible	Internal		566998	VSVA-B-P53E-D-D2-1R5L
	Exhausted in normal position, mechanical spring return	Reversible	External		567008	VSVA-B-P53E-ZD-D2-1R5L

Datasheet – Width 65 mm

-  - Flow rate
Up to 4600 l/min

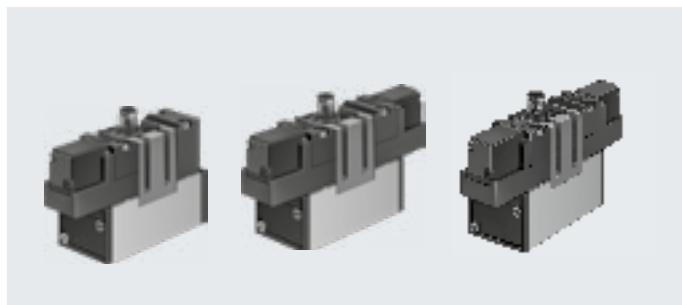-  - Voltage
24 V DC



General technical data

Design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Flow direction	Not reversible			
Exhaust air function	Can be throttled			
Manual override	Non-detenting			
Type of mounting	Via through-hole			
Mounting position	Any			
Nominal width [mm]	14.5			
Width [mm]	65			
Grid dimension [mm]	71			
Pneumatic connections	Sub-base size 3 to ISO 5599-1			
Conforms to standard	ISO 5599-1			

Flow rates

Valve function	5/2-way valve	5/3-way valve		
		Normally closed	Normally exhausted	Normally open
Standard nominal flow rate [l/min]	4500	4100	4600	4000

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MEBH-5/2...	59	87	–	–
	MEBH-5/2-D-1-ZSR-FR...	28	109	–	–
5/2-way valve, double solenoid	JMEBH-...	–	–	16	–
	JMEBDH-...	–	–	–	20
5/3-way valve	MEBH-5/3G...	38	130	–	–
	MEBH-5/3E...	38	130	–	–
	MEBH-5/3B...	38	130	–	–

Datasheet – Width 65 mm

Operating and environmental conditions		Pneumatic spring	Mechanical spring
Reset method			
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium		Lubricated operation possible (required for further operation)	
Operating pressure	[MPa]	0.2 ... 1	0.3 ... 1
	[bar]	2 ... 10	3 ... 10
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	
Relative humidity	[%]	0 ... 90	

Electrical data			
Electrical connection	Central plug, round design M12x1, 4-pin		
Characteristic coil data	Voltage	[V DC]	24
	Power	[W]	2.5
Degree of protection to EN 60529	IP65		


Materials			
Housing	Die-cast aluminium		
Seals	NBR		
LABS (PWIS) conformity	VDMA24364-B1/B2-L		

Datasheet – Width 65 mm

Dimensions

5/2-way valves, single solenoid

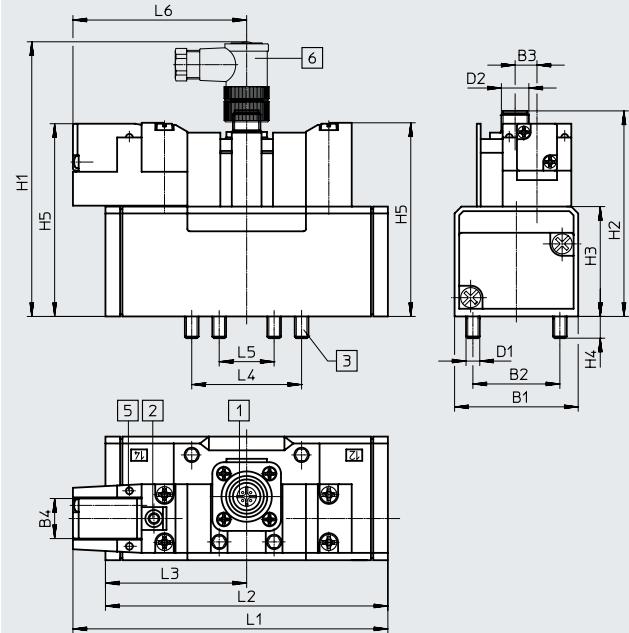
Download CAD data → www.festo.com



- [1] Plug socket mounting adjustable by 3x30°
 - [2] Manual override
 - [3] Captive retaining screws
 - [5] LED indicator
 - [6] Angled plug socket SIE-WD-TR
→ page 138

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
MEBH-5/2 ...	65	48	12	17.5	M8	M12	130	97.8	55	12	93.1	158.7	145.4	72.7	64	32	86
MEBH-5/2 ... -FR-C												178	164.7				

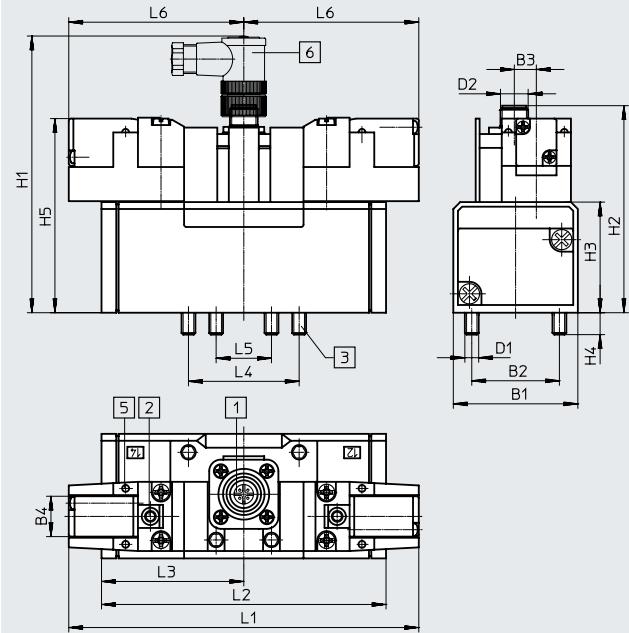5/2-way double solenoid valves, 5/3-way valves




- [1] Plug socket mounting adjustable by 3x30°
 - [2] Manual override
 - [3] Captive retaining screws
 - [5] LED indicator
 - [6] Angled plug socket SIE-WD-TR
→ page 138

Type	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
JMEBH-5/2...	65	48	12	17.5	M8	M12	130	97.8	55	12	93.1	171.9	145.4	72.7	64	32	86
JMEBDH-5/2...													145.4	72.7			
MEBH-5/3...													184	92			

Ordering data – Width 65 mm


Central plug M12 – Pin allocation

5/2-way valve



- 1 Unused
2 Unused
3 com (-)
4 Signal (+) Solenoid 14

5/2-way double solenoid valve and 5/3-way valve



- 1 Unused
2 Signal (+) Solenoid 12
3 com (-)
4 Signal (+) Solenoid 14

Ordering data	Description	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid					
	Pneumatic spring return	Internal	1000	184507	MEBH-5/2-D-3-ZSR-C
	Mechanical spring return	Internal	1000	184508	MEBH-5/2-D-3-ZSR-FR-C
5/2-way valve, double solenoid					
	–	Internal	1080	184509	JMEBH-5/2-D-3-ZSR-C
	With dominant signal at 14	Internal	1080	184510	JMEBDH-5/2-D-3-ZSR-C
5/3-way valve					
	Normally closed, mechanical spring return	Internal	1120	184512	MEBH-5/3G-D-3-ZSR-C
	Exhausted in normal position, mechanical spring return	Internal	1120	184511	MEBH-5/3E-D-3-ZSR-C
	Normally open, mechanical spring return	Internal	1120	184513	MEBH-5/3B-D-3-ZSR-C

Datasheet – Width 42 mm

-  - Flow rate
Up to 1200 l/min

-  - Voltage
24 V DC



General technical data

Design	Piston spool		
Sealing principle	Soft		
Actuation type	Electrical		
Type of control	Piloted		
Flow direction	With external pilot air supply	Reversible	
	With internal pilot air supply	Not reversible	
Exhaust air function	Can be throttled		
Manual override	Non-detenting		
Type of mounting	On sub-base via through-hole		
Mounting position	Any		
Nominal width	[mm]	8	
Overlap	Positive overlap		
Width	[mm]	42	
Grid dimension	[mm]	43	
Pneumatic connections	Sub-base size 1 to ISO 5599-1		
Noise level	[dB (A)]	85	
Conforms to standard	ISO 5599-1		

Flow rates

Standard nominal flow rate	[l/min]	1200
----------------------------	---------	------

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MDH-5/2...	25	36	–	–
	MDH-5/2...-FR...	20	42	–	–
5/2-way valve, double solenoid	JMDH...	–	–	18	–
	JMDDH...	–	–	18	18
5/3-way valve	MDH-5/3G...	25	55	–	–
	MDH-5/3E...	25	55	–	–
	MDH-5/3B...	25	55	–	–

Datasheet – Width 42 mm


Operating and environmental conditions		Pneumatic spring	Mechanical spring
Reset method			
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium		Lubricated operation possible (required for further operation)	
Operating pressure	Internal pilot air supply External pilot air supply	[bar] [bar]	2 ... 10 -0.9 ... +16
Pilot pressure	Internal pilot air supply External pilot air supply	[bar] [bar]	2 ... 10 3 ... 10
Ambient temperature		[°C]	-10 ... +50
Temperature of medium		[°C]	-10 ... +50
Safety data			
Max. positive test pulse with 0 signal		[μs]	3800
Max. negative test pulse with 1 signal		[μs]	4900
Shock resistance			Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance			Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6
Electrical data			
Electrical connection			M12x1
Characteristic coil data	Voltage Power	[V DC] [W]	24 2.7
Permissible voltage fluctuations		[%]	±10
Duty cycle		[%]	100
Degree of protection to EN 60529			IP65
Materials			
Housing			Die-cast aluminium
Seals			HNBR, NBR
LABS (PWIS) conformity			VDMA24364-B1/B2-L

Datasheet – Width 42 mm

Dimensions

5/2-way valves, single solenoid

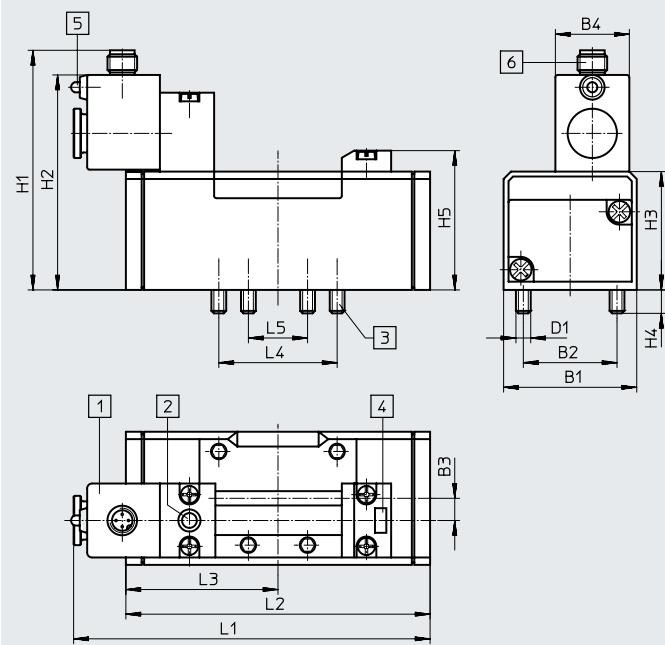
Download CAD data → www.festo.com



- [1] Solenoid coil can be turned 90° regardless of the manual override
- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label
- [5] LED indicator
- [6] Device plug M12x1
2-pin coil to VDMA
4-pin coil to Desina

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
MDH-5/2 ...	42	28	6	30	M5	87.2	77.2	38	9	46.5	121.8	87.6	43.8	36	18	–
MDH-5/2- ... -FR...											132.2	98				

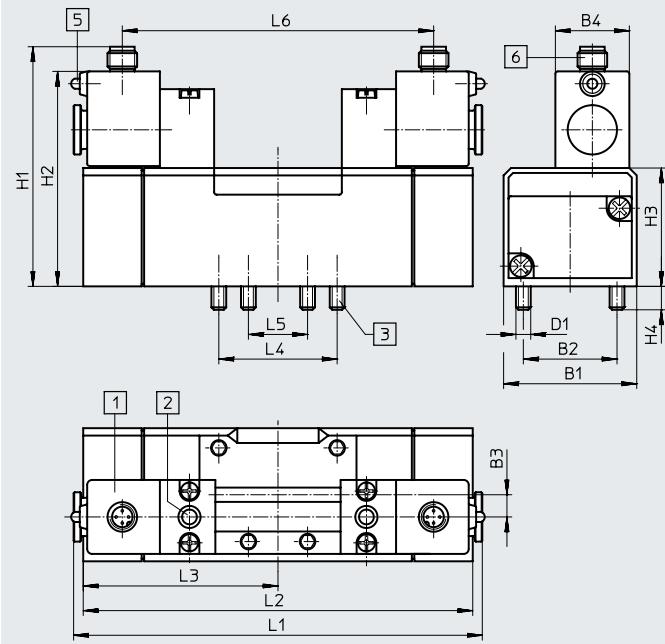5/2-way double solenoid valves, 5/3-way valves




- [1] Solenoid coil can be turned 90° regardless of the manual override
- [2] Manual override
- [3] Captive retaining screws
- [5] LED indicator
- [6] Device plug M12x1
2-pin coil to VDMA
4-pin coil to Desina

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
JMDH-5/2- ...	42	28	6	30	M5	87.2	77.2	38	9	–	148	87.6	43.8	36	18	108.5
JMDHH-5/2- ...												87.6	43.8			
MDH-5/3...												108.4	54.3			

Ordering data – Width 42 mm


Terminal allocation

M12 plug – 2-pin to VDMA



- 1 Unused
2 Unused
3 com (-)
4 Signal (+)

M12 plug – 4-pin to Desina



- 1 Connected to 2
2 Connected to 1
3 com (-)
4 Signal (+)


Ordering data – Solenoid valves

Circuit symbol	Description	Coil	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid						
	Pneumatic spring return	2-pin to VDMA	Internal	420	197125	MDH-5/2-D-1-M12-C
		4-pin to Desina	Internal	420	540803	MDH-5/2-D-1-M12D-C
	Pneumatic spring return	2-pin to VDMA	External	420	533332	MDH-5/2-D-1-S-M12-C
		4-pin to Desina	External	420	540810	MDH-5/2-D-1-S-M12D-C
	Mechanical spring return	2-pin to VDMA	Internal	420	533010	MDH-5/2-D-1-FR-M12-C
		4-pin to Desina	Internal	420	540804	MDH-5/2-D-1-FR-M12D-C
	Mechanical spring return	2-pin to VDMA	External	420	533761	MDH-5/2-D-1-S-FR-M12-C
		4-pin to Desina	External	420	540811	MDH-5/2-D-1-S-FR-M12D-C
5/2-way valve, double solenoid						
	–	2-pin to VDMA	Internal	550	532687	JMDH-5/2-D-1-M12-C
		4-pin to Desina	Internal	550	540809	JMDH-5/2-D-1-M12D-C
	With dominant signal at 14	2-pin to VDMA	Internal	550	539079	JMDDH-5/2-D-1-M12-C
		4-pin to Desina	Internal	550	540808	JMDDH-5/2-D-1-M12D-C
5/3-way valve						
	Normally closed, mechanical spring return	2-pin to VDMA	Internal	580	525307	MDH-5/3G-D-1-M12-C
		4-pin to Desina	Internal	580	540806	MDH-5/3G-D-1-M12D-C
	Exhausted in normal position, mechanical spring return	2-pin to VDMA	Internal	580	197126	MDH-5/3E-D-1-M12-C
		4-pin to Desina	Internal	580	540805	MDH-5/3E-D-1-M12D-C
	Normally open, mechanical spring return	2-pin to VDMA	Internal	580	533005	MDH-5/3B-D-1-M12-C
		4-pin to Desina	Internal	580	540807	MDH-5/3B-D-1-M12D-C

Datasheet – Width 52 mm

-  - Flow rate
Up to 2300 l/min

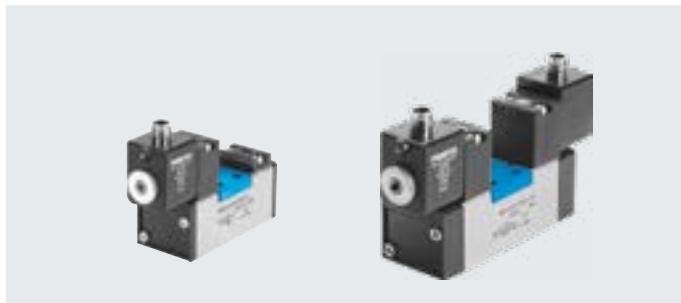-  - Voltage
24 V DC



General technical data

Design	Piston spool
Sealing principle	Soft
Actuation type	Electrical
Type of control	Piloted
Flow direction	Not reversible
Exhaust air function	Can be throttled
Manual override	Non-detenting
Type of mounting	On sub-base, with through-hole and screw
Mounting position	Any
Nominal width [mm]	11.5
Overlap	Positive overlap
Width [mm]	52
Grid dimension [mm]	56
Pneumatic connections	Sub-base size 2 to ISO 5599-1
Noise level [dB (A)]	85
Conforms to standard	ISO 5599-1

Flow rates

Standard nominal flow rate	[l/min]	2300
----------------------------	---------	------

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MDH-5/2-...	45	60	–	–
	MDH-5/2-...-FR...	25	60	–	–
5/2-way valve, double solenoid	JMDH-...	–	–	20	–
	JMDDH-...	–	–	20	20
5/3-way valve	MDH-5/3G-...	35	70	–	–
	MDH-5/3E-...	35	70	–	–
	MDH-5/3B-...	35	70	–	–

Datasheet – Width 52 mm


Operating and environmental conditions		
Reset method	Pneumatic spring	Mechanical spring
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)	
Operating pressure	[bar]	2 ... 10
Ambient temperature	[°C]	-10 ... +50
Temperature of medium	[°C]	-10 ... +50
Safety data		
Max. positive test pulse with 0 signal	[μs]	3800
Max. negative test pulse with 1 signal	[μs]	4900
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-26	
Electrical data		
Electrical connection	M12x1	
Characteristic coil data	Voltage Power	[V DC] [W]
Permissible voltage fluctuations	[%]	±10
Duty cycle	[%]	100
Degree of protection to EN 60529	IP65	
Materials		
Housing	Die-cast aluminium	
Seals	HNBR, NBR	
Note on materials	RoHS-compliant	
LABS (PWIS) conformity	VDMA24364-B1/B2-L	

Datasheet – Width 52 mm

Dimensions

5/2-way valves, single solenoid

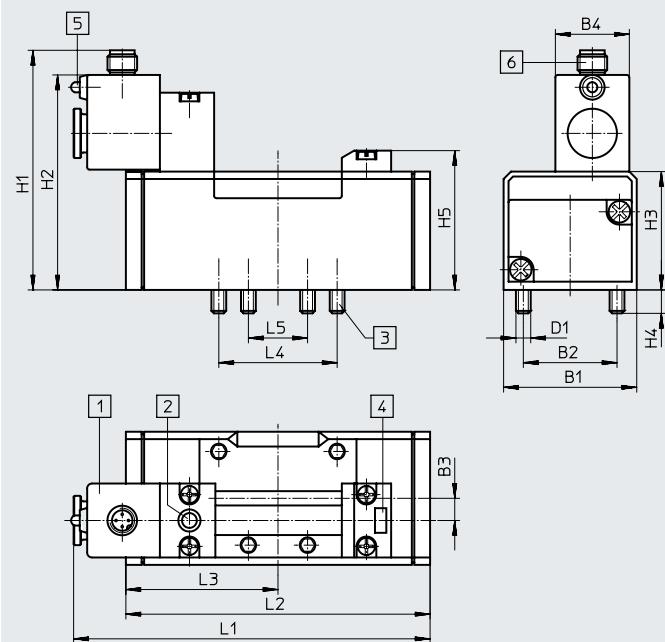
Download CAD data → www.festo.com



- [1] Solenoid coil can be turned 90° regardless of the manual override
- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label
- [5] LED indicator
- [6] Device plug M12x1
2-pin coil to VDMA
4-pin coil to Desina

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
MDH-5/2 ...	54	38	9	30	M6	97.2	87.2	48	9.5	56.5	144.6	123.4	61.7	48	24	–
MDH-5/2- ... -FR...											161.9	140.6				

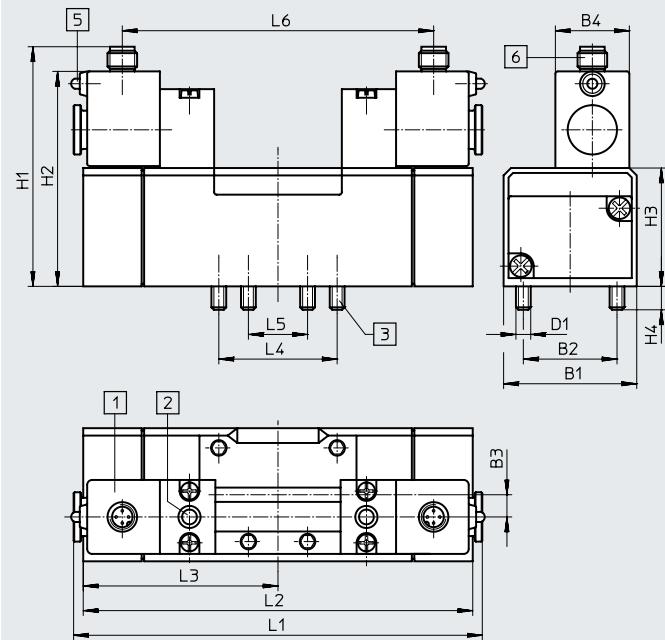5/2-way double solenoid valves, 5/3-way valves




- [1] Solenoid coil can be turned 90° regardless of the manual override
- [2] Manual override
- [3] Captive retaining screws
- [5] LED indicator
- [6] Device plug M12x1
2-pin coil to VDMA
4-pin coil to Desina

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
JMDH-5/2- ...	54	38	9	30	M6	97.2	87.2	48	9.5	–	165.8	123.4	61.7	48	24	126.3
JMDHH-5/2- ...												123.4	61.7			
MDH-5/3...												158	79			

Ordering data – Width 52 mm


Terminal allocation

M12 plug – 2-pin to VDMA



- 1 Unused
- 2 Unused
- 3 com (-)
- 4 Signal (+)

M12 plug – 4-pin to Desina



- 1 Connected to 2
- 2 Connected to 1
- 3 com (-)
- 4 Signal (+)

Ordering data		Description	Coil	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid							
	Pneumatic spring return	2-pin to VDMA	Internal	810	533008	MDH-5/2-D-2-M12-C	
		4-pin to Desina	Internal	810	540812	MDH-5/2-D-2-M12D-C	
	Mechanical spring return	2-pin to VDMA	Internal	810	533011	MDH-5/2-D-2-FR-M12-C	
		4-pin to Desina	Internal	810	540813	MDH-5/2-D-2-FR-M12D-C	
5/2-way valve, double solenoid							
	–	2-pin to VDMA	Internal	940	533013	JMDH-5/2-D-2-M12-C	
		4-pin to Desina	Internal	940	540818	JMDH-5/2-D-2-M12D-C	
	With dominant signal at 14	2-pin to VDMA	Internal	940	539077	JMDDH-5/2-D-2-M12-C	
		4-pin to Desina	Internal	940	540817	JMDDH-5/2-D-2-M12D-C	
5/3-way valve							
	Normally closed, mechanical spring return	2-pin to VDMA	Internal	1000	539078	MDH-5/3G-D-2-M12-C	
		4-pin to Desina	Internal	1000	540815	MDH-5/3G-D-2-M12D-C	
	Exhausted in normal position, mechanical spring return	2-pin to VDMA	Internal	1000	533016	MDH-5/3E-D-2-M12-C	
		4-pin to Desina	Internal	1000	540814	MDH-5/3E-D-2-M12D-C	
	Normally open, mechanical spring return	2-pin to VDMA	Internal	1000	533006	MDH-5/3B-D-2-M12-C	
		4-pin to Desina	Internal	1000	540816	MDH-5/3B-D-2-M12D-C	

Datasheet – Width 65 mm

-  - Flow rate
Up to 4500 l/min

-  - Voltage
24 V DC



General technical data

Design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Flow direction	Not reversible			
Exhaust air function	Can be throttled			
Manual override	Non-detenting			
Type of mounting	On sub-base, with through-hole and screw			
Mounting position	Any			
Nominal width [mm]	14.5			
Overlap	Positive overlap			
Width [mm]	65			
Grid dimension [mm]	71			
Pneumatic connections	Sub-base size 3 to ISO 5599-1			
Noise level [dB (A)]	85			
Conforms to standard	ISO 5599-1			

Flow rates

Valve function	5/2-way valve	5/3-way valve		
		Normally closed	Normally exhausted	Normally open
Standard nominal flow rate [l/min]	4500	4100	4600	4000

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, single solenoid	MDH-5/2...	54	57	–	–
	MDH-5/2...-FR...	28	68	–	–
5/2-way valve, double solenoid	JMDH...	–	–	21	–
	JMDDH...	–	–	23	23
5/3-way valve	MDH-5/3G...	35	79	–	–
	MDH-5/3E...	36	84	–	–
	MDH-5/3B...	36	84	–	–

Datasheet – Width 65 mm


Operating and environmental conditions		
Reset method	Pneumatic spring	Mechanical spring
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)	
Operating pressure	[bar]	2 ... 10
Ambient temperature	[°C]	-10 ... +50
Temperature of medium	[°C]	-10 ... +50
Safety data		
Max. positive test pulse with 0 signal	[μs]	3800
Max. negative test pulse with 1 signal	[μs]	4900
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6	
Electrical data		
Electrical connection	M12x1	
Characteristic coil data	Voltage Power	[V DC] [W]
Permissible voltage fluctuations	[%]	±10
Duty cycle	[%]	100
Degree of protection to EN 60529	IP65	
Materials		
Housing	Die-cast aluminium	
Seals	HNBR, NBR	
Note on materials	RoHS-compliant	
LABS (PWIS) conformity	VDMA24364-B1/B2-L	

Datasheet – Width 65 mm

Dimensions

5/2-way valve, single solenoid

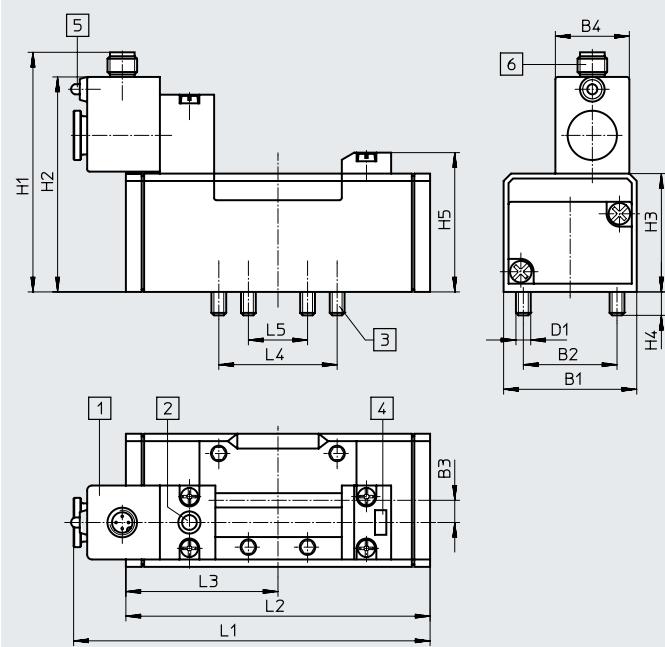
Download CAD data → www.festo.com



- [1] Solenoid coil can be turned 90° regardless of the manual override
- [2] Manual override
- [3] Captive retaining screws
- [4] Slot for inscription label
- [5] LED indicator
- [6] Device plug M12x1
2-pin coil to VDMA
4-pin coil to Desina

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
MDH-5/2 ...	65	48	12	30	M8	104.2	94.2	55	12	62.5	165.9	145.4	72.7	64	32	–
MDH-5/2- ... -FR...											182.5	140.6				

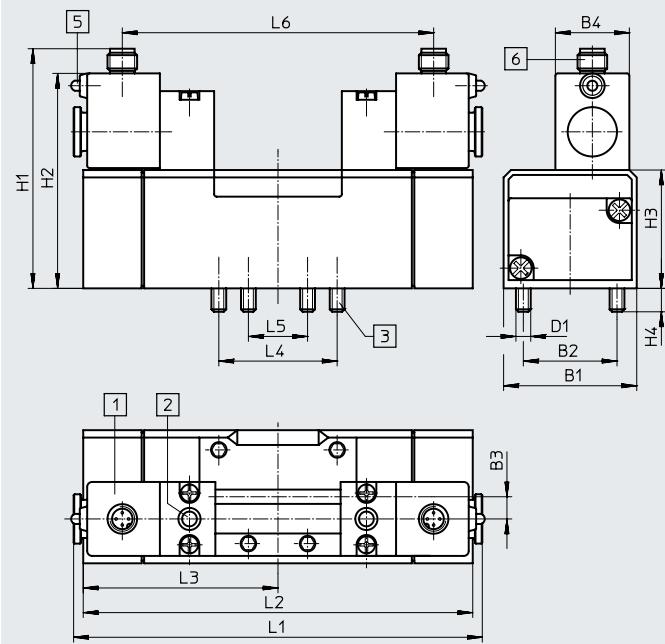5/2-way double solenoid valves, 5/3-way valves




- [1] Solenoid coil can be turned 90° regardless of the manual override
- [2] Manual override
- [3] Captive retaining screws
- [5] LED indicator
- [6] Device plug M12x1
2-pin coil to VDMA
4-pin coil to Desina

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
JMDH-5/2- ...	65	48	12	30	M8	104.2	94.2	55	12	–	186.4	145.4	72.7	64	32	146.9
JMDHH-5/2- ...												145.4	72.7			
MDH-5/3...												184	92			

Ordering data – Width 65 mm


Terminal allocation

M12 plug – 2-pin to VDMA



- 1 Unused
- 2 Unused
- 3 com (-)
- 4 Signal (+)

M12 plug – 4-pin to Desina



- 1 Connected to 2
- 2 Connected to 1
- 3 com (-)
- 4 Signal (+)

Ordering data	Description	Coil	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid						
	Pneumatic spring return	2-pin to VDMA	Internal	1000	533009	MDH-5/2-D-3-M12-C
		4-pin to Desina	Internal	1000	540819	MDH-5/2-D-3-M12D-C
	Mechanical spring return	2-pin to VDMA	Internal	1000	533012	MDH-5/2-D-3-FR-M12-C
		4-pin to Desina	Internal	1000	540820	MDH-5/2-D-3-FR-M12D-C
5/2-way valve, double solenoid						
	–	2-pin to VDMA	Internal	1100	533015	JMDH-5/2-D-3-M12-C
		4-pin to Desina	Internal	1100	540825	JMDH-5/2-D-3-M12D-C
	With dominant signal at 14	2-pin to VDMA	Internal	1100	539081	JMDDH-5/2-D-3-M12-C
		4-pin to Desina	Internal	1100	540824	JMDDH-5/2-D-3-M12D-C
5/3-way valve						
	Normally closed, mechanical spring return	2-pin to VDMA	Internal	1120	539080	MDH-5/3G-D-3-M12-C
		4-pin to Desina	Internal	1120	540822	MDH-5/3G-D-3-M12D-C
	Exhausted in normal position, mechanical spring return	2-pin to VDMA	Internal	1120	533017	MDH-5/3E-D-3-M12-C
		4-pin to Desina	Internal	1120	540821	MDH-5/3E-D-3-M12D-C
	Normally open, mechanical spring return	2-pin to VDMA	Internal	1120	533007	MDH-5/3B-D-3-M12-C
		4-pin to Desina	Internal	1120	540823	MDH-5/3B-D-3-M12D-C

Standards-based valves to ISO 5599-1, square plug type A

Datasheet – Width 76 mm

-  - Flow rate
Up to 6000 l/min

-  - Voltage
24 V DC
48 V AC



General technical data

Design	Piston spool	
Sealing principle	Soft	
Actuation type	Electrical	
Type of control	Piloted	
Flow direction	Not reversible	
Exhaust air function	Can be throttled	
Manual override	Non-detenting	
Type of mounting	On sub-base, with through-hole and screw	
Mounting position	Any	
Nominal width [mm]	18	
Overlap	Positive overlap	
Width [mm]	76	
Grid dimension [mm]	82	
Pneumatic connections	Sub-base size 4 to ISO 5599-1	
Noise level [dB (A)]	85	
Conforms to standard	ISO 5599-1	

Flow rates

Valve function	5/2-way valve	5/3-way valve
Standard nominal flow rate [l/min]	6000	4800

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover
5/2-way valve	Single solenoid	120	160	–
	Double solenoid	–	–	40
5/3-way valve		85	290	–

Datasheet – Width 76 mm

Operating and environmental conditions		
Valve function	MDH-...-D-4-24DC, JMDH-...-D-4-24DC	MDH-...-D-4, JMDH-...-D-4
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)	
Operating pressure	5/2-way valve, single solenoid [bar]	3 ... 16
	5/2-way valve, double solenoid [bar]	2 ... 16
	5/3-way valve [bar]	3 ... 16
Ambient temperature	[°C]	-10 ... +50
Temperature of medium	[°C]	-10 ... +60
CE marking (see declaration of conformity) ¹⁾	To EU Low Voltage Directive	-
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for electrical equipment	-

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Safety data		
Type	MDH-...-D-4-24DC, JMDH-...-D-4-24DC	MDH-...-D-4, JMDH-...-D-4
Max. positive test pulse with 0 signal	[μs]	4300
Max. negative test pulse with 1 signal	[μs]	2100

Electrical data – MDH-...-24DC, JMDH-...-24DC		
	DC voltage	Alternating voltage
Electrical connection	To DIN EN 175301-803	
Characteristic coil data	Voltage [V DC]	24
	[V AC]	-
	Frequency [Hz]	48
	Power [W]	6.8
	Pick-up power [VA]	5 0/60
	Holding power [VA]	-
Duty cycle	[%]	14.5
Degree of protection to EN 60529	IP65	9.9

Electrical data – Pilot valve MDH-3/2...												
Type	MDH-3/2-24DC	MDH-3/2-24DC/42AC	MDH-3/2-110AC	MDH-3/2-230AC								
Electrical connection	Plug, square design to EN 175301-803, type A											
Characteristic coil data	Voltage [V DC]	24	-	-	24	-	-	-	-	110	-	-
	[V AC]	-	48	53	-	42	42	110	110	-	230	230
	Frequency [Hz]	-	50	60	-	50	60	50	60	-	50	60
	Power [W]	6.8	-	-	8.4	-	-	-	-	6.3	-	-
	Pick-up power [VA]	-	14.5	15	-	14	12	14.5	12	-	14.5	12
	Holding power [VA]	-	9.9	9.3	-	10	7	10.5	7.6	-	10.5	7.6
Permissible voltage fluctuations	[%]	±10	±10	±10	±10	±10	±10	±10	±10	±10	±10	±10
Permissible frequency fluctuations	[%]	-	-	-	±10	±10	±10	±10	±10	±10	±10	±10
Duty cycle	[%]	100										
Degree of protection to EN 60529	IP65											


Materials												
Housing	Aluminium											
Seals	NBR											
Note on materials	RoHS-compliant											
LABS (PWIS) conformity	VDMA24364-B1/B2-L											

Datasheet – Width 76 mm

Dimensions

5/2-way valves, single solenoid

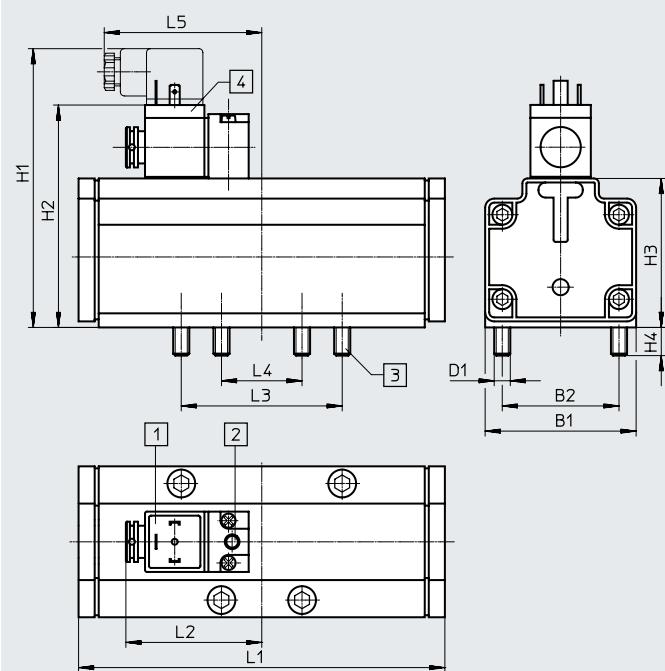
Download CAD data → www.festo.com



Type	B1	B2	D1	H1	H2	H3	H4	L1	L2	L3	L4	L5
MDH-5/2 ...	76	58	M8	139	110.5	74	14	182	67.5	80	40	81




5/2-way double solenoid valves, 5/3-way valves

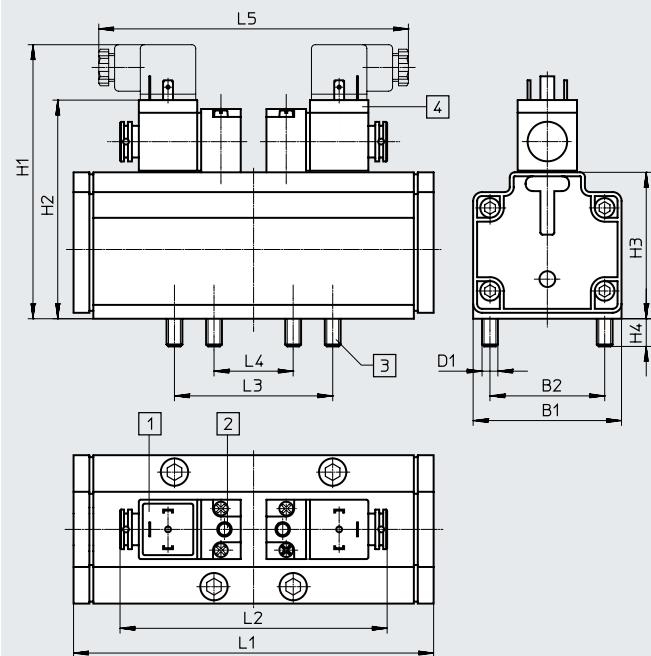- [1] Connection for plug socket with plug pattern to EN 175301-803, type A → page 137
- [2] Manual override
- [3] Captive retaining screws
- [4] Solenoid coil can be turned 90° regardless of the manual override



Type	B1	B2	D1	H1	H2	H3	H4	L1	L2	L3	L4	L5
JMDH-5/2-...	76	58	M8	139	110.5	74	14	182	135	80	40	162
MDH-5/3...												

Ordering data – Width 76 mm


Ordering data		Description	Voltage	Pilot air supply	Weight [g]	Part no.	Type
5/2-way valve, single solenoid							
	Pneumatic spring return	24 V DC	Internal	2600	12457	MDH-5/2-3/4-D-4-24DC	
		-	Internal	2600	14544	MDH-5/2-3/4-D-4 ¹⁾	
5/2-way valve, double solenoid							
	-	24 V DC	Internal	2600	12458	JMDH-5/2-3/4-D-4-24DC	
		-	Internal	2600	14545	JMDH-5/2-3/4-D-4 ¹⁾	
5/3-way valve							
	Normally closed, mechanical spring return	24 V DC	Internal	2600	12459	MDH-5/3G-3/4-D-4-24DC	
		-	Internal	2600	14546	MDH-5/3G-3/4-D-4 ¹⁾	
	Exhausted in normal position, mechanical spring return	24 V DC	Internal	2600	12460	MDH-5/3E-3/4-D-4-24DC	
		-	Internal	2600	14547	MDH-5/3E-3/4-D-4 ¹⁾	
Usable pilot valves							
	Electrical connection to EN 175301-803 type A	24 V DC	-	140	119600	MDH-3/2-24DC	
		24 V DC/ 42 V AC	-	140	119603	MDH-3/2-24DC/42AC	
		110 V AC	-	140	119601	MDH-3/2-110AC	
		110 V DC/ 230 V AC	-	140	119602	MDH-3/2-230AC	

1) Without pilot valve. The part number of the pilot valve must be added after the type code when ordering.

Order example: 14546 MDH-5/3G-3/4-D-4-119602 (for MDH-3/2-230AC with part no. 119602)

Peripherals overview

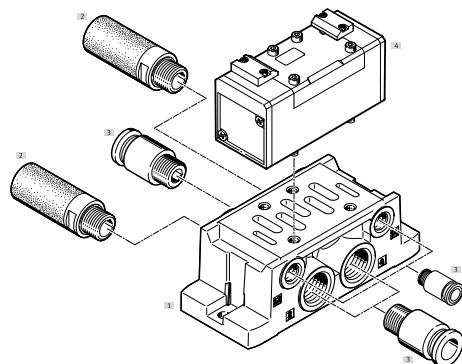
Valve on individual sub-base



Individual components		Type	Brief description	→ Page/Internet
[1]	Sub-base	VABS-S1...	Pneumatic ports on the side	104
	Individual sub-base	NAS...	Pneumatic ports on the side	104
		NAU...	Pneumatic ports underneath	107
[2]	Silencer	U...	For fitting in exhaust ports	silencer
[3]	Push-in fitting	QS...	For connecting tubing with standard O.D.	qs
[4]	Pneumatic valve	VL...	Port pattern to ISO 5599-1	87
		J...	Port pattern to ISO 5599-1	87
		JD...	Port pattern to ISO 5599-1	87

Peripherals overview

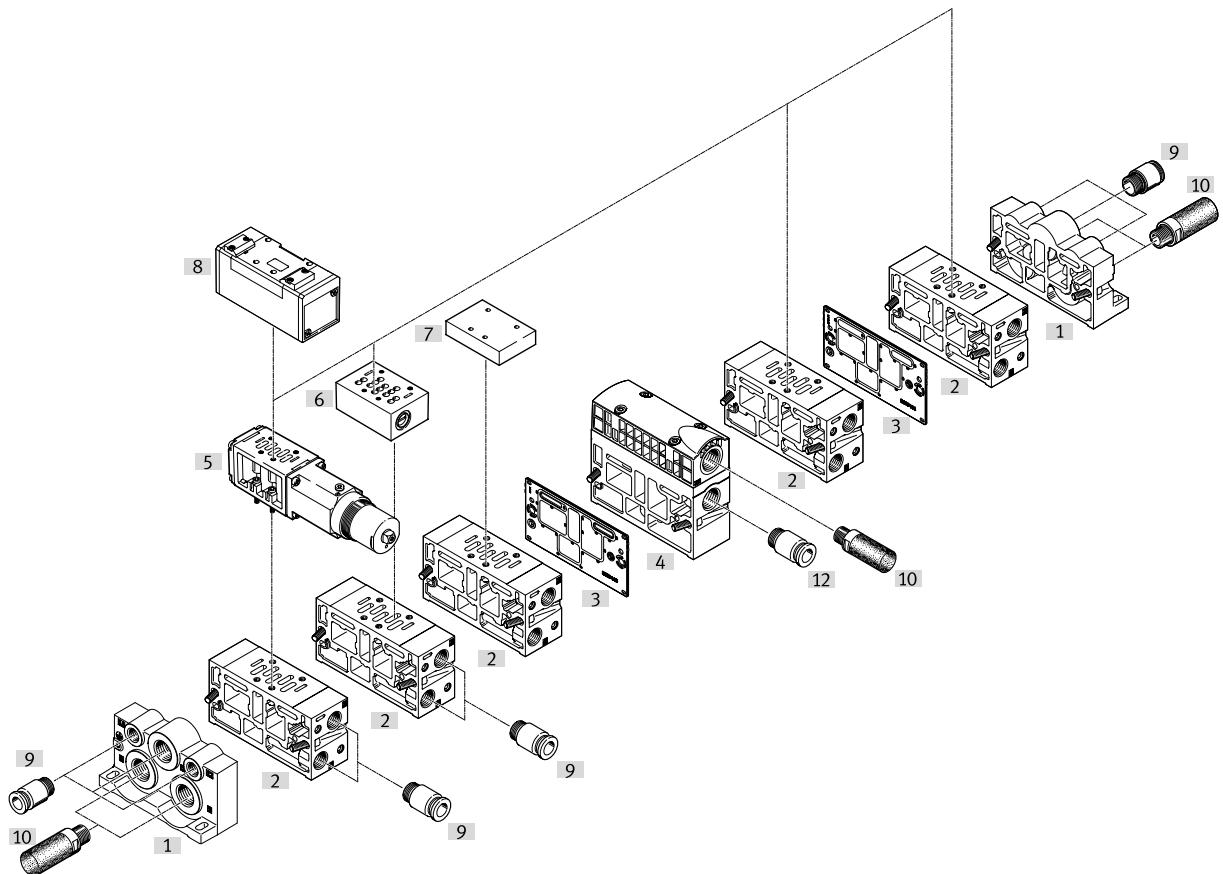Manifold assembly




Individual components

	Type	Brief description	→ Page/Internet	
[1]	End plates	VABE-S1-...	For sealing the manifold sub-bases	116
[2]	Manifold sub-base	VABV-S1-...	With ports 2 and 4	109
[3]	Duct separation	VABD-S1-1-...	For sealing ducts 1, 3, 5, 12 and 14 between end plate and manifold sub-base, e.g. to create pressure zones	120
[4]	Supply plate	VABF-S1-1-...	With ports for air supply 1 and exhausts 3 and 5	111
[5]	Regulator plate	VABF-S1-...-R...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
		LR-ZP-...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
[6]	Throttle plate	VABF-S1-...-F1B1-C	Restricts the flow of exhaust air in ducts 3 and 5	123
		GRO-ZP-...	Restricts the flow of exhaust air in ducts 3 and 5	123
[7]	Cover plate	NDV-...	For sealing unused manifold sub-bases	119
[8]	Pneumatic valve	VL-...	Port pattern to ISO 5599-1	87
		J-...	Port pattern to ISO 5599-1	87
		JD-...	Port pattern to ISO 5599-1	87
[9]	Push-in fitting	QS-...	For connecting tubing with standard O.D.	qs
[10]	Silencer	U-...	For fitting in exhaust ports	silencer
[12]	Push-in fitting	QS-...	For connecting tubing with standard O.D.	qs

Peripherals overview

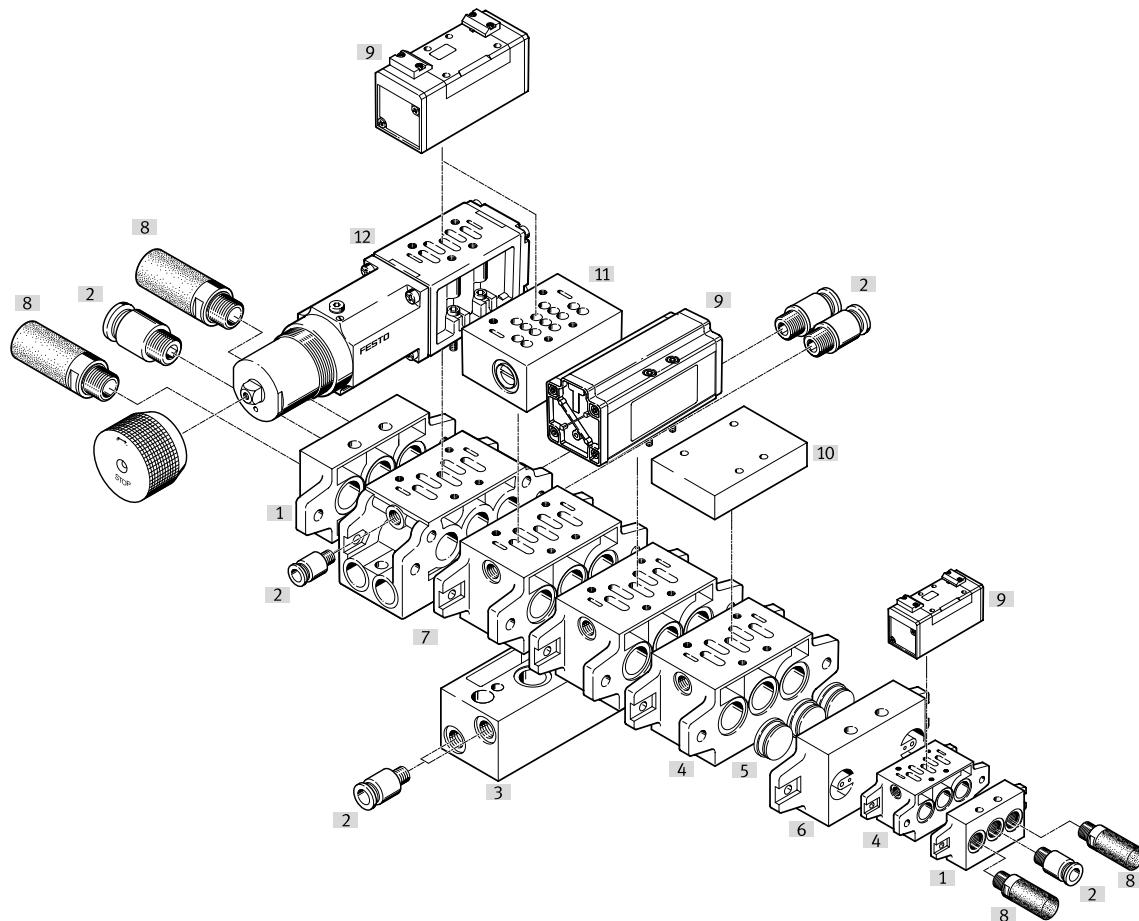Manifold assembly



Individual components		Type	Brief description	→ Page/Internet
[1]	End plate kit	NEV-...	For sealing the manifold sub-bases	115
[2]	Push-in fitting	QS-...	For connecting tubing with standard O.D.	qs
[3]	90°-connection plate	NAW-...	For routing ports 2 and 4 to the front	114
[4]	Manifold sub-base	NAV-...	With ports 2 and 4 underneath	109
[5]	Isolating disc	NSC-...	For sealing ducts 1, 3, 5 between end plate and manifold sub-base, e.g. to create pressure zones	119
[6]	Intermediate plate	NZV-...	For connecting manifold sub-bases of different sizes	121
[7]	Manifold sub-base with 90° connections	NAWW-...	With ports 2 and 4 either underneath or to the front	114
[8]	Silencer	U-...	For fitting in exhaust ports	silencer
[9]	Pneumatic valve	VL-...	Port pattern to ISO 5599-1	87
		J-...	Port pattern to ISO 5599-1	87
		JD-...	Port pattern to ISO 5599-1	87
[10]	Cover plate	NDV-...	For sealing unused manifold sub-bases	119
[11]	Throttle plate	VABF-S1-...-F1B1-C	Restricts the flow of exhaust air in ducts 3 and 5	123
		GRO-ZP-...	Restricts the flow of exhaust air in ducts 3 and 5	123
[12]	Regulator plate	VABF-S1-...-R...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130
		LR-ZP-...	Pressure regulator for manually setting a particular pressure in the regulated port upstream or downstream of the valve	130

Datasheet – Width 42 mm

-  - Flow rate
1200 l/min



General technical data		
Type	VL- ... -C, J ... -C	VL- ... -EX, J ... -EX
Design	Piston spool	Piston spool
Sealing principle	Soft	Soft
Actuation type	Pneumatic	Pneumatic
Type of control	Direct	Direct
Flow direction	Reversible VL-5/2-D-1-C: non-reversible	Reversible VL-5/2-D-1-C-EX: non-reversible
Exhaust air function	Can be throttled	Can be throttled
Manual override	None	None
Type of mounting	On sub-base via through-hole	On sub-base via through-hole
Mounting position	Any	Any
Nominal width	[mm]	8
Overlap	Positive overlap	Positive overlap
Width	[mm]	42
Grid dimension	[mm]	43
Pneumatic connections	Sub-base size 1 to ISO 5599-1	
Noise level	[dB (A)]	85
Conforms to standard	ISO 5599-1	

Flow rates		
Standard nominal flow rate	[l/min]	1200

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, monostable	VL-5/2-D-1-C	9	18	–	–
	VL-5/2-D-1-C-EX	9	18	–	–
	VL-5/2-D-1-FR-C	6	23	–	–
	VL-5/2-D-1-FR-C-EX	6	23	–	–
5/2-way valve, bistable	J-5/2-D-1-C	–	–	6	–
	J-5/2-D-1-C-EX	–	–	6	–
	JD-5/2-D-1-C	–	–	6	4
	JD-5/2-D-1-C-EX	–	–	6	4
5/3-way valve	VL-5/3G-D-1-C	7	44	–	–
	VL-5/3G-D-1-C-EX	7	44	–	–
	VL-5/3E-D-1-C	7	45	–	–
	VL-5/3E-D-1-C-EX	7	45	–	–
	VL-5/3B-D-1-C	7	44	–	–
	VL-5/3B-D-1-C-EX	7	44	–	–

Datasheet – Width 42 mm

ATEX	
Type	VL- ... -EX, J ... -EX
ATEX category for gas	II 2G
Type of (ignition) protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex h IIIC T130°C Db
Explosion ambient temperature [°C]	-10 <= Ta <= +60
Explosion protection certification outside EU	EPL Db (GB) EPL Gb (GB)
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for explosions

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and environmental conditions		5/2-way valve		5/3-way valve
Valve function		Monostable		Bistable
		Pneumatic spring	Mechanical spring	
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)			
Operating pressure [bar]	2 ... 16	-0.9 ... +16	-0.9 ... +16	-0.9 ... +16
Pilot pressure [bar]	2 ... 16	3 ... 16	2 ... 16	3 ... 16
Ambient temperature [°C]	-10 ... +60			
Temperature of medium [°C]	-10 ... +60			

Safety data	
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6


Materials	
Housing	Die-cast aluminium
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Datasheet – Width 42 mm

Dimensions

Download CAD data → www.festo.com

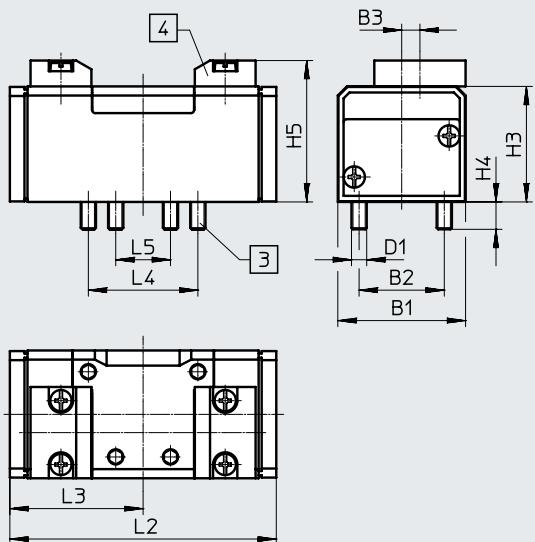
5/2-way valves, pneumatic spring return, 5/2-way valves, bistable



- [3] Captive retaining screws
 [4] Slot for inscription label

Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/2- ...	42	28	6	M5	38	9	46.5	87.6	43.8	36	18
J-5/2- ...											
JD-5/2- ...											

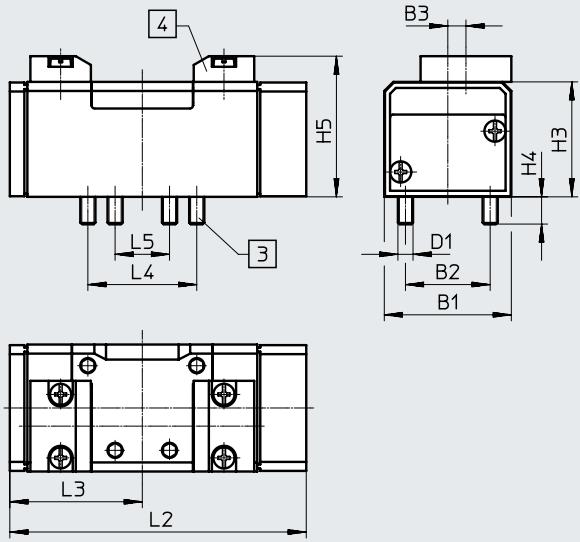5/2-way valves, mechanical spring return



- [3] Captive retaining screws
 [4] Slot for inscription label


Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/2- ... -FR- ...	42	28	6	M5	38	9	46.5	98	43.8	36	18

Datasheet – Width 42 mm





Dimensions

Download CAD data → www.festo.com

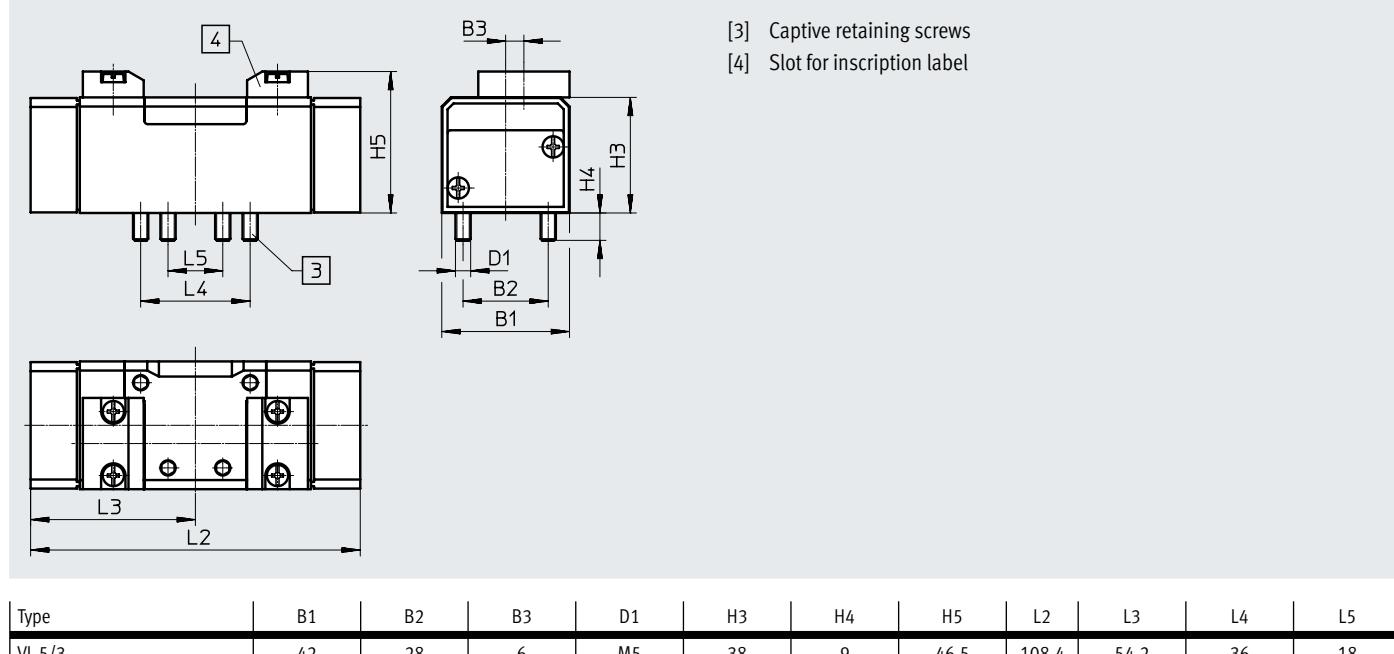5/3-way valves



Datasheet – Width 42 mm

Ordering data		Description	Weight [g]	Part no.	Type
5/2-way valve, monostable					
	Pneumatic spring return	–	290	151009	VL-5/2-D-1-C
		ATEX category → page 88	290	536007	VL-5/2-D-1-C-EX
	Mechanical spring return	–	290	151014	VL-5/2-D-1-FR-C
		ATEX category → page 88	290	536010	VL-5/2-D-1-FR-C-EX
5/2-way valve, bistable					
	–	–	290	151007	J-5/2-D-1-C
		ATEX category → page 88	290	536013	J-5/2-D-1-C-EX
	With dominant signal at 14	UL – Recognized (OL)	290	151008	JD-5/2-D-1-C
		ATEX category → page 88	290	536016	JD-5/2-D-1-C-EX
5/3-way valve					
	Normally closed Mechanical spring return	UL – Recognized (OL)	320	151010	VL-5/3G-D-1-C
		ATEX category → page 88	320	536019	VL-5/3G-D-1-C-EX
	Normally exhausted Mechanical spring return	–	320	151011	VL-5/3E-D-1-C
		ATEX category → page 88	320	536022	VL-5/3E-D-1-C-EX
	Normally pressurised Mechanical spring return	UL – Recognized (OL)	320	151012	VL-5/3B-D-1-C
		ATEX category → page 88	320	536025	VL-5/3B-D-1-C-EX

Datasheet – Width 52 mm

-  - Flow rate
2300 l/min



General technical data		VL- ... -C, J ... -C	VL- ... -EX, J ... -EX
Type			
Design	Piston spool	Piston spool	
Sealing principle	Soft	Soft	
Actuation type	Pneumatic	Pneumatic	
Type of control	Direct	Direct	
Flow direction	Reversible	Reversible	
	VL-5/2-D-2-C: non-reversible	VL-5/2-D-2-C-EX: non-reversible	
Exhaust air function	Can be throttled	Can be throttled	
Manual override	None	None	
Type of mounting	On sub-base, with through-hole and screw	On sub-base, with through-hole and screw	
Mounting position	Any	Any	
Nominal width [mm]	11.5	11.5	
Overlap	Positive overlap	Positive overlap	
Width [mm]	52	52	
Grid dimension [mm]	56	56	
Pneumatic connections	Sub-base size 2 to ISO 5599-1	Sub-base size 2 to ISO 5599-1	
Noise level [dB (A)]	85	85	
Conforms to standard	ISO 5599-1	ISO 5599-1	

Flow rates	
Standard nominal flow rate	[l/min] 2300

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, monostable	VL-5/2-D-2-C	23	39	–	–
	VL-5/2-D-2-C-EX	23	39	–	–
	VL-5/2-D-2-FR-C	11	39	–	–
	VL-5/2-D-2-FR-C-EX	11	39	–	–
5/2-way valve, bistable	J-5/2-D-2-C	–	–	8	–
	J-5/2-D-2-C-EX	–	–	8	–
	JD-5/2-D-2-C	–	–	8	8
	JD-5/2-D-2-C-EX	–	–	8	8
5/3-way valve	VL-5/3G-D-2-C	15	56	–	–
	VL-5/3G-D-2-C-EX	15	56	–	–
	VL-5/3E-D-2-C	16	59	–	–
	VL-5/3E-D-2-C-EX	16	59	–	–
	VL-5/3B-D-2-C	15	57	–	–
	VL-5/3B-D-2-C-EX	15	57	–	–

Datasheet – Width 52 mm

ATEX	
Type	VL- ... -EX, J ... -EX
ATEX category for gas	II 2G
Type of (ignition) protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex h IIIC T130°C Db
Explosion ambient temperature [°C]	-10 <= Ta <= +60
Explosion protection certification outside EU	EPL Db (GB) EPL Gb (GB)
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for explosions

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and environmental conditions		5/2-way valve				5/3-way valve
Valve function		Monostable	Bistable	Pneumatic spring	Mechanical spring	
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]					
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]					
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)					
Operating pressure [MPa]	0.2 ... 1.6	-0.09 ... +1.6	-0.09 ... +1.6	-0.09 ... +1.6	-0.09 ... +1.6	
	[bar]	2 ... 16	-0.9 ... +16	-0.9 ... +16	-0.9 ... +16	
Pilot pressure	[bar]	2 ... 16	3 ... 16	2 ... 16	3 ... 16	
Ambient temperature [°C]	-10 ... +60					
Temperature of medium [°C]	-10 ... +60					

Safety data	
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6


Materials	
Housing	Die-cast aluminium
Seals	HNBR, NBR
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet – Width 52 mm

Dimensions

Download CAD data → www.festo.com

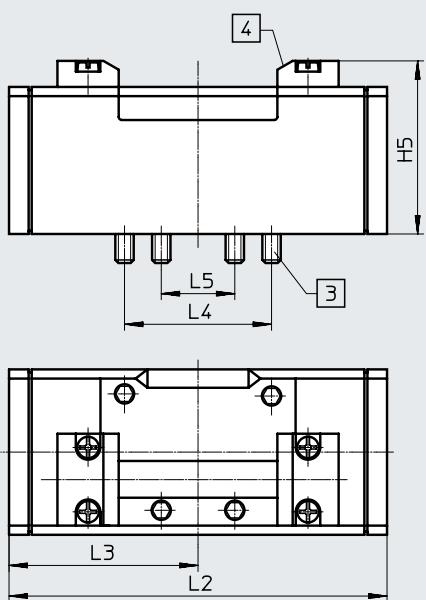5/2-way valves, pneumatic spring return, 5/2-way bistable valves




[3] Captive retaining screws

[4] Slot for inscription label

Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/2- ...	54	38	9	M6	48	9.5	56.5	123.4	61.7	48	24
J-5/2- ...											
JD-5/2- ...											

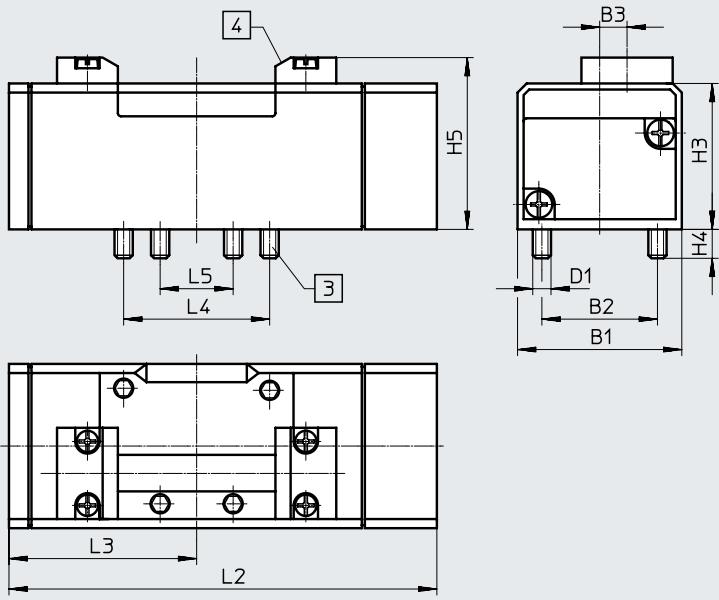5/2-way valves, mechanical spring return



[3] Captive retaining screws

[4] Slot for inscription label


Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/2- ... -FR- ...	54	38	9	M6	48	9.5	56.5	140.7	61.7	48	24

Datasheet – Width 52 mm

Dimensions

Download CAD data → www.festo.com

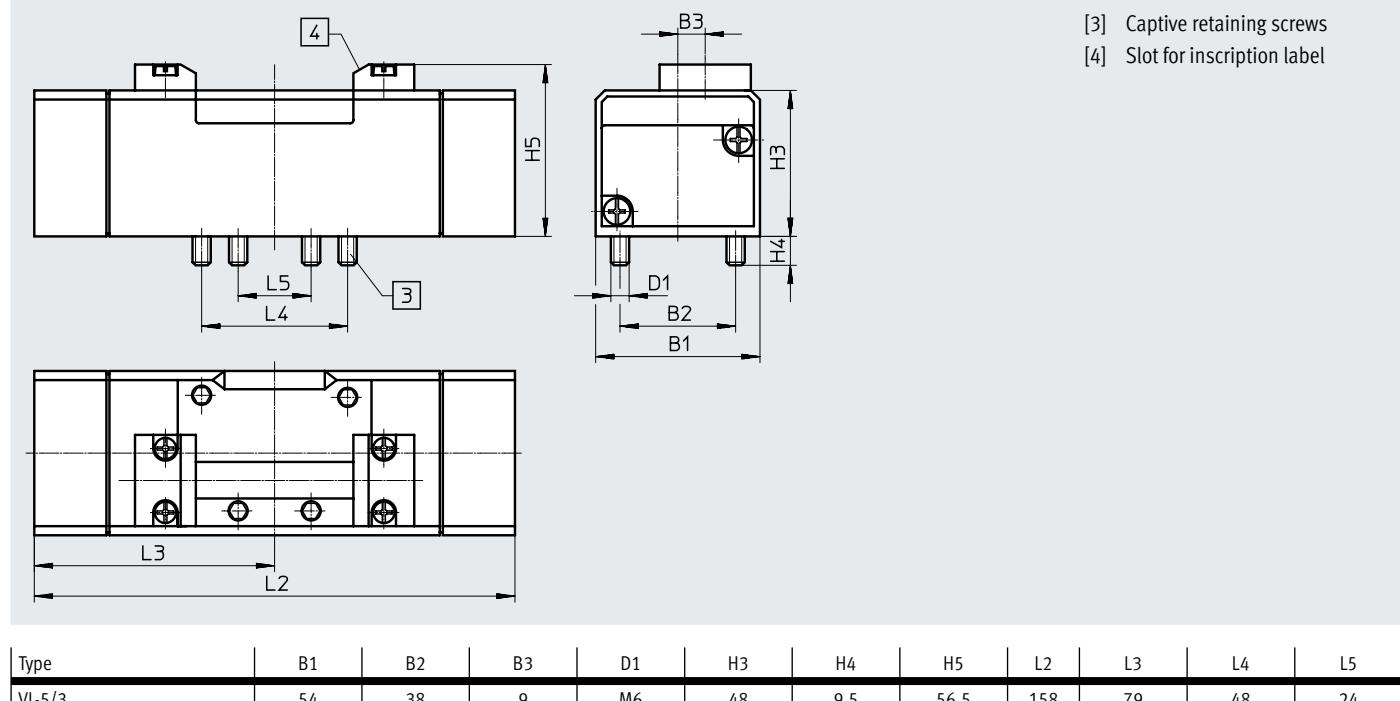5/3-way valves



Datasheet – Width 52 mm

Ordering data	Description	Weight [g]	Part no.	Type	
5/2-way valve, monostable					
	Pneumatic spring return	UL – Recognized (OL) ATEX category → page 93	550 550	151845 536008	VL-5/2-D-2-C VL-5/2-D-2-C-EX
		UL – Recognized (OL) ATEX category → page 93	550 550	151844 536011	VL-5/2-D-2-FR-C VL-5/2-D-2-FR-C-EX
5/2-way valve, bistable					
	-	–	550	151846	J-5/2-D-2-C
		ATEX category → page 93	550	536014	J-5/2-D-2-C-EX
	With dominant signal at 14	UL – Recognized (OL)	550	151847	JD-5/2-D-2-C
		ATEX category → page 93	550	536017	JD-5/2-D-2-C-EX
5/3-way valve					
	Normally closed Mechanical spring return	UL – Recognized (OL) ATEX category → page 93	825 825	151848 536020	VL-5/3G-D-2-C VL-5/3G-D-2-C-EX
		UL – Recognized (OL) ATEX category → page 93	825 825	151849 536023	VL-5/3E-D-2-C VL-5/3E-D-2-C-EX
	Normally pressurised Mechanical spring return	UL – Recognized (OL)	825	151850	VL-5/3B-D-2-C
		ATEX category → page 93	825	536026	VL-5/3B-D-2-C-EX

Datasheet – Width 65 mm

-  - Flow rate
Up to 4600 l/min



General technical data		
Type	VL- ... -C, J ... -C	VL- ... -EX, J ... -EX
Design	Piston spool	Piston spool
Sealing principle	Soft	Soft
Actuation type	Pneumatic	Pneumatic
Type of control	Direct	Direct
Flow direction	Reversible VL-5/2-D-3-C: non-reversible	Reversible VL-5/2-D-3-C-EX: non-reversible
Exhaust air function	Can be throttled	Can be throttled
Manual override	None	None
Type of mounting	On sub-base, with through-hole and screw	On sub-base, with through-hole and screw
Mounting position	Any	Any
Nominal width	[mm]	14.5
Overlap	Positive overlap	Positive overlap
Width	[mm]	65
Grid dimension	[mm]	71
Pneumatic connections	Sub-base size 3 to ISO 5599-1	
Noise level	[dB (A)]	85
Conforms to standard	ISO 5599-1	

Flow rates					
Valve function	5/2-way valve	5/3-way valve			
		Normally closed	Normally exhausted	Normally pressurised	
Standard nominal flow rate	[l/min]	4500	4100	4600	4100

Standards-based valves to ISO 5599-1, pneumatic valves

Datasheet – Width 65 mm

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
5/2-way valve, monostable	VL-5/2-D-1-C	29	36	–	–
	VL-5/2-D-1-C-EX	29	36	–	–
	VL-5/2-D-1-FR-C	13	43	–	–
	VL-5/2-D-1-FR-C-EX	13	43	–	–
5/2-way valve, bistable	J-5/2-D-1-C	–	–	8	–
	J-5/2-D-1-C-EX	–	–	8	–
	JD-5/2-D-1-C	–	–	8	8
	JD-5/2-D-1-C-EX	–	–	8	8
5/3-way valve	VL-5/3G-D-1-C	17	61	–	–
	VL-5/3G-D-1-C-EX	17	61	–	–
	VL-5/3E-D-1-C	18	63	–	–
	VL-5/3E-D-1-C-EX	18	63	–	–
	VL-5/3B-D-1-C	16	60	–	–
	VL-5/3B-D-1-C-EX	16	60	–	–

ATEX	
Type	VL- ... -EX, J ... -EX
ATEX category for gas	II 2G
Type of (ignition) protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex h IIIC T130°C Db
Explosion ambient temperature	[°C] -10 <= Ta <= +60
Explosion protection certification outside EU	EPL Db (GB) EPL Gb (GB)
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾	To UK regulations for explosions

1) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and environmental conditions		5/2-way valve		5/3-way valve
Valve function		Monostable	Bistable	
Pneumatic spring	Mechanical spring			
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)			
Operating pressure	[MPa]	0.2 ... 1.6	-0.09 ... +1.6	-0.09 ... +1.6
	[bar]	2 ... 16	-0.9 ... +16	-0.9 ... +16
Pilot pressure	[bar]	2 ... 16	3 ... 16	2 ... 16
Ambient temperature	[°C]	-10 ... +60		
Temperature of medium	[°C]	-10 ... +60		


Safety data	
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

Materials	
Housing	Die-cast aluminium
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Datasheet – Width 65 mm

Dimensions

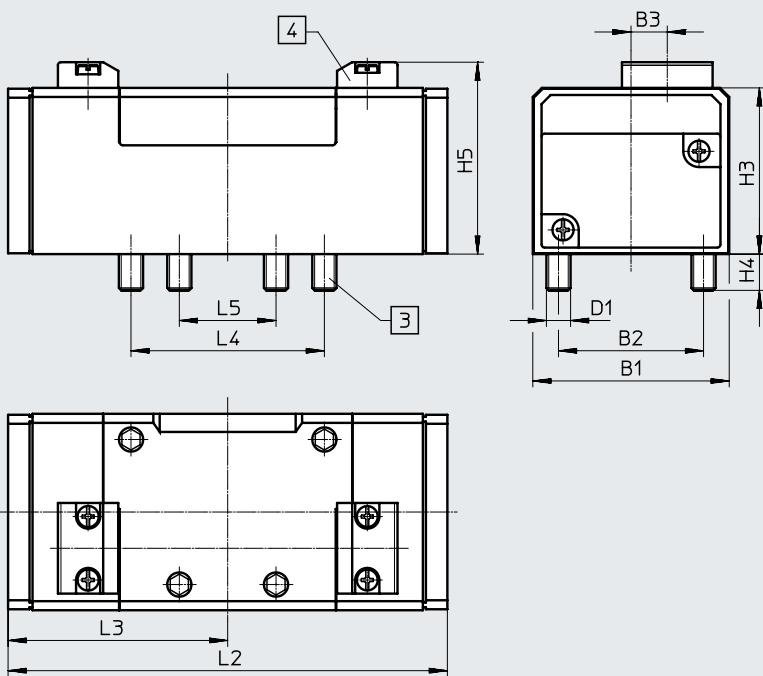
5/2-way valves, pneumatic spring return, 5/2-way bistable valves

Download CAD data → www.festo.com

- [3] Captive retaining screws
[4] Slot for inscription label

Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/2- ...	65	48	12	M8	55	12	63.5	145.4	72.7	64	32
J-5/2- ...											
JD-5/2- ...											

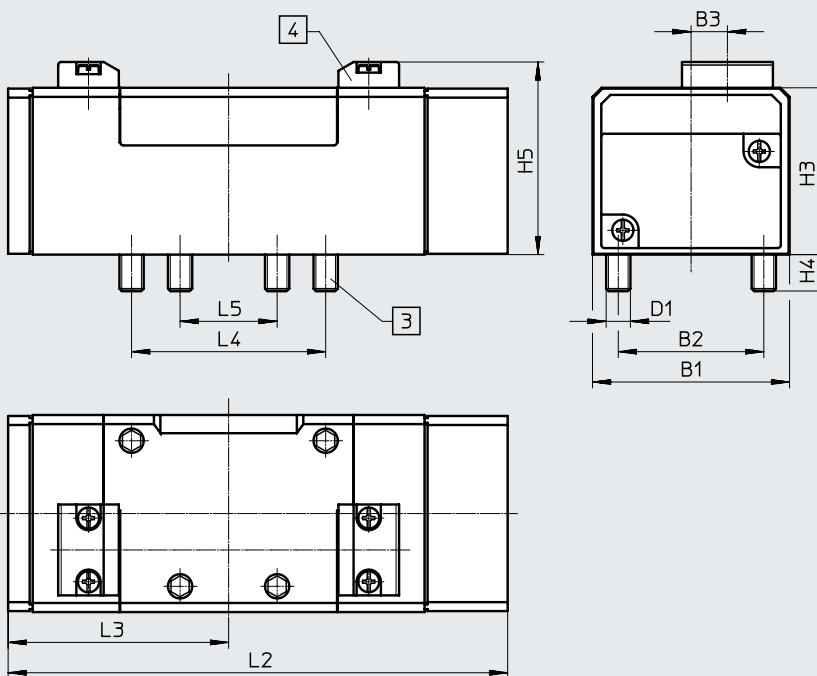5/2-way valves, mechanical spring return



- [3] Captive retaining screws
[4] Slot for inscription label


Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/2- ... -FR- ...	65	48	12	M8	55	12	63.5	164.7	72.7	64	32

Datasheet – Width 65 mm

Dimensions

Download CAD data → www.festo.com

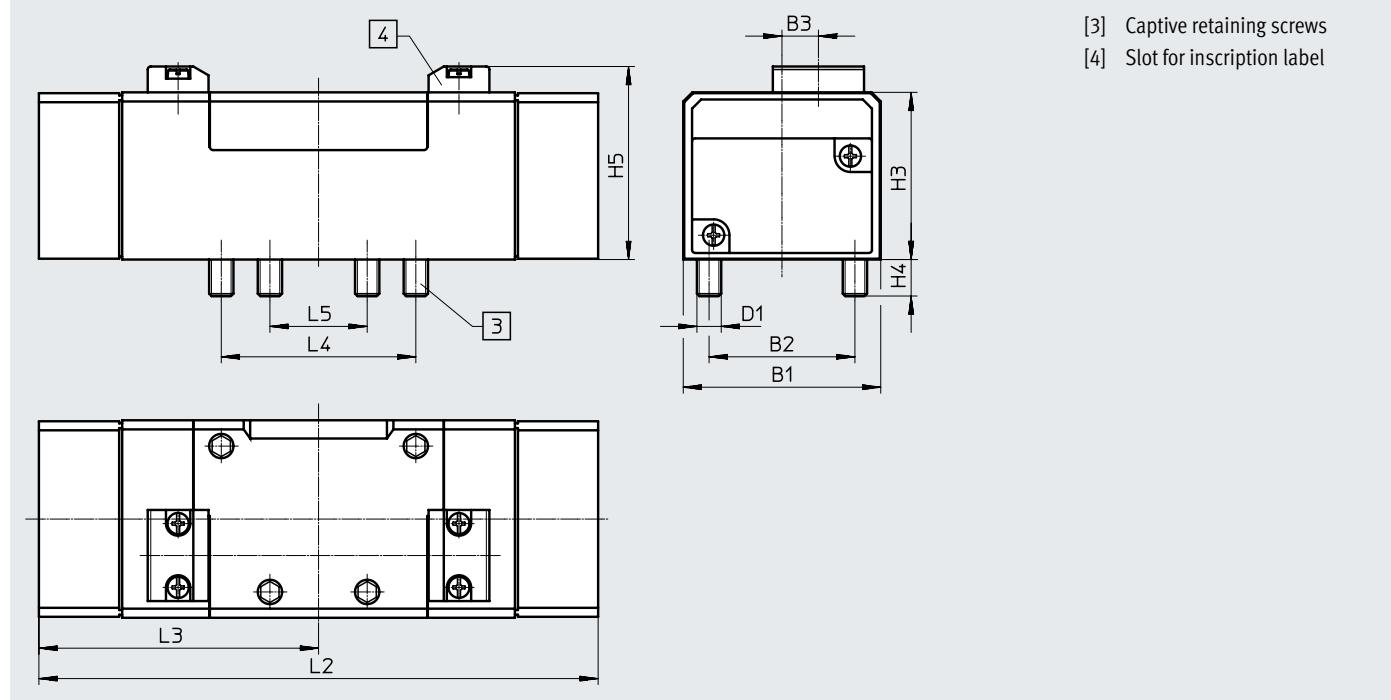5/3-way valves



Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
VL-5/3...	65	48	12	M8	55	12	63.5	184	92	64	32

Ordering data

Circuit symbol

Description

Weight
[g]

Part no.

Type

5/2-way valve, monostable

	Pneumatic spring return	c UL us - Recognized (OL) ATEX category → page 98	810 810	151864 536009	VL-5/2-D-3-C VL-5/2-D-3-C-EX
	Mechanical spring return	c UL us - Recognized (OL) ATEX category → page 98	810 810	151863 536012	VL-5/2-D-3-FR-C VL-5/2-D-3-FR-C-EX

5/2-way valve, bistable

	-	-	810 810	151865 536015	J-5/2-D-3-C J-5/2-D-3-C-EX
	With dominant signal at 14	c UL us - Recognized (OL) ATEX category → page 98	810 810	151866 536018	JD-5/2-D-3-C JD-5/2-D-3-C-EX

5/3-way valve

	Normally closed Mechanical spring return	c UL us - Recognized (OL) ATEX category → page 98	910 910	151867 536021	VL-5/3G-D-3-C VL-5/3G-D-3-C-EX
	Normally exhausted Mechanical spring return	c UL us - Recognized (OL) ATEX category → page 98	910 910	151868 536024	VL-5/3E-D-3-C VL-5/3E-D-3-C-EX
	Normally pressurised Mechanical spring return	- ATEX category → page 98	910 910	151869 536027	VL-5/3B-D-3-C VL-5/3B-D-3-C-EX

Datasheet – Width 76 mm

-  - Flow rate
Up to 6000 l/min

**General technical data**

Design	Piston spool		
Sealing principle	Soft		
Actuation type	Pneumatic		
Type of control	Direct		
Flow direction	Reversible		
Exhaust air function	Can be throttled		
Manual override	None		
Type of mounting	On sub-base, with through-hole and screw		
Mounting position	Any		
Nominal width [mm]	18		
Overlap	Positive overlap		
Width [mm]	76		
Grid dimension [mm]	82		
Pneumatic connections	Sub-base size 4 to ISO 5599-1		
Noise level [dB (A)]	85		
Conforms to standard	ISO 5599-1		

Flow rates

Valve function	5/2-way valve	5/3-way valve
Standard nominal flow rate [l/min]	6000	4800

Switching times [ms]

		Switching time on	Switching time off	Switching time changeover
5/2-way valve, monostable	VL-5/2-3/4-D-4	25	90	–
5/2-way valve, bistable	J-5/2-3/4-D-4	–	–	20
5/3-way valve	VL-5/3G-3/4-D-4	40	130	–
	VL-5/3E-3/4-D-4	50	170	–

Datasheet – Width 76 mm

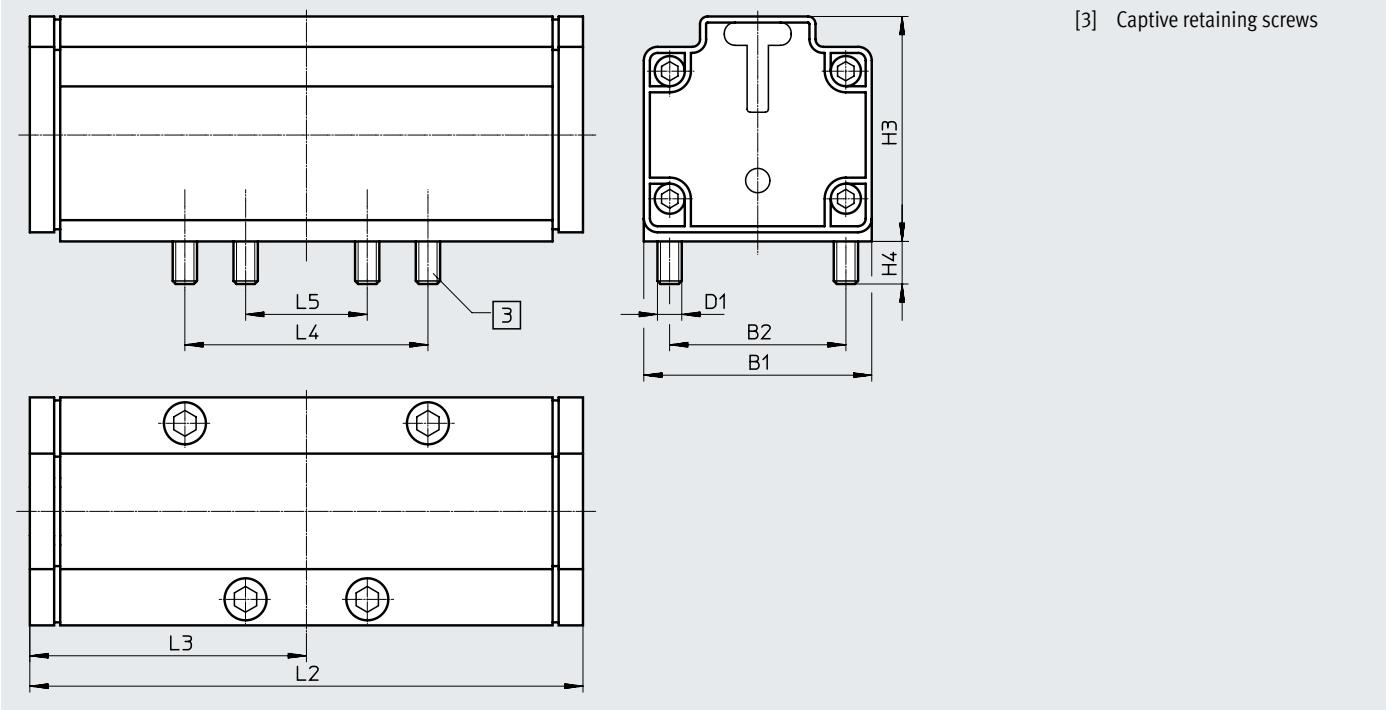
Operating and environmental conditions		5/2-way valve		5/3-way valve	
Valve function	<td>Monostable</td> <td>Bistable</td> <td></td> <td></td>	Monostable	Bistable		
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)				
Operating pressure	[bar]	-0.9 ... +16	-0.9 ... +16	-0.9 ... +16	
Pilot pressure	[bar]	3 ... 16	2 ... 16	3 ... 16	
Ambient temperature	[°C]	-10 ... +60			
Temperature of medium	[°C]	-10 ... +60			

Materials	
Housing	Aluminium
Seals	NBR
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Dimensions

Download CAD data → www.festo.com

5/3-way valves



Type	B1	B2	D1	H3	H4	L2	L3	L4	L5
VL-5/2-3/4-D-4	76	58	M8	74	14	182	91	80	40
J-5/2-3/4-D-4									
VL-5/3E-3/4-D-4									
VL-5/3G-3/4-D-4									

Datasheet – Width 76 mm

Ordering data	Description	Weight [g]	Part no.	Type
5/2-way valve, monostable				
	Mechanical spring return	1800	12461	VL-5/2-3/4-D-4
5/2-way valve, bistable				
	-	1800	12462	J-5/2-3/4-D-4
5/3-way valve				
	Normally closed Mechanical spring return	2000	12463	VL-5/3G-3/4-D-4
	Normally exhausted Mechanical spring return	2000	12464	VL-5/3E-3/4-D-4

Accessories

Individual sub-base NAS

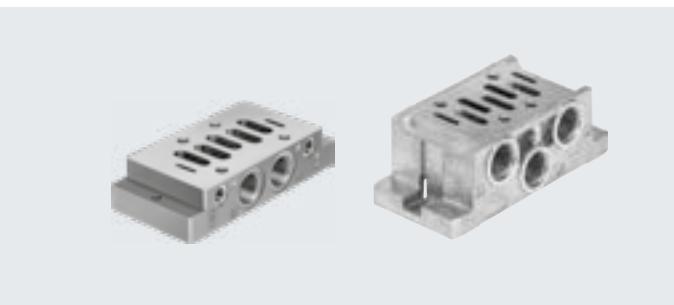
Lateral connections

Sub-base VABS

Materials:

Die-cast aluminium

Anodised aluminium



General technical data

Type	NAS-1/4	NAS-3/8	NAS-1/2	NAS-3/4	VABS
Conforms to standard	ISO 5599-1				–
Based on standard	–				ISO 5599-1
Actuation type	–				Electrical
Sealing principle	–				Soft
Mounting position	–				Any
Suitable for vacuum	–				Yes
Type of mounting	Via through-hole			With through-hole for M5 screw	

Materials

Type	NAS-1/4	NAS-3/8	NAS-1/2	NAS-3/4	VABS
Sub-base	Die-cast aluminium		Anodised aluminium		Die-cast aluminium
Note on materials	–		–		RoHS-compliant
LABS (PWIS) conformity	–		–		VDMA24364-B1/B2-L

Operating and environmental conditions


Type	NAS-1/4	NAS-3/8	NAS-1/2	NAS-3/4	VABS
Operating medium	–		–		Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium	–		–		Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	–		–		Lubricated operation possible (required for further operation)
Operating pressure	[MPa]	–	–	–	0 ... 1.6
	[bar]	–	–	–	0 ... 16
Pilot pressure	[MPa]	–	–	–	0 ... 1
	[bar]	–	–	–	0 ... 10
Ambient temperature	[°C]	–	–	–	-10 ... +60
Temperature of medium	[°C]	–	–	–	-10 ... +60
Storage temperature	[°C]	–	–	–	-20 ... +60
Corrosion resistance class CRC ¹⁾	–		–	–	0 - no corrosion stress
CE marking (see declaration of conformity) ²⁾	–		–	–	To EU Low Voltage Directive
Certification	c UL - Recognized (OL)			–	–

1) For additional information www.festo.com/x/topic/crc

2) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.


Accessories

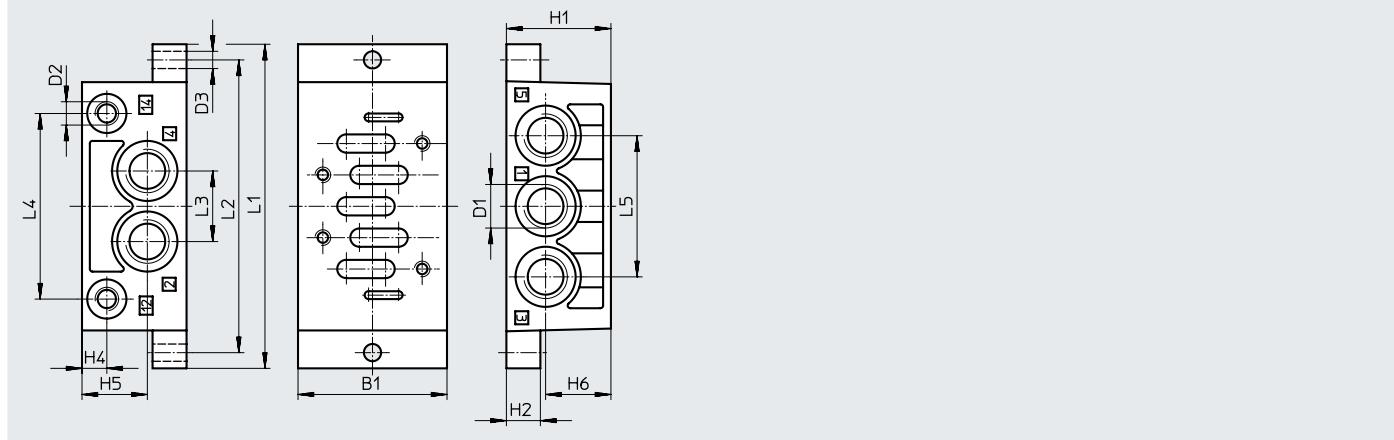Dimensions – Individual sub-base NAS

Download CAD data → www.festo.com

Type	B1	D1	D2	D3	H1	H2	H4	H5	H6	L1	L2	L3	L4	L5
NAS-1/4-1A-ISO	48	G1/4	G1/8	5.5	32	10	9	20.3	20.3	110	98	23	60	46
NAS-3/8-2A-ISO	57	G3/8	G1/8	6.6	40	13	9	25	25	124	112	27	71	54
NAS-1/2-3A-ISO	71	G1/2	G1/8	6.6	32	18	9	16	16	149	136	32	91	64
NAS-3/4-4A-ISO	85	G3/4	G1/8	9	42	19	9	21	21	186	170	42	111	84

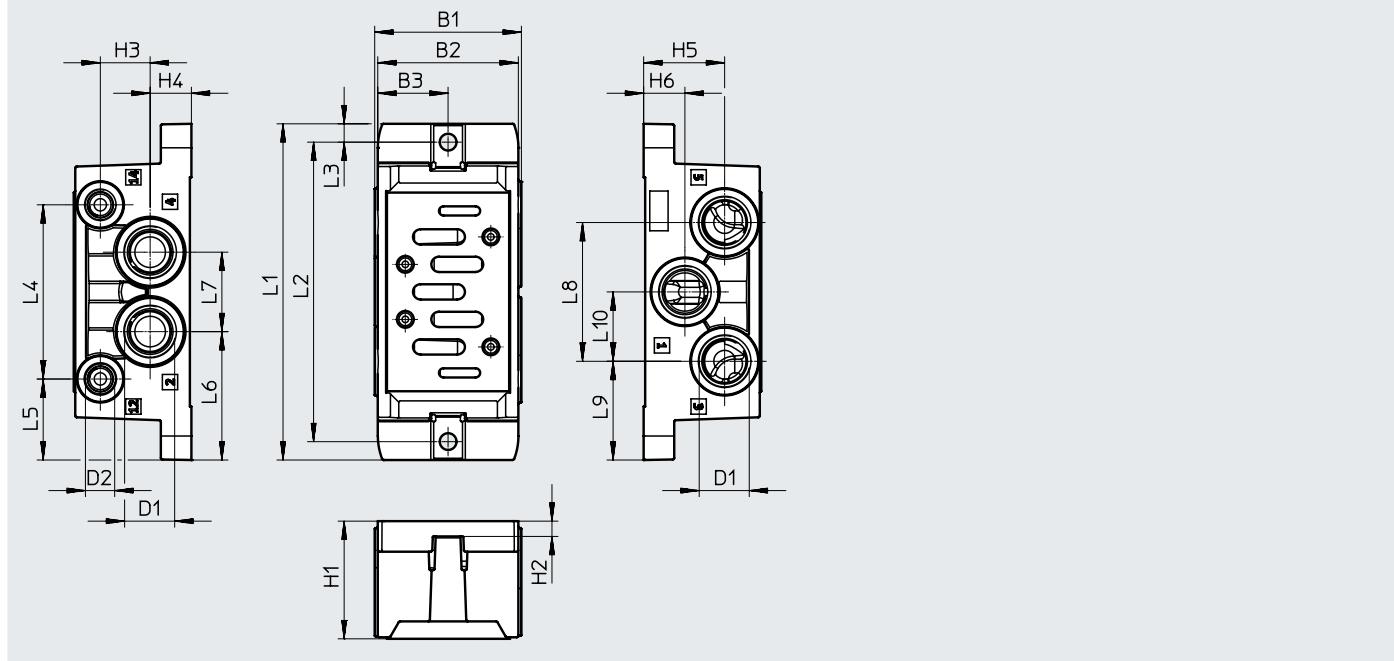Dimensions – Sub-base VABS

Download CAD data → www.festo.com

Type	B1	B2	B3	D1	D2	H1	H2	H3	H4	H5	H6
VABS-S1-1S-G38	48	46	23	G3/8	G1/8	38.5	5	16.3	13.5	26.5	13.5
VABS-S1-1S-N38				3/8 NPT	1/8 NPT						
VABS-S1-2S-G12	58	56	28	G1/2	G1/8	45	10	18	16	29	16
VABS-S1-2S-N12				1/2 NPT	1/8 NPT						

Type	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABS-S1-1S-G38	110	98	6	57	26.5	42	26	45.4	32.3	22.7
VABS-S1-1S-N38										
VABS-S1-2S-G12	124	112	6	72	26	46	32	55	34.5	27.5
VABS-S1-2S-N12										

Accessories

Ordering data		Width	Pneumatic port		Weight [g]	Part no.	Type
Designation to VDMA			1, 2, 3, 4, 5	12, 14			
VDMA 24345-A-1	–	G1/4	G1/8	190	9484	NAS-1/4-1A-ISO	
–	48 mm	G3/8	G1/8	230	8032642	VABS-S1-1S-G38	
		3/8 NPT	1/8 NPT	230	8032643	VABS-S1-1S-N38	
VDMA 24345-A-2	–	G3/8	G1/8	300	11310	NAS-3/8-2A-ISO	
–	58 mm	G1/2	G1/8	380	8032644	VABS-S1-2S-G12	
		1/2 NPT	1/8 NPT	380	8032645	VABS-S1-2S-N12	
VDMA 24345-A-3	–	G1/2	G1/8	360	10336	NAS-1/2-3A-ISO	
VDMA 24345-A-4	–	G3/4	G1/8	1260	152813	NAS-3/4-4A-ISO	

 Note: This product corresponds to ISO 1179-1 and ISO 228-1.

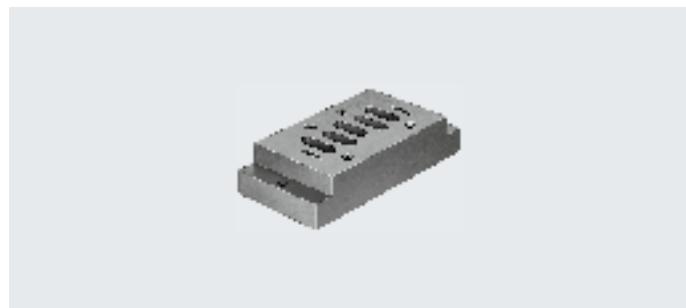
Accessories

Individual sub-base NAU

Connections underneath

Materials:

Die-cast aluminium
Anodised aluminium



General technical data

Conforms to standard	ISO 5599-1		
Type of mounting	Via through-hole		


Materials

Type	NAU-1/4	NAU-3/8	NAU-1/2	NAU-3/4
Sub-base	Die-cast aluminium	Anodised aluminium		

Operating and environmental conditions

Type	NAU-1/4	NAU-3/8	NAU-1/2	NAU-3/4
Certification	c UL - Recognized (OL)	-	-	-

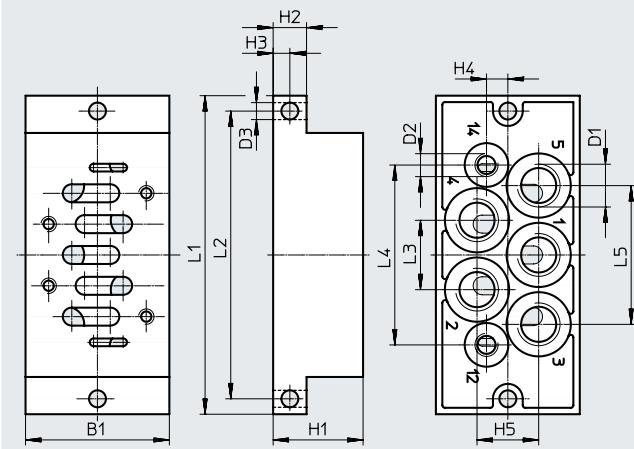Dimensions

Download CAD data → www.festo.com

Type	B1	D1	D2	D3	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5
NAU-1/4-1B-ISO	46	G1/4	G1/8	5.5	30	10	5	7.5	20	110	98	23	60.7	46
NAU-3/8-2B-ISO	56	G3/8	G1/8	6.6	35	13	6.5	8.3	24	124	112	27	70	54
NAU-1/2-3B-ISO	71	G1/2	G1/8	6.6	32	18	9	10	30	149	136	33	90	66
NAU-3/4-4B-ISO	85	G3/4	G1/8	9	28	19	9.5	12	37	186	170	42	111	84

Accessories

Ordering data		Pneumatic port	Weight [g]	Part no.	Type
Designation to VDMA		1, 2, 3, 4, 5	12, 14		
VDMA 24345-B-1	G1/4	G1/8	–	9485	NAU-1/4-1B-ISO
VDMA 24345-B-2	G3/8	G1/8	450	11416	NAU-3/8-2B-ISO
VDMA 24345-B-3	G1/2	G1/8	660	10337	NAU-1/2-3B-ISO
VDMA 24345-B-4	G3/4	G1/8	1080	152814	NAU-3/4-4B-ISO

 Note: This product corresponds to ISO 1179-1 and ISO 228-1.

Accessories

Manifold sub-base
NAV**VABV**

Connections underneath

Materials:

Die-cast aluminium

Anodised aluminium

Dimensions NAV → page122


General technical data

Type	NAV-1/4	NAV-3/8	NAV-1/2	NAV-3/4	VABV
Conforms to standard	ISO 5599-1				–
Based on standard	–				ISO 5599-1
Maximum number of valve positions	–				1
Suitable for vacuum	–				Yes
Exhaust air function	–				Via throttle plate

Materials

Type	NAV-1/4	NAV-3/8	NAV-1/2	NAV-3/4	VABV
Sub-base	Die-cast aluminium		Anodised aluminium		Die-cast aluminium
Note on materials	–		–		RoHS-compliant
LABS (PWIS) conformity	–		–		VDMA24364-B1/B2-L

Operating and environmental conditions


Type	NAV-1/4	NAV-3/8	NAV-1/2	NAV-3/4	VABV
Operating medium	–	–		–	Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium	–	–		–	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	–	–		–	Lubricated operation possible (required for further operation)
Operating pressure	[MPa]	–	–	–	0 ... 1
	[bar]	–	–	–	0 ... 10
Ambient temperature	[°C]	–	–	–	-10 ... +50
Temperature of medium	[°C]	–	–	–	-10 ... +50
Storage temperature	[°C]	–	–	–	-20 ... +60
Corrosion resistance class CRC ¹⁾	–	–	–	–	0 - no corrosion stress
CE marking (see declaration of conformity) ²⁾	–	–	–	–	To EU Low Voltage Directive
Certification	–		UL – Recognized (OL)	–	–

1) For additional information www.festo.com/x/topic/crc2) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Accessories

Dimensions – VABV

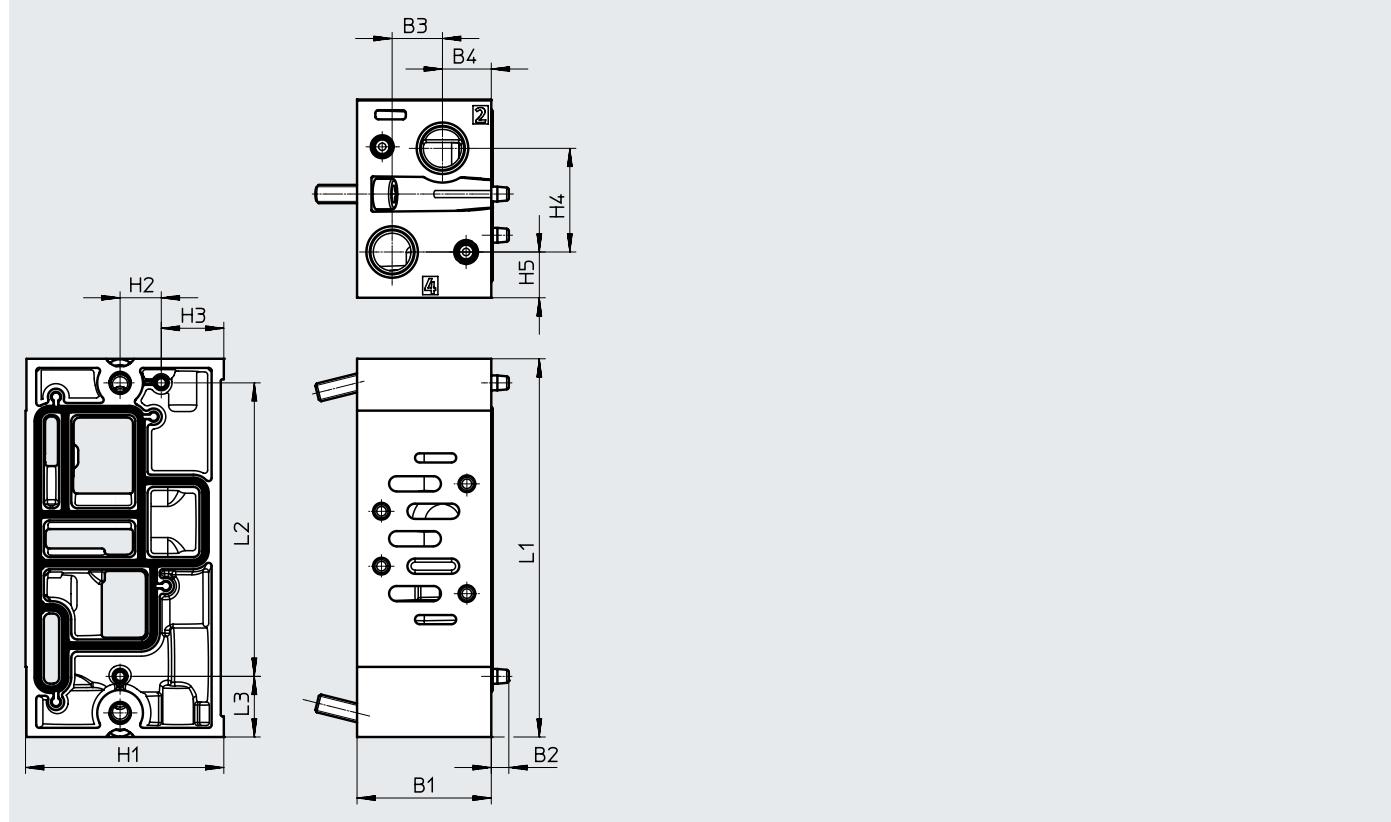Download CAD data → www.festo.com



Type	B1	B2	B3	H1	H2	H3	H4	H5	L1	L2	L3
VABV-S1-1SB-G38	44	16.5	16	65	13.5	20.5	34	15	124	96.2	19.9
VABV-S1-1SB-N38											
VABV-S1-2SB-G12	59	19.5	22					35.5	14.5		
VABV-S1-2SB-N12											


Designation to VDMA	Width	Pneumatic port		Weight [g]	Part no.	Type
		2, 4	12, 14			
VDMA 24345-C-1	–	G1/4	G1/8	240	10173	NAV-1/4-1C-ISO
–	44 mm	G3/8	–	490	8029812	VABV-S1-1SB-G38
		3/8 NPT	–	490	8029813	VABV-S1-1SB-N38
		G3/8	G1/8	400	11305	NAV-3/8-2C-ISO
VDMA 24345-C-2	59 mm	G1/2	–	670	8029814	VABV-S1-2SB-G12
		1/2 NPT	–	670	8029815	VABV-S1-2SB-N12
		G1/2	G1/8	700	10175	NAV-1/2-3C-ISO
VDMA 24345-C-3	–	G3/4	G1/8	1400	11139	NAV-3/4-4C-ISO

Accessories

Supply plate VABF

Materials:

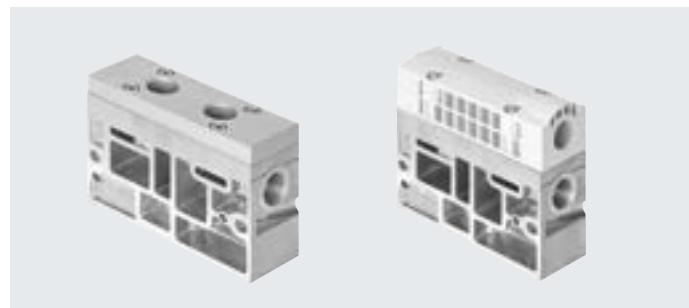Die-cast aluminium
Wrought aluminium alloy
PA



General technical data

Based on standard	ISO 5599-1	
Maximum number of valve positions	1	
Suitable for vacuum	Yes	
Exhaust air function	Via throttle plate	

Materials

Type	VABFS1-1-P1A11	VABFS1-1-P1A12
Exhaust air plate	Wrought aluminium alloy	PA
Supply plate	Anodised aluminium	Die-cast aluminium
Note on materials	RoHS-compliant	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L	VDMA24364-B1/B2-L

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)	
Operating pressure	[MPa]	0 ... 1
	[bar]	0 ... 10
Ambient temperature	[°C]	-10 ... +50
Temperature of medium	[°C]	-10 ... +50
Storage temperature	[°C]	-20 ... +60
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress	
CE marking (see declaration of conformity) ²⁾	To EU Low Voltage Directive	

1) For additional information www.festo.com/x/topic/crc

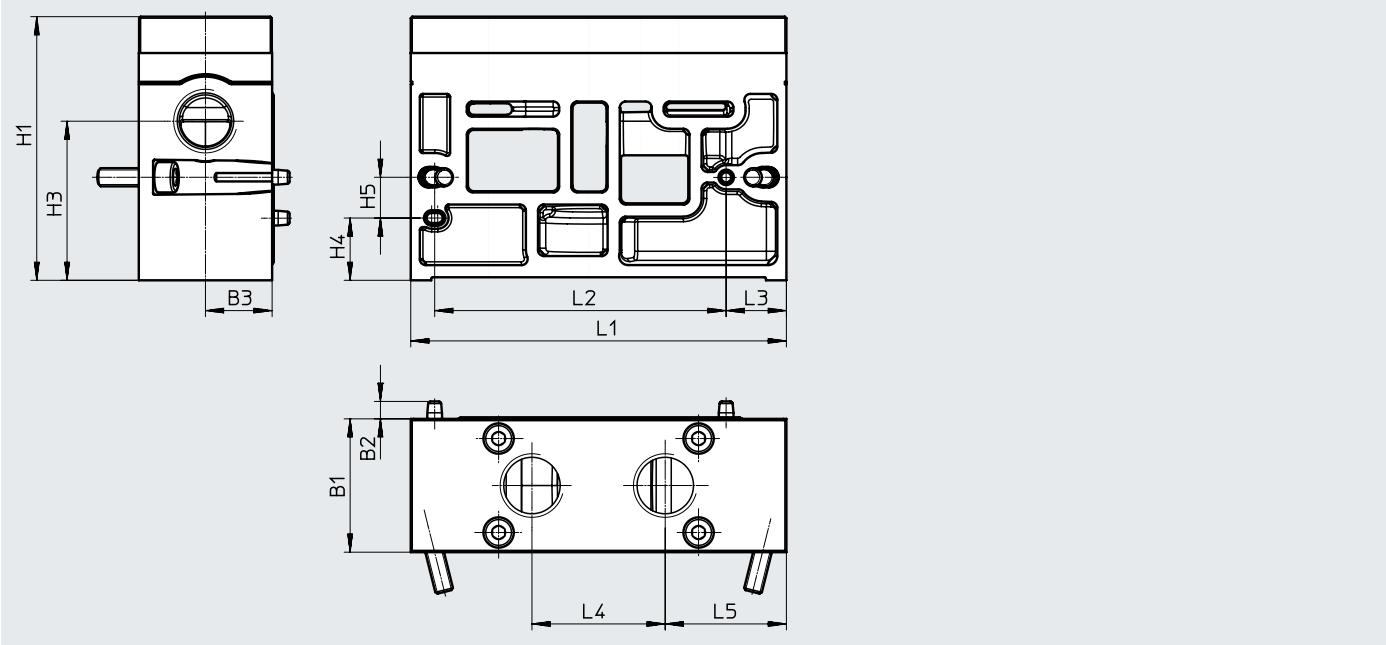
2) Additional information: www.festo.com/catalogue/... → Support/Downloads.

Accessories

Dimensions


Port 3 and 5 separated

Download CAD data → www.festo.com



Type	B1	B2	B3	H1	H3	H4	H5	L1	L2	L3	L4	L5
VABFS1-1-P1A11	44	5.5	22	87	52.5	20.5	13.5	124	96.2	19.9	44	40

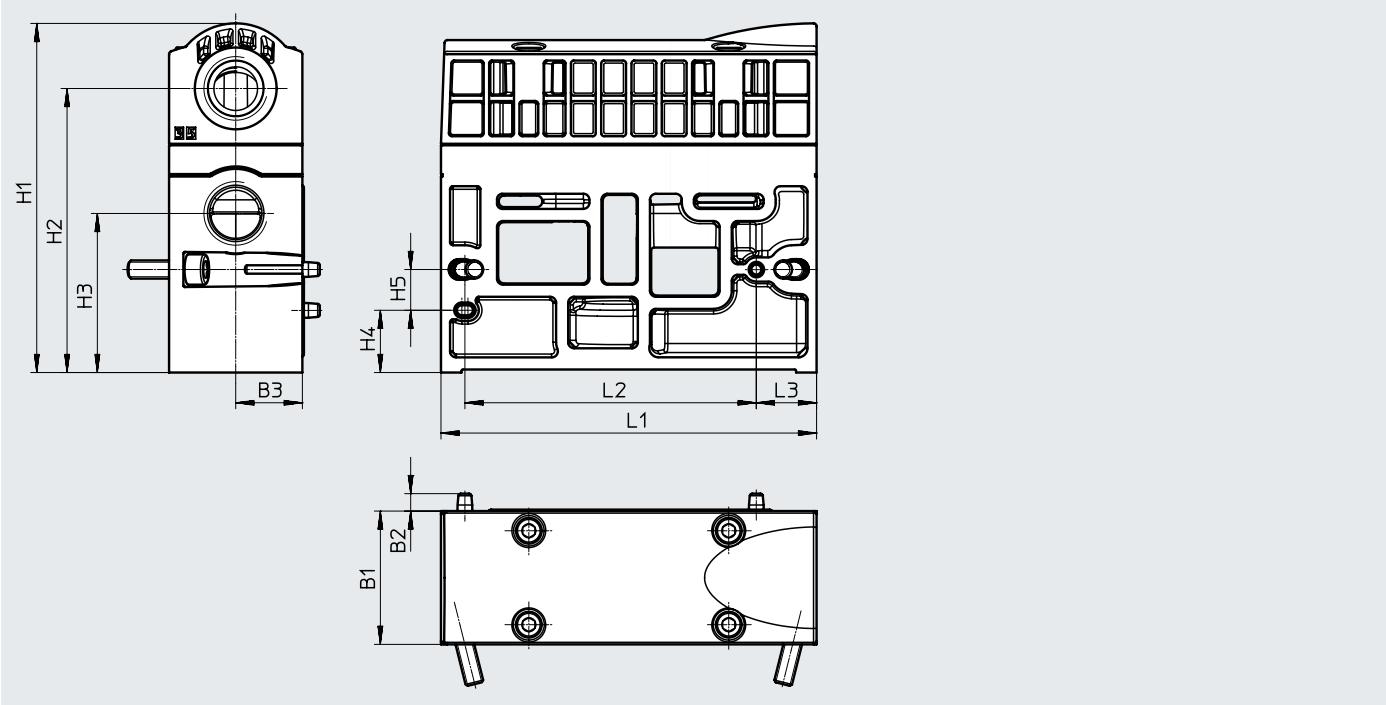Port 3 and 5 combined



Type	B1	B2	B3	H1	H2	H3	H4	H5	L1	L2	L3
VABFS1-1-P1A12	44	5.8	22	115.2	93.8	52.5	20.5	13.5	124	96.2	19.9

Accessories

Ordering data		Width	Description	Pneumatic port	Weight	Part no.	Type
				1, 3, 5	[g]		
44 mm		Port 3 and 5 separated	G1/2	660	8037655	VABF-S1-1-P1A11-G12	
			1/2 NPT	660	8037656	VABF-S1-1-P1A11-N12	
		Port 3 and 5 combined	G1/2	650	8037653	VABF-S1-1-P1A12-G12	
			1/2 NPT	650	8037654	VABF-S1-1-P1A12-N12	

Accessories

90°-connection plate NAW

Ports on the side and on top

Materials:

Die-cast aluminium
Anodised aluminium

Dimensions → page 122



General technical data

Conforms to standard	ISO 5599-1
----------------------	------------

Operating and environmental conditions

Type	NAW-1/4	NAW-3/8	NAW-1/2	NAW-3/4
Sub-base material	Die-cast aluminium		Anodised aluminium	

Ordering data

Designation to VDMA	Pneumatic port	Weight [g]	Part no.	Type
	2	4		
VDMA 24345-E-1	G1/4	360	11304	NAW-1/4-1E-ISO
VDMA 24345-E-2	G3/8	600	11307	NAW-3/8-2E-ISO
VDMA 24345-E-3	G1/2	920	11309	NAW-1/2-3E-ISO
VDMA 24345-E-4	G3/4	1550	11141	NAW-3/4-4E-ISO

Manifold sub-base with 90° connections NAVW

Connections on the side and underneath

Materials:

Die-cast aluminium

Dimensions → page 122



General technical data

Conforms to standard	ISO 5599-1
----------------------	------------

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
------------------	---

Ordering data

Pneumatic port	Weight [g]	Part no.	Type
1, 2, 4	12, 14		
G1/4	320	152789	NAW-1/4-1-ISO
G3/8	550	152790	NAW-3/8-2-ISO
G1/2	1020	152791	NAW-1/2-3-ISO

• Note: This product corresponds to ISO 1179-1 and ISO 228-1.

Accessories

End plate kit NEV

Materials:

Die-cast aluminium
Anodised aluminium

Dimensions NEV → page 122



General technical data

Conforms to standard	ISO 5599-1
----------------------	------------

Ordering data


Designation to VDMA	Pneumatic port	Weight [g]	Part no.	Type
	1, 3, 5			
VDMA 24345-D-1	G3/8	280	10174	NEV-1DA/DB-ISO
VDMA 24345-D-2	G1/2	450	11306	NEV-2DA/DB-ISO
VDMA 24345-D-3	G1	760	10176	NEV-3DA/DB-ISO
VDMA 24345-D-4	G1	1390	11140	NEV-4DA/DB-ISO

• Note: This product corresponds to ISO 1179-1 and ISO 228-1.

Accessories

End plate VABE

Materials:
Die-cast aluminium



General technical data

Based on standard	ISO 5599-1
Suitable for vacuum	Yes
Exhaust air function	Via throttle plate
Type of mounting	With through-hole for M6 screw

Materials

End plate	Die-cast aluminium
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)	
Operating pressure	[MPa]	0 ... 1
	[bar]	0 ... 10
Ambient temperature	[°C]	-10 ... +50
Temperature of medium	[°C]	-10 ... +50
Storage temperature	[°C]	-20 ... +60
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress	
CE marking (see declaration of conformity) ²⁾	To EU Low Voltage Directive	

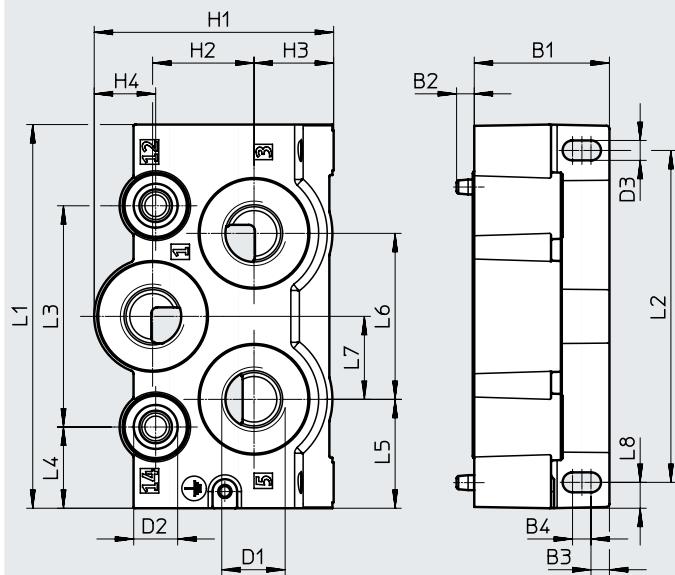
1) For additional information www.festo.com/x/topic/crc

2) Additional information: www.festo.com/catalogue/... → Support/Downloads.


Accessories

Dimensions

End plate, left



Right end plate

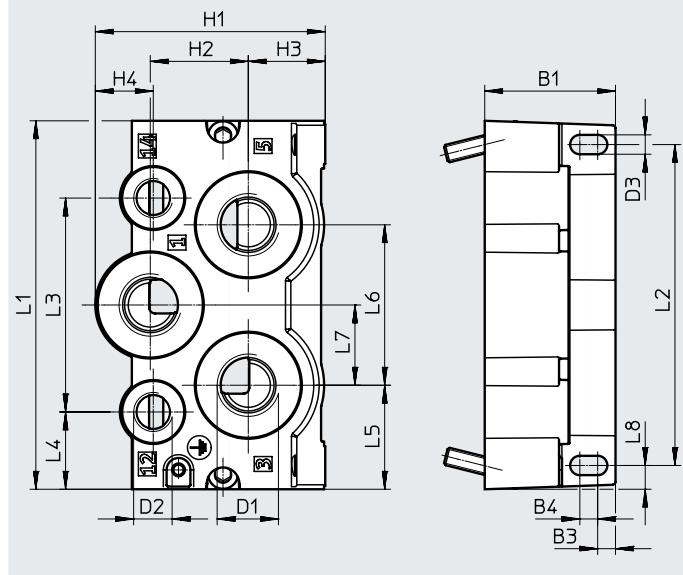Download CAD data → www.festo.com

Type	B1	B2	B3	B4	D1	D2	D3	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6	L7	L8
VABE-S1-1L...G12	44	5.8	6	6	G1/2	—	6.5	77.9	33	25.9	20	124.9	108	72	26.4	35.4	54	27	8.4
VABE-S1-1LZ...G12					G1/2	G1/4													
VABE-S1-1L...N12					1/2 NPT	—													
VABE-S1-1LZ...N12					1/2 NPT	1/4 NPT													
VABE-S1-2L...G34					G3/4	—													
VABE-S1-2LZ...G34					G3/4	G1/4													
VABE-S1-2L...N34					3/4 NPT	—													
VABE-S1-2LZ...N34					3/4 NPT	1/4 NPT													
VABE-S1-1R...G12	44		6	6	G1/2	—	6.5	77.4	33	25.9	19.5	124	108	72	26	35	54	27	8
VABE-S1-1RZ...G12					G1/2	G1/4													
VABE-S1-1R...N12					1/2 NPT	—													
VABE-S1-1RZ...N12					1/2 NPT	1/4 NPT													
VABE-S1-2R...G34					G3/4	—													
VABE-S1-2RZ...G34					G3/4	G1/4													
VABE-S1-2R...N34					3/4 NPT	—													
VABE-S1-2RZ...N34					3/4 NPT	1/4 NPT													

Accessories

Ordering data		Pneumatic port	Weight [g]	Pilot air supply	Part no.	Type
Width		1, 3, 5	12, 14			
End plate, left						
44 mm	G1/2	–	400	Internal	8032662	VABE-S1-1L-G12
		G1/4		External	8032660	VABE-S1-1LZ-G12
	1/2 NPT	–	400	Internal	8032663	VABE-S1-1L-N12
		1/4 NPT		External	8032661	VABE-S1-1LZ-N12
	G3/4	–	360	Internal	8032666	VABE-S1-2L-G34
		G1/4		External	8032664	VABE-S1-2LZ-G34
	3/4 NPT	–	360	Internal	8032667	VABE-S1-2L-N34
		1/4 NPT		External	8032665	VABE-S1-2LZ-N34
Right end plate						
44 mm	G1/2	–	410	Internal	8032670	VABE-S1-1R-G12
		G1/4		External	8032668	VABE-S1-1RZ-G12
	1/2 NPT	–	410	Internal	8032671	VABE-S1-1R-N12
		1/4 NPT		External	8032669	VABE-S1-1RZ-N12
	G3/4	–	370	Internal	8032674	VABE-S1-2R-G34
		G1/4		External	8032672	VABE-S1-2RZ-G34
	3/4 NPT	–	370	Internal	8032675	VABE-S1-2R-N34
		1/4 NPT		External	8032673	VABE-S1-2RZ-N34

Accessories

Cover plate NDV

Materials:

Width 42 mm, 52 mm, 65 mm:

Steel

Width 76 mm:

Wrought aluminium alloy

Dimensions → page 122



General technical data

Conforms to standard	ISO 5599-1
----------------------	------------

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)

Ordering data

Width	Weight [g]	Part no.	Type
42 mm	113	9489	NDV-1-ISO
52 mm	166	11308	NDV-2-ISO
65 mm	314	10340	NDV-3-ISO
76 mm	1480	11142	NDV-4-ISO

Isolating disc NSC

Materials:

Wrought aluminium alloy

Dimensions → 122



General technical data

Conforms to standard	ISO 5599-1
----------------------	------------


Ordering data

Width	Pneumatic port	Weight [g]	Part no.	Type
42 mm	G1/4	6	11550	NSC-1/4-1-ISO
52 mm	G3/8	9.2	11908	NSC-3/8-2-ISO
65 mm	G1/2	20	11551	NSC-1/2-3-ISO
76 mm	G3/4	24	11699	NSC-3/4-4-ISO

Accessories

Duct separation VABD

Materials:
Steel, NBR



General technical data

Based on standard	ISO 5599-1
Suitable for vacuum	Yes
Exhaust air function	Via throttle plate
Type of mounting	With through-hole for M6 screw

Materials

Separator plate	Steel NBR
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)		
Operating pressure	[MPa]	0 ... 1	
	[bar]	0 ... 10	
Ambient temperature	[°C]	-10 ... +50	
Temperature of medium	[°C]	-10 ... +50	
Storage temperature	[°C]	-20 ... +60	
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress		
CE marking (see declaration of conformity) ²⁾	To EU Low Voltage Directive		

1) For additional information www.festo.com/x/topic/crc

2) Additional information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Ordering data


Duct separation	Weight [g]	Part no.	Type
Duct 1	60	8029438	VABD-S1-1-P1-C
Duct 3 and duct 5	70	8029439	VABD-S1-1-P2-C
Ducts 1, 3 and 5	75	8029440	VABD-S1-1-P3-C
Ducts 1, 3, 5, 12 and 14	75	8029441	VABD-S1-1-P6-C
Duct 12 and duct 14	60	8036068	VABD-S1-1-P7-C

Accessories

Intermediate plate NZV

For connecting manifold sub-bases of different sizes

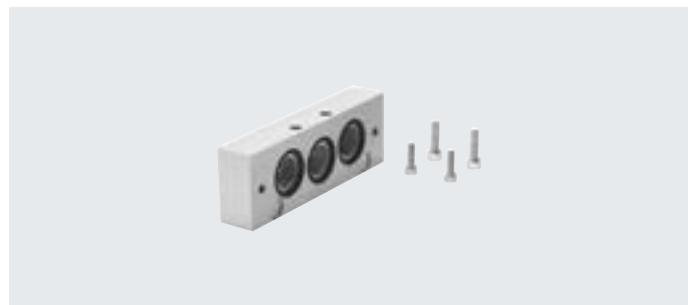Materials:
Die-cast aluminium, anodised




General technical data

Based on standard

ISO 5599-1


Dimensions

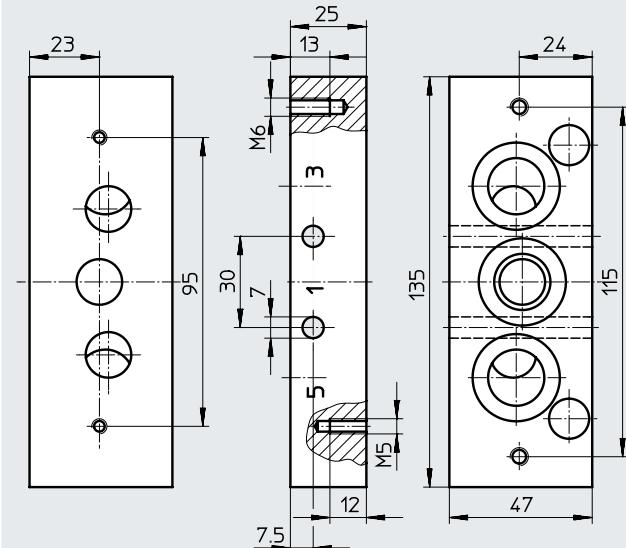NZV-1-2



Download CAD data → www.festo.com

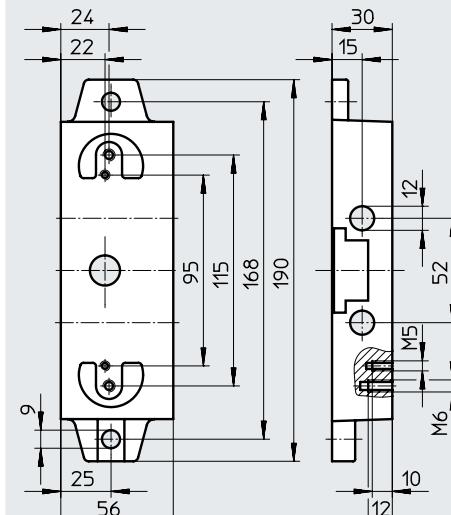NZV-3-2/1



Ordering data


Weight [g]	Part no.	Type
---------------	----------	------

For manifold sub-bases of width 42 mm, 52 mm	393	164940	NZV-1-2
For manifold sub-bases of width 42 mm and 65 mm or 52 mm and 65 mm	473	12911	NZV-3-2/1

Accessories

Dimensions – Manifold assembly

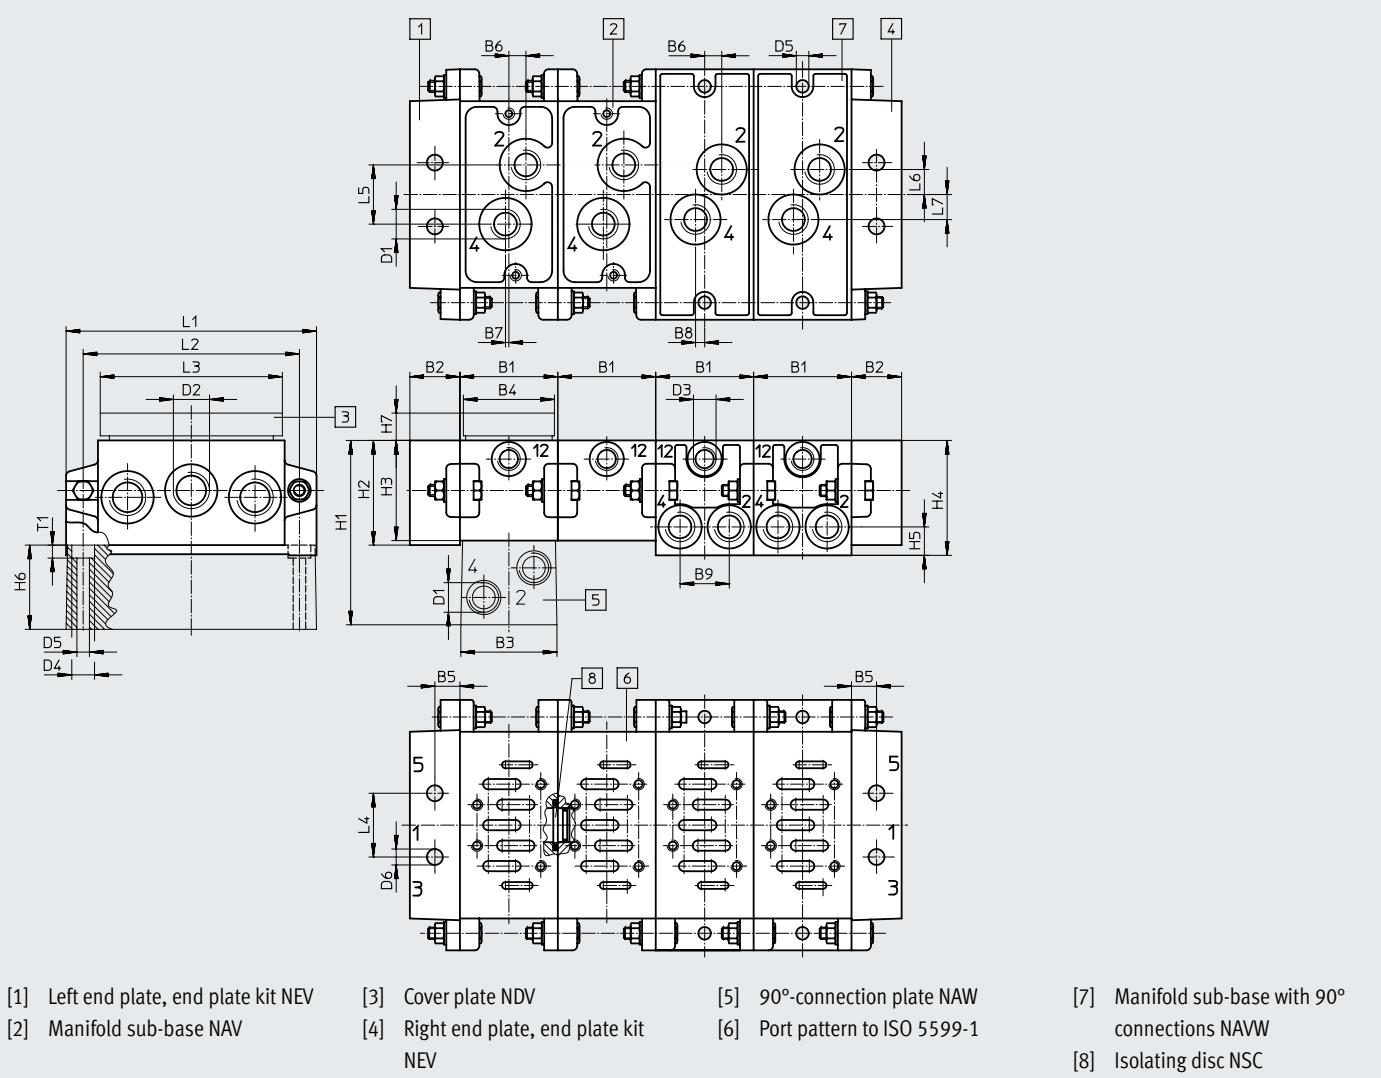Download CAD data → www.festo.com



[1] Left end plate, end plate kit NEV

[2] Manifold sub-base NAV

[3] Cover plate NDV

[4] Right end plate, end plate kit
NEV

[5] 90°-connection plate NAW

[6] Port pattern to ISO 5599-1

[7] Manifold sub-base with 90°
connections NAWW


[8] Isolating disc NSC

Width	B1	B2	B3	B4	B5	B6	B7	B8	B9	D1	D2	D3	D4	D5	D6
42 mm	43	22	42	40	11	7.5	1.5	4	21.6	G1/4	G3/8	G1/8	10	5.5	7
52 mm	56	26	55	50	13	6	5	6	27	G3/8	G1/2	G1/8	11	6.6	9
65 mm	71	30	70	70	15	8	6	6	35.5	G1/2	G1	G1/8	15	9	12
76 mm	82	30	80	80	15	9	8	–	–	G3/4	G1	G1/8	15	9	12

Width	H1	H2	H3	H4	H5	H6	H7	L1	L2	L3	L4	L5	L6	L7	T1
42 mm	81	46	44	50.5	12.5	37	5	110	95	80	28	26	11	11	5.7
52 mm	85	47	45	60	15	40	5	135	115	96	35	30	15	14	6.8
65 mm	99	56	54	66	17.5	45	5	190	168	120	52	38	19	19	9
76 mm	120	58	55	–	–	65	5	215	184	–	56	52	–	–	9

Note: This product corresponds to ISO 1179-1 and ISO 228-1.

Accessories



Exhaust air flow control for 3 and 5.



General technical data			
Type	VABF-S1-1-F1B1-C	VABF-S1-2-F1B1-C	GRO-ZP-3-ISO
Based on standard	ISO 5599-1		
Pneumatic vertical stacking	Throttle plate, exhaust air flow control		
Mounting position	Any		
Type of mounting	Via through-hole		
Standard nominal flow rate [l/min]	1100	–	1500
Degree of protection	IP65	IP65	–
	NEMA4	NEMA4	–


Materials			
Housing	Die-cast aluminium		
Note on materials	RoHS-compliant		

Operating and environmental conditions															
Type	VABF-S1-1-F1B1-C	VABF-S1-2-F1B1-C	GRO-ZP-3-ISO												
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	Compressed air to ISO 8573-1:2010 [7:--:--]													
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	Lubricated operation possible (in which case lubricated operation will always be required)													
Operating pressure	<table border="1"> <tr> <td>[MPa]</td> <td>-0.09 ... +1</td> <td>-0.09 ... +1</td> <td>–</td> </tr> <tr> <td>[bar]</td> <td>-0.9 ... +10</td> <td>-0.9 ... +10</td> <td>0 ... +16</td> </tr> </table>	[MPa]	-0.09 ... +1	-0.09 ... +1	–	[bar]	-0.9 ... +10	-0.9 ... +10	0 ... +16						
[MPa]	-0.09 ... +1	-0.09 ... +1	–												
[bar]	-0.9 ... +10	-0.9 ... +10	0 ... +16												
Input pressure 1	<table border="1"> <tr> <td>[MPa]</td> <td>–</td> <td>+0.05 ... +1</td> <td>–</td> </tr> <tr> <td>[bar]</td> <td>–</td> <td>+0.5 ... +10</td> <td>–</td> </tr> <tr> <td>[psi]</td> <td>–</td> <td>7.25 ... 145</td> <td>–</td> </tr> </table>	[MPa]	–	+0.05 ... +1	–	[bar]	–	+0.5 ... +10	–	[psi]	–	7.25 ... 145	–		
[MPa]	–	+0.05 ... +1	–												
[bar]	–	+0.5 ... +10	–												
[psi]	–	7.25 ... 145	–												
Ambient temperature	[°C]	-5 ... +50	-20 ... +80												
Temperature of medium	[°C]	–	-20 ... +80												


Accessories

Standard nominal flow rate q_{nN} as a function of the turns n of the regulating screw

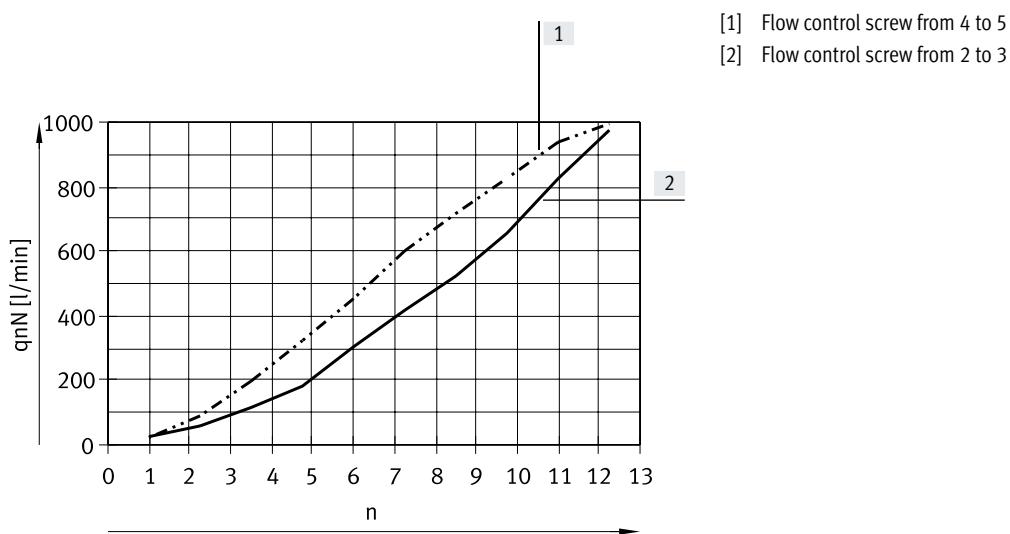
VABFS1-1-F1B1-C



VABFS1-2-F1B1-C

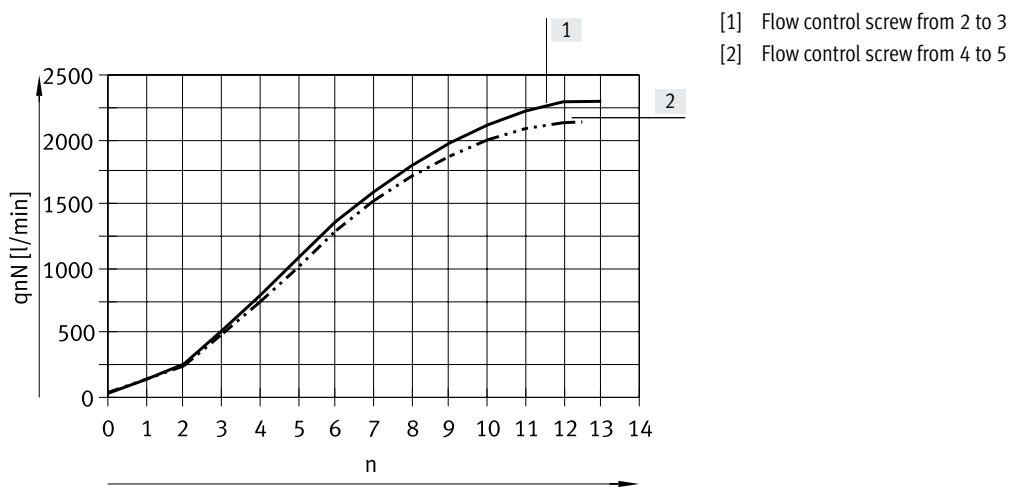


GRO-ZP-3-ISO

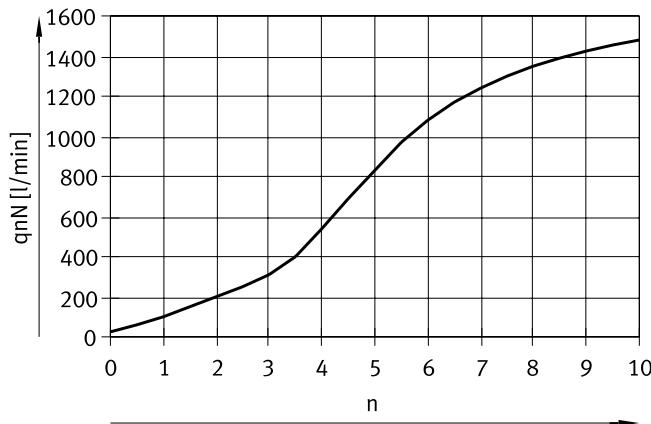

Accessories


Dimensions

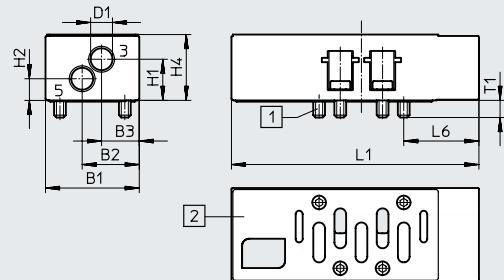VABF-S1...

Download CAD data → www.festo.com

- [1] Captive retaining screws
- [2] Port pattern to ISO 5599-1

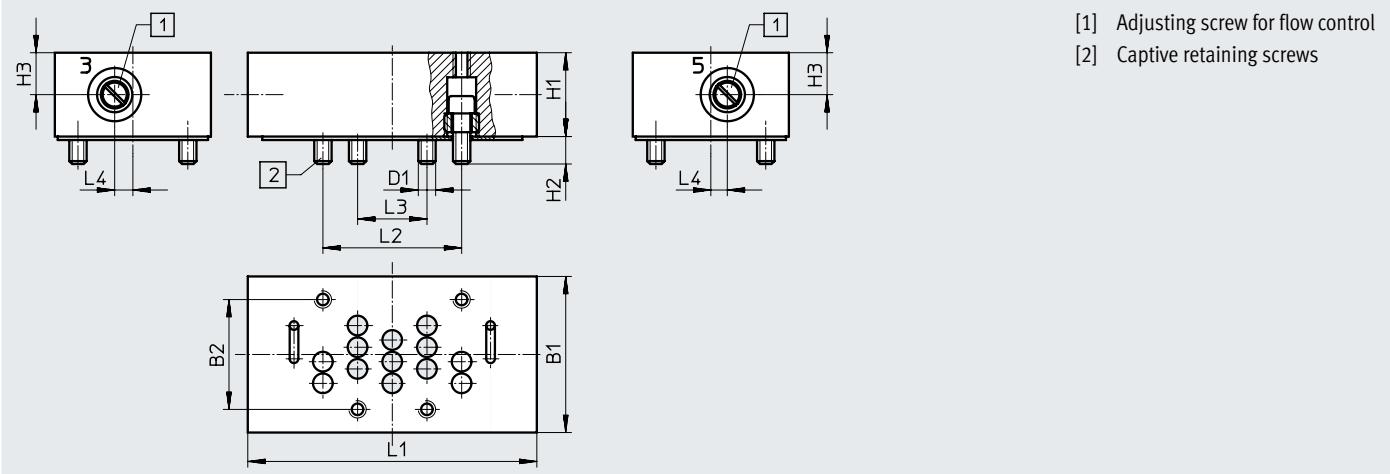GRO-ZP-3-ISO



- [1] Adjusting screw for flow control
- [2] Captive retaining screws

Type	Width	B1	B2	B3	D1	H1	H2	H3	H4	L1	L2	L3	L5	L6	T1
VABF-S1-1-F1B1-C	42 mm	39.9	24.3	16.1	9.3	17.5	9.2	—	28	105.3	—	—	—	32	7.3
VABF-S1-2-F1B1-C	52 mm	52	32.5	22.5	13.4	29.5	13.5	—	45	131	—	—	—	40.9	10
GRO-ZP-3-ISO	65 mm	70	48	—	M8	33	12	16.5	—	132	64	32	7	—	—

Circuit symbol	Description	Width	Weight [g]	Part no.	Type
	Exhaust air flow control valve	42 mm	220	549102	VABF-S1-1-F1B1-C
		52 mm	565	555788	VABF-S1-2-F1B1-C
		65 mm	850	119674	GRO-ZP-3-ISO

Accessories



Alternative compressed air supply for port 1 of the mounted valve.



General technical data	
Type	VABF-S1-1-P1A3-G38 VABF-S1-2-P1A3-G12
Based on standard	ISO 5599-1
Pneumatic vertical stacking	Alternative compressed air supply for 1
Mounting position	Any
Type of mounting	On individual sub-base, on manifold sub-base
Standard nominal flow rate	[l/min]
1300	2800
Pneumatic port 1	G3/8
Degree of protection	IP65
	NEMA4
	IP65
	NEMA4


Materials	
Housing	Die-cast aluminium
Note on materials	RoHS-compliant

Operating and environmental conditions	
Type	VABF-S1-1-P1A3-G38 VABF-S1-2-P1A3-G12
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)
Operating pressure	[MPa] -0.09 ... +1 -0.09 ... +1 [bar] -0.9 ... +10 -0.9 ... +10
Input pressure 1	[MPa] - +0.05 ... +1 [bar] - +0.5 ... +10 [psi] - 7.25 ... 145
Ambient temperature	[°C] -5 ... +50 -5 ... +50

Accessories

Dimensions

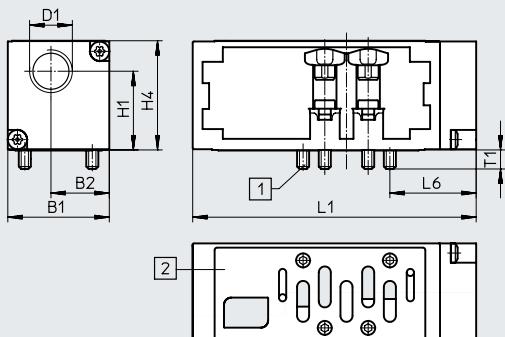Download CAD data → www.festo.com



[1] Captive screws


[2] Port pattern to ISO 5599-1

Type	B1	B2	D1	H1	H4	L1	L6	T1
VABF-S1-1-P1A3-G38	42.1	24.2	G3/8	32.7	45.3	117.6	35.8	7.9
VABF-S1-2-P1A3-G12	54	31	G1/2	42.4	58.9	136	38	10

Ordering data

Circuit symbol	Description	Width	Standard nominal flow rate [l/min]	Weight [g]	Part no.	Type
4 2 11 14 5 1 3 12	Vertical supply plate	42 mm	1300	340	549100	VABF-S1-1-P1A3-G38
		52 mm	2800	605	555785	VABF-S1-2-P1A3-G12

Accessories



Vertical pressure shut-off plate for blocking duct 1 and duct 14 upstream of a valve.



General technical data		VABF-S1-1-L1D1-C	VABF-S1-2-L1D1-C
Type			
Based on standard		ISO 5599-1	
Pneumatic vertical stacking		Shut-off for 1	Alternative compressed air supply for 1
Mounting position		Any	
Type of mounting		On individual sub-base, on manifold sub-base	
Standard nominal flow rate	[l/min]	1200	1950
Pneumatic port 1		G3/8	G1/2
Degree of protection		IP65	IP65
		NEMA4	NEMA4


Materials	
Housing	Die-cast aluminium
Note on materials	RoHS-compliant

Operating and environmental conditions		VABF-S1-1-L1D1-C	VABF-S1-2-L1D1-C
Type			
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Note on the operating/pilot medium	Lubricated operation possible (required for further operation)		
Operating pressure	[MPa]	-0.09 ... +1	-0.09 ... +1
	[bar]	-0.9 ... +10	-0.9 ... +10
Input pressure 1	[MPa]	-	+0.05 ... +1
	[bar]	-	+0.5 ... +10
	[psi]	-	7.25 ... 145
Ambient temperature	[°C]	-5 ... +50	-5 ... +50

Accessories

Dimensions

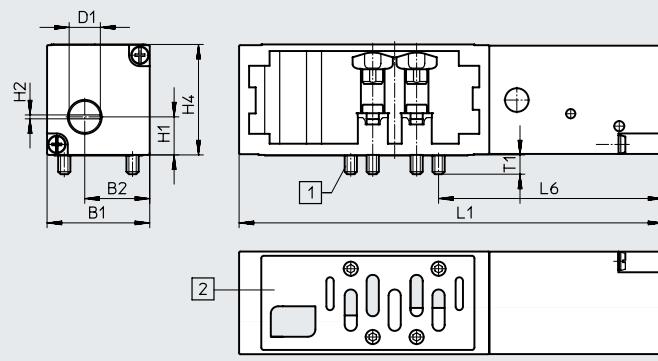Download CAD data → www.festo.com



[1] Captive screws


[2] Port pattern to ISO 5599-1

Type	B1	B2	D1	H1	H2	H4	L1	L6	T1
VABF-S1-1-L1D1-C	42.1	26.7	12.8	15.6	1.6	45.3	173.8	92	7.9
VABF-S1-2-L1D1-C	54	32.6	14	21.3	1.6	58.7	191.2	93.2	10

Ordering data

Circuit symbol	Description	Width	Standard nominal flow rate [l/min]	Weight [g]	Part no.	Type
	Vertical pressure shut-off plate	42 mm	1200	600	549103	VABF-S1-1-L1D1-C
		52 mm	1950	1030	555790	VABF-S1-2-L1D1-C

Accessories



The pressure regulator enables a particular pressure in the regulated port to be set manually upstream or downstream of the valve.



General technical data			
Type	VABF-S1-1-R...	VABF-S1-2-R...	LR-ZP-...-3
Width [mm]	42	52	65
Based on standard	ISO 5599-1	ISO 5599-1	ISO 5599-1
Pneumatic vertical stacking	Pressure regulator	Pressure regulator	Pressure regulator
Design	–	–	Piston
Regulator function	Output pressure constant With secondary exhausting	Output pressure constant With secondary exhausting	–
Mounting position	Any	Any	–
Type of mounting	On individual sub-base On manifold sub-base	On individual sub-base On manifold sub-base	–
Optional pressure gauge	possible	possible	–
Pressure gauge connection	With retaining clamp	With retaining clamp	–
Degree of protection	IP65 NEMA4	IP65 NEMA4	–

Materials			
Type	VABF-S1-1-R...	VABF-S1-2-R...	LR-ZP-...-3
Regulator housing	Die-cast aluminium	Die-cast aluminium	Die-cast aluminium, steel
Control unit	PA	PA	–
Seals	–	–	NBR
Note on materials	RoHS-compliant Free of paint-wetting impairment substances	RoHS-compliant Free of paint-wetting impairment substances	RoHS-compliant Contains paint-wetting impairment substances


Operating and environmental conditions			
Type	VABF-S1-1-R...	VABF-S1-2-R...	LR-ZP-...-3
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	–	–
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	–	–
Input pressure 1	[MPa] [bar] [psi]	0.05 ... 1 +0.5 ... +10 7.25 ... 145	0.05 ... 1 +0.5 ... +10 7.25 ... 145
Ambient temperature	[°C]	-5 ... +50	-5 ... +50
Certification	–	–	UL – Recognized (OL)

Product weight			
Type	VABF-S1-1-R...	VABF-S1-2-R...	LR-ZP-...-3
Regulated port	1 2 4 2 and 4	640 g 640 g 640 g 920 g	1190 g 1230 g 1230 g 1990 g
			1220 g 1220 g 1220 g 1770 g

Accessories

Dimensions

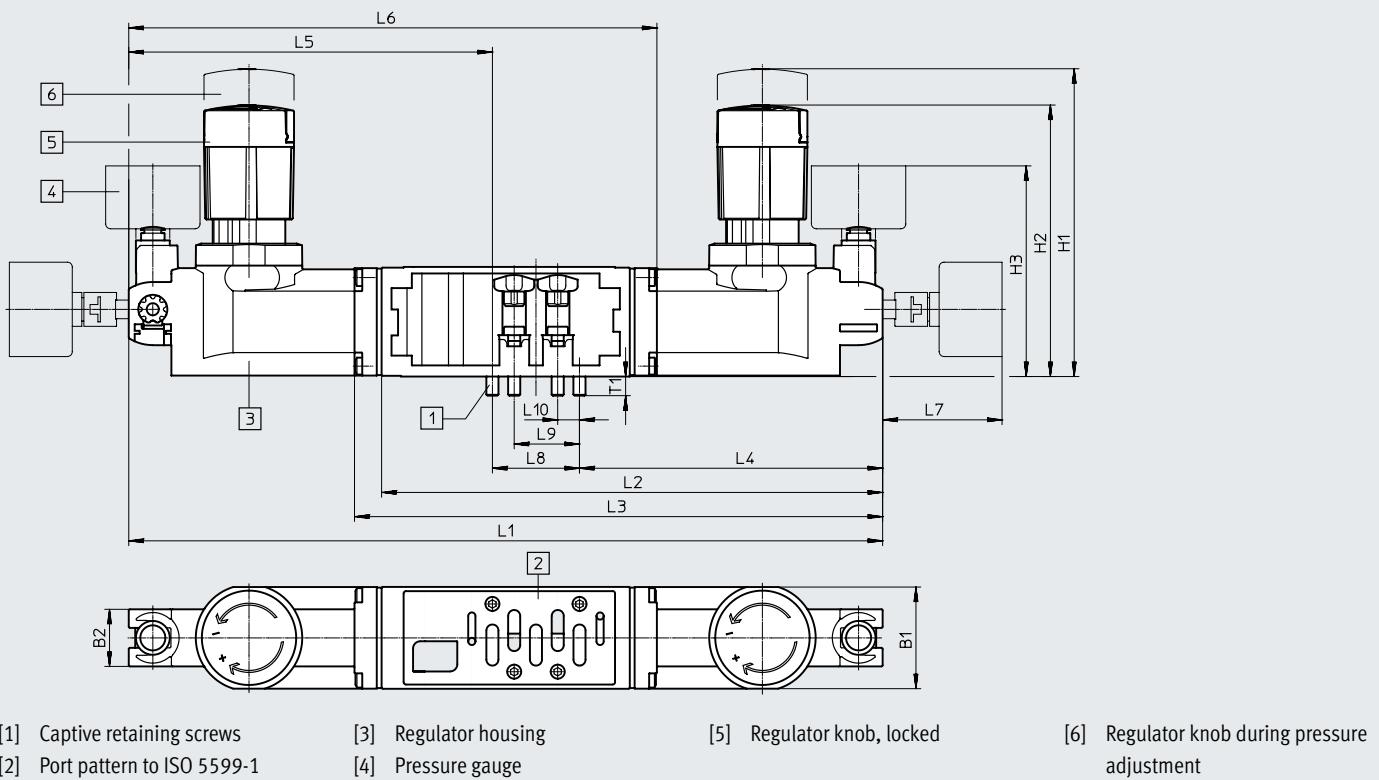VABF-S1-1..., VABF-S1-2-...

Download CAD data → www.festo.com


Type	B1	B2	H1	H2	H3	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	T1
Regulator plate, width 42 mm																
VABF-S1-1-R1...	42.1	23.6	115	112	87.1	—	207.1	—	125.3	—	—	49.4	36	27	9	7.9
VABF-S1-1-R2...						—	—	216.2	125.3	—	—					
VABF-S1-1-R3...						—	—	—	125.3	150.3	216.1					
VABF-S1-1-R4...						311.6	—	—	—	—	—					
VABF-S1-1-R5...						311.6	—	—	—	—	—					
VABF-S1-1-R6...						—	—	216.2	125.3	—	—					
VABF-S1-1-R7...						—	—	—	125.3	150.3	216.1					
Regulator plate, width 52 mm																
VABF-S1-2-R1...	54	23.6	182	167	94.4	—	250.2	—	152.2	—	—	49.4	48	38	12	10
VABF-S1-2-R2...						—	—	264.2	152.2	—	—					
VABF-S1-2-R3...						—	—	—	152.2	180.2	264.2					
VABF-S1-2-R4...						380.4	—	—	—	—	—					
VABF-S1-2-R5...						380.4	—	—	—	—	—					
VABF-S1-2-R6...						—	—	264.2	152.2	—	—					
VABF-S1-2-R7...						—	—	—	152.2	180.2	264.2					

Accessories

Dimensions

Download CAD data → www.festo.com

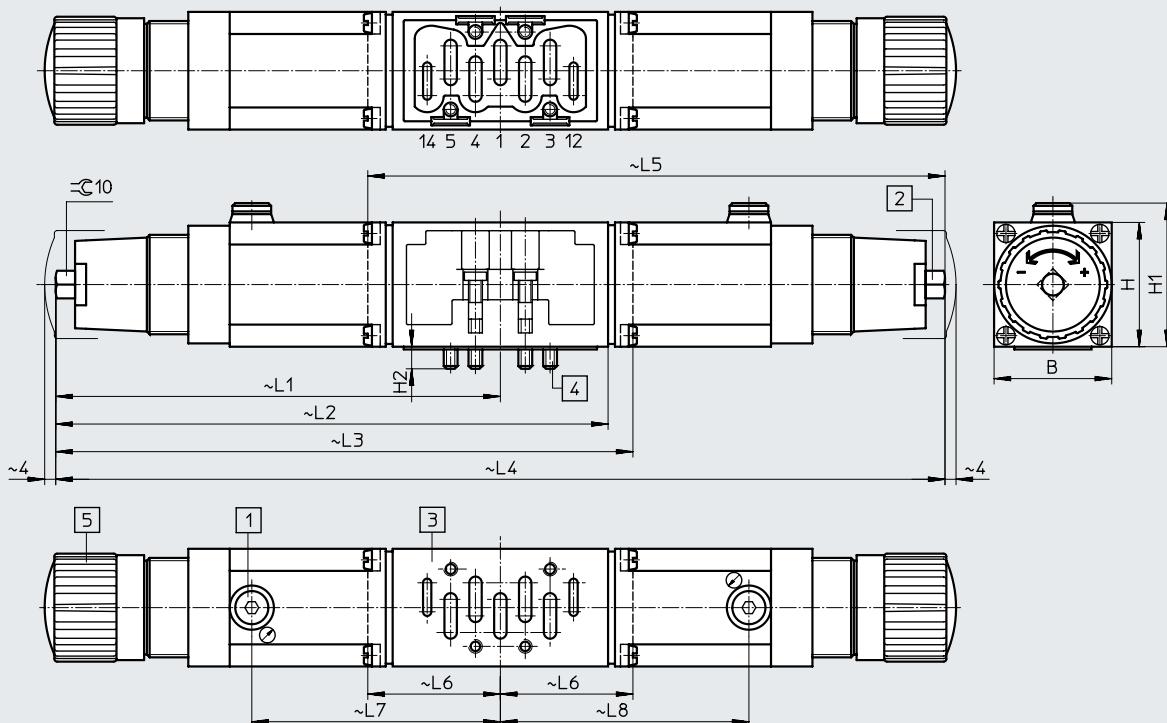LR-ZP-...-3



[1] Pressure gauge connection

G1/8

[2] Adjusting screw

[3] Port pattern to ISO 5599-1

[4] Captive retaining screws



[5] Rotary knob

Type	B	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8
Regulator plate, width 65 mm												
LR-ZP-P-D-3	70	63	65	14	201.5	-	274	-	-	-	119	-
LR-ZP-B-D-3					201.5	-	-	-	274	72.5	-	119
LR-ZP-A-D-3					201.5	-	-	403	-	-	119	119
LR-ZP-A/B-D-3					201.5	260	-	-	-	-	119	-








Flow rate q_n as a function of output pressure p_2

LR-ZP-A-D-3, LR-ZP-B-D-3, LR-ZP-A/B-D-3

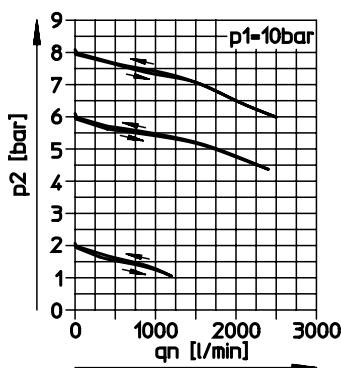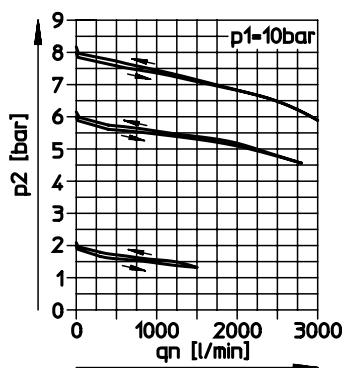LR-ZP-P-D-3



Accessories

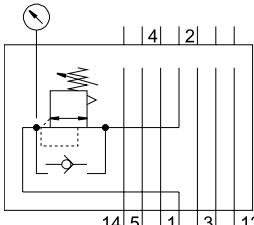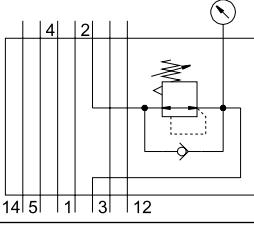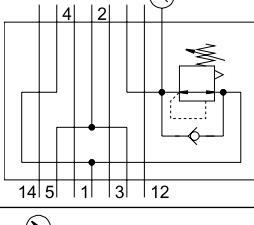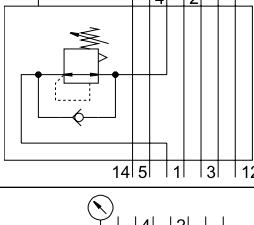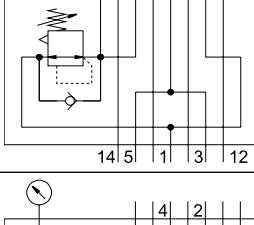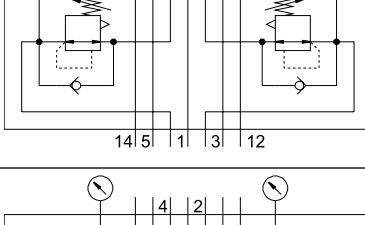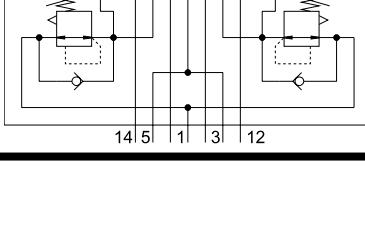Ordering data	Regulated port	Regulator	Control range	Part no.	Type
Regulator plate, width 42 mm					
	1	P	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546817	VABF-S1-1-R1C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546818	VABF-S1-1-R1C2-C-10
	2	B	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546821	VABF-S1-1-R2C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546822	VABF-S1-1-R2C2-C-10
	2, reversible	B	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546827	VABF-S1-1-R6C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546828	VABF-S1-1-R6C2-C-10
	4	A	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546819	VABF-S1-1-R3C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546820	VABF-S1-1-R3C2-C-10
	4, reversible	A	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546829	VABF-S1-1-R7C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546830	VABF-S1-1-R7C2-C-10
	2 and 4	AB	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546823	VABF-S1-1-R4C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546824	VABF-S1-1-R4C2-C-10
	2 and 4, reversible	AB	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	546825	VABF-S1-1-R5C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	546826	VABF-S1-1-R5C2-C-10

Accessories

Ordering data	Regulated port	Regulator	Control range	Part no.	Type
Regulator plate, width 52 mm					
	1	P	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555757	VABF-S1-2-R1C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555758	VABF-S1-2-R1C2-C-10
	2	B	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555759	VABF-S1-2-R2C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555760	VABF-S1-2-R2C2-C-10
	2, reversible	B	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555767	VABF-S1-2-R6C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555768	VABF-S1-2-R6C2-C-10
	4	A	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555761	VABF-S1-2-R3C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555762	VABF-S1-2-R3C2-C-10
	4, reversible	A	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555769	VABF-S1-2-R7C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555770	VABF-S1-2-R7C2-C-10
	2 and 4	AB	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555763	VABF-S1-2-R4C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555764	VABF-S1-2-R4C2-C-10
	2 and 4, reversible	AB	0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	555765	VABF-S1-2-R5C2-C-6
			0.05 ... 1 MPa 0.5 ... 10 bar 7.25 ... 145 psi	555766	VABF-S1-2-R5C2-C-10




Accessories

Ordering data		Regulated port	Regulator	Control range	Part no.	Type
Regulator plate, width 65 mm						
	1	P	0 ... 12 bar	35968	LR-ZP-P-D-3	
	2	B	0.5 ... 12 bar	35426	LR-ZP-B-D-3	
	4	A	0.5 ... 12 bar	35971	LR-ZP-A-D-3	
	2, 4	AB	0.5 ... 12 bar	35429	LR-ZP-A/B-D-3	









Ordering data – Accessories	Width	Weight [g]	Part no.	Type
Pressure gauge for intermediate pressure regulator plates LR-ZP	65 mm	64.5	345395	MA-40-16-1/8

Note: This product corresponds to ISO 1179-1 and ISO 228-1.




Accessories

Ordering data	Description	Voltage	Cable length [m]	Part no.	Type
Solenoid coil MSF					
	Solenoid coil	12 V DC	-	34410	MSFG-12-OD
		24 V DC and 42 V AC, 50 ... 60 Hz	-	34411	MSFG-24/42-50/60-OD
		42 V DC	-	34413	MSFG-42-OD
		24 V AC	-	34415	MSFW-24-5 0/60-OD
		48 V AC, 50 ... 60 Hz	-	34418	MSFW-48-5 0/60-OD
		110 V AC, 50 ... 60 Hz and 120 V AC, 60 Hz	-	34420	MSFW-110-5 0/60-OD
		230 V AC, 50 ... 60 Hz and 240 V AC, 60 Hz	-	34422	MSFW-230-5 0/60-OD
		240 V AC, 50 ... 60 Hz	-	34424	MSFW-240-5 0/60-OD
	Solenoid coil with socket MSSD	12 V DC	-	4526	MSFG-12
		24 V DC and 42 V AC, 50 ... 60 Hz	-	4527	MSFG-24/42-5 0/60
		24 V AC	-	4534	MSFW-24-5 0/60
		110 V AC, 50 ... 60 Hz and 120 V AC, 60 Hz	-	6720	MSFW-110-5 0/60
		230 V AC, 50 ... 60 Hz and 240 V AC, 60 Hz	-	4540	MSFW-230-5 0/60
	Solenoid coil for ATEX environment	24 V DC	1	8059804	VACF-B-K1-1-1-EX4-M
			5	8059805	VACF-B-K1-1-5-EX4-M
		24 V AC, 50 ... 60 Hz	1	8059808	VACF-B-K1-1A-1-EX4-M
		110 V AC, 50 ... 60 Hz	1	8059811	VACF-B-K1-16B-1-EX4-M
			5	8059812	VACF-B-K1-16B-5-EX4-M
		230 V AC, 50 ... 60 Hz	1	8059809	VACF-B-K1-3A-1-EX4-M
			5	8059810	VACF-B-K1-3A-5-EX4-M
Solenoid coil MSN1					
	Solenoid coil	24 V DC	-	123060	MSN1G-24DC-OD
		12 V DC and 24 V AC, 50 ... 60 Hz	-	170152	MSN1W-24AC/12DC
		110 V AC, 50 ... 60 Hz	-	123061	MSN1W-110AC-OD
		230 V AC, 50 ... 60 Hz	-	123062	MSN1W-230AC-OD

Accessories

Ordering data		Description		Cable length [m]	Part no.	Type	
Electrical accessories for solenoid coil MSF							
	Angled socket 	Screw terminal Insulation displacement technology	Cable fitting Pg9	–	34431	MSSD-F	
			Cable fitting M16	–	59710	MSSD-F-M16	
			Cable fitting M16	–	192746	MSSD-F-S-M16	
	PUR cable sheath, connection technology M12x1 A-coded 	24 AC/DC 110 AC/DC	<ul style="list-style-type: none"> Signal status indication Protective circuit 	0.3	3679773	NEBV-B2W3F-P-K-0.3-N-M12W3	
				0.6	3679774	NEBV-B2W3F-P-K-0.6-N-M12W3	
		24 AC/DC 230 AC/DC		–	3579463	NEBV-B2W3-K-0.3-N-M12W3	
				0.3	3579464	NEBV-B2W3-K-0.6-N-M12W3	
		PUR cable sheath PVC cable sheath	24 V DC 230 V AC	Signal status indication	0.6	3679778	NEBV-B2W3F-P-K-0.6-N-LE3
					3579468	NEBV-B2W3-K-0.6-N-LE3	
					10	193458	KMF-1-24DC-10-LED
					2.5	30935	KMF-1-24DC-2.5-LED
					5	30937	KMF-1-24DC-5-LED
	Illuminating seal 	12 ... 24 V DC 230 V DC/V AC	Signal status indication	–	19143	MF-LD-12-24DC	
				–	19144	MF-LD-230AC	
		PUR cable sheath PVC cable sheath	24 AC/DC 230 AC/DC	Signal status indication	0.6	3679776	NEBV-A1W3F-P-K-0.6-N-LE3
					0.6	3579466	NEBV-A1W3-K-0.6-N-LE3
			24 V DC 230 V AC	Signal status indication	2.5	30931	KMC-1-24DC-2.5-LED
					5	30933	KMC-1-24DC-5-LED
					10	193459	KMC-1-24DC-10-LED
	Illuminating seal 	12 ... 24 V DC 230 V DC/V AC	Signal status indication	–	30932	KMC-1-230AC-2.5	
				–	30934	KMC-1-230AC-5	
		24 V DC 230 V AC	Signal status indication	–	19145	MC-LD-12-24DC	
				–	19146	MC-LD-230AC	
Electrical accessories for valves with square plug type B to industry standard							
	Angled socket 	Via screw terminals With insulation displacement connection	Cable fitting M16	–	539710	MSSD-F-M16	
			Cable fitting Pg9	–	★ 34431	MSSD-F	
			Cable fitting M16	–	192746	MSSD-F-S-M16	
	PVC cable sheath 	24 V DC 230 V AC	Signal status indication	2.5 m	★ 30935	KMF-1-24DC-2.5-LED	
				5 m	30937	KMF-1-24DC-5-LED	
				10 m	193458	KMF-1-24-10-LED	
	Illuminating seal 	24 V DC	Signal status indication	–	19143	MF-LD-12-24DC	

Accessories

Ordering data		Description	Part no.	Type
Electrical accessories for valves with central plug				
	Angled socket, M12, 4-pin, type A, screw terminal		12956	SIE-WD-TR
	Modular system for a choice of connecting cables → Internet: nebu	0.1 ... 30 m	–	NEBU-...
	Connecting cable, straight socket, M12x1, 5-pin, open cable end, 4-wire	2.5	550326	NEBU-M12G5-K-2.5-LE4
		5	541328	NEBU-M12G5-K-5-LE4
	Connecting cable, angled socket, M12x1, 5-pin, open cable end, 4-wire	2.5	550325	NEBU-M12W5-K-2.5-LE4
		5	541329	NEBU-M12W5-K-5-LE4
Pressure gauge				
	With cartridge connector, for pressure regulator	Display range 0 ... 16 bar Display range 0 ... 10 bar	543487 543488	PAGN-26-16-P10 PAGN-26-10-P10
Seal				
	Enables the valves with central plug M12, 3-pin, to be mounted on the sub-bases of the valve terminal VTS/VTSA-F		571343	VABD-S2-1-S-C
Inscription label				
	Inscription label for valves, pack size 24		161937	IBS-9x17
	Clip-on inscription label holder for valve cap, for valves with central plug M12, 3-pin		540888	ASCF-T-S6
Manual override				
	For manual override, non-detenting or covered	For valves with square plug type B to industry standard	8049538	VAMC-B10-20-CH2-S
	Cover cap for manual override, non-detenting	For valves with central plug M12, 3-pin	541010	VAMC-S6-CH
	Cover cap for manual override, concealed	For valves with central plug M12, 3-pin	541011	VAMC-S6-CS
	Heavy-duty cover cap for manual override, non-detenting, detenting via accessory	For valves with central plug M12, 3-pin	4105147	VAMC-B-S6-CTR
	Tool for manual override	For MN1H/MFH valves For heavy-duty cover cap, detenting position	157651 1662543	AHB-MD/MF/MV AHB-MEB-B