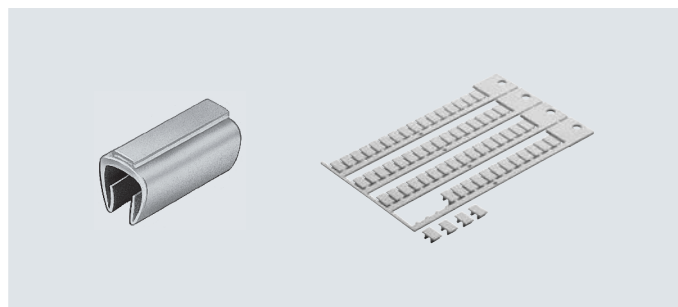


Data sheet

Inscription label KM-BZ, IBS, KMC, MH, ASLR

Inscription labels for identification, can be used in holders or carriers on suitably equipped components.



General technical data		KM-BZ	MH	IBS	KMC/F
Type					
Type of mounting		Inscription is pressed onto a cable	Pressed into inscription label holders or suitable slots on the components		
Labelling		The inscription label holder itself is not labelled. The inscription consists of an insertable label or paper/cardboard strips.		By the user directly on the inscription label	
Cable diameter	[mm]	5 ... 8	-		
Product weight	[g]	-	7	-	-

General technical data		ASLR-C-E4	ASLR-D-L1	ASLR-L-423	ASLR-L-55	ASLR-LS6-2016	ASLR-LX4-612-P240
Type							
Designation element		-	-	-	-	-	Device and location identification
Designation element		-	-	-	-	-	Individual mounting
Size		-	-	-	-	-	6x12.5 mm
Design type		-	-	-	-	-	Version X4
Type of mounting		-	-	-	-	-	Can be pressed in manually
Labelling		-	-	-	-	-	Provided by the customer
Labelling area		-	-	-	-	-	4.9 mm x 11.4 mm
Labelling technology		-	-	-	-	-	Printer from PHOENIX CONTACT such as THERMOMARK, BLUEMARK or TOPMARK
Application information		-	-	-	-	-	Printing on frame and as double label possible
Pack size		-	-	-	-	-	240
Information about pack size		-	-	-	-	-	10 frames with 24 pieces each
Product weight	[g]	-	1	-	-	-	0.1

Data sheet










Operating and environmental conditions						
Type	ASLR-C-E4	ASLR-D-L1	ASLR-L-423	ASLR-L-55	ASLR-L-S6-2016	ASLR-L-X4-612-P240
Ambient temperature [°C]	–	–	–	–	–	–40 ... +85
Storage temperature [°C]	–	–	–	–	–	–40 ... +85
Corrosion resistance class CRC ¹⁾	–	2	4	0	0	–
Fire-tested	–	–	–	UL94 V-2	–	UL94 V-0

- 1) Corrosion resistance class CRC 0 to Festo standard FN 940070
 No corrosion stress. Applies to small, visually unimportant standards-based parts such as threaded pins, circlips and clamping sleeves which are usually only available on the market in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.
 Corrosion resistance class CRC 2 to Festo standard FN 940070
 Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.
 Corrosion resistance class CRC 4 to Festo standard FN 940070
 Particularly high corrosion stress. Outdoor exposure under extreme corrosive conditions. Parts exposed to aggressive media, e.g. in the chemical or food industries. Such applications may need to be safeguarded by means of special testing (→ also FN 940082), using appropriate media.

Materials					
Type	KM-BZ	MH	IBS	IBS-8x20	KMC/F
Label	–	PC	PA	PA	PA
Note on materials	–	–	–	RoHS-compliant	–

Materials						
Type	ASLR-C-E4	ASLR-D-L1	ASLR-L-423	ASLR-L-55	ASLR-L-S6-2016	ASLR-L-X4-612-P240
Label	–	–	PC	PA	–	PC
Label holder	–	PP	–	–	–	–
Colour	–	–	–	–	–	White
Note on materials	RoHS-compliant	RoHS-compliant	RoHS-compliant	RoHS-compliant	RoHS-compliant	RoHS-compliant
	–	–	Free of copper and PTFE	–	–	–

Data sheet

Ordering data	Description	Dimensions (HxW) [mm]	Scope of delivery	Part no.	Type
	Inscription label for attachment to a cable	11x20	1	33361	KM-BZ
	Inscription label for pressing into a holder	4.5x9	80 (number per frame)	197259	MH-BZ-80X
		6x10	64 (number per frame)	18576	IBS-6x10
		8x20	20 (number per frame)	539388	IBS-8x20
		9x17	24 (number per frame)	161937	IBS-9x17
		9x20	20 (number per frame)	18182	IBS-9x20
	Inscription label for pressing into a holder	11/8x17	35 (number per frame)	33362	KMC/F/V-BZ-35X
	Inscription label for pressing into a holder	6x15	200 pieces	565306	ASLR-C-E4
	Inscription label for pressing into a holder The inscription label is made up of two parts and can be divided into two smaller units if required.	6x12.5	240 pieces	8087174	ASLR-L-X4-612-P240
	Inscription label	–	1000 pieces	574590	ASLR-L-55
	Inscription label for insertion in label holder	4x23	–	541598	ASLR-L-423
	Inscription label, labelled, for sticking (self-adhesive) on the component • 4 inscription labels, duct 1/3/5 • 4 inscription labels, duct 1 • 4 inscription labels, duct 3/5	20x16	3x4 pieces	8003303	ASLR-L-S6-2016
	Holder for an inscription label and covering for the manual override	–	10	570818	ASLR-D-L1

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalnepantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us



www.festo.com/socialmedia



www.festo.com

Subject to change