

Round cylinders CRDSNU

FESTO



Key features

Their applications

Reliable components need to be fully functional and operational, even in harsh operating conditions. The aim is to maximise availability of machinery while minimising downtimes. Stainless-steel cylinders are therefore used in applications where the surface finish of normal pneumatic drives would not be able to withstand the surrounding media. However, designing a corrosion-resistant system involves more than simply selecting a suitable steel; it also requires the selection of a matching concept for mounting components and accessories.

Application example:

The atmosphere in the maturing cellar of a cheese factory consists of an unpleasant mix of ammonia, lactic acid and 98% humidity.

Our strength

Festo's stainless-steel cylinders are characterised by resistant materials, such as 1.4301 and 1.4401. These popular high-alloy, stainless austenitic chrome-nickel and chrome-nickel-molybdenum steels protect against chemical or electrochemical stress as well as damage to the surface materials caused by cleaning agents or disinfectants. These groups of materials are particularly resistant to uniform surface corrosion and offer increased protection against pitting and crevice corrosion.

The benefits to you

Festo's worldwide service network ensures optimum availability of stainless-steel cylinders. As well as a comprehensive range of standards-based cylinders to DIN ISO 15552 and 6432, we also offer a range of matching mounting components and accessories. The stainless-steel cylinders are assembled with grease that is compliant with NSF-H1 and wipers in accordance with BGVV (Federal Institute for Risk Assessment) guidelines. This means that they are suitable for use in the food zone. We will be pleased to provide you with further information about future additions to our stainless-steel range. Just get in touch with us.

Good to know

For applications in harsh environments, you can rely on our years of experience in stainless steel. Our experts will answer any questions you might have about surface finishes and chemical resistance.

Resistance

Complete resistance to pitting and crevice corrosion is not always possible, even with ideal application parameters. The following parameters increase the pitting effect of chloride ions:

- Concentration of chloride ions
- Duration of contact
- Temperature
- Decreasing pH value

It must therefore be ensured during design, assembly and operation that all parts of the machinery can be properly cleaned to avoid an accumulation of chloride ions.

Selected sealing materials ensure very high resistance to a wide range of chemical compounds. Further information on media resistance can be obtained on the Internet at www.festo.com.

Various types of contamination of machines make cleaning processes necessary in many industry sectors. The degree of cleaning required ranges from wiping the machinery with a dry cloth to wet cleaning to foam cleaning with different exposure times and concentrations.

It is therefore impossible to make a general recommendation on compatibility.



Wet cleaning







Foam cleaning

Key features

Variants

CRDSNU Basic version	CRDSNU-S2: Through piston rod	CRDSNU-MQ: Short end cap without swivel mounting	CRDSNU-MG/CRDSNU-B-MG: Bearing cap without mounting thread
-------------------------	----------------------------------	---	---



Further variants


Symbol	Key features	Description
	S2 Through piston rod	For working at both ends with the same force in the forward and return stroke, for attaching external stops
	S6 Heat-resistant seals	Temperature resistance up to max. 120 °C
	K2 Extended male piston rod thread	–
	K3 Female piston rod thread	–
	K5 Custom piston rod thread	Metric standard thread to ISO
	K8 Extended piston rod	–
	A1 Wiper variant	Increased chemical resistance: Wiper made from fluoro rubber
	A2 Wiper variant	Hard wiper: Cylinder with hard wiper seal for dust, particles and viscous media
	A3 Wiper variant	Unlubricated operation: Cleaning processes degrease the piston rod. A special piston rod seal permits a longer service life compared to the standard seal.
	TT Low temperature	Temperature resistance down to max. -40 °C

Cushioning types

	Cushioning P	Cushioning PPS	Cushioning PPV
Operating mode	• The drive is fitted with polymer elastic end-position cushioning	• The drive is fitted with self-adjusting end-position cushioning	• The drive is fitted with adjustable end-position cushioning
Application	• Small loads • Low speeds • Low impact energies	• Small to medium loads • Low to medium speeds • Medium impact energies	• Medium to large loads • High speeds • High impact energies
Benefits	• No adjustment required • Saves time	• No adjustment required • Saves time • Powerful	• Very powerful

Peripherals overview

CRDSNU-12 ... 25-...

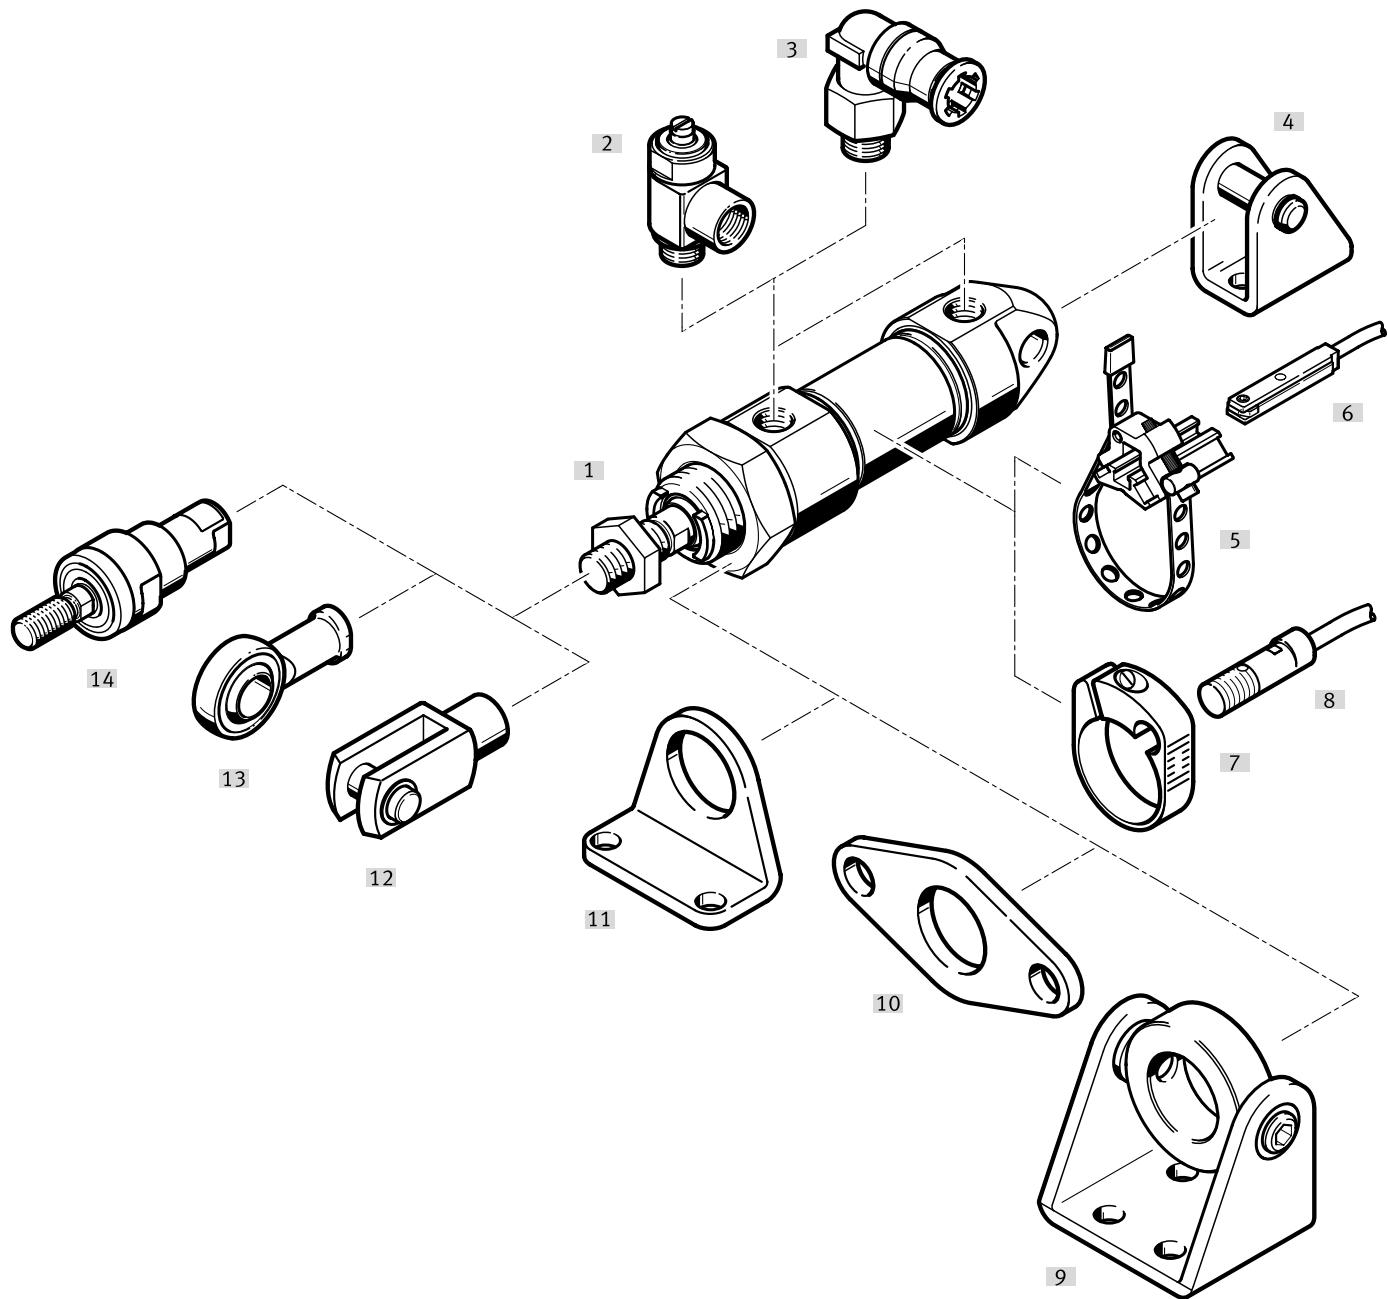


Peripherals overview

Mounting attachments and accessories	Description	CRDSNU-		CRDSNU-B		→ Page/Internet
		Basic version	MQ	MG	MG	
[1] Standards-based cylinder CRDSNU-12 ... 25-...						
[2] One-way flow control valve CRGRLA	For regulating speed	■	■	■	■	40
[3] Push-in fitting CRQS	For connecting tubing with standard O.D.	■	■	■	■	qs
[4] Clevis foot CRLBN	For end caps	■	—	■	■	38
[5] Mounting kit SMBR	For proximity switches CRSMT-8	■	■	■	■	40
[6] Proximity switch CRSMT-8M	<ul style="list-style-type: none"> • Design for T-slot • For position sensing 	■	■	■	■	39
[7] Mounting kit CRSMBR	For proximity switches CRSMEO-4	■	■	■	■	39
[8] Proximity switch CRSMEO-4	<ul style="list-style-type: none"> • Round design • For position sensing 	■	■	■	■	39
[9] Swivel mounting CRSBN	For bearing caps	■	■	—	—	36
[10] Flange mounting CRFBN	For bearing caps	■	■	—	—	37
[11] Foot mounting CRHBN	For bearing caps	■	■	—	—	36
[12] Rod clevis CRSG	Permits a swivelling movement of the cylinder in one plane	■	■	■	■	39
[13] Rod eye CRSGS	With spherical bearing	■	■	■	■	39
[14] Self-aligning rod coupler CRFK	To compensate for radial and angular deviations	■	■	■	■	39

Peripherals overview

CRDSNU-12 ... 25-...-S2 – Through piston rod

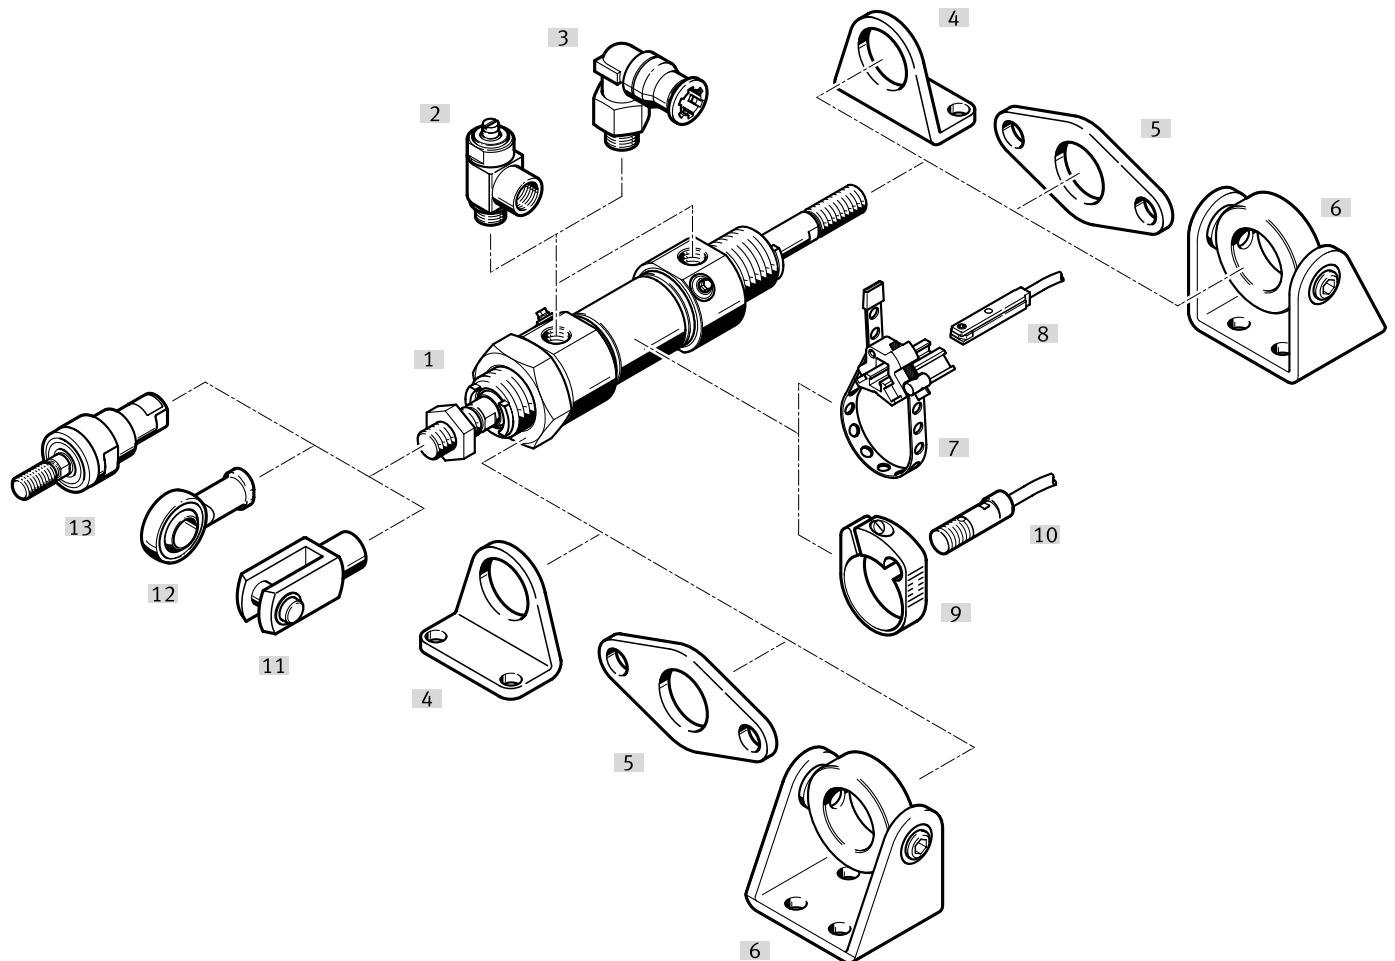

Peripherals overview

Mounting attachments and accessories	Description	→ Page/Internet
[1] Standards-based cylinder with through piston rod CRDSNU-12 ... 25-...-S2		
[2] One-way flow control valve CRGRLA	For regulating speed	40
[3] Push-in fitting CRQS	For connecting tubing with standard O.D.	qs
[4] Foot mounting CRHBN	For bearing and end caps	36
[5] Flange mounting CRFBN	For bearing and end caps	37
[6] Swivel mounting CRSBN	For bearing and end caps	36
[7] Mounting kit SMBR	For proximity switches CRSMT-8	40
[8] Proximity switch CRSMT-8M	<ul style="list-style-type: none"> • Design for T-slot • For position sensing 	39
[9] Mounting kit CRSMBR	For proximity switches CRSMEO-4	39
[10] Proximity switch CRSMEO-4	<ul style="list-style-type: none"> • Round design • For position sensing 	39
[11] Rod clevis CRSG	Permits a swivelling movement of the cylinder in one plane	39
[12] Rod eye CRSGS	With spherical bearing	39
[13] Self-aligning rod coupler CRFK	To compensate for radial and angular deviations	39


Type codes

001	Series	
CRDSNU	Round cylinder, double-acting, stainless steel	
002	Piston diameter [mm]	
12	12	
16	16	
20	20	
25	25	
003	Stroke range [mm]	
...	1 ... 500	
004	Cushioning	
P	Elastic cushioning rings/plates on both sides	
PPS	Pneumatic cushioning, self-adjusting at both ends	
PPV	Pneumatic cushioning, adjustable at both ends	
005	Position sensing	
A	For proximity sensor	
006	Cylinder end cap	
	Standard	
MQ	Short end cap without swivel mounting	
MG	Bearing cap without mounting thread	
007	Scraper variant	
	None	
A1	Increased chemical resistance	
A2	Hard scraper	
A3	For unlubricated operation	

008	Piston rod type	
	At one end	
S2	Through piston rod	
009	Piston rod thread type	
	Male thread	
K3	Female thread	
010	Custom thread	
"M10"K5	M10	
011	Piston rod extension	
	None	
...K8	1 ... 500 mm	
012	Temperature resistance	
	Standard	
S6	Heat-resistant seals max. 120 °C	
013	Temperature range	
	Standard	
TT	-40 ... +80°C	
014	EU certification	
	None	
EX4	II 2GD	

Datasheet

P cushioning



- - Diameter
12 ... 25 mm
- - Stroke length
1 ... 500 mm
Longer strokes on request
- - Spare parts service



General technical data

Piston diameter	12	16	20	25
Pneumatic connection	M5	M5	G1/8	G1/8
Piston rod thread	M6	M6	M8	M10x1.25
Design	Piston			
	Piston rod			
	Cylinder barrel			
Cushioning	P	Elastic cushioning rings/plates at both ends		
	PPV	–	Cushioning, adjustable at both ends	
	PPS	–	Cushioning, self-adjusting at both ends	
Cushioning length	PPV [mm]	–	15	17
	PPS [mm]	–	12	15
Position sensing	Via proximity switch			
Type of mounting	Via accessories			
	With male thread			
Mounting position	Any			

Operating conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)		
Operating pressure ¹⁾	[MPa]	0.1 ... 1	
	[bar]	1 ... 10	
	[psi]	14.5 ... 145	
Food safe ²⁾	→ Supplementary material information		

1) An increase in the minimum operating pressure is possible with variants

2) More information www.festo.com/sp → Certificates.

Environmental conditions

Standards-based cylinder	Basic type/A3	A1	TT	S6
Ambient temperature ¹⁾ [°C]	-20 ... +80	0 ... +80	-40 ... +80	0 ... +120
Corrosion resistance class CRC ²⁾	3 - High corrosion stress			

1) Note operating range of the proximity switches

2) More information: www.festo.com/x/topic/crc

Datasheet

ATEX¹⁾	
ATEX category for gas	II 2G
Type of ignition protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of ignition protection for dust	Ex h IIIC T120°C Db
Explosion-proof ambient temperature	-20°C <= Ta <= +60°C
CE marking (see declaration of conformity)	To EU Explosion Protection Directive (ATEX)
Explosion protection certification outside the EU	EPL Gb (GB) EPL Db (GB)


1) Note the ATEX certification of the accessories.

Forces [N] and impact energy [J]				
Piston diameter	12	16	20	25
Theoretical force at 0.6 MPa (6 bar, 87 psi), advancing	68	121	188	295
Theoretical force at 0.6 MPa (6 bar, 87 psi), retracting	51	104	158	247
Impact energy in the end positions for P cushioning ¹⁾	0.07	0.15	0.20	0.30


1) The values are reduced by approx. 50% at an ambient temperature of 80°C

Weight [g]				
Piston diameter	12	16	20	25
Basic weight with 0 mm stroke	101	130	310	410
Additional weight per 10 mm stroke	4	5	7	11
Moving mass with 0 mm stroke	19	21	42	73
Additional mass per 10 mm stroke	2	2	4	6


Datasheet

Max. transverse force F_q as a function of projection l 

Basic version

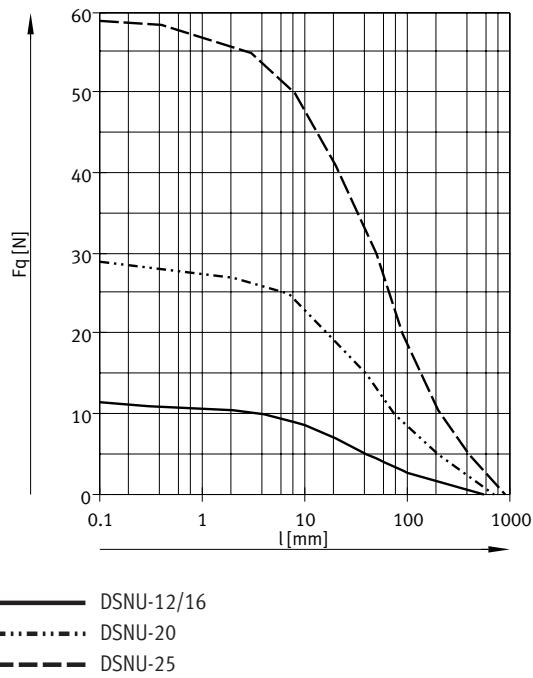


S2 – Through piston rod

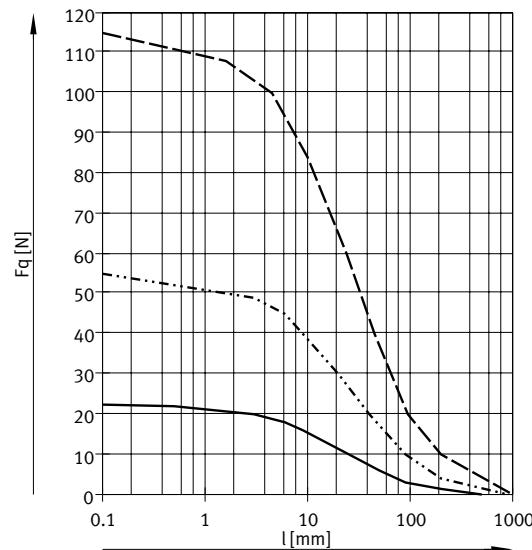

Materials

Sectional view

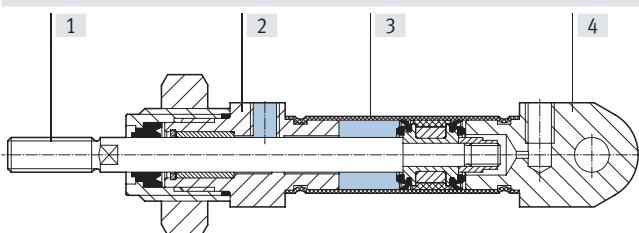

Standards-based cylinder	Basic version	A1	A3	TT	S6
[1] Piston rod	High-alloy stainless steel				
[2] Bearing cap	High-alloy stainless steel				
[3] Cylinder barrel	High-alloy stainless steel				
[4] End cap	High-alloy stainless steel				
- Seals	TPE-U (PUR) media seal (modified for resistance to hydrolysis and cleaning)	FPM	UHMW-PE	TPE-U (PUR) (suitable for low temperatures)	FPM
Note on materials	RoHS-compliant				
	-		Contains paint-wetting impairment substances		-
LABS (PWIS) conformity	VDMA 24364-B2-L	VDMA 24364-Zone III	VDMA 24364-B2-L		
Maritime classification ¹⁾	See certificate				


1) More information www.festo.com/sp → Certificates

Datasheet

Dimensions

Basic version

Download CAD data → www.festo.com

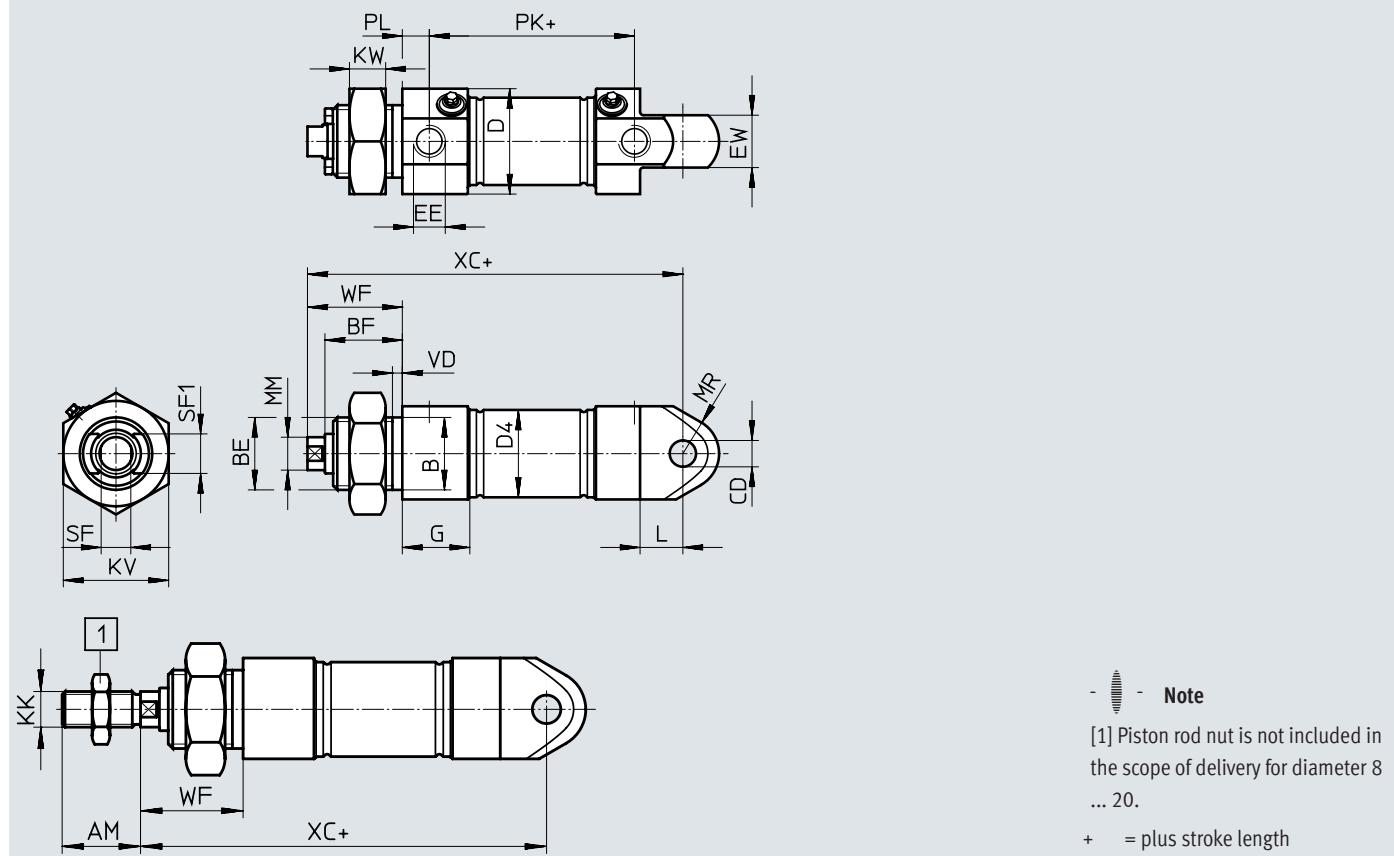

∅ [mm]	AM	B ∅ h9	BE	BF	CD ∅ H8	D ∅	D4 ∅
12	16	16	M16x1.5	18	6	20	13.3
16	16	16	M16x1.5	18	6	20	17.3
20	20	22	M22x1.5	20.7	8	30	21.3
25	22	22	M22x1.5	23.5	8	32	26.5


∅ [mm]	EE	EW	G	KK	KV	KW	L	MM ∅
12	M5	12	9.5	M6	24	8	10	6
16	M5	12	9.7	M6	24	8	10	6
20	G1/8	16	20.5	M8	32	11	13	8
25	G1/8	16	20.5	M10x1.25	32	11	13	10

∅ [mm]	MR	PL	SF	SF1	VD	WF	XC	±1
12	8	6	5	9	3.5	22	75	
16	8	6	5	9	3.5	22	82	
20	11	8.2	7	12	3.5	24	95	
25	11	8.2	9	12	3.5	28	104	


Datasheet

Dimensions


MQ – Short end cap without swivel mounting

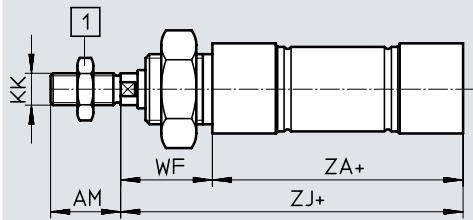Download CAD data → www.festo.com


MG – Bearing cap without mounting thread

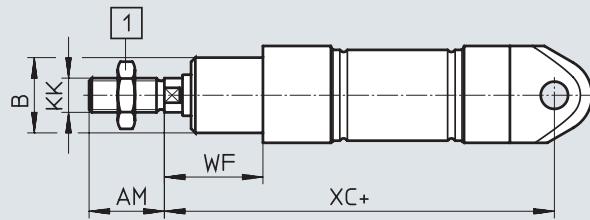


MQ-K3 – Short end cap without swivel mounting, with female piston rod thread

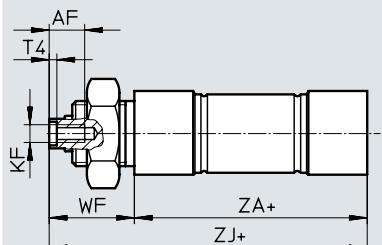


MG-K3 – Bearing cap without mounting thread, with female piston rod thread

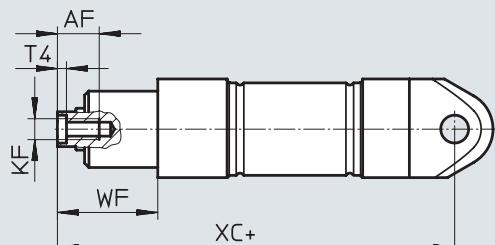

S2 – Through piston rod

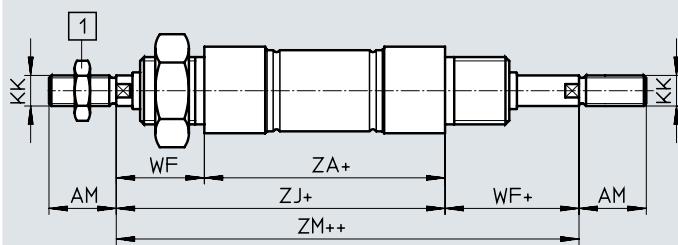

S2-K3 – Through piston rod, with female thread

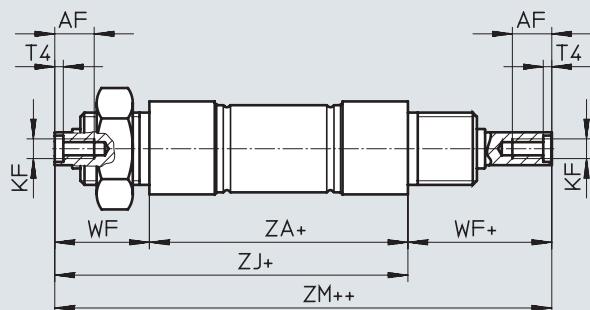

Note

[1] Piston rod nut is not included in the scope of delivery for diameter 8 ... 20.

+ = plus stroke length

++ = plus 2x stroke length

\varnothing [mm]	AF	AM	B \varnothing h9	KF	KK
12	–	16	16	–	M6
16	–	16	16	–	M6
20	12	20	22	M4	M8
25	12	22	22	M6	M10x1.25


\varnothing [mm]	T4	WF	XC ±1	ZA	ZJ	ZM
12	–	22	75	50	72	95
16	–	22	82	56	78	101
20	2	24	95	68	92	117
25	2.6	28	104	69.5	97.5	126

Datasheet


Dimensions

Download CAD data → www.festo.com


K2 – Extended male piston rod thread

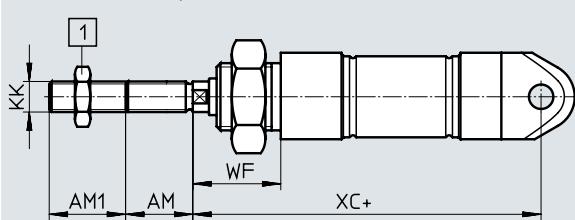


K3 – Female piston rod thread

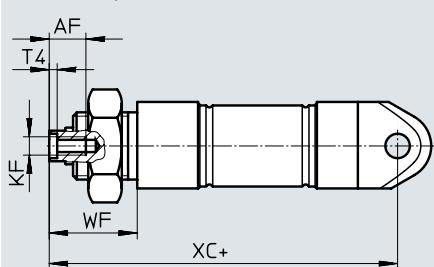


K5 – Custom piston rod thread

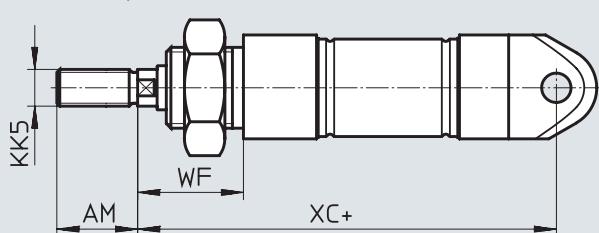


K8 – Extended piston rod

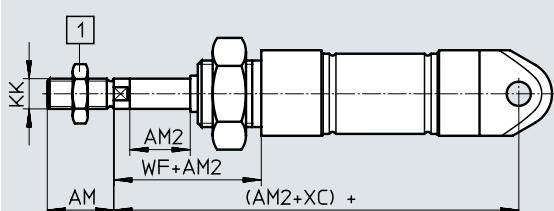

K3-K8 – Extended piston rod, with female thread

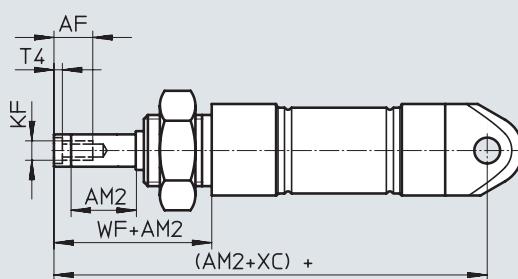

TT – Low temperature / A2 – Hard wiper

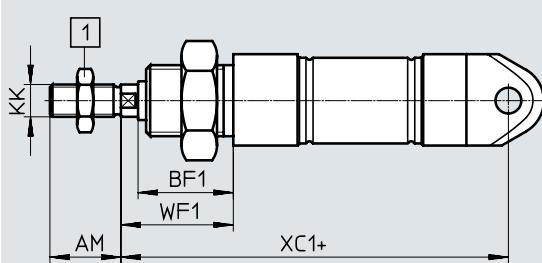

Note

[1] Piston rod nut is not included in the scope of delivery for diameter 8 ... 20.

+ = plus stroke length

Datasheet

Ø	AF	AM	AM1	AM2
[mm]			max.	max.
12	–	16	1 ... 20	1 ... 100
16	–	16	1 ... 20	1 ... 100
20	12	20	1 ... 25	1 ... 100
25	12	22	1 ... 35	1 ... 100

Ø	BF1	KF	KK	KK5
[mm]				
12	24	–	M6	–
16	24	–	M6	–
20	26.7	M4	M8	–
25	29.5	M6	M10x1.25	M10

Ø	T4	WF	WF1	XC	XC1
[mm]				±1	±1
12	–	22	28	75	81
16	–	22	28	82	88
20	2	24	30	95	101
25	2.6	28	34	104	110

Ordering data

Ordering data				
Type	Piston diameter [mm]	Stroke [mm]	P – A – Part no.	Elastic cushioning rings/plates With position sensing Type
	12	10	8152524	CRDSNU-12-10-P-A
		25	8152525	CRDSNU-12-25-P-A
		40	8152526	CRDSNU-12-40-P-A
		50	8152527	CRDSNU-12-50-P-A
		80	8152528	CRDSNU-12-80-P-A
		100	8152529	CRDSNU-12-100-P-A
	16	10	8152548	CRDSNU-16-10-P-A
		15	8152549	CRDSNU-16-15-P-A
		20	8152550	CRDSNU-16-20-P-A
		25	8152551	CRDSNU-16-25-P-A
		40	8152552	CRDSNU-16-40-P-A
		50	8152553	CRDSNU-16-50-P-A
		80	8152554	CRDSNU-16-80-P-A
		100	8152555	CRDSNU-16-100-P-A
	20	10	8152557	CRDSNU-20-10-P-A
		15	8152558	CRDSNU-20-15-P-A
		20	8152559	CRDSNU-20-20-P-A
		25	8152560	CRDSNU-20-25-P-A
		40	8152561	CRDSNU-20-40-P-A
		50	8152562	CRDSNU-20-50-P-A
		80	8152563	CRDSNU-20-80-P-A
		100	8152564	CRDSNU-20-100-P-A
	25	10	8152627	CRDSNU-25-10-P-A
		15	8152628	CRDSNU-25-15-P-A
		20	8152629	CRDSNU-25-20-P-A
		25	8152630	CRDSNU-25-25-P-A
		40	8152631	CRDSNU-25-40-P-A
		50	8152632	CRDSNU-25-50-P-A
		80	8152633	CRDSNU-25-80-P-A
		100	8152634	CRDSNU-25-100-P-A

Ordering data

Ordering data – Stocked parts			
Type [mm]	Piston diameter [mm]	Stroke [mm]	Part no. Type
	16	10	8073759 CRDSNU-B-16-10-P-A-MG-A1
		25	8073760 CRDSNU-B-16-25-P-A-MG-A1
		40	8073761 CRDSNU-B-16-40-P-A-MG-A1
		50	8073762 CRDSNU-B-16-50-P-A-MG-A1
		80	8073763 CRDSNU-B-16-80-P-A-MG-A1
		100	8073764 CRDSNU-B-16-100-P-A-MG-A1
		125	8073765 CRDSNU-B-16-125-P-A-MG-A1
		160	8073766 CRDSNU-B-16-160-P-A-MG-A1
		200	8073767 CRDSNU-B-16-200-P-A-MG-A1
	20	10	8073980 CRDSNU-B-20-10-PPS-A-MG-A1
		25	8073979 CRDSNU-B-20-25-PPS-A-MG-A1
		40	8073978 CRDSNU-B-20-40-PPS-A-MG-A1
		50	8073977 CRDSNU-B-20-50-PPS-A-MG-A1
		80	8073976 CRDSNU-B-20-80-PPS-A-MG-A1
		100	8073975 CRDSNU-B-20-100-PPS-A-MG-A1
		125	8073974 CRDSNU-B-20-125-PPS-A-MG-A1
		160	8073973 CRDSNU-B-20-160-PPS-A-MG-A1
		200	8073972 CRDSNU-B-20-200-PPS-A-MG-A1
	25	10	2159636 CRDSNU-B-25-10-PPS-A-MG-A1
		25	2159637 CRDSNU-B-25-25-PPS-A-MG-A1
		40	2159638 CRDSNU-B-25-40-PPS-A-MG-A1
		50	2159639 CRDSNU-B-25-50-PPS-A-MG-A1
		80	2159640 CRDSNU-B-25-80-PPS-A-MG-A1
		100	2159641 CRDSNU-B-25-100-PPS-A-MG-A1
		125	2159642 CRDSNU-B-25-125-PPS-A-MG-A1
		160	2159643 CRDSNU-B-25-160-PPS-A-MG-A1
		200	2159644 CRDSNU-B-25-200-PPS-A-MG-A1

-  - Note

The bearing cap on stocked parts is made of one piece.

When ordered using the modular product system, the bearing cap is made of two pieces, which makes it possible to exchange the wiper in the event of a repair.

Ordering data

Ordering table – Modular product system									
Size	12	16	20	25	Conditions	Code	Enter code		
Module no.	552787	552788	552789	552790					
Version	Stainless steel					CR			
Function	Standards-based cylinder, double-acting, to ISO 6432					DSNU			
Piston diameter [mm]	12	16	20	25		-...			
Stroke [mm]	1 ... 200		1 ... 320		1 ... 500	[1]	-...		
Cushioning	Elastic cushioning rings/plates at both ends				[10]	-P			
	-	Pneumatic cushioning, self-adjusting			[2] [8]	-PPS			
	-	-	Pneumatic cushioning, adjustable at both ends			-PPV			
Position sensing	Via proximity switch					-A			
Cylinder end cap	Short end cap without swivel mounting					-MQ			
	Bearing cap without mounting thread					-MG			
Wiper variant	Increased chemical resistance				[2]	-A1			
	Hard wiper				[2] [3] [9]	-A2			
	Unlubricated operation				[2]	-A3			
Piston rod type	Through piston rod				[3] [4]	-S2			
Extended male thread	Extended male piston rod thread								
	[mm]	1 ... 20	1 ... 25	1 ... 35		-...K2			
Female thread	Piston rod with female thread								
	-	-	(M4)	(M6)	[5]	-K3			
Custom thread	Custom piston rod thread								
	-	-	-	M10		-“...”K5			
Extended piston rod	[mm]	1 ... 100					-...K8		
Temperature resistance	Heat-resistant seals max. +120°C						-S6		
Low temperature	-	Seals and lubricating grease from -40°C ... +80 °C			[3] [6] [9]	-TT			
EU certification (ATEX)	II 2GD				[7]	-EX4			

[1] -... Longer strokes on request

[2] PPS, A1, A2, A3 Not with S6, TT

[3] A2, S2, TT Not with MG

[4] S2 Not with MQ

[5] K3 Not with K2, K5

[6] TT Not with S6

[7] EX4 Not with S6, TT

[8] PPS Not with MQ for piston diameter 16





[9] A2, TT Not with S2, K3

[10] P Not with B except for piston diameter 16

Key features

Variants

CRDSNU Basic version	CRDSNU-S2: Through piston rod	CRDSNU-MQ: Short end cap without swivel mounting	CRDSNU-MG: Bearing cap without mounting thread
-------------------------	----------------------------------	---	---



Further variants


Symbol	Key features	Description
	S2 Through piston rod	For working at both ends with the same force in the forward and return stroke, for attaching external stops
	S6 Heat-resistant seals	Temperature resistance up to max. 120 °C
	K2 Extended male piston rod thread	–
	K3 Female piston rod thread	–
	K5 Custom piston rod thread	Metric standard thread to ISO
	K8 Extended piston rod	–
	A1 Wiper variant	Increased chemical resistance
	A2 Wiper variant	Hard wiper: Cylinder with hard
	A3 Wiper variant	Unlubricated operation: Cleaning processes degrease the piston rod. A special piston rod seal permits a longer service life compared to the standard seal.
	TT Low temperature	Temperature resistance down to max. –40 °C

Cushioning types

	Cushioning P	Cushioning PPS	Cushioning PPV
Operating mode	• The drive is fitted with polymer elastic end-position cushioning	• The drive is fitted with self-adjusting end-position cushioning	• The drive is fitted with adjustable end-position cushioning
Application	• Small loads • Low speeds • Low impact energies	• Small to medium loads • Low to medium speeds • Medium impact energies	• Medium to large loads • High speeds • High impact energies
Benefits	• No adjustment required • Saves time	• No adjustment required • Saves time • Powerful	• Very powerful

Peripherals overview

CRDSNU-32 ... 100-...

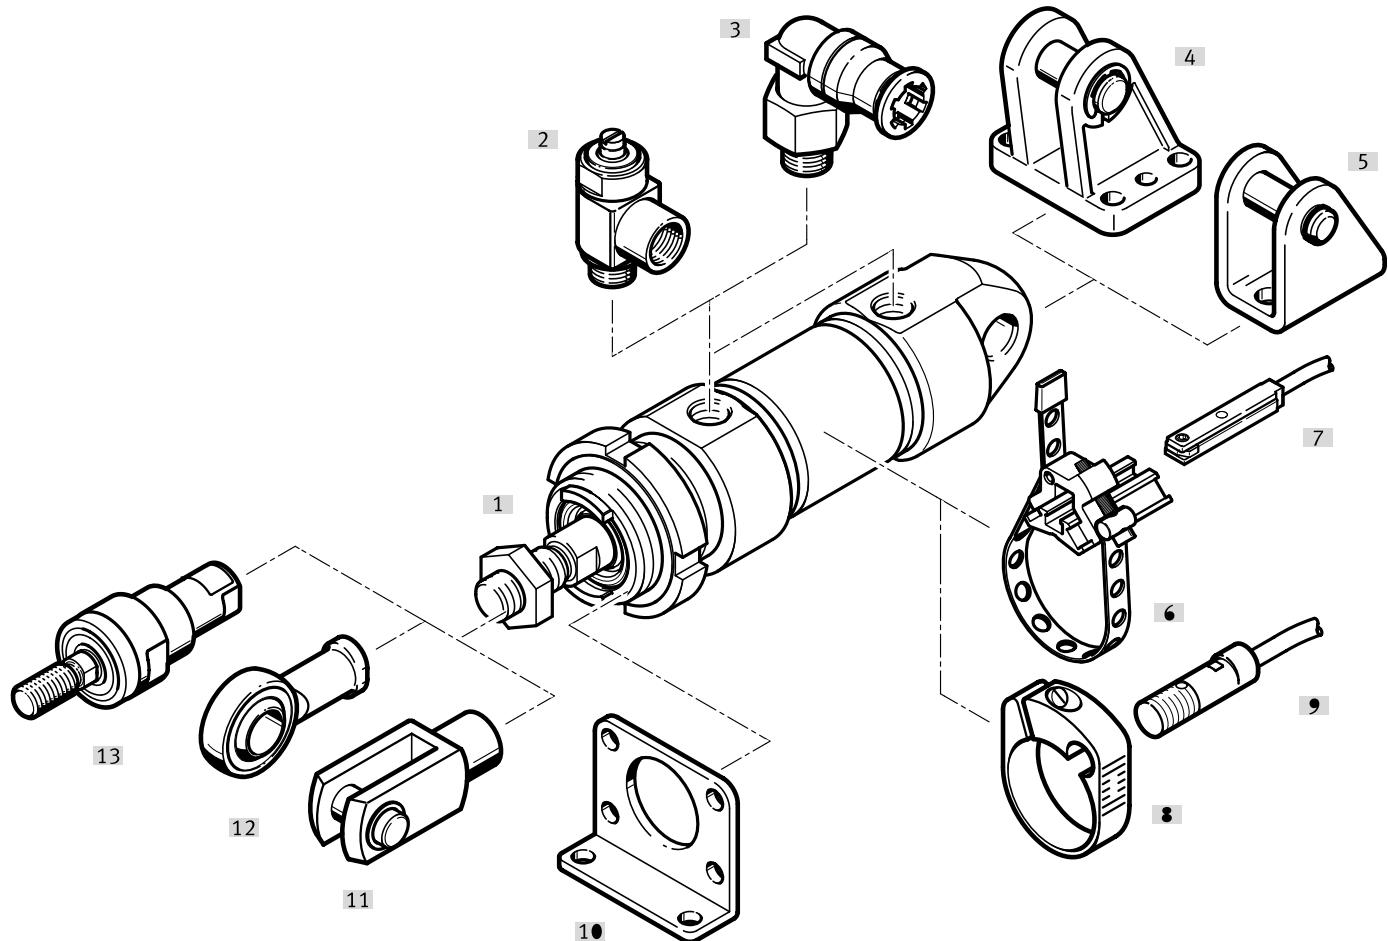


Peripherals overview

Mounting attachments and accessories	Description	CRDSNU-			→ Page/Internet
		Basic version	MQ	MG	
[1] Round cylinder CRDSNU-32 ... 100...					
[2] One-way flow control valve CRGRLA	For regulating speed	■	■	■	40
[3] Push-in fitting CRQS	For connecting tubing with standard O.D.	■	■	■	qs
[4] Clevis foot CRLBN	For end caps	■	-	■	38
[5] Clevis foot LBG	For end caps	■	-	■	38
[6] Mounting kit SMBR	For proximity switches CRSMT-8	■	■	■	40
[7] Proximity switch CRSMT-8M	<ul style="list-style-type: none"> • Design for T-slot • For position sensing 	■	■	■	39
[8] Mounting kit CRSMBR	For proximity switches CRSMEO-4	■	■	■	39
[9] Proximity switch CRSMEO-4	<ul style="list-style-type: none"> • Round design • For position sensing 	■	■	■	39
[10] Flange mounting CRFV	<ul style="list-style-type: none"> • 1 included in the scope of delivery • For bearing caps 	■	■	-	37
[11] Rod clevis CRSG	Permits a swivelling movement of the cylinder in one plane	■	■	■	39
[12] Rod eye CRSGS	With spherical bearing	■	■	■	39
[13] Self-aligning rod coupler CRFK	To compensate for radial and angular deviations	■	■	■	39

Round cylinders CRDSNU, stainless steel

Peripherals overview

CRDSNU-32 ... 100-...-S2 – Through piston rod

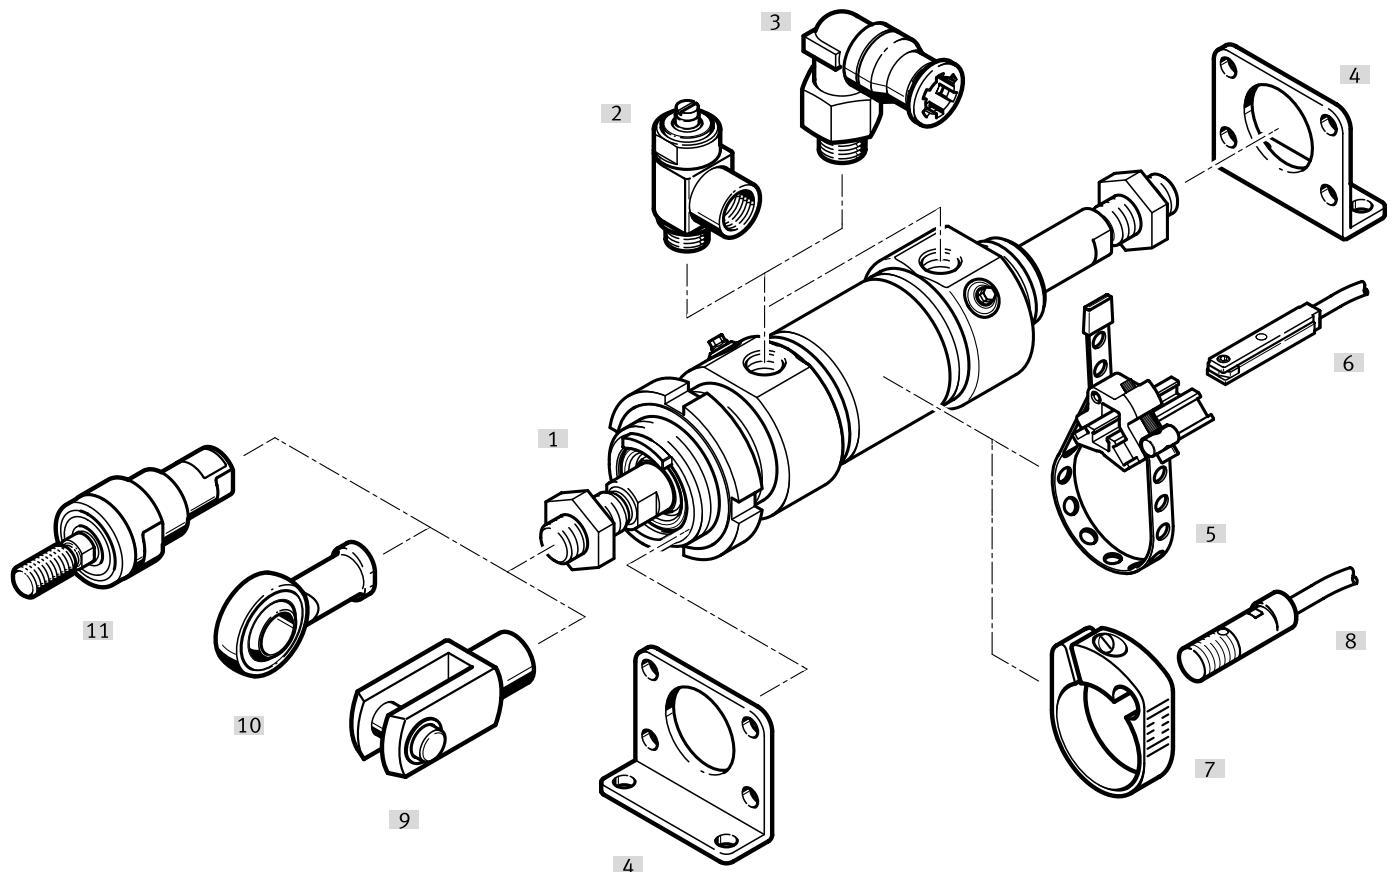

Peripherals overview


Mounting attachments and accessories	Description	→ Page/Internet
[1] Round cylinders with through piston rod CRDSNU-32 ... 100-...-S2		
[2] One-way flow control valve CRGRLA	For regulating speed	40
[3] Push-in fitting CRQS	For connecting tubing with standard O.D.	qs
[4] Foot mounting CRH	<ul style="list-style-type: none"> • 2 included in the scope of delivery • For bearing and end caps 	36
[5] Mounting kit SMBR	For proximity switches CRSMT-8	40
[6] Proximity switch CRSMT-8M	<ul style="list-style-type: none"> • Design for T-slot • For position sensing 	39
[7] Mounting kit CRSMBR	For proximity switches CRSMEO-4	39
[8] Proximity switch CRSMEO-4	<ul style="list-style-type: none"> • Round design • For position sensing 	39
[9] Rod clevis CRSG	Permits a swivelling movement of the cylinder in one plane	39
[10] Rod eye CRSGS	With spherical bearing	39
[11] Self-aligning rod coupler CRFK	To compensate for radial and angular deviations	39

Type codes

001	Series	008	Piston rod type
CRDSNU	Round cylinder, double-acting, stainless steel		
002	Piston diameter		
32	32		At one end
40	40	S2	Through piston rod
50	50		
63	63	009	Piston rod thread extension
80	80		None
100	100	...K2	1 ... 70 mm
003	Stroke	010	Piston rod thread type
...	1 ... 500		Male thread
004	Cushioning	K3	Female thread
P	Elastic cushioning rings/plates on both sides	011	Custom thread
PPS	Pneumatic cushioning, self-adjusting at both ends	"M10"K5	M10
PPV	Pneumatic cushioning, adjustable at both ends	"M12"K5	M12
005	Position sensing	"M16"K5	M16
A	For proximity sensor	"M20"K5	M20
006	Cylinder end cap	012	Piston rod extension
	Standard		None
MQ	Short end cap without swivel mounting	...K8	1 ... 500 mm
MG	Bearing cap without mounting thread	013	Temperature resistance
007	Scraper variant		Standard
	None	S6	Heat-resistant seals max. 120 °C
A1	Increased chemical resistance	014	Temperature range
A2	Hard scraper		Standard
A3	For unlubricated operation	TT	-40 ... +80°C
		015	EU certification
			None
		EX4	II 2GD

Datasheet

P cushioning



- - Diameter
32 ... 100 mm
- - Stroke length
1 ... 500 mm
Longer strokes on request
- - Spare parts service



General technical data

Piston diameter	32	40	50	63	80	100
Pneumatic connection	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2
Piston rod thread	M10x1.25	M12x1.25	M16x1.5	M16x1.5	M20x1.5	M20x1.5
Design	Piston					
	Piston rod					
	Cylinder barrel					
Cushioning	P	Elastic cushioning rings/plates at both ends				
	PPV	Cushioning, adjustable at both ends				
	PPS	Cushioning, self-adjusting at both ends				
Cushioning length	PPV [mm]	14	18	20	21	31
	PPS [mm]	14	18	20	21	31
Position sensing	Via proximity switch					
Type of mounting	Via accessories					
	With male thread					
Mounting position	Any					

Operating conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]					
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)					
Operating pressure ¹⁾	[MPa]	0.1 ... 1				
	[bar]	1 ... 10				
	[psi]	14.5 ... 145				
Food safe ²⁾	→ Supplementary material information					

1) An increase in the minimum operating pressure is possible with variants

2) More information www.festo.com/sp → Certificates.

Environmental conditions

Standards-based cylinder	Basic type/A3	A1	TT	S6
Ambient temperature ¹⁾	[°C]	-20 ... +80	0 ... +80	-40 ... +80
Corrosion resistance class CRC				
Ø 32 ... 63		3 - High corrosion stress ²⁾		
Ø 80 ... 100		4 - Particularly high corrosion stress. ²⁾		

1) Note operating range of the proximity switches

2) More information: www.festo.com/x/topic/crc

Datasheet

ATEX ¹⁾	
ATEX category for gas	II 2G
Type of ignition protection for gas	Ex h IIC T4 Gb
ATEX category for dust	II 2D
Type of ignition protection for dust	Ex h IIIC T120°C Db
Explosion-proof ambient temperature	-20°C <= Ta <= +60°C
CE marking (see declaration of conformity)	To EU Explosion Protection Directive (ATEX)
Explosion protection certification outside the EU	EPL Gb (GB) EPL Db (GB)


1) Note the ATEX certification of the accessories.

Forces [N] and impact energy [J]						
Piston diameter	32	40	50	63	80	100
Theoretical force at 0.6 MPa (6 bar, 87 psi), advancing	483	754	1178	1870	3016	4712
Theoretical force at 0.6 MPa (6 bar, 87 psi), retracting	415	633	990	1682	2721	4418
Impact energy in the end positions for P cushioning ¹⁾	0.4	0.7	1.0	1.3	1.8	2.5


1) The values are reduced by approx. 50% at an ambient temperature of 80°C

Weight [g]						
Piston diameter	32	40	50	63	80	100
Basic weight with 0 mm stroke	670	1327	2020	2943	5891	8527
Additional weight per 10 mm stroke	15	24	40	44	68	75
Moving mass with 0 mm stroke	118	232	416	472	860	1018
Additional mass per 10 mm stroke	9	16	25	25	39	39


Datasheet

Max. transverse force F_q as a function of projection l 

Basic version

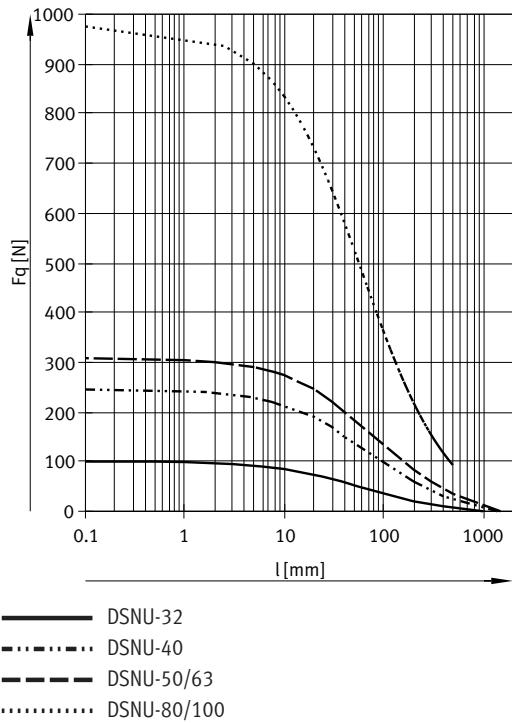


S2 – Through piston rod

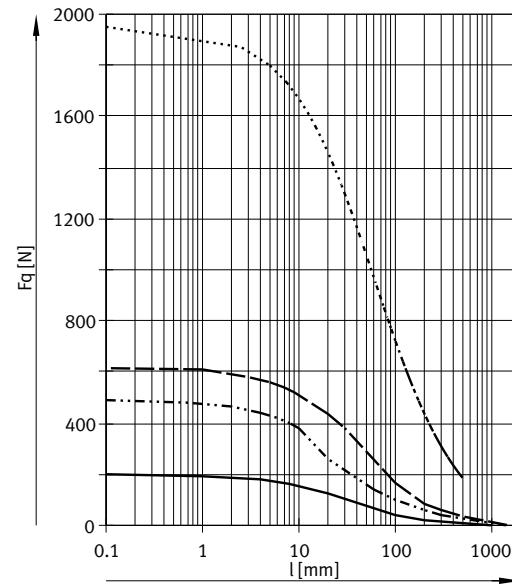

Materials

Sectional view

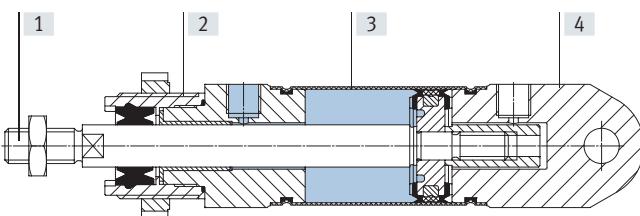


Standards-based cylinder	Basic version	A1	A3	TT	S6
[1] Piston rod	High-alloy stainless steel				
[2] Bearing cap	High-alloy stainless steel				
[3] Cylinder barrel	High-alloy stainless steel				
[4] End cap	High-alloy stainless steel				
– Seals	TPE-U (PUR) media seal (modified for resistance to hydrolysis and cleaning)	FPM	UHMW-PE	TPE-U (PUR) (suitable for low temperatures)	FPM
Note on materials	RoHS-compliant	–	Contains paint-wetting impairment substances	–	
LABS (PWIS) conformity	VDMA 24364-B2-L	VDMA 24364-Zone III	VDMA 24364-B2-L		

Datasheet

Dimensions

Basic version

Download CAD data → www.festo.com

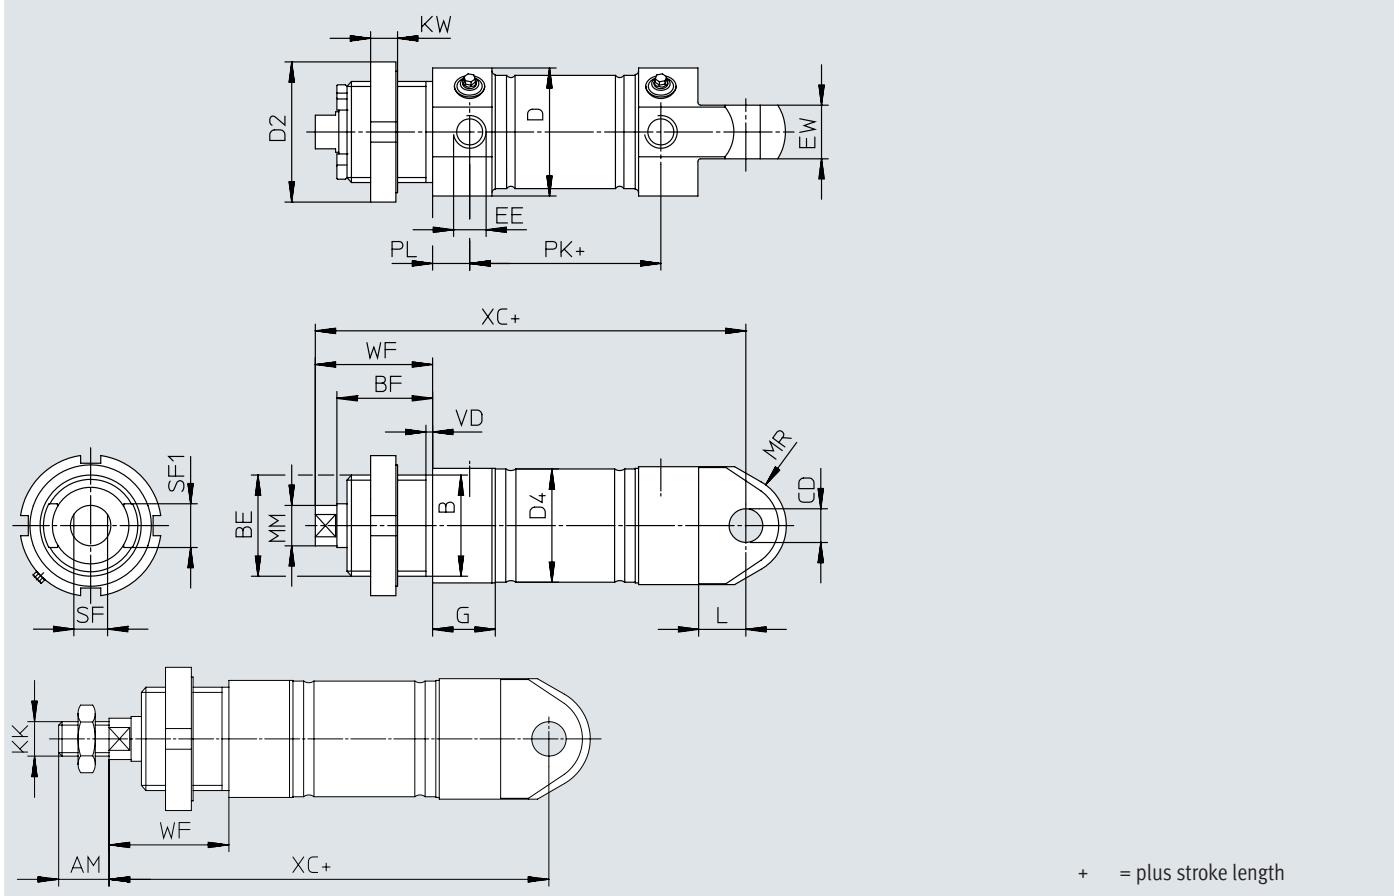

Datasheet

\varnothing [mm]	AM	B \varnothing h9	BE	BF	CD \varnothing H8	D \varnothing	D2 \varnothing	D4 \varnothing
32	22	30	M30x1.5	28.4	10	38	42	33.6
40	24	38	M38x1.5	32	12	49	50	41.6
50	32	45	M45x1.5	36.4	16	57	60	52.4
63	32	45	M45x1.5	36.4	16	70	60	65.4
80	40	50	M50x2	42.2	20	88	75	82.8
100	40	50	M50x2	42.2	20	108	75	102.8


\varnothing [mm]	EE	EW	G	KK	KW	L	MM \varnothing
32	G1/8	16	18.6	M10x1.25	8	14	12
40	G1/4	18	24.7	M12x1.25	10	16	16
50	G1/4	21	24.4	M16x1.5	10	17	20
63	G3/8	21	27.4	M16x1.5	10	17	20
80	G3/8	35	32.4	M20x1.5	13	22	25
100	G1/2	35	32.4	M20x1.5	13	22	25

\varnothing [mm]	MR	PL	SF	SF1	VD	WF	XC ± 1
32	15	9	10	13	4.3	34	118
40	19	12	13	18	4.3	39	140
50	22.5	12	17	22	4.3	44	147
63	22.5	13	17	22	4.3	44	156
80	30	16	22	22	4.5	50	193
100	36	16	22	22	4.5	50	196

Datasheet


Dimensions

MQ – Short end cap without swivel mounting

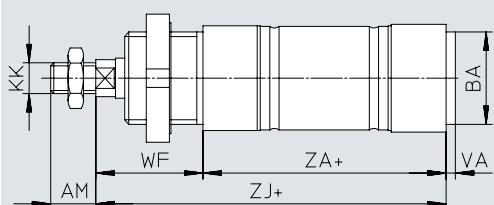


Download CAD data → www.festo.com


MG – Bearing cap without mounting thread

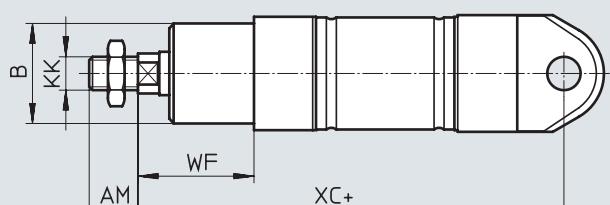


MQ-K3 – Short end cap without swivel mounting, with female piston rod thread

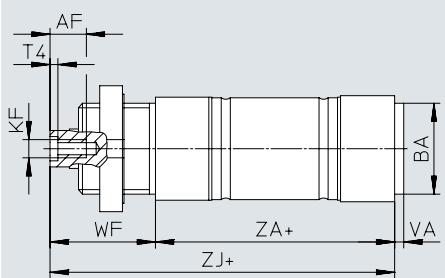


MG-K3 – Bearing cap without mounting thread, with female piston rod thread

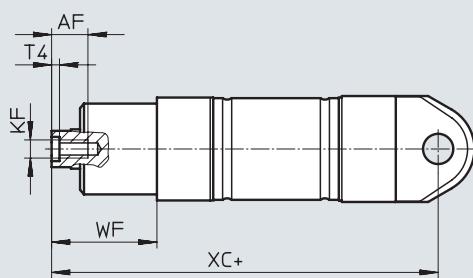

S2 – Through piston rod

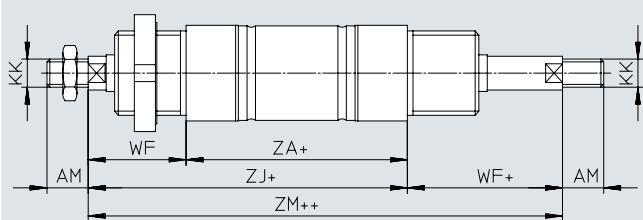

S2-K3 – Through piston rod, with female thread

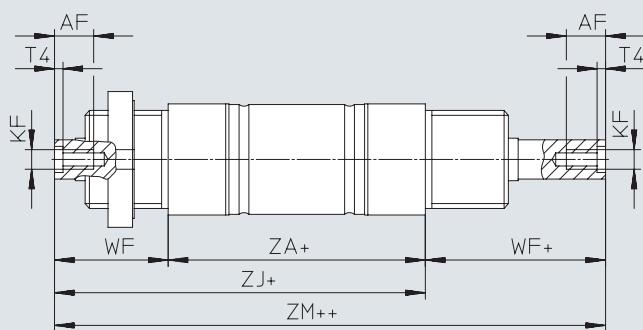

+ = plus stroke length

++ = plus 2x stroke length

Datasheet

Ø [mm]	AF	AM	B Ø h9	BA h9	KF	KK
32	12	22	30	30	M6	M10x1.25
40	12	24	38	38	M8	M12x1.25
50	16	32	45	45	M10	M16x1.5
63	16	32	45	45	M10	M16x1.5
80	20	40	50	45	M12	M20x1.5
100	20	40	50	55	M12	M20x1.5


Ø [mm]	T4	VA	WF	XC ±1	ZA	ZJ	ZM
32	2.6	3	34	118	69.5	104	138
40	3.3	4	39	140	84.6	124	163
50	4.7	4	44	147	86.2	130	175
63	4.7	4	44	156	94.2	139	183
80	6.1	4	50	193	120.7	171	221
100	6.1	4	50	196	123.7	174	224

Datasheet


Dimensions

Download CAD data → www.festo.com


K2 – Extended male piston rod thread

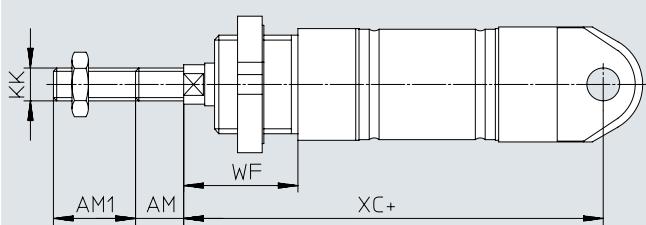


K3 – Female piston rod thread

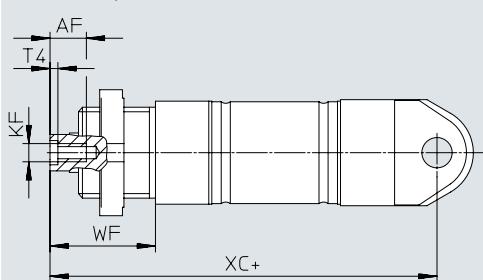


K5 – Custom piston rod thread

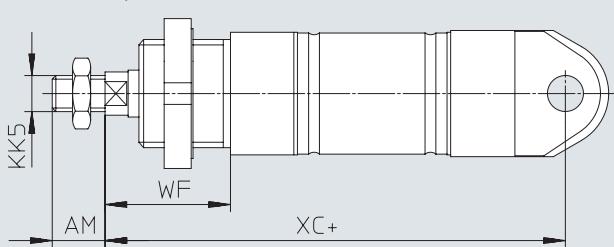


K8 – Extended piston rod

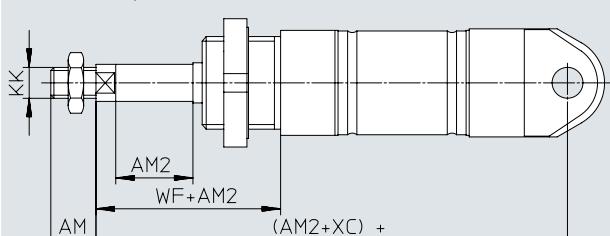

K3-K8 – Extended piston rod, with female thread

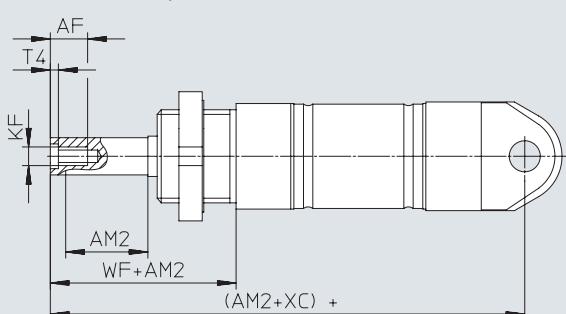

TT – Low temperature / A2 – Hard wiper

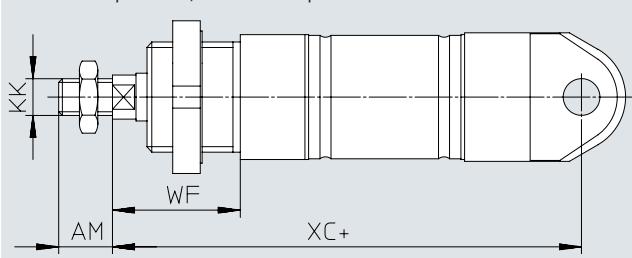

+ = plus stroke length

Datasheet

∅ [mm]	AF	AM	AM1	AM2	KF
			max.	max.	
32	12	22	1 ... 35	1 ... 500	M6
40	12	24	1 ... 35	1 ... 500	M8
50	16	32	1 ... 70	1 ... 500	M10
63	16	32	1 ... 70	1 ... 500	M10
80	20	40	1 ... 70	1 ... 500	M12
100	20	40	1 ... 70	1 ... 500	M12

∅ [mm]	KK	KK5	T4	WF	XC
					±1
32	M10x1.25	M10	2.6	34	118
40	M12x1.25	M12	3.3	39	140
50	M16x1.5	M16	4.7	44	147
63	M16x1.5	M16	4.7	44	156
80	M20x1.5	M20	6.1	50	193
100	M20x1.5	M20	6.1	50	196

Ordering data

Ordering data		P – Elastic cushioning rings/plates A – With position sensing		
Type	Piston diameter [mm]	Stroke [mm]	Part no.	Type
	32	10	8152637	CRDSNU-32-10-P-A
		25	8152638	CRDSNU-32-25-P-A
		40	8152639	CRDSNU-32-40-P-A
		50	8152640	CRDSNU-32-50-P-A
		80	8152641	CRDSNU-32-80-P-A
		100	8152642	CRDSNU-32-100-P-A

Ordering data – Stocked parts				
Type	Piston diameter [mm]	Stroke [mm]	Part no.	Type
	32	10	2176399	CRDSNU-B-32-10-PPS-A-MG-A1
		25	2176400	CRDSNU-B-32-25-PPS-A-MG-A1
		40	2176401	CRDSNU-B-32-40-PPS-A-MG-A1
		50	2176402	CRDSNU-B-32-50-PPS-A-MG-A1
		80	2176403	CRDSNU-B-32-80-PPS-A-MG-A1
		100	2176404	CRDSNU-B-32-100-PPS-A-MG-A1
		125	2176405	CRDSNU-B-32-125-PPS-A-MG-A1
		160	2176406	CRDSNU-B-32-160-PPS-A-MG-A1
		200	2176407	CRDSNU-B-32-200-PPS-A-MG-A1
		40	8073989	CRDSNU-B-40-10-PPS-A-MG-A1
		25	8073988	CRDSNU-B-40-25-PPS-A-MG-A1
		40	8073987	CRDSNU-B-40-40-PPS-A-MG-A1
		50	8073986	CRDSNU-B-40-50-PPS-A-MG-A1
		80	8073985	CRDSNU-B-40-80-PPS-A-MG-A1
		100	8073984	CRDSNU-B-40-100-PPS-A-MG-A1
		125	8073983	CRDSNU-B-40-125-PPS-A-MG-A1
		160	8073982	CRDSNU-B-40-160-PPS-A-MG-A1
		200	8073981	CRDSNU-B-40-200-PPS-A-MG-A1

 - Note

The bearing cap on stocked parts is made of one piece.

When ordered using the modular product system, the bearing cap is made of two pieces, which makes it possible to exchange the wiper in the event of a repair.

Ordering data

Ordering table – Modular product system									
Size	32	40	50	63	80	100	Conditions	Code	Enter code
Module no.	552791	552792	552793	552794	8126418	8126417			
Version	Stainless steel							CR	CR
Function	Round cylinder, double-acting							DSNU	DSNU
Piston diameter [mm]	32	40	50	63	80	100		-...	
Stroke [mm]	1 ... 500						[1]	-...	
Cushioning	Elastic cushioning rings/plates at both ends							-P	
	Pneumatic cushioning, self-adjusting						[2]	-PPS	
	Pneumatic cushioning, adjustable at both ends							-PPV	
Position sensing	Via proximity switch							-A	-A
Cylinder end cap	Short end cap without swivel mounting							-MQ	
	Bearing cap without mounting thread							-MG	
Wiper variant	Increased chemical resistance						[2]	-A1	
	Hard wiper						[2] [3]	-A2	
	Unlubricated operation						[2]	-A3	
Piston rod type	Through piston rod						[3] [4]	-S2	
Extended male thread	Extended male piston rod thread								
	[mm]	1 ... 35	1 ... 70					-...K2	
Female thread	Piston rod with female thread								
	M6	M8	M10	M10	M12	M12	[5]	-K3	
Custom thread	Custom piston rod thread								
	M10	M12	M16	M16	M20	M20		-“...”K5	
Extended piston rod [mm]	1 ... 500							-...K8	
Temperature resistance	Heat-resistant seals max. +120 °C							-S6	
Low temperature	Seals and lubricating grease from -40 °C ... +80 °C						[3] [6]	-TT	
EU certification (ATEX)	II 2GD						[7]	-EX4	

- [1] -... Longer strokes on request
 [2] PPS, A1, A2, A3 Not with S6, TT
 [3] A2, S2, TT Not with MG
 [4] S2 Not with MQ
 [5] K3 Not with K2, K5
 [6] TT Not with S6
 [7] EX4 Not with S6, TT

Round cylinders CRDSNU

Accessories

Foot mounting CRHBN


Scope of delivery:

CRHBN-... x1: 1 foot

CRHBN-... x2: 2 feet, 1 nut

Material:

High-alloy steel

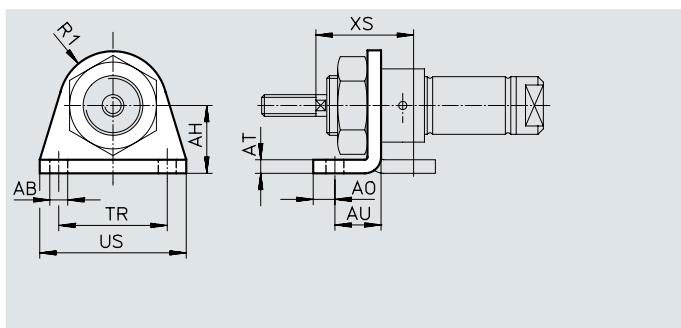

Dimensions and ordering data


For Ø [mm]	AB Ø	AH	AO	AT	AU	R1	TR	US	XS	CRC ¹⁾	Weight [g]	Part no.	Type
12	5.5	20	6	4	14	13	32	42	32	4	43	161866	CRHBN-12/16x1
16	5.5	20	6	4	14	13	32	42	32	4	107	162999	CRHBN-12/16x2
20	6.6	25	8	5	17	20	40	54	36	4	94	161867	CRHBN-20/25x1
25	6.6	25	8	5	17	20	40	54	40	4	236	162998	CRHBN-20/25x2

1) More information: www.festo.com/x/topic/crc

Foot mounting CRH

Material:

High-alloy steel

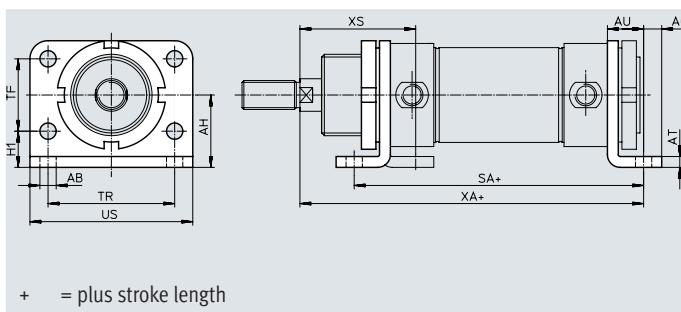

Dimensions and ordering data



For Ø [mm]	AB Ø	AH	AO	AT	AU	H1	SA	TF	TR	US	XA	XS	CRC ¹⁾	Weight [g]	Part no.	Type
32	7	28	7	4	14	14	124	28	52	66	148	48	4	237	162951	CRH-32
40	9	33	10	5	20	18	153	30	60	80	178	60	4	341	162952	CRH-40
50	9	40	10	6	20	20	160	40	70	90	190	64	4	559	162953	CRH-50
63	9	45	10	6	20	20	164	50	76	96	195	64	4	680	162954	CRH-63

1) More information: www.festo.com/x/topic/crc

Swivel mounting CRSBN

Material:

High-alloy steel

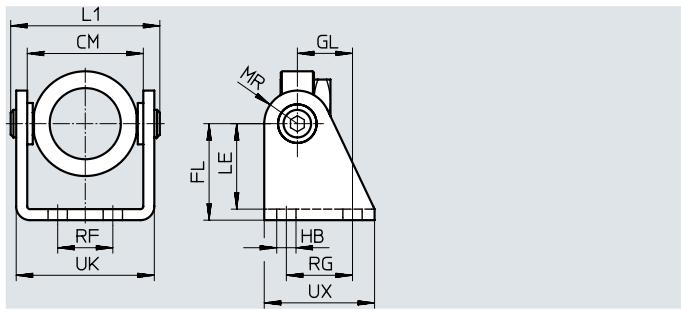

Dimensions and ordering data


For Ø [mm]	CM	FL	GL	HB Ø	L1	LE	MR	RF	RG	UK	UX	CRC ¹⁾	Weight [g]	Part no.	Type
20	38.1	35	20	7	55	31	12	20	24	50.1	40	4	230	552904	CRSBN-20/25
25															

1) More information: www.festo.com/x/topic/crc

Accessories

Flange mounting CRFBN

Material:
High-alloy steel

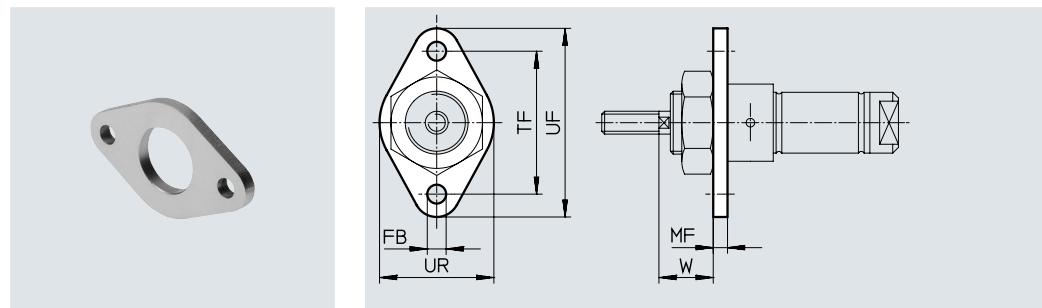


Dimensions and ordering data										
For Ø [mm]	FB Ø	MF	TF	UF	UR	W	CRC ¹⁾	Weight [g]	Part no.	Type
12, 16	5.5	4	40	53	30	18	4	26	161864	CRFBN-12/16
20	6.6	5	50	66	40	19	4	52	161865	CRFBN-20/25
25	6.6	5	50	66	40	23	4	52	161865	CRFBN-20/25

1) More information: www.festo.com/x/topic/crc

Flange mounting CRFV

Material:
High-alloy steel

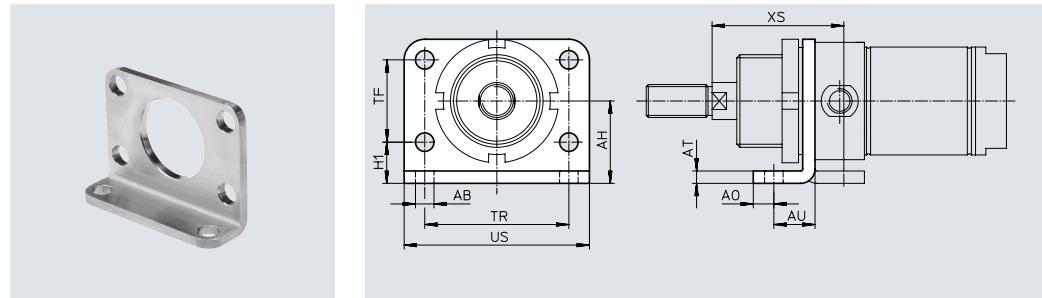

Dimensions and ordering data											
For Ø [mm]	AB Ø	AH	AO	AT	AU	H1	TF	TR	US	XS	CRC ¹⁾
											Weight [g]
32	7	28	7	4	14	14	28	52	66	48	4
40	9	33	10	5	20	18	30	60	80	60	4
50	9	40	10	6	20	20	40	70	90	64	4
63	9	45	10	6	20	20	50	76	96	64	4


1) More information: www.festo.com/x/topic/crc

Round cylinders CRDSNU

Accessories

Clevis foot CRLBN

Material:
High-alloy steel

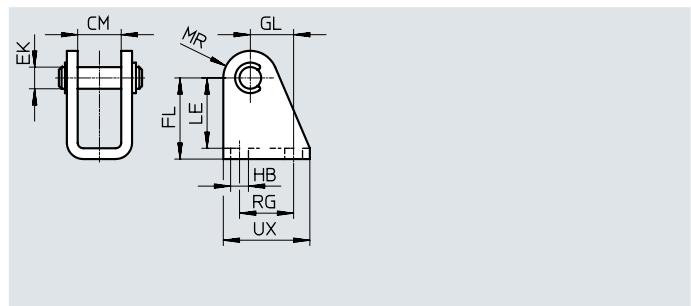

Dimensions and ordering data



For Ø [mm]	CM	EK Ø	FL	GL	HB	LE	MR	RG	UX	CRC ¹⁾	Weight [g]	Part no.	Type
12, 16	12.1	6	27 +0.3/-0.2	13	5.5	24	7	15	25	4	39	161862	CRLBN-12/16
20, 25	16.1	8	30 +0.4/-0.2	16	6.6	26	10	20	32	4	82	161863	CRLBN-20/25
32	16.1	10	35 +0.4/-0.2	18.5	6.6	31	11	24	35	4	106	195866	CRLBN-32
40	18.1	12	40 +0.4/-0.2	24.5	9	35	13	30	45	4	185	195867	CRLBN-40
50, 63	21.1	16	45 +0.5/-0.2	28	9	39	14	34	50	4	293	195868	CRLBN-50/63

1) More information: www.festo.com/x/topic/crc

Clevis foot LBG-...-R3

The pivot pin is secured against rotation with a spring pin.

Material: High-alloy stainless steel
RoHS-compliant

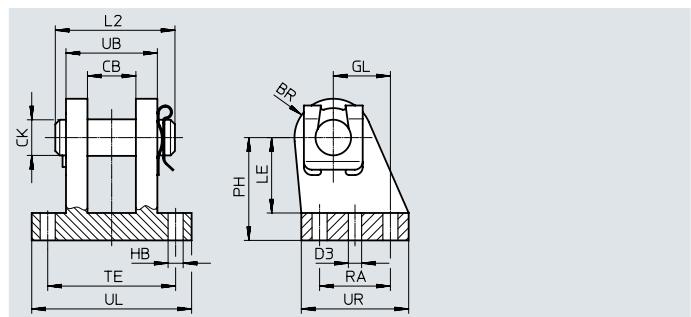

Dimensions and ordering data

For Ø [mm]	CL	CM	EK Ø	FL	GL	HB Ø	L2	LE	MR
80	50	25.1	20	63	30	11	60	49	18
100	50	25.1	20	71	41	11	60	56	22


For Ø [mm]	RF	RG	S1 Ø	UK	UX	CRC ¹⁾	Weight [g]	Part no.	Type
80	70	36	7.8	89	55	3	1050	2078797	LBG-80-R3
100	70	46	9.8	89	65	3	1375	2078799	LBG-100-R3

1) More information: www.festo.com/x/topic/crc

Accessories

Nut CR

Material:
High-alloy steel

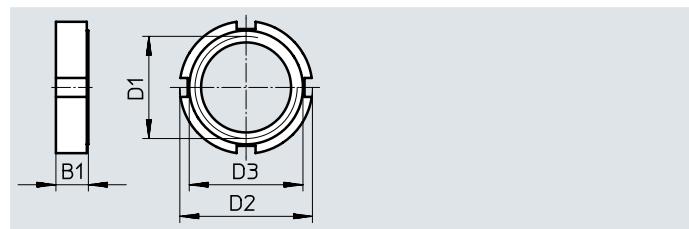

Dimensions and ordering data								
For Ø [mm]	B1	D1	D2	D3	CRC ¹⁾	Weight [g]	Part no.	Type
32	8	M30x1.5	42	36	4	40	197326	CR-M30x1.5
40	10	M38x1.5	50	48	4	61	197327	CR-M38x1.5
50, 63	10	M45x1.5	60	56	4	89	197328	CR-M45x1.5
80, 100	13	M50x2	75	67	4	228	197329	CR-M50x2

1) More information: www.festo.com/x/topic/crc

Ordering data – Piston-rod attachments, corrosion-resistant

For Ø	Part No.	Type
Rod eye CRSGS		
	12, 16	195580 CRSGS-M6
	20	195581 CRSGS-M8
	25, 32	195582 CRSGS-M10x1.25
	40	195583 CRSGS-M12x1.25
	50, 63	195584 CRSGS-M16x1.5
	80, 100	195585 CRSGS-M20x1.5
Self-aligning rod coupler CRFK		
	25, 32	2305778 CRFK-M10x1.25
	40	2305779 CRFK-M12x1.25
	50, 63	2490673 CRFK-M16x1.5
	80, 100	2545677 CRFK-M20x1.5

Datasheets → Internet: piston rod attachment

For Ø	Part No.	Type
Rod clevis CRSG		
	12, 16	13567 CRSG-M6
	20	13568 CRSG-M8
	25, 32	13569 CRSG-M10x1.25
	40	13570 CRSG-M12x1.25
	50, 63	13571 CRSG-M16x1.5
	80, 100	13572 CRSG-M20x1.5

Ordering data – Proximity switches, magnetic reed CRSMEO

Electrical connection Cable	Cable length [m]	Part no.	Type
	N/O		
Corrosion-resistant			
3-wire	2.5	161775	CRSMEO-4-K-LED-24

Datasheets → Internet: crsmeo

Ordering data – Mounting kits


For Ø	Part no.	Type
-------	----------	------

Mounting kit CRSMBR

	12	164581	CRSMBR-12
	16	164582	CRSMBR-16
	20	164583	CRSMBR-20
	25	164584	CRSMBR-25
	32	163888	CRSMBR-32
	40	163889	CRSMBR-40
	50	163890	CRSMBR-50
	63	163891	CRSMBR-63

Round cylinders CRDSNU

Accessories

Ordering data – Proximity switches CRSMT-8M for T-slot, magneto-resistive						Datasheets → Internet: crsmt
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type
N/O						
	Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core Cable, 3-core Plug M8x1, 3-pin Plug M12x1, 3-pin	5.0 10.0 0.3 0.3	574380 574381 574383 574382	CRSMT-8M-PS-24V-K-5.0-OE CRSMT-8M-PS-24V-K-10.0-OE CRSMT-8M-PS-24V-K-0.3-M8D CRSMT-8M-PS-24V-K-0.3-M12
Ordering data – Connecting cables						Datasheets → Internet: nebu
	Electrical connection, left	Electrical connection, right		Cable length [m]	Part no.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-core		2.5 5	541333 541334	NEBU-M8G3-K-2.5-LE3 NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-core		2.5 5	541363 541364	NEBU-M12G5-K-2.5-LE3 NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-core		2.5 5	541338 541341	NEBU-M8W3-K-2.5-LE3 NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-core		2.5 5	541367 541370	NEBU-M12W5-K-2.5-LE3 NEBU-M12W5-K-5-LE3
Ordering data – Mounting kit SMBR						Datasheets → Internet: smbr
				Part no.	Type	
	For standards-based cylinder CRDSNU			538937	SMBR-8/8/100-S6	
Ordering data – One-way flow control valves CRGRLA						Datasheets → Internet: crgrla
	Connection Thread	For push-in fitting	Material	Part no.	Type	
	M5 G1/8 G1/4 G3/8 G1/2	CRQS/CRQSL/CRQST	Electropolished stainless-steel casting	161403 161404 161405 161406 161407	CRGRLA-M5-B CRGRLA-1/8-B CRGRLA-1/4-B CRGRLA-3/8-B CRGRLA-1/2-B	
Ordering data – Air reservoirs CRVZS						Datasheets → Internet: crvzs
	Connection Thread	Volume [l]	Material	Part no.	Type	
	G1/8 G1/4 G1/4 G1/2 G1, G3/8 G1, G3/8	0.1 0.4 0.75 2 5 10	High-alloy stainless steel	160233 160234 160235 160236 192159 160237	CRVZS-0.1 CRVZS-0.4 CRVZS-0.75 CRVZS-2 CRVZS-5 CRVZS-10	
Ordering data – Tubing						Datasheets → Internet: tubing
	Standard O.D. tubing			PLN, PFAN		
						