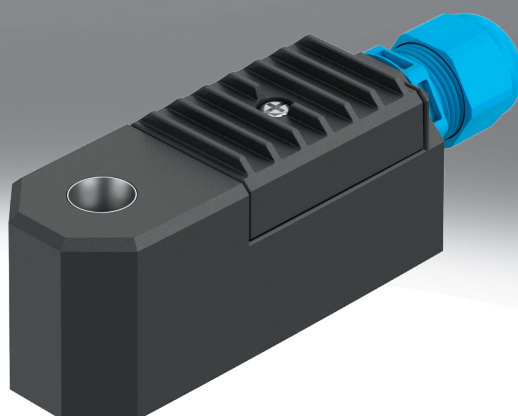


Solenoid coils

FESTO



Festo Core Range
Solves the majority of your automation tasks







Worldwide:
Simply good:
Fast:

Quickest delivery – wherever, whenever
Expected high Festo quality
Easy and fast to select

With the Festo Core Range, we have selected the most important products and functions from our broad product catalogue, and added the quickest delivery.
The Core Range offers you the best value for your automation tasks.

Just look
for the
star!






Product range overview


Version	Type	For valve series										→ Page/ Internet	
		MFH	MOFH	JMFH	JMFDH	NVF3	MUFH	VOFD	VOFC	VSNC	VUVS		
F solenoid coil													
	MSF	■	■	■	■	■	■	–	–	–	–	5	
	VACF	–	–	–	–	–	–	–	–	■	■	11 10 15	
F solenoid coil for potentially explosive atmospheres													
	MSF...-EX	■	■	■	■	■	■	–	–	–	–	8	
	VACF...-EX4-M	■	■	■	■	■	–	–	–	–	–	17	
N solenoid coil													
	VACN-N VACN-N-R	–	–	–	–	–	–	–	–	■	–	27	
N solenoid coil for potentially explosive atmospheres													
	VACN...-EX2-N	–	–	–	–	–	–	–	–	■	–	32	
	VACN...-U4-M											34	
	VACN...-EX4-M											36	
	VACN...-EX4-A											38	
C solenoid coil													
	VACC-S13	–	–	–	–	–	–	■	■	–	–	40	
	VACC-S18	–	–	–	–	–	–	■	–	–	–	48	

 Note

ATEX certification is only effective in combination with other ATEX-certified components.

Product range overview

Version	Type	For valve series						→ Page/ Internet
		MN1H	JMN1H	JMN1DH	VZWM-L	VUVS	VZWE	
N1 solenoid coil								
	MSN1	■	■	■	–	–	–	66
S solenoid coil								
	VACS	–	–	–	–	■	–	68
H solenoid coil								
	MH-2	–	–	–	■	–	–	79
H1 solenoid coil								
	VACN-H1	–	–	–	–	–	■	81
D solenoid coil								
	MD-2	–	–	–	■	–	–	84

**Note**

ATEX certification is only effective in combination with other ATEX-certified components.

Selection aid

Solenoid valves and corresponding solenoid coils									
Valve series	Valve type	Solenoid coil							
		C	D	F	H	H1	N	N1	S
Standards-based valves to ISO 5599-1	MN1H, JMN1H, JMN1DH	–	–	–	–	–	–	■	–
	MFH, JMFH, JMFDH	–	–	■	–	–	–	–	–
	MDH, JMDH	–	■	–	–	–	–	–	–
Standards-based NAMUR valves	NVF3	–	–	■	–	–	–	–	–
	MN1H	–	–	–	–	–	–	■	–
Solenoid valves for process automation	VOFC	■	–	–	–	–	–	–	–
	VOFD	■	–	–	–	–	–	–	–
	VSNC	–	–	■	–	–	■	–	–
Tiger 2000	MFH, JMFH	–	–	■	–	–	–	–	–
Tiger Classic	MFH, MOFH, JMFH, JMFDH	–	–	■	–	–	–	–	–
Directly actuated solenoid valves	MDH, MODH	–	■	–	–	–	–	–	–
VS series	VUVS	–	–	■	–	–	–	–	■
M5 compact system	MUFH	–	–	■	–	–	–	–	–
Process control valves	VZWM-L	–	■	–	■	–	–	–	–
	VZWE	–	–	–	–	■	–	–	–

Datasheet

-  Voltage
12 ... 42 V DC
24 ... 240 V AC
-  Temperature range
-5 ... +40 °C

- In accordance with VDE regulation 0580, insulation class F
- Can be replaced without interrupting the pneumatic circuit
- Low power consumption and temperature rise



General technical data

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated 360° on the armature)
Max. tightening torque of socket [Nm]	0.4
Product weight [g]	55

Materials

Solenoid coil	Thermoset, copper, steel
Note on materials	RoHS-compliant

Electrical data

Electrical connection	3-pin	
	Plug to industry standard, type B	Plug to EN 175301, type A
Min. pickup time [ms]	10	
Permissible voltage fluctuations [%]	-10 / +10	
Duty cycle [%]	100	
Degree of protection to EN 60529	IP65 with plug socket	

Characteristic coil data

Operating voltage	12 V DC	24 V DC	42 V DC	24 V AC	42 V AC	48 V AC	110 V AC	230 V AC	240 V AC
Power [W]	4.1	4.5	5.5	–	–	–	–	–	–
Pickup power, 50 Hz [VA]	–	–	–	9	9	9	9	9	9
Holding power, 50 Hz [VA]	–	–	–	7	7	7	7	7	7
Power factor cos(phi)	–	–	–	0.7	0.7	0.7	0.7	0.7	0.7
Frequency [Hz]	–	–	–	50/60	50/60	50/60	50/60	50/60	50/60
Permissible frequency fluctuations [%]	–	–	–	-5 / +5	-5 / +5	-5 / +5	-5 / +5	-5 / +5	-5 / +5

Operating and environmental conditions

Operating voltage	12 V DC	24 V DC	42 V DC	24 V AC	42 V AC	48 V AC	110 V AC	230 V AC	240 V AC
Ambient temperature [°C]	-5 ... +40						-5 ... +40		
CE marking (see declaration of conformity) ²⁾	–						To EU Low Voltage Directive ¹⁾		
UKCA marking (see declaration of conformity) ²⁾	–						To UK regulations for electrical equipment		


1) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions



[1] Retaining nut

[2] Solenoid coil
(can be rotated 360° on the armature)





[3] Plug pins

-  - **Note**

Can only be used on aluminium valves with valve body dimensions ≥ 26 x 16 x 14 mm

Download CAD data → www.festo.com







Type	B1	H1	H2	L1	L2
MSFG-...	22	29	33.8	29.5	12.5
MSFW-...					

Ordering data					
	Description	LABS (PWIS) conformity	Operating voltage	Part no.	Type
Solenoid coil, plug to industry standard, type B					
	Without plug socket	VDMA24364-C1-L	12 V DC	34410	MSFG-12-OD
			24 V DC, 42 V AC	34411	MSFG-24/42-50/60-OD
			42 V DC	34413	MSFG-42-OD
			24 V AC	34415	MSFW-24-50/60-OD
			48 V AC	34418	MSFW-48-50/60-OD
			110 V AC	34420	MSFW-110-50/60-OD
			230 V AC	34422	MSFW-230-50/60-OD
			240 V AC	34424	MSFW-240-50/60-OD
	With plug socket	VDMA24364-C1-L	12 V DC	4526	MSFG-12
			24 V DC, 42 V AC	4527	MSFG-24/42-50/60
			24 V AC	4534	MSFW-24-50/60
			110 V AC	6720	MSFW-110-50/60
			230 V AC	4540	MSFW-230-50/60
Solenoid coil, plug to EN 175301, type A					
	Without plug socket	VDMA24364-C1-L	24 V DC, 42 V AC	34412	MSFG-24/42-50/60-DS-OD
		VDMA24364-B2-L	230 V AC	175118	MSFW-230-50/60-DS-OD
	With plug socket, plug can be repositioned by 180°	VDMA24364-C1-L	24 V DC, 42 V AC	13264	MSFG-24/42-50/60-DS
	Maritime classification ¹⁾ , see certificate		110 V AC	13265	MSFW-110-50/60-DS
			230 V AC	13266	MSFW-230-50/60-DS

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

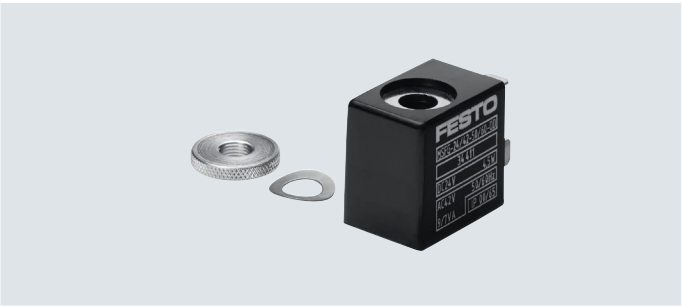
★ Core Range

Ordering data		Description	Cable length [m]	Part no.	Type	
Accessories for solenoid coil with electrical connection to industry standard, type B						
	Angled socket	Screw terminal	Cable fitting Pg9	–	★ 34431 MSSD-F	
			Cable fitting M16	–	59710 MSSD-F-M16	
	PUR cable sheath, connection technology M12x1 A-coded	24 AC/DC	• Signal status display	0.3	3679773 NEBV-B2W3F-P-K-0.3-N-M12W3	
			• Protective circuit	0.6	3679774 NEBV-B2W3F-P-K-0.6-N-M12W3	
		110 AC/DC	–	0.3	3579463 NEBV-B2W3-K-0.3-N-M12W3	
			–	0.6	3579464 NEBV-B2W3-K-0.6-N-M12W3	
	PUR cable sheath	24 AC/DC	• Signal status display	0.6	3679778 NEBV-B2W3F-P-K-0.6-N-LE3	
		230 AC/DC	–	0.6	3579468 NEBV-B2W3-K-0.6-N-LE3	
	PVC cable sheath	24 V DC	Signal status display	2.5	★ 30935 KMF-1-24DC-2.5-LED	
			–	5	30937 KMF-1-24DC-5-LED	
			–	10	193458 KMF-1-24DC-10-LED	
		230 V AC	–	2.5	30936 KMF-1-230AC-2.5	
			–	5	30938 KMF-1-230AC-5	
			–	–	–	
		Illuminating seal	12 ... 24 V DC	Signal status display	–	19143 MF-LD-12-24DC
			230 V DC/V AC	Signal status display	–	19144 MF-LD-230AC
Accessories for solenoid coil with electrical connection to EN 175301, type A						
	Angled socket	Screw terminal	Cable fitting Pg9	–	34583 MSSD-C	
			Cable fitting M16	–	539709 MSSD-C-M16	
		Insulation displacement technology	Cable fitting M16	–	192748 MSSD-C-S-M16	
	PUR cable sheath, connection technology M12x1 A-coded	24 AC/DC	• Signal status display	0.3	3679771 NEBV-A1W3F-P-K-0.3-N-M12W3	
			• Protective circuit	0.6	3679772 NEBV-A1W3F-P-K-0.6-N-M12W3	
		110 AC/DC	–	0.3	3579461 NEBV-A1W3-K-0.3-N-M12W3	
			–	0.6	3579462 NEBV-A1W3-K-0.6-N-M12W3	
	PUR cable sheath	24 AC/DC	• Signal status display	0.6	3679776 NEBV-A1W3F-P-K-0.6-N-LE3	
		230 AC/DC	–	0.6	3579466 NEBV-A1W3-K-0.6-N-LE3	
	PVC cable sheath	24 V DC	Signal status display	2.5	30931 KMC-1-24DC-2.5-LED	
			–	5	30933 KMC-1-24DC-5-LED	
			–	10	193459 KMC-1-24DC-10-LED	
		230 V AC	–	2.5	30932 KMC-1-230AC-2.5	
			–	5	30934 KMC-1-230AC-5	
			–	–	–	
	Illuminating seal	12 ... 24 V DC	Signal status display	–	19145 MC-LD-12-24DC	
		230 V DC/V AC	Signal status display	–	19146 MC-LD-230AC	
Inscription label						
	–	Scope of delivery: 35 labels in a frame		33362	KMC/F/V-BZ-35X	

Datasheet



- In accordance with the ATEX Directive
- In accordance with VDE regulation 0580, insulation class F
- Plug connection
- Can be replaced without interrupting the pneumatic circuit
- Manifold assembly permissible (minimum clearance from coil to coil 5 mm)



General technical data		
Type of mounting	Via knurled nut	
Mounting position	Any (can be rotated 360° on the armature)	
Product weight	[g]	55

Materials	
Solenoid coil	Steel, copper, thermoset
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Electrical data	
Electrical connection	3-pin
	Plug pins with plug pattern to Festo standard for MSSD-F
Max. tightening torque of socket	[Nm] 0.4
Min. pickup time	[ms] 10
Permissible voltage fluctuations	[%] -10 / +10
Duty cycle	[%] 100
Degree of protection to EN 60529	IP65 with plug socket

Characteristic coil data					
Operating voltage		24 V DC	24 V AC	110 V AC	230 V AC
Power	[W]	4.5	–	–	–
Pickup power, 50 Hz	[VA]	–	9	9	9
Holding power, 50 Hz	[VA]	–	7	7	7
Power factor cos(phi)		–	0.7	0.7	0.7
Frequency	[Hz]	–	50/60	50/60	50/60
Permissible frequency fluctuations	[%]	–	-5 / +5	-5 / +5	-5 / +5

Operating and environmental conditions				
Operating voltage		24 V DC	24 V AC	110 V AC 230 V AC
Ambient temperature	[°C]	-5 ... +40		-5 ... +40
CE marking (see declaration of conformity) ²⁾		– To EU Low Voltage Directive ¹⁾		


1) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

ATEX	
ATEX category for gas	II 3G
Type of ignition protection for gas	Ex nA IIC T4X Gc
ATEX category for dust	II 3D
Type of ignition protection for dust	Ex tc IIIC T130°C X Dc IP65
Explosion-proof ambient temperature [°C]	$-5 \leq T_a \leq +40$
CE marking (see declaration of conformity)	To EU Explosion Protection Directive (ATEX)
Explosion protection certification outside the EU	EPL Gc (CN)
	EPL Dc (CN)

Dimensions

 Download CAD data → www.festo.com


- [1] Retaining nut
(tightening torque 0.4 Nm)
- [2] Solenoid coil
- [3] Plug pins for plug sockets
MSSD-F



Note

Can only be used on aluminium valves with valve body dimensions $\geq 26 \times 16 \times 14$ mm

Type	B1	H1	H2	L1	L2
MSFG-...-EX	22	29	33.8	29.5	12.5
MSFW-...-EX					

Ordering data

	Description	Operating voltage	Part no.	Type
Solenoid coil				
	Explosion-proof, without plug socket	24 V DC	536931	MSFG-24-EX
		24 V AC	536932	MSFW-24-50/60-EX
		110 V AC	536933	MSFW-110-50/60-EX
		230 V AC	536934	MSFW-230-50/60-EX

Type codes

001	Series	
VACF	Solenoid coil VACF	

002	Solenoid coil type	
B	Solenoid coil, size 22/8	
A	Solenoid coil size 30/8	

003	Electrical connection	
A1	Plug pattern type A, to EN 175301-803	
B2	Connection pattern type B, industry standard	
C1	Plug pattern type C, to EN 175301-803	
K1	Cable	
R1	Individual connector M8, 4-pin	
R3	Single plug M12 A-coded, according to EN 61076-2-101	
R4	Single plug M12 A-coded, pin assignment according to DESINA	
R8	Individual connector M8, 3-pin	

004	Nominal operating voltage	
1	24 V DC	
1A	24 V AC/50-60 Hz	
3A	230 V AC/50-60 Hz	
3W	230 V AC/240 V AC/50-60 Hz	
5	12 V DC	
7	48 V DC	
7A	48 V AC/50-60 Hz	
16B	120 V AC/60 Hz and 110V AC/50-60 Hz	

005	Circuitry	
	None	
RA	Holding current reduction, analogue, with integrated protective circuit	

006	Display	
	None	
L	LED	

007	Cable length [m]	
	Without	
1	1 m	
5	5 m	
10	10 m	
20	20 m	

008	EU certification	
	None	
EX4	II 2GD	

009	Type of ignition protection	
	None	
M	Encapsulation	

Datasheet

-  Voltage
12 ... 48 V DC
24 ... 240 V AC
-  Temperature range
-20 ... +50 °C

- In accordance with VDE regulation 0580, insulation class H
- Can be replaced without interrupting the pneumatic circuit



General technical data

Conforms to standard	IEC 61010-1
Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)

Materials

Housing seal set	Aluminium, HNBR
Housing	PA, steel
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type A
Permissible voltage [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Power [W]	2.8	2.6	2.8	–	–	–	–
Pickup power, 50 Hz [VA]	–	–	–	2.5	2.5	2.7	3.9
Holding power, 50 Hz [VA]	–	–	–	1.7	1.7	1.9	2.8
Frequency [Hz]	–	–	–	50/60	50/60	50/60	50/60
Surge resistance [kV]	–	–	–	–	–	2.5	4

Operating and environmental conditions

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Ambient temperature [°C]	-20 ... +50					-20 ... +50	
Corrosion resistance class CRC ¹⁾	2					2	
Pollution degree	–					3	
CE marking (see declaration of conformity) ²⁾	–					To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ²⁾	–					To UK regulations for electrical equipment	
Certification	c UL us - Recognized (OL)					c UL us - Recognized (OL)	
Maritime classification ²⁾	See certificate					See certificate	
Certificate-issuing authority	DNVGL-TAA000011J					DNVGL-TAA000011J	

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

★ Core Range

Dimensions

Technical drawings of the VACF-A-A1 solenoid coil showing top, side, and front views with dimension labels B1, B2, B3, B4, D1, D2, D3, H1, H2, H3, H4, H5, H6, L1, L2, T1.


Download CAD data → www.festo.com

[1] Plug pattern to EN 175301-803, type A

[2] Knurled nut (seal set for solenoid coil)

[3] Solenoid coil (can be rotated in increments of 45° on the armature, can be pushed on in any direction)

Type	B1	B2	B3	B4	D1	D2	D3	H1	H2	H3	H4	H5	H6	L1	L2	T1
VACF-A-A1-...	29.5	24	18	6.3	8.2	22.5	M3	47.4	35.3	15	9.9	20.8	24	30	7.9	5

Ordering data		Description	Operating voltage	Product weight	Part no.	Type
Solenoid coil						
	Without plug socket, plug pattern to EN 175301-803, type A	12 V DC	83.1 g	8030821	VACF-A-A1-5	
		24 V DC	82.6 g	★ 8030822	VACF-A-A1-1	
		48 V DC	82.7 g	8030823	VACF-A-A1-7	
		24 V AC	83.4 g	8030824	VACF-A-A1-1A	
		48 V AC	82.3 g	8030825	VACF-A-A1-7A	
		110/120 V AC	82.4 g	8030826	VACF-A-A1-16B	
		230/240 V AC	79.2 g	8030828	VACF-A-A1-3W	
Seal set						
	To achieve degree of protection IP67		12.6 g	8034611	VAMC-B10-A-B-S8	

Datasheet

-  Voltage
12 ... 48 V DC
24 ... 240 V AC
-  Temperature range
-10 ... +50 °C

- In accordance with VDE regulation 0580, insulation class H
- Can be replaced without interrupting the pneumatic circuit



General technical data

Conforms to standard	IEC 61010-1
Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)

Materials

Housing seal set	Aluminium, HNBR
Housing	PA, steel
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to industry standard, type B (11 mm)
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Power [W]	3.4	3.3	3.4	–	–	–	–
Pickup power, 50 Hz [VA]	–	–	–	3.9	3.9	4.4	5.8
Holding power, 50 Hz [VA]	–	–	–	2.6	2.7	3.3	4.6
Frequency [Hz]	–	–	–	50/60	50/60	50/60	50/60
Surge resistance [kV]	–	–	–	–	–	2.5	4

Operating and environmental conditions

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Ambient temperature [°C]	-20 ... +50					-20 ... +50	
Corrosion resistance class CRC ¹⁾	2					2	
Pollution degree	–					3	
CE marking (see declaration of conformity) ²⁾	–					To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ²⁾	–					To UK regulations for electrical equipment	
Certification	c UL us - Recognized (OL)					c UL us - Recognized (OL)	
Maritime classification ²⁾	See certificate					See certificate	
Certificate-issuing authority	DNVGL-TAA000011J					DNVGL-TAA000011J	

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions

Technical drawing of the solenoid coil VACF-B-B2 showing three views: top, side, and front. Dimensions are labeled with letters and numbers. Callouts 1, 2, and 3 point to the plug pattern, knurled nut, and solenoid coil respectively.

Download CAD data → www.festo.com

- [1] Plug pattern to industry standard, type B
- [2] Knurled nut (seal set for solenoid coil)
- [3] Solenoid coil (can be rotated in increments of 45° on the armature, can be pushed on in any direction)

Type	B1	B2	B3	B4	D1	D2	D3	H1	H2	H3	H4	H5	H6	L1	L2	T1
VACF-B-B2-...	22	17	11	6.3	8.2	21.5	M3	41.7	29.7	14.5	9.7	17	25	29	6.9	5

Ordering data					
	Description	Operating voltage	Product weight	Part no.	Type
Solenoid coil					
	Without plug socket, plug pattern to industry standard, type B (11 mm)	12 V DC	55.6 g	8030801	VACF-B-B2-5
		24 V DC	56.5 g	8030802	VACF-B-B2-1
		48 V DC	55.9 g	8030803	VACF-B-B2-7
		24 V AC	55.8 g	8030804	VACF-B-B2-1A
		48 V AC	55.3 g	8030805	VACF-B-B2-7A
		110/120 V AC	52.3 g	8030806	VACF-B-B2-16B
		230/240 V AC	53 g	8030808	VACF-B-B2-3W
Seal set					
	To achieve degree of protection IP67	10 g	8034609	VAMC-B10-B-B-S8	

14

→Internet: www.festo.com/catalogue/...

Subject to change – 2024/12

Datasheet

-  Voltage
12 ... 48 V DC
24 ... 240 V AC
-  Temperature range
-10 ... +50 °C

- In accordance with VDE regulation 0580, insulation class H
- Can be replaced without interrupting the pneumatic circuit



General technical data

Conforms to standard	IEC 61010-1
Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)

Materials

Housing seal set	Aluminium, HNBR
Housing	PA, steel
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type C
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Power [W]	3.4	3.3	3.4	–	–	–	–
Pickup power, 50 Hz [VA]	–	–	–	3.9	3.9	4.4	5.8
Holding power, 50 Hz [VA]	–	–	–	2.6	2.7	3.3	4.6
Frequency [Hz]	–	–	–	50/60	50/60	50/60	50/60
Surge resistance [kV]	–	–	–	–	–	2.5	4

Operating and environmental conditions

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Ambient temperature [°C]	-20 ... +50					-20 ... +50	
Corrosion resistance class CRC ¹⁾	2					2	
Pollution degree	–					3	
CE marking (see declaration of conformity) ³⁾	–					To EU Low Voltage Directive ²⁾	
UKCA marking (see declaration of conformity) ³⁾	–					To UK regulations for electrical equipment	
Certification	c UL us - Recognized (OL)					c UL us - Recognized (OL)	

1) More information www.festo.com/x/topic/crc

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions

Technical drawing of solenoid coil VACF-B-C1 showing front, side, and top views with dimensions B1, B2, B3, D3, H3, H6, L1, L2, D2, D4, H4, H5, D1, H2, H1.

Download CAD data → www.festo.com

[1] Plug pattern to EN 175301-803, type C

[2] Knurled nut (seal set for solenoid coil)

[3] Solenoid coil (can be rotated in increments of 45° on the armature, push on in any direction)

Type	B1	B2	B3	D1	D2	D3	D4	H1	H2	H3	H4	H5	H6	L1	L2
VACF-B-C1-...	22	16	8	8.2	21.5	27	3.3	40.5	29.5	9.7	8.6	17	16	29	6.9

Ordering data					
	Description	Operating voltage	Product weight	Part no.	Type
Solenoid coil					
	Without plug socket, plug pattern to EN 175301-803, type C	12 V DC	54.1 g	8030810	VACF-B-C1-5
		24 V DC	52.4 g	8030811	VACF-B-C1-1
		48 V DC	54.3 g	8030812	VACF-B-C1-7
		24 V AC	54 g	8030813	VACF-B-C1-1A
		48 V AC	53.5 g	8030814	VACF-B-C1-7A
		110/120 V AC	51 g	8030815	VACF-B-C1-16B
		230/240 V AC	51.1 g	8030817	VACF-B-C1-3W
Seal set					
	To achieve degree of protection IP67	10 g	8034609	VAMC-B10-B-B-S8	

16

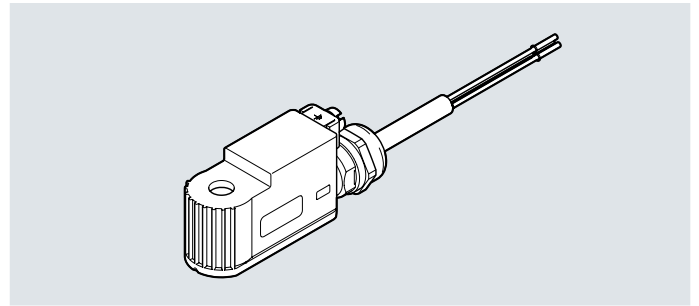
→Internet: www.festo.com/catalogue/...

Subject to change – 2024/12

Datasheet

-  Voltage
24 V DC
24 ... 230 V AC
-  Temperature range
-30 ... +40 °C

- In accordance with the ATEX Directive
- Can be replaced without interrupting the pneumatic circuit



General technical data

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)
Switching position indication	No
Product weight [g]	170

Materials

Solenoid coil	Aluminium, epoxy resin, copper, steel
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-C1-L

Electrical data

Electrical connection	Cable with open end, 3-core
Nominal conductor cross section [mm²]	0.75
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65

Characteristic coil data

Operating voltage	24 V DC	24 V AC	110 V AC	230 V AC
Power [W]	4.36	–	–	–
[VA]	–	3.85	4.18	5
Frequency [Hz]	–	50/60	50/60	50/60
Permissible frequency fluctuations [%]	–	-5 / +5	-5 / +5	-5 / +5
Min. pickup time [ms]	10	10	10	10

Operating and environmental conditions

Ambient temperature [°C]	-30 ... +40
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX) To EU RoHS Directive
UKCA marking (see declaration of conformity) ²⁾	According to UK explosion regulations To UK RoHS regulations

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

ATEX	
ATEX category for gas	II 2G
Type of ignition protection for gas	Ex mb IIC T5 Gb
ATEX category for dust	II 2D
Type of ignition protection for dust	Ex mb IIIC T95°C Db
Explosion-proof ambient temperature [°C]	−30 ≤ Ta ≤ +40
Explosion protection certification outside the EU	EPL Db (BR)
	EPL Db (CN)
	EPL Db (GB)
	EPL Db (IEC Ex)
	EPL Gb (BR)
	EPL Gb (CN)
	EPL Gb (GB)
Certificate-issuing authority	EPL Gb (IECEX)
	CML22UKEX5255X
	DNV17.0013X
	GYJ17.1077X
	IBExU 16 ATEX1146X
	IECEX IBE16.0024X

Dimensions

Technical drawing of the VACF-B-K1 solenoid coil. The drawing shows a side view and a front view. Dimensions are indicated: L1 (total length), L2 (coil length), L3 (cable length), B1 (width), H1 (height), and H2 (height). Numbered callouts 1-5 identify components: 1. Solenoid coil, 2. Equipotential bonding connection terminal, 3. Heat-resistant rubber tubing, 4. Knurled nut, 5. Length depending on order.

Download CAD data → www.festo.com

- [1] Solenoid coil
- [2] Equipotential bonding connection terminal
- [3] Heat-resistant rubber tubing
- [4] Knurled nut
- [5] Length depending on order

Type	B1	H1	H2	L1	L2	L3
VACF-B-K1-...	22	27	31.7	55.5	11.8	50

Ordering data						
	Description	Operating voltage	Cable length	Part no.	Type	
	Cable with open end, 3-core	24 V DC	1 m	8059804	VACF-B-K1-1-1-EX4-M	
			5 m	8059805	VACF-B-K1-1-5-EX4-M	
			10 m	8059806	VACF-B-K1-1-10-EX4-M	
			20 m	8059807	VACF-B-K1-1-20-EX4-M	
		24 V AC	1 m	8059808	VACF-B-K1-1A-1-EX4-M	
		110 V AC	1 m	8059811	VACF-B-K1-16B-1-EX4-M	
			5 m	8059812	VACF-B-K1-16B-5-EX4-M	
		230 V AC	1 m	8059809	VACF-B-K1-3A-1-EX4-M	
			5 m	8059810	VACF-B-K1-3A-5-EX4-M	

Datasheet

-  Voltage
24 V DC
-  Temperature range
-20 ... +50 °C
-20 ... +60 °C
- Electrical connection: round
plug M8, 4-pin



General technical data		
Electrical connection 1	Connection type	Plug
	Connection technology	M8x1 A-coded to EN 61076-2-104
	Number of pins/cores	4
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; ISO 20401
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials	
Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

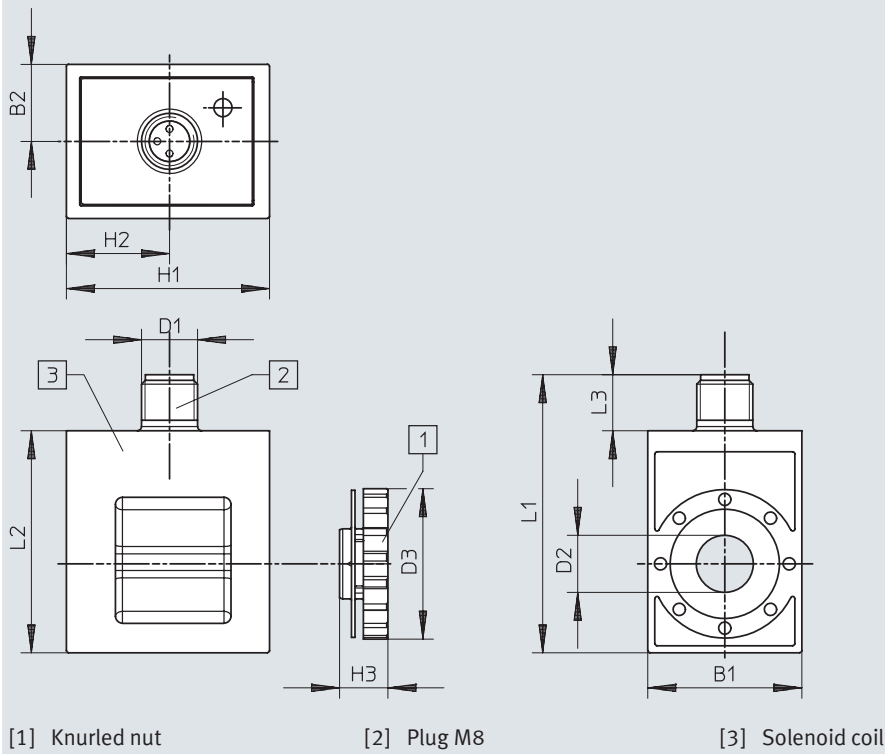
Electrical data		
Characteristic coil data		24 V DC: 3.4 W 24VDC: LV1.2: HV3.3
Permissible voltage fluctuations	[%]	+/- 10
Nominal pick-up current per solenoid coil	[mA]	– 138 up to 70 ms
Nominal current with current reduction	[mA]	– 50 after 70 ms
Duty cycle	[%]	100
Insulation class		H
Enamelled wire insulation class		H

Operating and environmental conditions		
Characteristic coil data		24 V DC: 3.4 W 24VDC: LV1.2: HV3.3
Ambient temperature	[°C]	-20 ... 50 -20 ... 60
Temperature of medium	[°C]	-20 ... 50 -20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress
Degree of protection		IP65
Certification		c UL us - Recognized (OL)

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions Download CAD data → www.festo.com



Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACF-B-R1-...	22	11	M8	8.2	21.5	29	14.7	6.9	39.7	31.7	6.5

Ordering data					
	Description	Characteristic coil data	Product weight	Part no.	Type
	Plug M8x1, A-coded to EN 61076-2-104, 4-pin	24 V DC: 3.4 W	49 g	8150875	VACF-B-R1-1L
		24VDC: LV1.2: HV3.3	49 g	8150879	VACF-B-R1-1RAL
Seal set					
	To achieve degree of protection IP67		10 g	8034609	VAMC-B10-B-B-S8

Datasheet

-  Voltage
24 V DC
-  Temperature range
-20 ... +50 °C
-20 ... +60 °C

- Electrical connection: round plug M12, 2-pin



General technical data		
Electrical connection 1	Connection type	Plug
	Connection technology	M12x1, A-coded to EN 61076-2-101
	Number of pins/cores	2
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; ISO 20401
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials	
Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

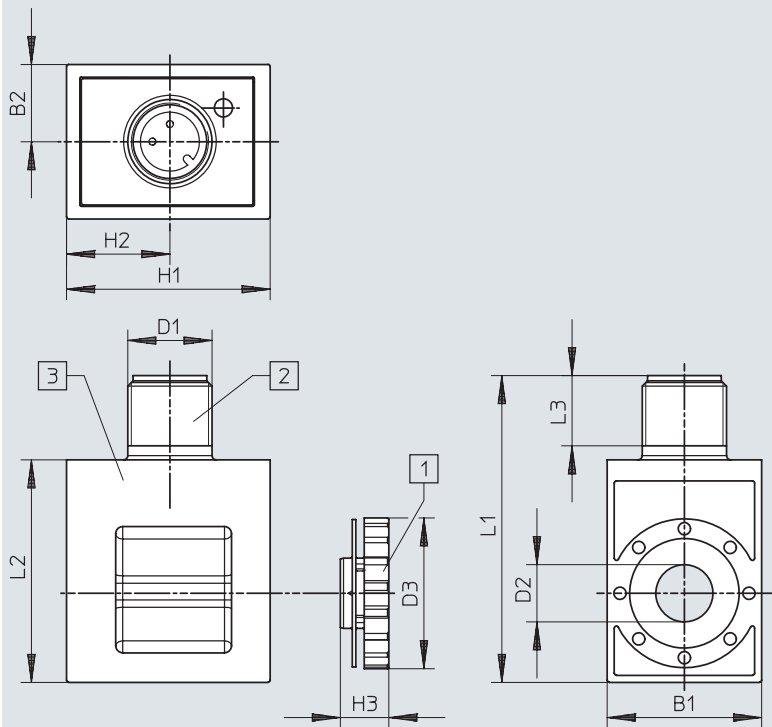
Electrical data		
Characteristic coil data		24 V DC: 3.4 W 24VDC: LV1.2: HV3.3
Permissible voltage fluctuations	[%]	+/- 10
Nominal pick-up current per solenoid coil	[mA]	– 138 up to 70 ms
Nominal current with current reduction	[mA]	– 50 after 70 ms
Duty cycle	[%]	100
Insulation class		H
Enamelled wire insulation class		H

Operating and environmental conditions		
Characteristic coil data		24 V DC: 3.4 W 24VDC: LV1.2: HV3.3
Ambient temperature	[°C]	-20 ... 50 -20 ... 60
Temperature of medium	[°C]	-20 ... 50 -20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress
Degree of protection		IP65
Certification		c UL us - Recognized (OL)

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions Download CAD data → www.festo.com



[1] Knurled nut [2] Plug M8 [3] Solenoid coil

Type	B1	B2	D1	D2 ø	D3 ø	H1	H2	H3	L1	L2	L3
VACF-B-R3-...	22	11	M12	8.2	21.5	29	14.7	6.9	43.7	31.7	10

Ordering data					
	Description	Characteristic coil data	Product weight	Part no.	Type
	Plug M12x1, A-coded to EN 61076-2-101, 2-pin	24 V DC: 3.4 W	49.5 g	8150876	VACF-B-R3-1L
		24VDC: LV1.2: HV3.3	49.5 g	8150873	VACF-B-R3-1RAL
Seal set					
	To achieve degree of protection IP67		10 g	8034609	VAMC-B10-B-B-S8

Datasheet

-  Voltage
24 V DC
-  Temperature range
-20 ... +50 °C
-20 ... +60 °C

- Electrical connection: round plug M12, 4-pin
- Pin allocation to DESINA



General technical data		
Electrical connection 1	Connection type	Plug
	Connection technology	M12x1, A-coded to EN 61076-2-101
	Number of pins/cores	4
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; DESINA
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials	
Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

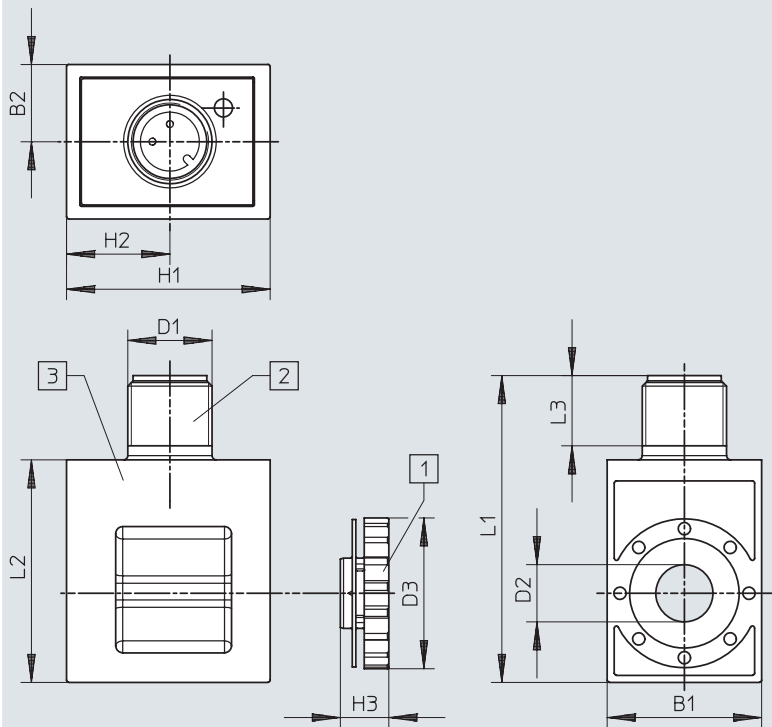
Electrical data		
Characteristic coil data		24 V DC: 3.4 W 24VDC: LV1.2: HV3.3
Permissible voltage fluctuations	[%]	+/- 10
Nominal pick-up current per solenoid coil	[mA]	– 138 up to 70 ms
Nominal current with current reduction	[mA]	– 50 after 70 ms
Duty cycle	[%]	100
Insulation class		H
Enamelled wire insulation class		H

Operating and environmental conditions		
Characteristic coil data		24 V DC: 3.4 W 24VDC: LV1.2: HV3.3
Ambient temperature	[°C]	-20 ... 50 -20 ... 60
Temperature of medium	[°C]	-20 ... 50 -20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress
Degree of protection		IP65
Certification		c UL us - Recognized (OL)

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions Download CAD data → www.festo.com



[1] Knurled nut [2] Plug M8 [3] Solenoid coil

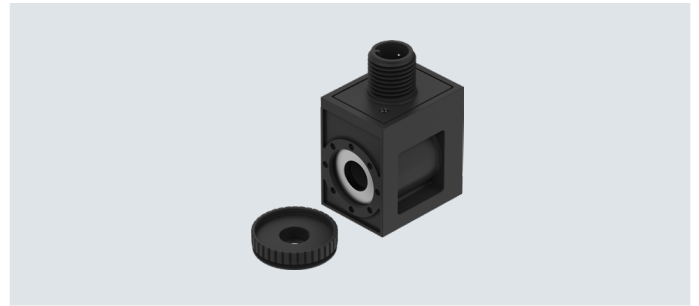
Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACF-B-R4-...	22	11	M12	8.2	21.5	29	14.7	6.9	43.7	31.7	10

Ordering data					
	Description	Characteristic coil data	Product weight	Part no.	Type
	Plug M12x1, A-coded to EN 61076-2-101, 4-pin	24 V DC: 3.4 W	49.5 g	8150877	VACF-B-R4-1L
		24VDC: LV1.2: HV3.3	49.5 g	8150880	VACF-B-R4-1RAL
Seal set					
	To achieve degree of protection IP67		10 g	8034609	VAMC-B10-B-B-S8

Datasheet

-  Voltage
24 V DC
-  Temperature range
-20 ... +50 °C
-20 ... +60 °C

- Electrical connection: round plug M8, 3-pin



General technical data

Electrical connection 1	Connection type	Plug
	Connection technology	M8x1 A-coded to EN 61076-2-104
	Number of pins/cores	3
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; ISO 20401
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials

Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Characteristic coil data		24 V DC: 3.4 W	24VDC: LV1.2: HV3.3
Permissible voltage fluctuations	[%]	+/- 10	
Nominal pick-up current per solenoid coil	[mA]	–	138 up to 70 ms
Nominal current with current reduction	[mA]	–	50 after 70 ms
Duty cycle	[%]	100	
Insulation class		H	
Enamelled wire insulation class		H	

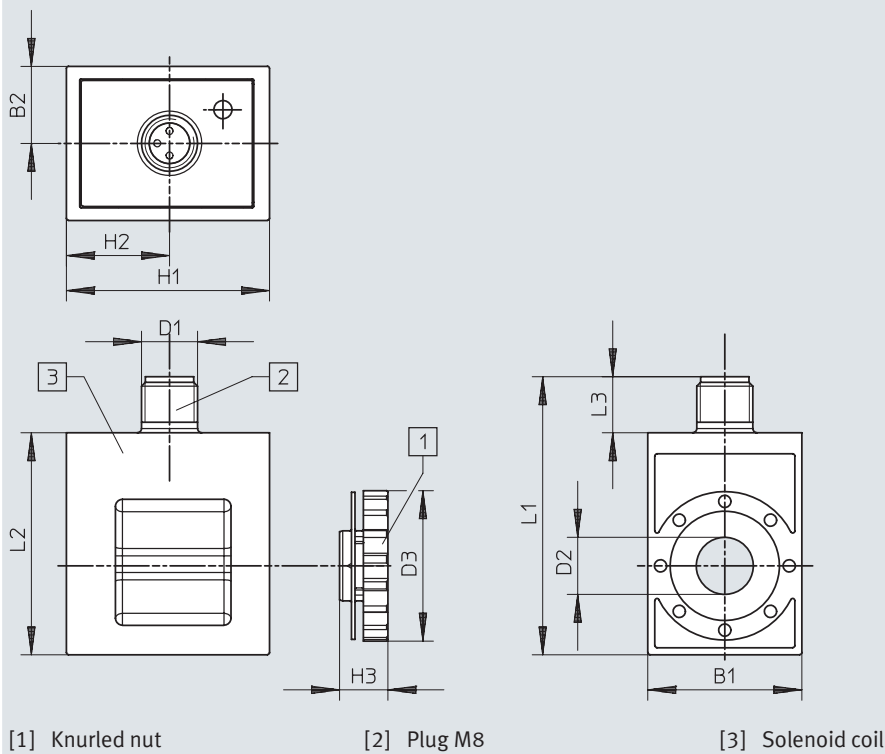
Operating and environmental conditions

Characteristic coil data		24 V DC: 3.4 W	24VDC: LV1.2: HV3.3
Ambient temperature	[°C]	-20 ... 50	-20 ... 60
Temperature of medium	[°C]	-20 ... 50	-20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress	
Degree of protection		IP65	
Certification		c UL us - Recognized (OL)	

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions Download CAD data → www.festo.com



Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACF-B-R8-...	22	11	M8	8.2	21.5	29	14.7	6.9	39.7	31.7	6.5

Ordering data					
	Description	Characteristic coil data	Product weight	Part no.	Type
	Plug M8x1, A-coded to EN 61076-2-104, 3-pin	24 V DC: 3.4 W	48.5 g	8150874	VACF-B-R8-1L
		24VDC: LV1.2: HV3.3	49 g	8150878	VACF-B-R8-1RAL
Seal set					
	To achieve degree of protection IP67		10 g	8034609	VAMC-B10-B-B-S8

Type codes

001	Series	
VACN	Solenoid coil, series N	

002	Solenoid coil type	
N	Solenoid coil N for armature tube 9 mm	
H1	Solenoid coil H1 for armature tube 14 mm	
X	Solenoid coil X for armature tube 14 mm	

003	Electrical connection	
A1	Connection pattern type A, to EN 175 301	
K1	Cable	
K11	Cable with insulating conduit connection	

004	Nominal operating voltage	
1	24 V DC	
2A	110 V AC/50-60 Hz	
16B	120 V AC/60 Hz and 110V AC/50-60 Hz	
3A	230 V AC/50-60 Hz	

005	Cable length [m]	
0.5	0.5	
10	10	

006	EU certification	
	None	
EX4	II 2GD	
EX2	II 3GD	

007	Certification	
	None	
U4	Class1 Div1 to NEC 500	

008	Type of ignition protection	
	None	
A	Intrinsically safe	
M	Encapsulation	
N	Non-sparking	

Datasheet

-  Voltage
24 V DC
110, 230 V AC
-  Temperature range
-20 ... +60 °C

- Can be replaced without interrupting the pneumatic circuit

**General technical data**

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)
Product weight [g]	95

Materials

Housing	Steel, polymer
Winding	Copper
Pin contacts	Brass
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type A
Permissible voltage [%]	-10 / +10
Duty cycle [%]	100
Insulation class	F
Enamelled wire insulation class	F
Degree of protection to EN 60529	IP65 with plug socket

Characteristic coil data

Operating voltage	24 V DC	110 V AC		230 V AC	
Frequency [Hz]	–	50	60	50	60
Power [W]	0.7	–	–	–	–
Pickup power [VA]	–	5.2	4.2	6.2	4.9
Holding power [VA]	–	3.1	2.5	3.7	2.9
Surge resistance [kV]	–	2.5		4	

Operating and environmental conditions

Operating voltage	24 V DC	110 V AC	230 V AC
Ambient temperature [°C]	−20 ... +60	−20 ... +60	
Corrosion resistance class CRC ¹⁾	2	2	
Pollution degree	–	3	
CE marking (see declaration of conformity) ²⁾	–	To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ²⁾	–	To UK regulations for electrical equipment	
Maritime classification ²⁾	See certificate		
Certificate-issuing authority	DNV TAA000011J		

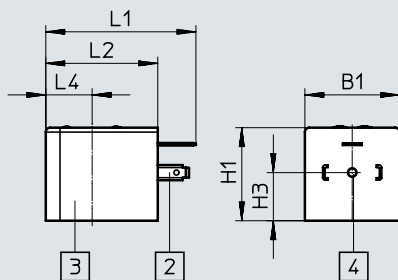
1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

★ Core Range



Dimensions

Download CAD data → www.festo.com

- [2] Plug pattern to EN 175301-803, type A
 [3] Solenoid coil
 [4] Retaining screw M3

Type	B1	H1	H3	L1	L2	L4
VACN-N-A1-...	30	29.5	15.3	47.6	35.5	14.7

Ordering data

Description	Part no.	Type
Solenoid coil		
 Without plug socket, plug pattern to EN 175301-803, type A	24 V DC	★ 8029144 VACN-N-A1-1
	110 V AC	8029134 VACN-N-A1-16B
	230 V AC	8029135 VACN-N-A1-3A
Plug socket		
 Operating voltage 230 V DC/V AC	Cable fitting Pg9	34583 MSSD-C
	Cable fitting M16	539709 MSSD-C-M16
	Operating voltage 24 V DC, signal status indication with LED	177617 MSSD-C-TY-24DC
Connecting cable		
 Operating voltage 24 V DC, signal status indication with LED	Cable length 0.6 m	3679776 NEBV-A1W3F-P-K-0.6-N-LE3
	Cable length 2.5 m	30931 KMC-1-24DC-2.5-LED
	Cable length 5 m	30933 KMC-1-24DC-5-LED
	Cable length 10 m	193459 KMC-1-24-10-LED
	Operating voltage 230 V DC/V AC	
	Cable length 0.6 m	3579466 NEBV-A1W3-K-0.6-N-LE3
 Electrical connection 2, M12x1, A-coded Operating voltage 24 V DC, signal status indication with LED	Cable length 0.3 m	3679771 NEBV-A1W3F-P-K-0.3-N-M12W3
	Cable length 0.6 m	3679772 NEBV-A1W3F-P-K-0.6-N-M12W3
	Operating voltage 230 V DC/V AC	
	Cable length 0.3 m	3579461 NEBV-A1W3-K-0.3-N-M12W3
	Cable length 0.6 m	3579462 NEBV-A1W3-K-0.6-N-M12W3
Illuminating seal		
 Operating voltage 24 V DC		19145 MC-LD-12-24DC
	Operating voltage 230 V DC/V AC	19146 MC-LD-230AC

Datasheet

-  - Voltage
24 V DC
-  - Temperature range
−20 ... +60 °C

- Can be replaced without interrupting the pneumatic circuit



General technical data	
Actuation type	Electrical
Type of mounting	Via knurled nut
Mounting position	Any
Signal status display	LED
Product weight	[g] 100

Materials	
Housing	Polymer
Solenoid coil	Thermoset, copper, steel
Winding	Copper
Note on materials	RoHS-compliant

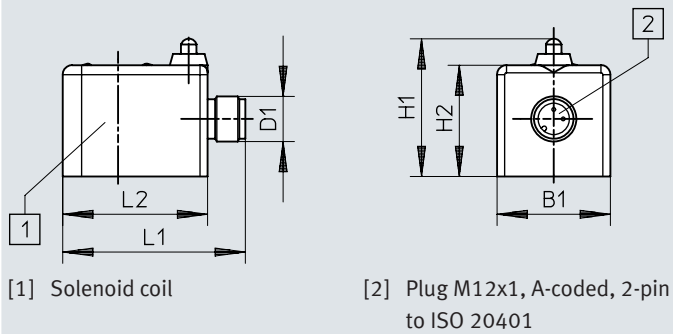
Electrical data		
Conforms to standard	ISO 20401	DESINA
Electrical connection 1, connection technology	M12x1, A-coded to EN 61076-2-101	
Electrical connection 1, connection type	Plug	
Electrical connection 1, number of pins/cores	2	4
Electrical connection 1, type of mounting	Screw-type lock	
Characteristic coil data	24 V DC: 2.7 W	
Permissible voltage fluctuations	[−10 / +10 %]	
Duty cycle	100	
Insulation class	F	
Enamelled wire insulation class	H	
Pollution degree	3	

Operating and environmental conditions	
Operating voltage	24 V DC
Ambient temperature	[°C] −20 ... +60
Corrosion resistance class CRC ¹⁾	2
Degree of protection	IP65
LABS (PWIS) conformity	VDMA24364-B2-L

1) More information www.festo.com/x/topic/crc

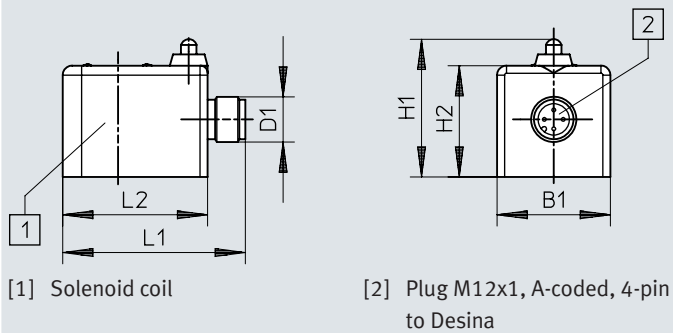
Datasheet

Dimensions – 2-pin

[Download CAD data → www.festo.com](http://www.festo.com)


Type	B1	D1	H1	H2	L1	L2
VACN-N-R3-1	30	M12x1	36.5	29.5	48.4	38.4

Dimensions – 4-pin

[Download CAD data → www.festo.com](http://www.festo.com)


Type	B1	D1	H1	H2	L1	L2
VACN-N-R4-1	30	M12x1	34.4	29.5	48.4	38.4

Ordering data

	Electrical connection	Number of pins/ cores	Conforms to standard	Part no.	Type
	Plug M12x1, A-coded	2	ISO 20401	8104526	VACN-N-R3-1
		4	DESINA	8104527	VACN-N-R4-1

Datasheet



- Non-sparking solenoid coil
- Category "II 3G" and "II 3D"
- Type of (ignition) protection for gas "Ex nA"
- ATEX certification
- Can be replaced without interrupting the pneumatic circuit

**General technical data**

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)
Product weight [g]	95

Materials

Housing	Steel, polymer
Winding	Copper
Pin contacts	Brass
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type A
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Insulation class	F
Enamelled wire insulation class	H
Degree of protection to EN 60529	IP65 with plug socket

Characteristic coil data

Operating voltage	24 V DC	110 V AC		230 V AC	
Frequency [Hz]	–	50	60	50	60
Power [W]	2.1	–	–	–	–
Pickup power [VA]	–	6.9	5.4	6.9	5.4
Holding power [VA]	–	4.1	3.2	4.1	3.3

Operating and environmental conditions

Ambient temperature [°C]	–20 ... +60
Corrosion resistance class CRC ¹⁾	2
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ²⁾	According to UK explosion regulations
Maritime classification ²⁾	See certificate
Certificate-issuing authority	DNV TAA000011J

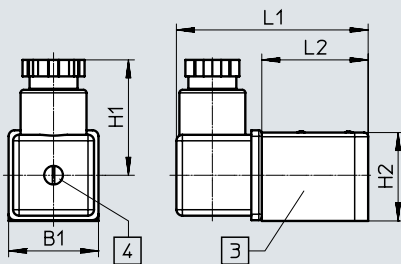
1) More information www.festo.com/x/topic/crc2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

ATEX	
ATEX category for gas	II 3G
Type of ignition protection for gas	Ex nA IIC T5/T4 X Gc
ATEX category for dust	II 3D
Type of ignition protection for dust	Ex tc IIIC T95°C/T105°C X Dc
Explosion-proof ambient temperature [°C]	-20 ≤ Ta ≤ +60
Explosion protection certification outside the EU	EPL Dc (GB)
	EPL Gc (GB)

Dimensions


Download CAD data → www.festo.com



- [3] Solenoid coil
[4] Retaining screw M3

Type	B1	H1	H2	L1	L2
VACN-N-A1-...-EX2-N	30	38.5	29.5	64	35.5

Ordering data

	Description	Operating voltage	Part no.	Type
	With plug socket included in the scope of delivery, plug pattern to EN 175301-803, type A	24 V DC	8029136	VACN-N-A1-1-EX2-N
		110 V AC	8029137	VACN-N-A1-16B-EX2-N
		230 V AC	8029138	VACN-N-A1-3A-EX2-N

Datasheet



- Encapsulated solenoid coil with insulating conduit connection
- Explosion protection certification "Class I", "Class II" and "Class III"
- FM certification
- Can be replaced without interrupting the pneumatic circuit

**General technical data**

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)
Product weight [g]	207

Materials

Housing	Steel, polymer
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	Cable
Cable length [m]	0.61
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Insulation class	H
Enamelled wire insulation class	H
Degree of protection to EN 60529	IP65

Characteristic coil data

Operating voltage	24 V DC	110 V AC	230 V AC
Frequency [Hz]	–	60	50
Power [W]	4.6	–	–
Pickup power [VA]	–	10	11.5
Holding power [VA]	–	6.8	8

Operating and environmental conditions

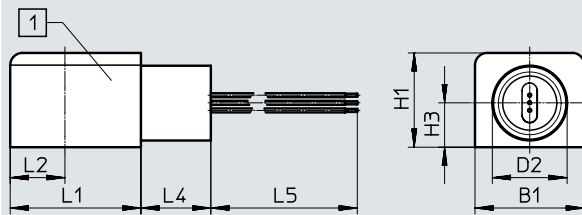
Operating voltage	24 V DC	110 V AC	230 V AC
Ambient temperature [°C]	-20 ... +60	-20 ... +60	
Corrosion resistance class CRC ¹⁾	2	2	
Maritime classification ²⁾	See certificate		
Certificate-issuing authority	DNV TAA000011J		

1) More information www.festo.com/x/topic/crc2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

ATEX		
Type of ignition protection for gas	AEx m II T4	
	Ex m II T4	
Explosion-proof ambient temperature [°C]	$-20 \leq T_a \leq +60$	
Explosion protection certification outside the EU	EPL Gb (US)	
	Class I, Div. 1 (US)	Class I, Div. 1 (CA)
	–	Class I, Div. 2 (CA)
	Class II, Div. 1 (US)	Class II, Div. 1 (CA)
	Class III, Div. 1 (US)	Class III, Div. 1 (CA)
Certificate-issuing authority	CSA 265489	
	FM 3053936	

Dimensions

Download CAD data → www.festo.com

[1] Solenoid coil

Type	B1	D2	H1	H3	L1	L2	L4	L5
VACN-N-K11-...	36	24.6	31	14.5	43	18	23	610

Ordering data

	Description	Operating voltage	Part no.	Type
	Moulded-in cable	24 V DC	8029146	VACN-N-K11-1-0.5-U4-M
		110 V AC	8029145	VACN-N-K11-16B-0.5-U4-M
		230 V AC	8029140	VACN-N-K11-3A-0.5-U4-M

Datasheet



- Category "II 2G" and "II 2D"
- Type of (ignition) protection for gas "Ex mb"
- ATEX certification
- Can be replaced without interrupting the pneumatic circuit

**General technical data**

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)

Materials

Housing	Steel, polymer
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Electrical data

Electrical connection	Cable
Cable diameter [mm]	7
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Insulation class	F
Enamelled wire insulation class	H
Degree of protection to EN 60529	IP65 with plug socket

Characteristic coil data

Operating voltage [V]	24 DC	110 AC	230 AC
Frequency [Hz]	–	50/60	50/60
Power [W]	2.6	–	–
[VA]	–	2.4	2.1

Operating and environmental conditions

Cable length [m]	3	10
Ambient temperature [°C]	-20 ... +50	
Corrosion resistance class CRC ¹⁾	2	
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX)	
	To EU RoHS Directive	
UKCA marking (see declaration of conformity) ²⁾	According to UK explosion regulations	
	To UK RoHS regulations	
Maritime classification ²⁾	See certificate	
Certificate-issuing authority	DNV TAA000011J	–

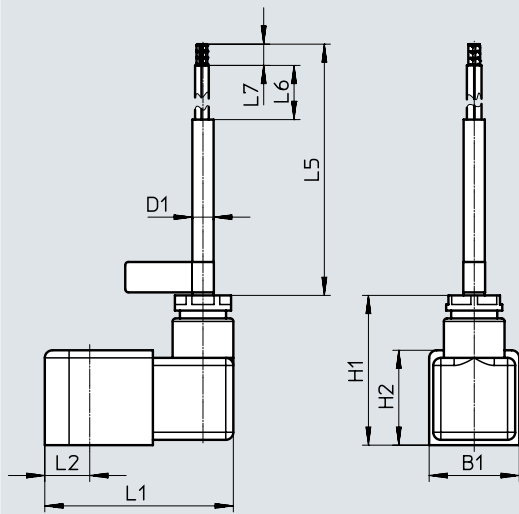
1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet


ATEX		
Cable length [m]	3	10
ATEX category for gas	II 2G	II 2G
Type of ignition protection for gas	Ex mb IIC T6 Gb	Ex mb IIC T6 Gb
ATEX category for dust	II 2D	II 2D
Type of ignition protection for dust	Ex mb tb IIIC T80°C Db	Ex mb tb IIIC T80°C Db
Explosion-proof ambient temperature [°C]	-20 ≤ Ta ≤ +50	-20 ≤ Ta ≤ +50
Explosion protection certification outside the EU	EPL Db (BR)	EPL Db (GB)
	EPL Db (CN)	EPL Db (IEC Ex)
	EPL Db (GB)	EPL Gb (GB)
	EPL Db (IEC Ex)	EPL Gb (IECEx)
	EPL Gb (BR)	—
	EPL Gb (CN)	—
	EPL Gb (GB)	—
	EPL Gb (IECEx)	—
Certificate-issuing authority	CCC 2021322307003994	IECEx PTB 15.0016X
	DNV 15.0189X	PTB 14 ATEX 2027 X
	GYJ21.1327X	—
	IECEx PTB 15.0016X	—
	PTB 14 ATEX 2027 X	—

Dimensions

Download CAD data → www.festo.com

Type	B1	D1	H1	H2	L1	L2	L5	L6	L7
VACN-N-K1-1-EX4-M	29.7	7	49.3	31.3	67	14.8	3000	43	7
VACN-N-K1-1-10-EX4-M	29.7	7	49.3	31.3	67	14.8	10000	43	7
VACN-N-K1-16B-EX4-M	29.7	7	49.3	31.3	67	14.8	3000	43	7
VACN-N-K1-3A-EX4-M	29.7	7	49.3	31.3	67	14.8	3000	43	7

Ordering data

	Description	Operating voltage	Cable length	Product weight	Part no.	Type
	With plug socket, with cable	24 V DC	3 m	353 g	8029143	VACN-N-K1-1-EX4-M
			10 m	762 g	8141606	VACN-N-K1-1-10-EX4-M
		110 V AC	3 m	353 g	8029142	VACN-N-K1-16B-EX4-M
		230 V AC	3 m	353 g	8029141	VACN-N-K1-3A-EX4-M

Datasheet



- Intrinsically safe solenoid coil
- Category "II 2G" and "II 2D"
- Type of ignition protection for gas "Ex ia"
- ATEX certification
- Can be replaced without interrupting the pneumatic circuit

**General technical data**

Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)
Product weight [g]	114

Materials

Housing	Steel, polymer
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Electrical data

Electrical connection	Plug, plug pattern to EN 175301-803, type A
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Insulation class	F
Enamelled wire insulation class	H
Degree of protection to EN 60529	IP65 with plug socket

Characteristic coil data

Operating voltage [V]	24 DC
Max. input voltage [V]	28 DC
Max. input current [mA]	115
Required current consumption [mA]	≥27
Effective internal capacitance	Negligibly low
Effective internal inductance	Negligibly low

Operating and environmental conditions

Ambient temperature [°C]	-20 ... +50
Corrosion resistance class CRC ¹⁾	2
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ²⁾	According to UK explosion regulations
Maritime classification ²⁾	See certificate
Certificate-issuing authority	DNV TAA000011J

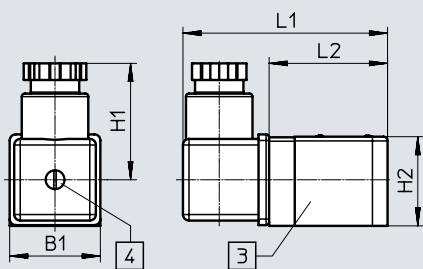
1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

ATEX		
ATEX category for gas		II 2G
Type of ignition protection for gas		Ex ia IIC T6, T4 Ga
ATEX category for dust		II 2D
Type of ignition protection for dust		Ex tb IIIC T80°C, T130°C Db IP65
Explosion-proof ambient temperature	[°C]	T4,T130°C: -40°C ≤ Ta ≤ +85°C
	[°C]	T6,T80°C: -40°C ≤ Ta ≤ +50°C
Explosion protection certification outside the EU		EPL Db (BR)
		EPL Db (CN)
		EPL Db (GB)
		EPL Db (IEC Ex)
		EPL Gb (BR)
		EPL Gb (CN)
		EPL Gb (GB)
		EPL Gb (IECEX)
Certificate-issuing authority		CCC 2021322307003993
		DNV 15.0188
		GYJ21.1326X
		IECEX PTB 15.0013
		PTB 09 ATEX 2043


Dimensions

Download CAD data → www.festo.com

- [3] Solenoid coil
[4] Retaining screw M3

Type	B1	H1	H2	L1	L2
VACN-N-A1-...-EX4-A	30	38.5	29.5	67.7	39.2

Ordering data

	Description	Operating voltage	Part no.	Type
	Intrinsically safe solenoid coil with plug socket included in the scope of delivery, plug pattern to EN 175301-803, type A	24 V DC	8029139	VACN-N-A1-1-EX4-A

Type codes

001	Series	
VACC	Solenoid valve, series C	

002	Solenoid coil type	
S13	Solenoid coil, shaft 13 mm	
S18	Solenoid valve, shaft 18 mm	

003	Power consumption	
11	1.1 W	
18	1.8 W	
25	2.5 W	
35	3.5 W	
70	7 W	
120	12 W	

004	Electrical connection	
A1	Connection pattern type A, to EN 175 301	
K4	Cable connector metric	
K5	Cable connector NPT	

005	Nominal operating voltage	
1	24 V DC	
1A	24 V AC/50-60 Hz	
1U	24 V DC and AC	
2A	110 V AC/50-60 Hz	
2U	110 V DC and AC	
3	230 V DC	
3A	230 V AC/50-60 Hz	
3U	230 V DC and AC	
7	48 V DC	
7U	48 V DC and AC	
16	120 V DC	
16U	120 V DC and AC	
27	60 V DC	
27U	60 V DC and AC	

006	Circuitry	
	None	
F	Fuse	

007	EU certification	
	None	
EX4	II 2GD	

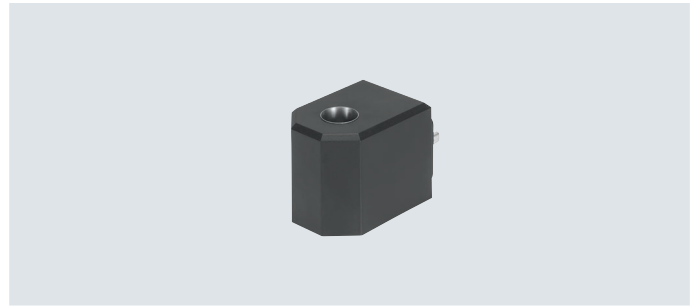
008	Certification	
	None	
U2	cULus, hazardous environment, USA and Canada (NEC 500)	
NE4	NEPSI, II 2GD	
NM4	INMETRO, II 2GD	

009	Type of ignition protection	
	None	
A	Intrinsically safe	
D	Flameproof encapsulation	
ME	Encapsulation, enhanced security	

Datasheet

-  Voltage
 - 24 V DC
 - 24 V AC/DC
 - 110 V AC/DC
 - 230 V AC/DC
-  Temperature range
 - 20 ... +60 °C

Nominal power
2 W at 24 V DC



General technical data

Type of mounting	Via knurled nut
Actuation type	Electrical
Mounting position	Any
Product weight [g]	210

Materials

Housing	PA, UP
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type A
Permissible voltage fluctuations [%]	–15 ... 10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data

Operating voltage	24 V DC	24 V AC/DC		110 V AC/DC		230 V AC/DC	
Frequency [Hz]	–	50/60	–	50/60	–	50/60	–
Power [W]	1.8	–	1.8	–	1.8	–	1.8
[VA]	–	1.8	–	1.8	–	1.8	–

Operating and environmental conditions

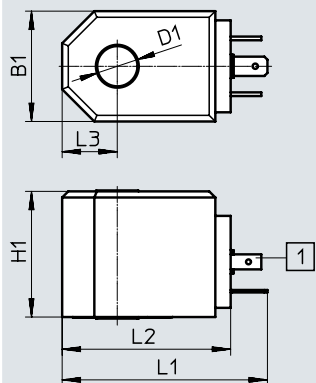
Operating voltage	24 V DC	24 V AC/DC	110 V AC/DC	230 V AC/DC
Ambient temperature [°C]	–20 ... 60		–20 ... 60	
Corrosion resistance class CRC ¹⁾	4		4	
CE marking (see declaration of conformity) ²⁾	–		To EU Low Voltage Directive	
UKCA marking (see declaration of conformity)	–		To UK regulations for electrical equipment	

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions



Download CAD data → www.festo.com

[1] Plug pattern type A, to
EN175301-803

Type	B1	D1	H1	L1	L2	L3
VACC-S13-18-A1-...	36	13.1	41	67	55	18

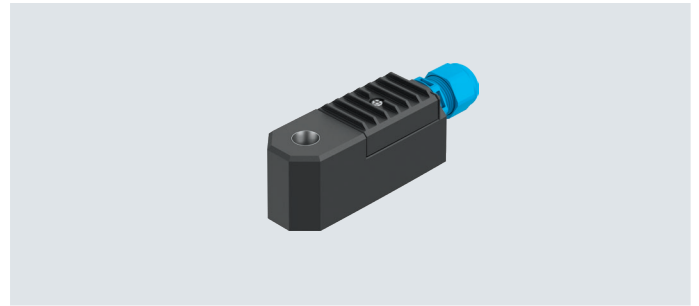
Ordering data				
	Description	Operating voltage	Part no.	Type
	Plug type A, to EN 175301-803	24 V DC	562889	VACC-S13-18-A1-1
		24 V AC/DC	562890	VACC-S13-18-A1-1U
		110 V AC/DC	562891	VACC-S13-18-A1-2U
		230 V AC/DC	562892	VACC-S13-18-A1-3U

Datasheet

Voltage
14 ... 32 V DC

Nominal power
0.22 ... 1.1 watt

- Intrinsically safe solenoid coil
- Type of ignition protection for gas "Ex ia"



General technical data

Actuation type	Electrical
Mounting position	Any
Switching position indication	No
Product weight [g]	330

Materials

Type	VACC-S13-11-K4-1-EX4A	VACC-S13-11-K4-1-NE4A	VACC-S13-11-K4-1-NM4A	VACC-S13-11-K4-1-KS4A
Solenoid coil	–	–	–	PA, UP
Note on materials	RoHS-compliant			
LABS (PWIS) conformity	VDMA24364 zone III			

Electrical data

Type	VACC-S13-11-K4-1-EX4A	VACC-S13-11-K4-1-NE4A	VACC-S13-11-K4-1-NM4A	VACC-S13-11-K4-1-KS4A
Electrical connection	Terminal box, threaded cable gland M20 x 1.5			
Permissible voltage [%]	–15 ... 10			
Duty cycle [%]	100			
Maximum input power, P _i [W]	1.2			
Maximum input voltage, U _i [V]	32			
Maximum input current, I _i [A]	0.2			
Required current consumption, I _{min} [mA]	16			
Degree of protection to EN 60529	IP65	IP65	IP65	IP64
Insulation class	H	H	H	H

Characteristic coil data

Type	VACC-S13-11-K4-1-EX4A	VACC-S13-11-K4-1-NE4A	VACC-S13-11-K4-1-NM4A	VACC-S13-11-K4-1-KS4A
Operating voltage [V DC]	14 ... 32			
Power [W]	0.22 ... 1.1			
Effective internal capacitance, C _i	Negligibly low	0 µF	Negligibly low	Negligibly low
Effective internal inductance, L _i	Negligibly low	0 mH	Negligibly low	Negligibly low

Datasheet

Operating and environmental conditions				
Type	VACC-S13-11-K4-1-EX4A	VACC-S13-11-K4-1-NE4A	VACC-S13-11-K4-1-NM4A	VACC-S13-11-K4-1-KS4A
Corrosion resistance class CRC ¹⁾	–	–	–	4
CE marking (see declaration of conformity) ³⁾	To EU EMC Directive ²⁾	–	–	To EU EMC Directive ²⁾
	To EU Explosion Protection Directive (ATEX)	–	–	To EU Explosion Protection Directive (ATEX)
	To EU RoHS Directive	–	–	–
UKCA marking (see declaration of conformity) ³⁾	To UK EMC regulations (UK-E)	–	–	–
	To UK explosion regulations (UK-X)	–	–	–
	To UK RoHS regulations (UK-R)	–	–	–

1) More information www.festo.com/x/topic/crc

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

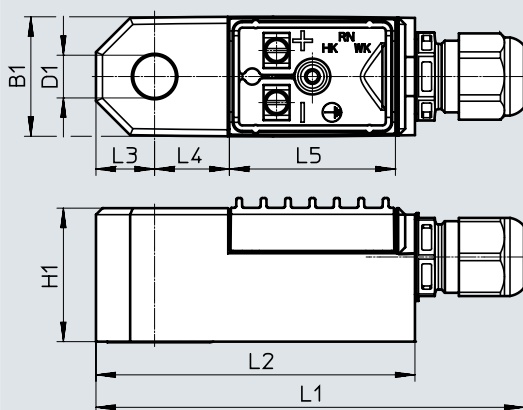
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information www.festo.com/catalogue/... → Support/Downloads.


ATEX				
Type	VACC-S13-11-K4-1-EX4A	VACC-S13-11-K4-1-NE4A	VACC-S13-11-K4-1-NM4A	VACC-S13-11-K4-1-KS4A
ATEX category for gas	II 2G	–	–	II 2G
Type of ignition protection for gas	Ex ia IIC T6/ T5 Gb	Ex ia IIC T5/T6 Gb	Ex ia IIC T6, T5 Gb	Ex ia IIC T5, T6
ATEX category for dust	II 2D	–	–	II 2D
Type of ignition protection for dust	Ex ia IIIC T95°C/T80°C IP65 Db	Ex ia IIIC T95°C/T80°C Db	Ex ia IIIC T80°C, T95°C IP65 Db	Ex iaD 21 T80/T95°C
EX ambient temperature	T5/ T95°C: –30°C ≤ Ta ≤ +65°C T6/ T80°C: –30°C ≤ Ta ≤ +50°C			
Explosion protection certification outside the EU	EPL Db (GB)	EPL Db (CN)	EPL Db (BR)	EPL Db (KR)
	EPL Db (IEC Ex)	EPL Gb (CN)	EPL Gb (BR)	EPL Gb (KR)
	EPL Gb (GB)	–	–	–
	EPL Gb (IECEX)	–	–	–
Certificate-issuing authority	BVS 15 ATEX E 030 X	GYJ20.1094X	DNV 17.0043X	21-AV4BO-0280X
	IECEx BVS 15.0020 X	–	–	22-AV4BO-0052X
	German Technical Control Board (TÜV) 21 UKEX 7016 X	–	–	–

Dimensions

Download CAD data → www.festo.com



Type	B1	D1	H1	L1	L2	L3	L4	L5
VACC-S13-11-K4-1	37	13.1	41	131	98	18	23	51

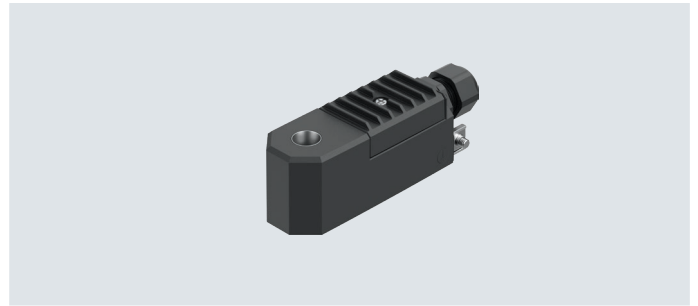
Ordering data				
	Description	Certification	Part no.	Type
	Terminal box, threaded cable gland M20 x 1.5	To EU Explosion Protection Directive (ATEX)	8109401	VACC-S13-11-K4-1-EX4A
		NEPSI	8114135	VACC-S13-11-K4-1-NE4A
		INMETRO	8114078	VACC-S13-11-K4-1-NM4A
		KCC	8114136	VACC-S13-11-K4-1-KS4A

Datasheet

Voltage
24 V AC/DC
60 V AC/DC
110 V AC/DC
230 V AC/DC

- Encapsulated solenoid coil with enhanced safety
- Type of (ignition) protection for gas "Ex e mb"

Nominal power
1.8 watt



General technical data

Actuation type	Electrical
Mounting position	Any
Switching position indication	No
Product weight [g]	330

Materials

Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	Terminal box, threaded cable gland M20 x 1.5
Permissible voltage fluctuations [%]	-15 ... 10
Duty cycle [%]	100
Insulation class	H
Degree of protection to EN 60529	IP65

Characteristic coil data

Operating voltage	24 V AC/DC		24 V AC/DC With fuse		60 V AC/DC		110 V AC/DC		230 V AC/DC	
Frequency [Hz]	50/60	–	50/60	–	50/60	–	50/60	–	50/60	–
Power [W]	–	1.8	–	1.8	–	1.8	–	1.8	–	1.8
	[VA]	1.8	–	1.8	–	1.8	–	1.8	–	1.8

Operating and environmental conditions

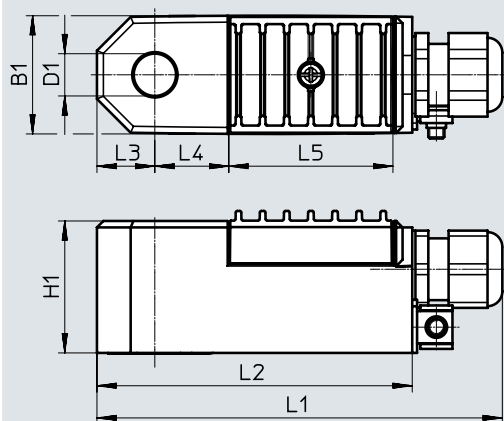
Type	VACC-S13-18-K4-...U...-EX4ME	VACC-S13-18-K4-...-NE4ME	VACC-S13-18-K4-...-NM4ME	VACC-S13-18-K4-...-KS4ME
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)	–	–	–
	To EU RoHS Directive	–	–	–
UKCA marking (see declaration of conformity) ¹⁾	To UK EX instructions (UK-X)	–	–	–
	To UK RoHS regulations (UK-R)	–	–	–

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet


ATEX Type	VACC-S13-18-K4-1UF-EX4ME	VACC-S13-18-K4-1U-EX4ME	VACC-S13-18-K4-2U-EX4ME	VACC-S13-18-K4-3U-EX4ME	VACC-S13-18-K4-27U-EX4ME	VACC-S13-18-K4-...-NE4ME	VACC-S13-18-K4-...-NM4ME	VACC-S13-18-K4-...-KS4ME
ATEX category for gas	II 2G	II 2G	II 2G	II 2G	II 2G	–	–	–
Type of ignition protection for gas	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T6... T4 Gb	Ex eb mb IIC T6, T5, T4 Gb	Ex e mb IIC T4, T5, T6
ATEX category for dust	II 2D	II 2D	II 2D	II 2D	II 2D	–	–	–
Type of ignition protection for dust	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T85°C... T130°C Db	Ex tb IIIC T85°C, T95°C, T130°C Db	Ex tD A21 IP65 T85/ T95/ T130°C
EX ambient temperature [°C]	T4/ T130°C: –30°C ≤ Ta ≤ +60°C							
	T5/ T95°C: –30°C ≤ Ta ≤ +60°C							
	T6/ T85°C: –30°C ≤ Ta ≤ +50°C							
Explosion protection certification outside the EU	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)	EPL Db (CN)	EPL Db (BR)	EPL Db (KR)
	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Gb (CN)	EPL Gb (BR)	EPL Gb (KR)
	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)	–	–	–
	EPL Gb (IECEX)	EPL Gb (IECEX)	EPL Gb (IECEX)	EPL Gb (IECEX)	EPL Gb (IECEX)	–	–	–
Certificate-issuing authority	–	BVS 15ATEX-E029X	–	–	BVS 15ATEX-E029X	GYJ23.1170X	INMETRO DNV 17.0042X	21-AV-4B0-0279X
	IECEX BVS 15.0075X	IECEX BVS 15.0075X	IECEX BVS 15.0075X	IECEX BVS 15.0075X	IECEX BVS 15.0075X	–	–	22-AV-4B0-0051X
	German Technical Control Board (TÜV) 21 UKEX 7015 X	German Technical Control Board (TÜV) 21 UKEX 7015 X	German Technical Control Board (TÜV) 21 UKEX 7015 X	German Technical Control Board (TÜV) 21 UKEX 7015 X	German Technical Control Board (TÜV) 21 UKEX 7015 X	–	–	–

Dimensions

Download CAD data → www.festo.com

Type	B1	D1	H1	L1	L2	L3	L4	L5
VACC-S13-18-K4	37	13.1	41	126	98	18	23	51

Datasheet

Ordering data	Description	Certification	Operating voltage	Internal fuse protection	Part no.	Type
	Terminal box, threaded cable gland M20 x 1.5	To EU Explosion Protection Directive (ATEX)	24 V AC/DC	–	★ 8109396	VACC-S13-18-K4-1U-EX4ME
				Fuse	★ 8109399	VACC-S13-18-K4-1UF-EX4ME
			60 V AC/DC	–	★ 8109400	VACC-S13-18-K4-27U-EX4ME
			110 V AC/DC	–	★ 8109397	VACC-S13-18-K4-2U-EX4ME
			230 V AC/DC	–	★ 8109398	VACC-S13-18-K4-3U-EX4ME
		NEPSI	24 V AC/DC	–	8118329	VACC-S13-18-K4-1U-NE4ME
				Fuse	8118332	VACC-S13-18-K4-1UF-NE4ME
			60 V AC/DC	–	8118333	VACC-S13-18-K4-27U-NE4ME
			110 V AC/DC	–	8118330	VACC-S13-18-K4-2U-NE4ME
			230 V AC/DC	–	8118331	VACC-S13-18-K4-3U-NE4ME
		INMETRO	24 V AC/DC	–	8118324	VACC-S13-18-K4-1U-NM4ME
				Fuse	8118327	VACC-S13-18-K4-1UF-NM4ME
			60 V AC/DC	–	8118328	VACC-S13-18-K4-27U-NM4ME
			110 V AC/DC	–	8118325	VACC-S13-18-K4-2U-NM4ME
			230 V AC/DC	–	8118326	VACC-S13-18-K4-3U-NM4ME
		KCC	24 V AC/DC	–	8156759	VACC-S13-18-K4-1U-KS4ME
				Fuse	8156762	VACC-S13-18-K4-1UF-KS4ME
			60 V AC/DC	–	8156763	VACC-S13-18-K4-27U-KS4ME
			110 V AC/DC	–	8156760	VACC-S13-18-K4-2U-KS4ME
			230 V AC/DC	–	8156761	VACC-S13-18-K4-3U-KS4ME

Datasheet

- 

Voltage

24 V DC

24 V AC

110 V AC

230 V AC
- 

Temperature range

–20 ... +60 °C
- Nominal power

3.6 W at 24 V DC



General technical data				
Operating voltage	24 V DC	24 V AC	110 V AC	230 V AC
Type of mounting	Via knurled nut			
Actuation type	Electrical			
Mounting position	Any			
Product weight	[g]	530		580

Materials	
Solenoid coil	Steel, PA
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data	
Electrical connection	Plug pins, 3-pin, with plug pattern type A, to EN 175301-803
Permissible voltage fluctuations	[%] –15 ... 10
Duty cycle	[%] 100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data				
Operating voltage	24 V DC	24 V AC	110 V AC	230 V AC
Frequency	[Hz] –	50/60	50/60	50/60
Power	[W] 3.5	–	–	–
	[VA] –	3.5	3.5	3.5

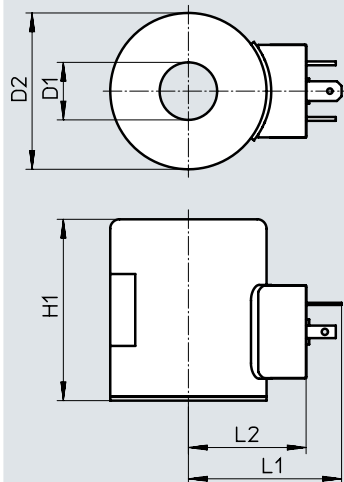
Operating and environmental conditions				
Operating voltage	24 V DC	24 V AC	110 V AC	230 V AC
Ambient temperature	[°C] –20 ... 60		–20 ... 60	
Corrosion resistance class CRC ¹⁾	4		4	
CE marking (see declaration of conformity) ²⁾	–		To EU Low Voltage Directive	
UKCA marking (see declaration of conformity)	–		To UK regulations for electrical equipment	

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)


Type	D1 Ø	D2 Ø	H1	L1	L2
VACC-S18-35-A1-1	18.2	50	58	50	38
VACC-S18-35-A1-1A					
VACC-S18-35-A1-2A					
VACC-S18-35-A1-3A					

Ordering data

	Description	Operating voltage	Part no.	Type
	Plug type A, to EN 175301-803	24 V DC	562906	VACC-S18-35-A1-1
		24 V AC	562907	VACC-S18-35-A1-1A
		110 V AC	562908	VACC-S18-35-A1-2A
		230 V AC	562909	VACC-S18-35-A1-3A

Datasheet

- 

Voltage

24 V DC

24 V AC

110 V AC

230 V AC
- Nominal power

12 W at 24 V DC
- 

Temperature range

-20 ... +60 °C



General technical data	
Type of mounting	Via knurled nut
Actuation type	Electrical
Mounting position	Any
Product weight	[g] 530

Materials	
Housing	PA, steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data	
Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type A
Permissible voltage fluctuations	[%] -15 ... 10
Duty cycle	[%] 100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data		24 V DC	24 V AC	110 V AC	230 V AC
Operating voltage		24 V DC	24 V AC	110 V AC	230 V AC
Frequency	[Hz]	–	50/60	50/60	50/60
Power	[W]	12.0	–	–	–
	[VA]	–	12.0	12.0	12.0

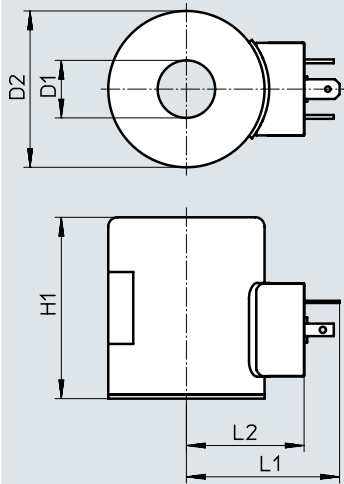
Operating and environmental conditions		24 V DC	24 V AC	110 V AC	230 V AC
Operating voltage		24 V DC	24 V AC	110 V AC	230 V AC
Ambient temperature	[°C]	-20 ... 60		-20 ... 60	
Corrosion resistance class CRC ¹⁾		4		4	
CE marking (see declaration of conformity) ²⁾		–		To EU Low Voltage Directive	
UKCA marking (see declaration of conformity)		–		To UK regulations for electrical equipment	

1) More information www.festo.com/x/topic/crc
2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions

Download CAD data → www.festo.com



Type	D1 Ø	D2 Ø	H1	L1	L2
VACC-S18-120-A1-1	18.2	50	58	50	38
VACC-S18-120-A1-1A					
VACC-S18-120-A1-2A					
VACC-S18-120-A1-3A					

Ordering data

	Description	Operating voltage	Part no.	Type
	Plug type A, to EN 175301-803	24 V DC	8040580	VACC-S18-120-A1-1
		24 V AC	8040890	VACC-S18-120-A1-1A
		110 V AC	8040582	VACC-S18-120-A1-2A
		230 V AC	8040584	VACC-18-120-A1-3A

Datasheet

Voltage
230 V AC

Temperature range
−50 ... +90 °C

Nominal power
3 watt at 230 V AC

- Solenoid coil with flameproof enclosure
- ATEX category: "II 2G" and "II 2D"
- Type of (ignition) protection for gas "Ex d"



General technical data

Type of mounting	Via knurled nut
Actuation type	Electrical
Mounting position	Any
Product weight [g]	1700

Materials

Housing	Wrought aluminium alloy, grey cast iron
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	K4	Terminal box, threaded cable gland, metric, M20 x 1.5
	K5	Terminal box, threaded cable gland, NPT, 1/2 NPT
Permissible voltage fluctuations	[%]	−15 ... 10
Duty cycle	[%]	100
Degree of protection to EN 60529		IP65 with plug socket
Insulation class		H

Characteristic coil data

Operating voltage	[V AC]	230
Frequency	[Hz]	50/60
Power	[VA]	1.8

ATEX

ATEX category for gas	II 2G
Type of ignition protection for gas	Ex d IIC T6, T5, T4 Gb
ATEX category for dust	II 2D
Type of ignition protection for dust	Ex tb IIIC T80°C,T95°C,T130°C Db
EX ambient temperature [°C]	T4,T130°C: −50°C <= Ta <= +90°C
	T5,T95°C: −50°C <= Ta <= +55°C
	T6,T80°C: −50°C <= Ta <= +40°C
Explosion protection certification out-side the EU	EPL Db (IEC Ex)
	EPL Gb (IECEX)
Certificate-issuing authority	BVS15ATEXE135
	IECEXBVS.15.0116

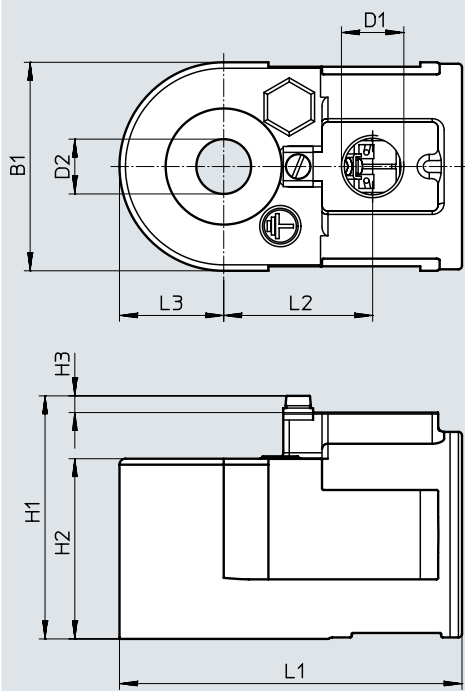
Datasheet

Operating and environmental conditions	
Corrosion resistance class CRC ¹⁾	4
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX)
	To EU RoHS Directive


1) More information www.festo.com/x/topic/crc
2) More information www.festo.com/catalogue/... → Support/Downloads.

Dimensions

Download CAD data → www.festo.com



Type	B1	D1	D2 Ø	H1	H2	H3	L1	L2	L3
VACC-S18-18-K4-3A-EX4D	70	M20x1.5	18.2	82	60.5	6	115	50	35
VACC-S18-18-K5-3A-EX4D		1/2 NPT							

Ordering data			
	Description	Part no.	Type
	Terminal box, cable fitting, metric, M20 x 1.5	3504741	VACC-S18-18-K4-3A-EX4D
	Terminal box, cable fitting NPT, 1/2 NPT	3546734	VACC-S18-18-K5-3A-EX4D

Datasheet

Voltage
24 V AC/DC
110 V AC/DC
230 V AC/DC

Temperature range
−20 ... +60 °C

Nominal power
2.5 W at 24 V DC

- Solenoid coil with flameproof enclosure
- ATEX category: "II 2G" and "II 2D"
- Type of (ignition) protection for gas "Ex d"
- Explosion protection certification outside the EU EPL Db and EPL Gb



General technical data

Type of mounting	Via knurled nut
Actuation type	Electrical
Mounting position	Any
Product weight [g]	1700

Materials

Housing	Wrought aluminium alloy, grey cast iron
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	K4	Terminal box, threaded cable gland, metric, M20 x 1.5
	K5	Terminal box, threaded cable gland, NPT, 1/2 NPT
Permissible voltage fluctuations	[%]	−15 ... 10
Duty cycle	[%]	100
Degree of protection to EN 60529		IP65
Insulation class		H

Characteristic coil data

Operating voltage		24 V AC/DC	110 V AC/DC	230 V AC/DC
Frequency	[Hz]	50/60	50/60	50/60
Power	[W]	2.5	2.5	2.5
	[VA]	2.5	2.5	2.5

ATEX

ATEX category for gas	II 2G
Type of ignition protection for gas	Ex d IIC T6, T5, T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex tb IIIC T80°C, 95°C, 130°C Db
EX ambient temperature [°C]	T4, T130°C: −50°C ≤ Ta ≤ +90°C
	T5, T95°C: −50°C ≤ Ta ≤ +55°C
	T6, T80°C: −50°C ≤ Ta ≤ +40°C
Explosion protection certification outside the EU	EPL Db (GB)
	EPL Db (IEC Ex)
	EPL Gb (GB)
	EPL Gb (IECEx)
Certificate-issuing authority	BVS15ATEXE135
	IECExBVS.15.0116

Datasheet

Operating and environmental conditions

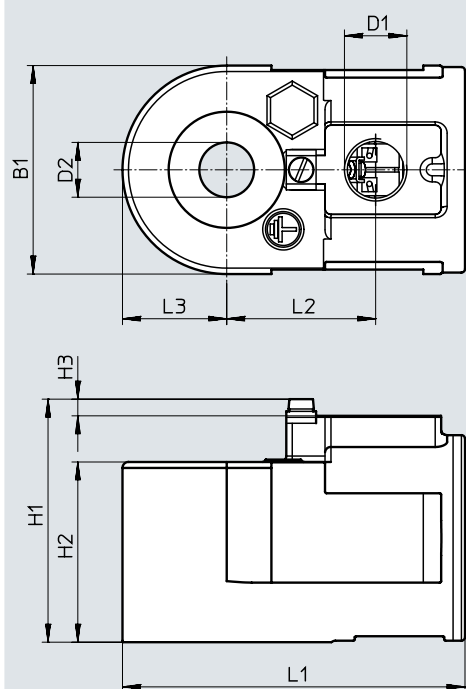
Corrosion resistance class CRC ¹⁾	4
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX)
	To EU RoHS Directive
UKCA marking (see declaration of conformity) ²⁾	According to UK explosion regulations
	To UK RoHS regulations

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Dimensions

Download CAD data → www.festo.com



Type	B1	D1	D2 ø	H1	H2	H3	L1	L2	L3
VACC-S18-25-K4-...U-EX4D	70	M20x1.5	18.2	82	60.5	6	115	50	35
VACC-S18-25-K5-...U-EX4D		1/2 NPT							

Ordering data

	Description	Operating voltage	Part no.	Type
	Terminal box, threaded cable gland, metric, M20 x 1.5	24 V AC/DC	562903	VACC-S18-25-K4-1U-EX4D
		110 V AC/DC	562904	VACC-S18-25-K4-2U-EX4D
		230 V AC/DC	562905	VACC-S18-25-K4-3U-EX4D
	Terminal box, threaded cable gland, NPT, 1/2 NPT	24 V AC/DC	562900	VACC-S18-25-K5-1U-EX4D
		110 V AC/DC	562901	VACC-S18-25-K5-2U-EX4D
		230 V AC/DC	562902	VACC-S18-25-K5-3U-EX4D

Datasheet

Voltage

24 V AC/DC

48 V AC/DC

110 V AC/DC

120 V AC/DC

230 V AC/DC

Temperature range

-20 ... +90 °C

- Solenoid coil with flameproof enclosure
- ATEX category: "II 2G" and "II 2D"
- Type of (ignition) protection for gas "Ex d"
- Explosion protection certification outside the EU EPL Db and EPL Gb



Nominal power

7 W at 24 V DC

General technical data		
Type of mounting	Via knurled nut	
Actuation type	Electrical	
Mounting position	Any	
Product weight	[g]	1700

Materials	
Housing	Wrought aluminium alloy, grey cast iron
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data		
Electrical connection	K4	Terminal box, threaded cable gland, metric, M20 x 1.5
	K5	Terminal box, threaded cable gland, NPT, 1/2 NPT
Permissible voltage fluctuations	[%]	-15 ... 10
Duty cycle	[%]	100
Degree of protection to EN 60529	IP65	
Insulation class	H	

Characteristic coil data						
Operating voltage		24 V AC/DC	48 V AC/DC	110 V AC/DC	120 V AC/DC	230 V AC/DC
Frequency	[Hz]	50/60	50/60	50/60	50/60	50/60
Power	[W]	7	7	7	7	7
	[VA]	7	7	7	7	7

ATEX	
ATEX category for gas	II 2G
Type of ignition protection for gas	Ex d IIC T6, T5, T4 Gb
ATEX category for dust	II 2D
Type of (ignition) protection for dust	Ex tb IIIC T80°C, 95°C, 130°C Db
EX ambient temperature [°C]	T4, T130°C: -50°C ≤ Ta ≤ +90°C
	T5, T95°C: -50°C ≤ Ta ≤ +55°C
	T6, T80°C: -50°C ≤ Ta ≤ +40°C
Explosion protection certification outside the EU	EPL Db (GB)
	EPL Db (IEC Ex)
	EPL Gb (GB)
	EPL Gb (IECEx)
Certificate-issuing authority	BVS15ATEXE135
	IECExBVS.15.0116

Datasheet


Operating and environmental conditions	
Corrosion resistance class CRC ¹⁾	4
CE marking (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX)
	To EU RoHS Directive
UKCA marking (see declaration of conformity) ²⁾	According to UK explosion regulations
	To UK RoHS regulations

1) More information www.festo.com/x/topic/crc
2) More information www.festo.com/catalogue/... → Support/Downloads.

Dimensions

Download CAD data → www.festo.com

Type	B1	D1	D2 ø	H1	H2	H3	L1	L2	L3
VACC-S18-70-K4-...-EX4D	70	M20x1.5	18.2	82	60.5	6	115	50	35
VACC-S18-70-K5-...-EX4D	70	1/2 NPT	18.2	82	60.5	6	115	50	35

Ordering data				
	Description	Operating voltage	Part no.	Type
	Terminal box, cable fitting, metric, M20 x 1.5	24 V AC/DC	3504563	VACC-S18-70-K4-1U-EX4D
		48 V AC/DC	3504574	VACC-S18-70-K4-7U-EX4D
		120 V AC/DC	3504609	VACC-S18-70-K4-16U-EX4D
		230 V AC/DC	3504639	VACC-S18-70-K4-3U-EX4D
	Terminal box, cable fitting NPT, 1/2 NPT	24 V AC/DC	3546549	VACC-S18-70-K5-1U-EX4D
		48 V AC/DC	3546588	VACC-S18-70-K5-7U-EX4D
		110 V AC/DC	3546625	VACC-S18-70-K5-2U-EX4D
		230 V AC/DC	3546662	VACC-S18-70-K5-3U-EX4D

Datasheet

- Voltage

24 V AC/DC

110 V AC/DC

230 V AC/DC
- Nominal power

3.5 watt
- Encapsulated solenoid coil with enhanced safety



General technical data									
Actuation type		Electrical							
Mounting position		Any							
Switching position indication		No							
Product weight		[g]	580						
Materials									
Note on materials		RoHS-compliant							
LABS (PWIS) conformity		VDMA24364 zone III							
Electrical data									
Electrical connection		Terminal box, threaded cable gland M20 x 1.5							
Permissible voltage fluctuations		[%]	−15 ... 10						
Duty cycle		[%]	100						
Degree of protection to EN 60529		IP66							
Insulation class		H							
Characteristic coil data									
Operating voltage		24 V AC/DC		24 V AC/DC With fuse		110 V AC/DC		230 V AC/DC	
Frequency	[Hz]	50/60	–	50/60	–	50/60	–	50/60	–
Power	[W]	–	3.5	–	3.5	–	3.5	–	3.5
	[VA]	3.5	–	3.5	–	3.5	–	3.5	–
Operating and environmental conditions									
Type		VACC-S18-35-K4-...-EX4ME		VACC-S18-35-K4-...-NE4ME		VACC-S18-35-K4-...-NM4ME		VACC-S18-35-K4-...-KS4ME	
CE marking (see declaration of conformity) ¹⁾		To EU Explosion Protection Directive (ATEX)		–		–		–	
		To EU RoHS Directive		–		–		–	
UKCA marking (see declaration of conformity) ¹⁾		To UK explosion regulations (UK-X)		–		–		–	
		To UK RoHS regulations (UK-R)		–		–		–	

1) More information www.festo.com/catalogue/... → Support/Downloads.

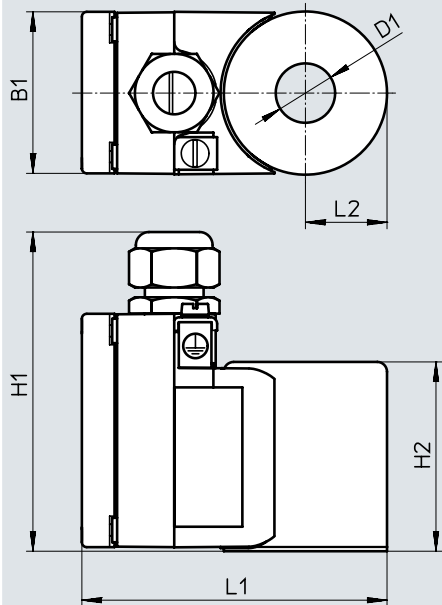
Datasheet

ATEX				
Type	VACC-S18-35-K4-1UF-EX4ME	VACC-S18-35-K4-1U-EX4ME	VACC-S18-35-K4-2U-EX4ME	VACC-S18-35-K4-3U-EX4ME
ATEX category for gas	II 2G	II 2G	II 2G	II 2G
Type of (ignition) protection for gas	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb
ATEX category for dust	II 2D	II 2D	II 2D	II 2D
Type of (ignition) protection for dust	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db
EX ambient temperature [°C]	T5/ T95°C: -25°C ≤ Ta ≤ +60°C			
	T6/ T80°C: -25°C ≤ Ta ≤ +50°C			
Explosion protection certification outside the EU	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)
	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)
	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)
	EPL Gb (IECEx)	EPL Gb (IECEx)	EPL Gb (IECEx)	EPL Gb (IECEx)
Certificate-issuing authority	–	–	–	BVS 16ATEXE036X
	–	–	–	IECEx BVS16.0028X
	German Technical Control Board (TÜV) 21 UKEX 7017 X	German Technical Control Board (TÜV) 21 UKEX 7017 X	German Technical Control Board (TÜV) 21 UKEX 7017 X	German Technical Control Board (TÜV) 21 UKEX 7017 X


ATEX			
Type	VACC-S18-35-K4-...-NE4ME	VACC-S18-35-K4-...-NM4ME	VACC-S18-35-K4-...-KS4ME
ATEX category for gas	–	–	–
Type of ignition protection for gas	Ex eb mb IIC T4 Gb	Ex eb mb IIC T6, T5 Gb	Ex e mb IIC T5, T6
ATEX category for dust	–	–	–
Type of ignition protection for dust	Ex tb IIIC T120°C Db	Ex tb IIIC T8 0°C, T95 °C Db	Ex tD A21 IP66 T85/T95°C
EX ambient temperature [°C]	T5/ T95°C: -25°C ≤ Ta ≤ +60°C		
	T6/ T80°C: -25°C ≤ Ta ≤ +50°C		
Explosion protection certification outside the EU	EPL Db (CN)	EPL Db (BR)	EPL Db (KR)
	EPL Gb (CN)	EPL Gb (BR)	EPL Gb (KR)
	–	–	–
	–	–	–
Certificate-issuing authority	GYJ23.1169X	INMETRO DNV 19.0135X	22-AV4BO-0256X
	–	–	22-AV4BO-0257X
	–	–	–

Datasheet

Dimensions Download CAD data → www.festo.com



Type	B1	D1 ø	H1	H2	L1	L2
VACC-S18-35-K4	50	18.2	100	58	95	25

Ordering data						
	Description	Certification	Operating voltage	Internal fuse protection	Part no.	Type
	Terminal box, threaded cable gland M20 x 1.5	To EU Explosion Protection Directive (ATEX)	24 V AC/DC	–	8109389	VACC-S18-35-K4-1U-EX4ME
				Fuse	8109388	VACC-S18-35-K4-1UF-EX4ME
			110 V AC/DC	–	8109387	VACC-S18-35-K4-2U-EX4ME
			230 V AC/DC	–	8109386	VACC-S18-35-K4-3U-EX4ME
		NEPSI	24 V AC/DC	–	8118257	VACC-S18-35-K4-1U-NE4ME
				Fuse	8118256	VACC-S18-35-K4-1UF-NE4ME
			110 V AC/DC	–	8118255	VACC-S18-35-K4-2U-NE4ME
			230 V AC/DC	–	8118254	VACC-S18-35-K4-3U-NE4ME
		INMETRO	24 V AC/DC	–	8118182	VACC-S18-35-K4-1U-NM4ME
				Fuse	8118179	VACC-S18-35-K4-1UF-NM4ME
			110 V AC/DC	–	8118174	VACC-S18-35-K4-2U-NM4ME
			230 V AC/DC	–	8118180	VACC-S18-35-K4-3U-NM4ME
		KCC	24 V AC/DC	–	8118317	VACC-S18-35-K4-1U-KS4ME
				Fuse	8118316	VACC-S18-35-K4-1UF-KS4ME
			110 V AC/DC	–	8118315	VACC-S18-35-K4-2U-KS4ME
			230 V AC/DC	–	8118314	VACC-S18-35-K4-3U-KS4ME

Datasheet

Voltage
24 V AC/DC
48 V DC
60 V DC
110 V AC/DC
230 V AC/DC

- Encapsulated solenoid coil with enhanced safety

Nominal power
12.0 watt



General technical data

Actuation type	Electrical
Mounting position	Any
Switching position indication	No
Product weight [g]	580

Materials

Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	Terminal box, threaded cable gland M20 x 1.5
Permissible voltage fluctuations [%]	-15 ... 10
Duty cycle [%]	100
Degree of protection to EN 60529	IP66
Insulation class	H

Characteristic coil data

Operating voltage	24 V AC/DC		24 V AC/DC With fuse		48 V DC	60 V DC	110 V AC/DC		230 V AC/DC	
Frequency [Hz]	50/60	–	50/60	–	–	–	50/60	–	50/60	–
Power [W]	–	12	–	12	12	12	–	12	–	12
	[VA]	12	–	12	–	–	12	–	12	–

Operating and environmental conditions

Type	VACC-S18-120-K4-...-EX4ME	VACC-S18-120-K4-...-NE4ME	VACC-S18-120-K4-...-NM4ME	VACC-S18-120-K4-...-KS4ME
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)	–	–	–
	To EU RoHS Directive			
UKCA marking (see declaration of conformity) ¹⁾	To UK explosion regulations (UK-X)	–	–	–
	To UK RoHS regulations (UK-R)			

1) More information www.festo.com/catalogue/... → Support/Downloads.

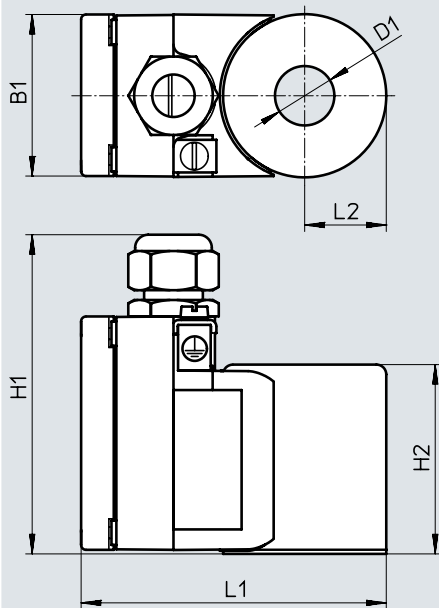
Datasheet

ATEX					
Type	VACC-S18-120-K4-1UF-EX4ME	VACC-S18-120-K4-1U-EX4ME	VACC-S18-120-K4-2U-EX4ME	VACC-S18-120-K4-3U-EX4ME	VACC-S18-120-K4-27-EX4ME
ATEX category for gas	II 2G	II 2G	II 2G	II 2G	II 2G
Type of (ignition) protection for gas	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb	Ex eb mb IIC T* Gb
ATEX category for dust	II 2D	II 2D	II 2D	II 2D	II 2D
Type of (ignition) protection for dust	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db	Ex tb IIIC T*°C Db
EX ambient temperature [°C]	T4/ T120°C: -25°C ≤ Ta ≤ +40°C				
Explosion protection certification outside the EU	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)	EPL Db (GB)
	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)	EPL Db (IEC Ex)
	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)	EPL Gb (GB)
	EPL Gb (IECEX)	EPL Gb (IECEX)	EPL Gb (IECEX)	EPL Gb (IECEX)	EPL Gb (IECEX)
Certificate-issuing authority	–	BVS 16ATEXE036X	BVS 16ATEXE036X	BVS 16ATEXE036X	–
	–	IECEX BVS16.0028X	IECEX BVS16.0028X	–	–
	German Technical Control Board (TÜV) 21 UKEX 7017 X	German Technical Control Board (TÜV) 21 UKEX 7017 X	German Technical Control Board (TÜV) 21 UKEX 7017 X	–	German Technical Control Board (TÜV) 21 UKEX 7017 X

ATEX			
Type	VACC-S18-120-K4-...-NE4ME	VACC-S18-120-K4-...-NM4ME	VACC-S18-120-K4-...-KS4ME
ATEX category for gas	–	–	–
Type of (ignition) protection for gas	Ex e mb IIC T4 Gb	Ex eb mb IIC T4 Gb	Ex e mb IIC T4
ATEX category for dust	–	–	–
Type of (ignition) protection for dust	Ex tD A21 IP66 T120°C	Ex tb IIIC T120°C Db	Ex tD A21 IP66 T120°C
EX ambient temperature [°C]	T4/ T120°C: -25°C ≤ Ta ≤ +40°C		
Explosion protection certification outside the EU	EPL Db (CN)	EPL Db (BR)	EPL Db (KR)
	EPL Gb (CN)	EPL Gb (BR)	EPL Gb (KR)
	–	–	–
	–	–	–
Certificate-issuing authority	GYJ17.1237X	INMETRO DNV 19.0135X	22-AV4BO-0256X
	–	–	22-AV4BO-0257X
	–	–	–

Datasheet

Dimensions

Download CAD data → www.festo.com

Type	B1	D1 Ø	H1	H2	L1	L2
VACC-S18-120-K4	50	18.2	100	58	95	25

Ordering data

	Description	Certification	Operating voltage	Internal fuse protection	Part no.	Type
	Terminal box, threaded cable gland M20 x 1.5	To EU Explosion Protection Directive (ATEX)	24 V AC/DC	–	8109395	VACC-S18-120-K4-1U-EX4ME
				Fuse	8109394	VACC-S18-120-K4-1UF-EX4ME
			48 V DC	–	8109390	VACC-S18-120-K4-7-EX4ME
			60 V DC	–	8109393	VACC-S18-120-K4-27-EX4ME
			110 V AC/DC	–	8109392	VACC-S18-120-K4-2U-EX4ME
			230 V AC/DC	–	8109391	VACC-S18-120-K4-3U-EX4ME
		NEPSI	24 V AC/DC	–	8118263	VACC-S18-120-K4-1U-NE4ME
				Fuse	8118262	VACC-S18-120-K4-1UF-NE4ME
			48 V DC	–	8118258	VACC-S18-120-K4-7-NE4ME
			60 V DC	–	8118261	VACC-S18-120-K4-27-NE4ME
			110 V AC/DC	–	8118260	VACC-S18-120-K4-2U-NE4ME
			230 V AC/DC	–	8118259	VACC-S18-120-K4-3U-NE4ME
		INMETRO	24 V AC/DC	–	8118181	VACC-S18-120-K4-1U-NM4ME
				Fuse	8118177	VACC-S18-120-K4-1UF-NM4ME
			48 V DC	–	8118175	VACC-S18-120-K4-7-NM4ME
			60 V DC	–	8118176	VACC-S18-120-K4-27-NM4ME
			110 V AC/DC	–	8118178	VACC-S18-120-K4-2U-NM4ME
			230 V AC/DC	–	8118173	VACC-S18-120-K4-3U-NM4ME
		KCC	24 V AC/DC	–	8118323	VACC-S18-120-K4-1U-KS4ME
				Fuse	8118322	VACC-S18-120-K4-1UF-KS4ME
			48 V DC	–	8118318	VACC-S18-120-K4-7-KS4ME
			60 V DC	–	8118321	VACC-S18-120-K4-27-KS4ME
			110 V AC/DC	–	8118320	VACC-S18-120-K4-2U-KS4ME
			230 V AC/DC	–	8118319	VACC-S18-120-K4-3U-KS4ME

Datasheet

- Voltage

24 V DC

48 V DC

125 V DC

220 V DC
- Solenoid coil with flame-proof enclosure
 - Class I, Div. 2 (CA)
 - Class I, Div. 2 (US)

Nominal power

7.0 W at 24 V DC



General technical data	
Type of mounting	Via knurled nut
Actuation type	Electrical
Mounting position	Any
Switching position indication	No
Product weight [g]	1700

Materials	
Housing	Grey cast iron, wrought aluminium alloy
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data	
Electrical connection	Terminal box, threaded cable gland, NPT1/2
Permissible voltage fluctuations [%]	-15 ... 10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65
Insulation class	H

Characteristic coil data				
Operating voltage	24 V DC	48 V DC	125 V DC	220 V DC
Power [W]	7.0	7.0	7.0	7.0

Operating and environmental conditions				
Operating voltage	24 V DC	48 V DC	125 V DC	220 V DC
Corrosion resistance class CRC ¹⁾	4		4	
CE marking (see declaration of conformity) ²⁾	–		To EU Low Voltage Directive	

1) More information www.festo.com/x/topic/crc

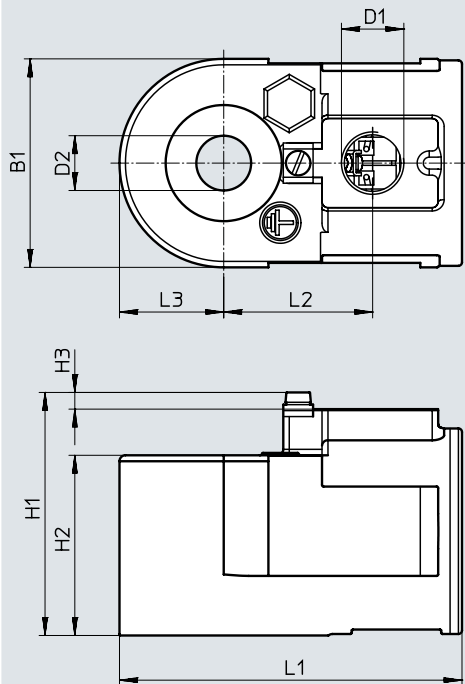
2) More information www.festo.com/catalogue/... → Support/Downloads.

ATEX	
EX ambient temperature	T4A, 120°C: -25 °C <= Ta <= +80 °C
Explosion protection certification outside the EU	Class I, Div. 2 (CA)
	Class I, Div. 2 (US)

Datasheet

Dimensions

Download CAD data → www.festo.com



Type	B1	D1	D2 Ø	H1	H2	H3	L1	L2	L3
VACC-S18-70-K5-...-U2D	70	1/2 NPT	18,2	82	60,5	6	115	50	35

Ordering data

	Description	Operating voltage	Part no.	Type
	Terminal box, threaded cable gland 1/2 NPT	24 V DC	3546816	VACC-S18-70-K5-1-U2D
		48 V DC	3546876	VACC-S18-70-K5-7-U2D
		125 V DC	3546913	VACC-S18-70-K5-16-U2D
		220 V DC	3546949	VACC-S18-70-K5-3-U2D

Datasheet

- 

Voltage

12 V DC

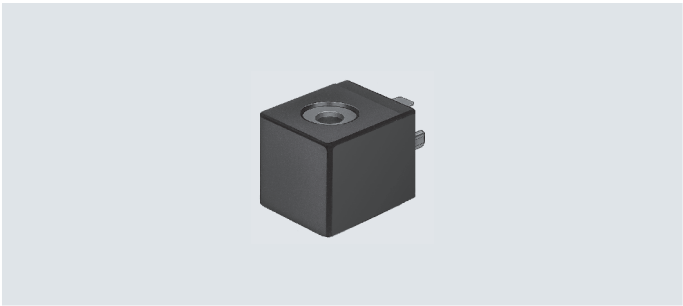
24 V DC

24 ... 230 V AC
- 

Temperature range

−10 ... +50 °C

- Can be replaced without interrupting the pneumatic circuit
- Plug pattern to EN 175301-803, type A



General technical data		
Type of mounting	Clamped using retaining clamp	
Mounting position	Any (can be rotated 360° on the armature)	
Product weight	[g]	80

Materials	
Housing	PA
Pin contact	Steel
Winding	Copper
LABS (PWIS) conformity	VDMA24364-C1-L

Electrical data						
Operating voltage	12 V DC	24 V DC	24 V AC	110 V AC	120 V AC	230 V AC
Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type A					
	Clip-on	–	Clip-on	–	–	–
Min. pickup time	[ms]	10	10	10		10
Permissible voltage fluctuations	[%]	−15 / +10	−15 / +10	At 50 Hz: −10 / +10 At 60 Hz: −10 / +20		−10 / +10
Duty cycle	[%]	100	100	100		100
Degree of protection to EN 60529	IP65 with plug socket		IP65 with plug socket			


Characteristic coil data										
Operating voltage		12 V DC	24 V DC	24 V AC		110 V AC		120 V AC	230 V AC	
Power	[W]	5	2.5	–		–		–	–	
Pickup power, 50 Hz	[VA]	–	–	7.5	5	7.5	5	5	7.5	5
Holding power, 50 Hz	[VA]	–	–	5	3.7	5	3.7	3.7	5	3.7
Power factor cos(phi)		–	–	0.7		0.7		0.7	0.7	
Frequency	[Hz]	–	–	50	60	50	60	60	50	60

Operating and environmental conditions						
Operating voltage	12 V DC	24 V DC	24 V AC	110 V AC	120 V AC	230 V AC
Ambient temperature	[°C]	−10 ... +50	−10 ... +50	−10 ... +50	−10 ... +50	
Temperature of medium	[°C]	−10 ... +50	−10 ... +50	−10 ... +50	−10 ... +50	
CE marking (see declaration of conformity) ¹⁾	–	–	–	To EU Low Voltage Directive		
UKCA marking (see declaration of conformity) ¹⁾	–	–	–	To UK regulations for electrical equipment		
Certification	–	c UL us - Recognized (OL)	–	–		
Maritime classification ¹⁾	–	–	–	See certificate		

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions

Download CAD data → www.festo.com



[1] Solenoid coil
(can be rotated 360° on the
armature)

[2] Safety clip

[3] Plug pins with plug pattern
to EN 175301-803, type A

Type	B1	H1	L1	L2
MSN1...	30	30	35.5	14.5

Ordering data

Description	Part no.	Type
Solenoid coil		
 Without plug socket, plug pattern to EN 175301-803, type A	24 V DC	123060 MSN1G-24DC-OD
	12 V DC, 24 V AC	170152 MSN1W-24AC/12DC
	110 V AC, 120 V AC	123061 MSN1W-110AC-OD
	230 V AC	123062 MSN1W-230AC-OD
Plug socket		
 Cable connection using clamping screws	34583	MSSD-C
 Cable connection using insulation displacement technology	192748	MSSD-C-S-M16
Connecting cable		
 Operating voltage 24 V DC, signal status indication with LED	Cable length 0.6 m	3679776 NEBV-A1W3F-P-K-0.6-N-LE3
	Cable length 2.5 m	30931 KMC-1-24DC-2.5-LED
	Cable length 5 m	30933 KMC-1-24DC-5-LED
	Cable length 10 m	193459 KMC-1-24-10-LED
Operating voltage up to 240 V	Cable length 0.6 m	3579466 NEBV-A1W3-K-0.6-N-LE3
	Cable length 2.5 m	30932 KMC-1-230AC-2.5
	Cable length 5 m	30934 KMC-1-230AC-5
	Cable length 10 m	193459 KMC-1-24-10-LED
 Electrical connection 2, M12x1, A-coded Operating voltage 24 V DC, signal status indication with LED	Cable length 0.3 m	3679771 NEBV-A1W3F-P-K-0.3-N-M12W3
	Cable length 0.6 m	3679772 NEBV-A1W3F-P-K-0.6-N-M12W3
	Cable length 0.3 m	3579461 NEBV-A1W3-K-0.3-N-M12W3
	Cable length 0.6 m	3579462 NEBV-A1W3-K-0.6-N-M12W3
Illuminating seal		
 Operating voltage 12 ... 24 V DC	19145	MC-LD-12-24DC
	19146	MC-LD-230AC
Inscription label		
 Scope of delivery: 35 labels in a frame	33362	KMC/F/V-BZ-35X

Type codes

001	Series	
VACS	Solenoid coil VACS	
002	Solenoid coil type	
C	Solenoid coil width of 18 mm for armature tube of 8 mm	
003	Electrical connection	
C1	Plug pattern type C, to EN 175301-803	
R1	Individual connector M8, 4-pin	
R3	Single plug M12 A-coded, according to EN 61076-2-101	
R4	Single plug M12 A-coded, pin assignment according to DESINA	
R8	Individual connector M8, 3-pin	

004	Nominal operating voltage	
1	24 V DC	
1A	24 V AC/50-60 Hz	
3W	230 V AC/240 V AC/50-60 Hz	
5	12 V DC	
7	48 V DC	
7A	48 V AC/50-60 Hz	
16B	120 V AC/60 Hz and 110V AC/50-60 Hz	

005	Circuitry	
	None	
R	Holding current reduction with integrated protective circuit	
RA	Holding current reduction, analogue, with integrated protective circuit	

006	Display	
	None	
L	LED	

Datasheet

-  Voltage
12 ... 48 V DC
24 ... 240 V AC
-  Temperature range
-10 ... +50 °C

- In accordance with VDE regulation 0580, insulation class H
- Plug pattern to EN 175301-803, type C
- Can be replaced without interrupting the pneumatic circuit



General technical data

Conforms to standard	IEC 61010-1
Type of mounting	Via knurled nut
Mounting position	Any (can be rotated in increments of 45° on the armature)

Materials

Housing seal set	Aluminium, HNBR
Housing	PA, steel
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Electrical connection	Plug pins, 3-pin, with plug pattern to EN 175301-803, type C
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65 with plug socket
Insulation class	H

Characteristic coil data

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Power [W]	2.6	2.6	2.4	–	–	–	–
Pickup power, 50 Hz [VA]	–	–	–	2.5	2.5	2.3	3.0
Holding power, 50 Hz [VA]	–	–	–	1.8	1.9	1.7	2.3
Frequency [Hz]	–	–	–	50/60	50/60	50/60	50/60
Surge resistance [kV]	–	–	–	–	–	2.5	4

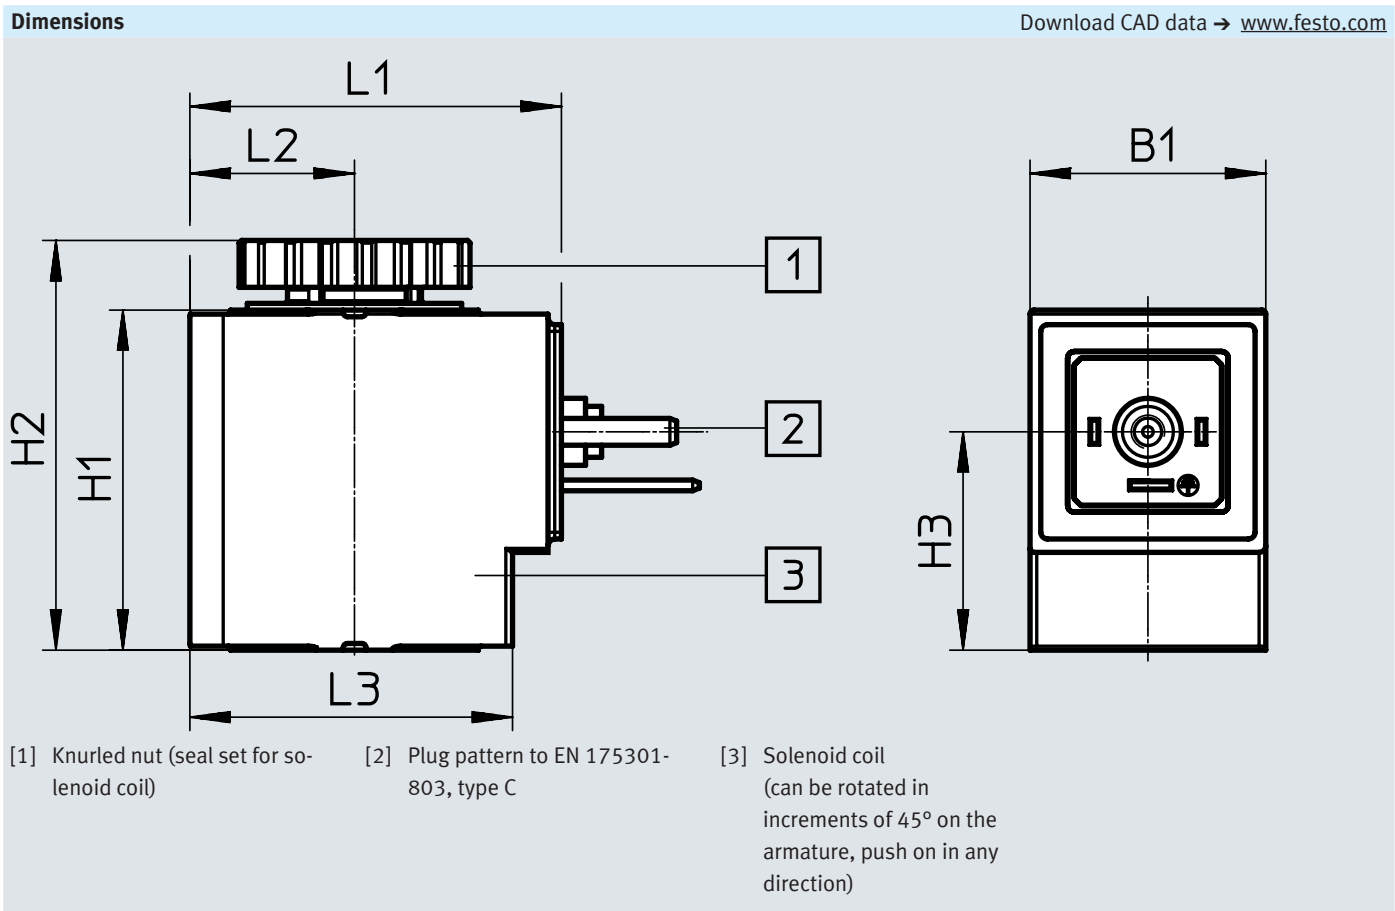
Operating and environmental conditions

Operating voltage	12 V DC	24 V DC	48 V DC	24 V AC	48 V AC	110/120 V AC	230/240 V AC
Ambient temperature [°C]	-10 ... +50					-10 ... +50	
Corrosion resistance class CRC ¹⁾	2					2	
Pollution degree	–					3	
CE marking (see declaration of conformity) ²⁾	–					To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ²⁾	–					To UK regulations for electrical equipment	
Certification	c UL us - Recognized (OL)					c UL us - Recognized (OL)	

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet



Type	B1	D1 ø	D2 ø	H1	H2	L1	L2	L6
VACS-C-C1-...	18,4	8.2	17.2	38.3	28	25.4	6.8	17.4

Ordering data					
Description		Operating voltage	Product weight	Part no.	Type
Solenoid coil					
	Without plug socket, plug pattern to EN 175301-803, type C	12 V DC	36.1 g	8025331	VACS-C-C1-5
		24 V DC	35.2 g	8025330	VACS-C-C1-1
		48 V DC	37.1 g	8025336	VACS-C-C1-7
		24 V AC	35.8 g	8025335	VACS-C-C1-1A
		48 V AC	35.6 g	8025337	VACS-C-C1-7A
		110/120 V AC	34.8 g	8025334	VACS-C-C1-16B
		230/240 V AC	34.6 g	8025338	VACS-C-C1-3W
Seal set					
	To achieve degree of protection IP67		6 g	2643771	VAMC-B10-C-B-S8

Datasheet

-  Voltage
24 V DC
-  Temperature range
-10 ... +50 °C
-10 ... +60 °C

- In accordance with VDE regulation 0580, insulation class H
- Plug M8, A-coded to EN 61076-2-104
- Can be replaced without interrupting the pneumatic circuit



General technical data

Electrical connection 1	Connection type	Plug
	Connection technology	M8x1 A-coded to EN 61076-2-104
	Number of pins/cores	4
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; ISO 20401
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials

Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Characteristic coil data		24VDC: 2.8	24VDC: LV1.2:HV3.3
Permissible voltage fluctuations	[%]	+/- 10	
Nominal pick-up current per solenoid coil	[mA]	–	138 up to 70 ms
Nominal current with current reduction	[mA]	–	50 after 70 ms
Duty cycle	[%]	100	
Insulation class		H	
Enamelled wire insulation class		H	

Operating and environmental conditions

Characteristic coil data		24VDC: 2.8	24VDC: LV1.2:HV3.3
Ambient temperature	[°C]	-20 ... 50	-20 ... 60
Temperature of medium	[°C]	-20 ... 50	-20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress	
Degree of protection		IP65	
Certification		c UL us - Recognized (OL)	

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions

Download CAD data → www.festo.com

[1] Knurled nut

[2] Plug M8x1, A-coded to EN 61076-2-104

[3] Solenoid coil
(can be rotated in increments of 45° on the armature, push on in any direction)

Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACS-C-R1-...	18	9	M8	8.2	17.2	25.4	13.1	6.8	37.4	29.4	6.5

Ordering data						
	Description	Characteristic coil data	Product weight	Part no.	Type	
Solenoid coil						
	Without socket, plug M8x1, 4-pin, A-coded to EN 61076-2-104	24VDC: 2.8	32.5 g	8135906	VACS-C-R1-1L	
		24VDC: LV1.2:HV3.3	32.5 g	8135910	VACS-C-R1-1RAL	

Datasheet

-  Voltage
24 V DC
-  Temperature range
-20 ... +50 °C
-10 ... +60 °C
-20 ... +60 °C

- In accordance with VDE regulation 0580, insulation class H
- Plug M12, A-coded to EN 61076-2-101
- Can be replaced without interrupting the pneumatic circuit



General technical data

Characteristic coil data		24VDC: 2.8	24VDC: LV0.36:HV2.6	24VDC: LV1.2:HV3.3
Electrical connection 1	Connection type	Plug		
	Connection technology	M12x1, A-coded to EN 61076-2-101		
	Number of pins/cores	2		
	Type of mounting	Screw-type lock		
Actuation type		Electrical	–	Electrical
Conforms to standard		IEC 61010-1; ISO 20401	–	IEC 61010-1; ISO 20401
Signal status display		LED		
Mounting position		Any		
Type of mounting		Via knurled nut		

Materials

Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Characteristic coil data		24VDC: 2.8	24VDC: LV0.36:HV2.6	24VDC: LV1.2:HV3.3
Permissible voltage fluctuations	[%]	+/- 10	+/- 10	+/- 10
Nominal pick-up current per solenoid coil	[mA]	–	108 up to 80 ms	138 up to 70 ms
Nominal current with current reduction	[mA]	–	15 after 80 ms	50 after 70 ms
Duty cycle	[%]	100	100	100
Maximum switching frequency	[Hz]	–	5	–
Insulation class		H	–	H
Enamelled wire insulation class		H	H	H
Maximum cable length	[m]	–	30	–

Operating and environmental conditions

Characteristic coil data		24VDC: 2.8	24VDC: LV0.36:HV2.6	24VDC: LV1.2:HV3.3
Ambient temperature	[°C]	–20 ... 50	–10 ... 60	–20 ... 60
Temperature of medium	[°C]	–20 ... 50	–	–20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress		
Degree of protection		IP65		
CE marking (see declaration of conformity) ³⁾		–	To EU EMC Directive ²⁾	–
Certification		c UL us - Recognized (OL)	RCM	c UL us - Recognized (OL)

1) More information www.festo.com/x/topic/crc

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

Dimensions

Download CAD data → www.festo.com

[1] Knurled nut

[2] Plug M12x1, A-coded to EN 61076-2-101

[3] Solenoid coil
(can be rotated in increments of 45° on the armature, push on in any direction)

Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACS-C-R3-...	18	9	M12	8.2	17.2	25.4	13.1	6.8	41.4	29.4	10

Ordering data						
	Description	Characteristic coil data	Product weight	Part no.	Type	
Solenoid coil						
	Without socket, plug M12x1, 4-pin, A-coded to EN 61076-2-101	24VDC: 2.8	33 g	8135907	VACS-C-R3-1L	
		24VDC: LV0.36:HV2.6	—	8135822	VACS-C-R3-1RL	
		24VDC: LV1.2:HV3.3	33 g	8194567	VACS-C-R3-1RAL	

Datasheet

-  Voltage
24 V DC
-  Temperature range
-10 ... +50 °C
-10 ... +60 °C

- In accordance with VDE regulation 0580, insulation class H
- Plug M12, A-coded to EN 61076-2-101
- Can be replaced without interrupting the pneumatic circuit



General technical data

Electrical connection 1	Connection type	Plug
	Connection technology	M12x1, A-coded to EN 61076-2-101
	Number of pins/cores	4
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; DESINA
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials

Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data

Characteristic coil data		24VDC: 2.8	24VDC: LV1.2:HV3.3
Permissible voltage fluctuations	[%]	+/- 10	
Nominal pick-up current per solenoid coil	[mA]	–	138 up to 70 ms
Nominal current with current reduction	[mA]	–	50 after 70 ms
Duty cycle	[%]	100	
Insulation class		H	
Enamelled wire insulation class		H	

Operating and environmental conditions

Characteristic coil data		24VDC: 2.8	24VDC: LV1.2:HV3.3
Ambient temperature	[°C]	-20 ... 50	-20 ... 60
Temperature of medium	[°C]	-20 ... 50	-20 ... 60
Corrosion resistance class CRC ¹⁾		2 - Moderate corrosion stress	
Degree of protection		IP65	
Certification		c UL us - Recognized (OL)	

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions

Download CAD data → www.festo.com

[1] Knurled nut

[2] Plug M12x1, A-coded to EN 61076-2-101

[3] Solenoid coil
(can be rotated in increments of 45° on the armature, push on in any direction)

Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACS-C-R4-...	18	9	M12	8.2	17.2	25.4	13.1	6.8	41.4	29.4	10

Ordering data					
	Description	Characteristic coil data	Product weight	Part no.	Type
Solenoid coil					
	Without socket, plug M12x1, 4-pin, A-coded to EN 61076-2-101	24VDC: 2.8	33 g	8135908	VACS-C-R4-1L
		24VDC: LV1.2:HV3.3	33 g	8135911	VACS-C-R4-1RAL

Datasheet

-  Voltage
24 V DC
-  Temperature range
-10 ... +50 °C
-10 ... +60 °C

- In accordance with VDE regulation 0580, insulation class H
- Plug M8, A-coded to EN 61076-2-104
- Can be replaced without interrupting the pneumatic circuit



General technical data		
Electrical connection 1	Connection type	Plug
	Connection technology	M8x1 A-coded to EN 61076-2-104
	Number of pins/cores	3
	Type of mounting	Screw-type lock
Actuation type		Electrical
Conforms to standard		IEC 61010-1; ISO 20401
Signal status display		LED
Mounting position		Any
Type of mounting		Via knurled nut

Materials	
Housing material	PA, steel
Solenoid coil material	Copper, steel, thermoplastic
Winding material	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Electrical data		
Characteristic coil data	24VDC: 2.8	24VDC: LV1.2:HV3.3
Permissible voltage [%]	+/- 10	
Nominal pick-up current per solenoid coil [mA]	–	138 up to 70 ms
Nominal current with current reduction [mA]	–	50 after 70 ms
Duty cycle [%]	100	
Insulation class	H	
Enamelled wire insulation class	H	

Operating and environmental conditions		
Characteristic coil data	24VDC: 2.8	24VDC: LV1.2:HV3.3
Ambient temperature [°C]	-20 ... 50	-20 ... 60
Temperature of medium [°C]	-20 ... 50	-20 ... 60
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress	
Degree of protection	IP65	
Certification	c UL us - Recognized (OL)	

1) More information www.festo.com/x/topic/crc

Datasheet

Dimensions

Download CAD data → www.festo.com

[1] Knurled nut

[2] Plug M8x1, A-coded to EN 61076-2-104

[3] Solenoid coil
(can be rotated in increments of 45° on the armature, push on in any direction)

Type	B1	B2	D1	D2 Ø	D3 Ø	H1	H2	H3	L1	L2	L3
VACS-C-R8-...	18	9	M8	8.2	17.2	25.4	13.1	6.8	37.4	29.4	6.5

Ordering data					
	Description	Characteristic coil data	Product weight	Part no.	Type
Solenoid coil					
	Without socket, plug M8x1, 3-pin, A-coded to EN 61076-2-104	24VDC: 2.8	32.5 g	8135905	VACS-C-R8-1L
		24VDC: LV1.2:HV3.3	32.5 g	8135909	VACS-C-R8-1RAL

Datasheet

-  Voltage
24 V DC
110, 230 V AC
-  Temperature range
-20 ... +50 °C

- Can be replaced without interrupting the pneumatic circuit
- Plug pattern to EN 175301-803, type A



General technical data

Type of mounting	Via lock nut
Max. tightening torque of fitting [Nm]	2
Mounting position	Any
Product weight [g]	150

Materials

Solenoid coil	Thermoset, copper, steel
Winding	Copper
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data

Electrical connection	To DIN EN 175301-803
Min. pickup time [ms]	12
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65
Note on degree of protection	IP00 without connector socket

Characteristic coil data

Operating voltage	24 V DC	110 V AC	230 V AC
Power [W]	7.9	–	–
[VA]	–	14	14
Power factor cos(phi)	–	0.7	0.7
Frequency [Hz]	–	50/60	50/60
Permissible frequency fluctuations [%]	-10 / +10	-10 / +10	-10 / +10

Operating and environmental conditions

Operating voltage	24 V DC	110 V AC	230 V AC
Ambient temperature [°C]	-20 ... 50	-20 ... 50	
CE marking (see declaration of conformity) ¹⁾	–	To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ¹⁾	–	To UK regulations for electrical equipment	

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

★ Core Range

Dimensions



Download CAD data → www.festo.com

[1] Lock nut (hex nut) G1/8

[2] Plug pattern to
EN 175301-803, type A

[3] Solenoid coil

Type	B1	H1	H2	H3	L1	L2	L3
MH-2-...	35.8	42.1	45.9	27.6	45.5	18	39.8

Ordering data				
	Description	Operating voltage	Part no.	Type
Solenoid coil				
	Without plug socket, plug pattern to EN 175301-803, type A	24 V DC	549906	MH-2-24VDC-PA
		110 V AC	549907	MH-2-110VAC-PA
		230 V AC	549908	MH-2-230VAC-PA
Plug socket				
	3-pin, square design, plug pattern to EN 175301-803, type A		★ 550067	MSSD-N

Type codes

001	Series	
VACN	Solenoid coil, series N	

002	Solenoid coil type	
N	Solenoid coil N for armature tube 9 mm	
H1	Solenoid coil H1 for armature tube 14 mm	
X	Solenoid coil X for armature tube 14 mm	

003	Electrical connection	
A1	Connection pattern type A, to EN 175 301	
K1	Cable	
K11	Cable with insulating conduit connection	

004	Nominal operating voltage	
1	24 V DC	
2A	110 V AC/50-60 Hz	
16B	120 V AC/60 Hz and 110V AC/50-60 Hz	
3A	230 V AC/50-60 Hz	

005	Cable length [m]	
0.5	0.5	
10	10	

006	EU certification	
	None	
EX4	II 2GD	
EX2	II 3GD	

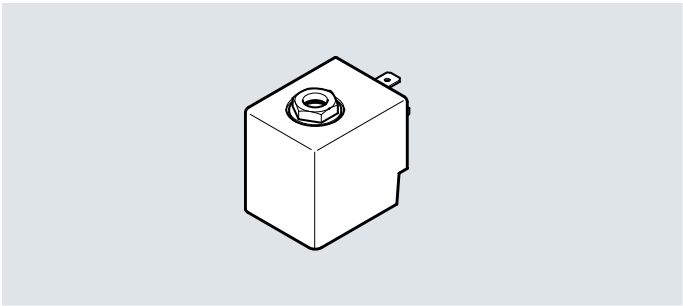
007	Certification	
	None	
U4	Class1 Div1 to NEC 500	

008	Type of ignition protection	
	None	
A	Intrinsically safe	
M	Encapsulation	
N	Non-sparking	

Datasheet

-  - Voltage
24 V DC
110, 230 V AC

- Can be replaced without interrupting the pneumatic circuit
- Plug pattern to EN 175301-803, type A
- For 14 mm armature



General technical data	
Type of mounting	Via lock nut
Max. tightening torque of fitting [Nm]	2
Mounting position	Any
Switching position indication	No
Product weight [g]	150

Materials	
Solenoid coil	Copper
	Steel
	Thermoplastic
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Electrical data	
Electrical connection	Plug
	Square design
	To EN 175301-803
	Type A
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection	IP65
Note on degree of protection	In mounted state

Characteristic coil data				
Operating voltage		24 V DC	110 V AC	230 V AC
Frequency [Hz]		–	50/60	50/60
Permissible frequency fluctuations [%]		-10 / +10	-10 / +10	-10 / +10
Power	[W]	11.9	–	–
	[VA]	–	–	–
Pickup power [VA]		–	36	36
Holding power [VA]		–	18.5	18.9
Power factor cos(φi)		0.7	0.7	0.7
Surge resistance [kV]		–	2.5	4
Min. pickup time [ms]		12	12	12

Datasheet

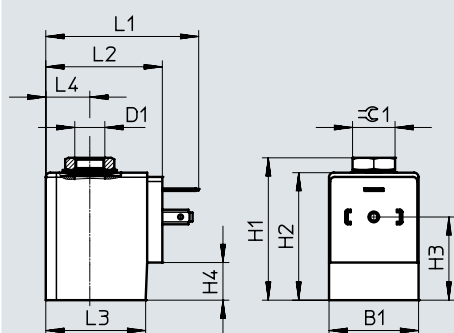
Operating and environmental conditions			
Operating voltage	24 V DC	110 V AC	230 V AC
Ambient temperature [°C]	-20 ... +50		
Restricted ambient temperature and temperature of medium	-20 ... +60 °C (with limited duty cycle)		
Corrosion resistance class CRC ¹⁾	4		
Pollution degree	–	3	
CE marking (see declaration of conformity) ²⁾	–	To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ²⁾	–	To UK regulations for electrical equipment	

1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... → Support/Downloads.

Dimensions

Download CAD data → www.festo.com



Type	B1	D1	H1	H2	H3	H4	L1	L2	L3	L4	∅ 1
VACN-H1-A1-...	35.8	G1/8	45.9	42.1	27.6	12.5	57	45	39.8	17.9	A/F 14

Ordering data

	Description	Operating voltage	Part no.	Type
Solenoid coil				
	Without plug socket, plug pattern to EN 175301-803, type A	24 V DC	8022877	VACN-H1-A1-1
		110 V AC	8022878	VACN-H1-A1-2A
		230 V AC	8022879	VACN-H1-A1-3A

Datasheet

-  Voltage
24 V DC
110, 230 V AC
-  Temperature range
-20 ... +50 °C

- Can be replaced without interrupting the pneumatic circuit
- Plug pattern to EN 175301-803, type A

**General technical data**

Type of mounting	Via knurled nut
Max. tightening torque of fitting [Nm]	0.5
Mounting position	Any
Product weight [g]	110

Materials

Solenoid coil	Thermoset, copper, steel
Winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Electrical data

Electrical connection	Plug pins with plug pattern to EN 175301-803, type A
Permissible voltage fluctuations [%]	-10 / +10
Duty cycle [%]	100
Degree of protection to EN 60529	IP65

Characteristic coil data

Operating voltage	24 V DC	110 V AC	230 V AC
Power [W]	6.8	–	–
Pickup power, 50 Hz [VA]	–	14.5	14.5
Holding power, 50 Hz [VA]	–	10.5	10.5
Power factor cos(phi)	–	0.7	0.7
Frequency [Hz]	–	50/60	50/60
Permissible frequency fluctuations [%]	–	-10 / +10	-10 / +10

Operating and environmental conditions

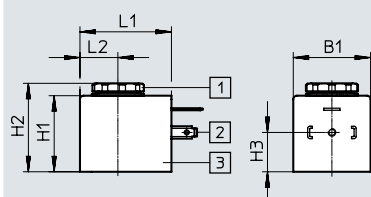
Operating voltage	24 V DC	110 V AC	230 V AC
Ambient temperature [°C]	-20 ... 50	-20 ... 50	
CE marking (see declaration of conformity) ¹⁾	–	To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ¹⁾	–	To UK regulations for electrical equipment	

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet

★ Core Range

Dimensions

Download CAD data → www.festo.com

- [1] Knurled nut M8x0.75
- [2] Plug pattern to EN 175301-803, type A
- [3] Solenoid coil

Type	B1	H1	H2	H3	L1	L2
MD-2-...	30	29.5	34.3	15.3	35.5	14.7

Ordering data

Ordering data	Description	Actuation type	Operating voltage	Part no.	Type
Solenoid coil					
	Without plug socket, plug pattern to EN 175301-803, type A	–	24 V DC	★ 549903	MD-2-24VDC-PA
		Electrical	110 V AC	549904	MD-2-110VAC-PA
			230 V AC	549905	MD-2-230VAC-PA
Plug socket					
	3-pin, square design, plug pattern to EN 175301-803, type A			★ 550067	MSSD-N