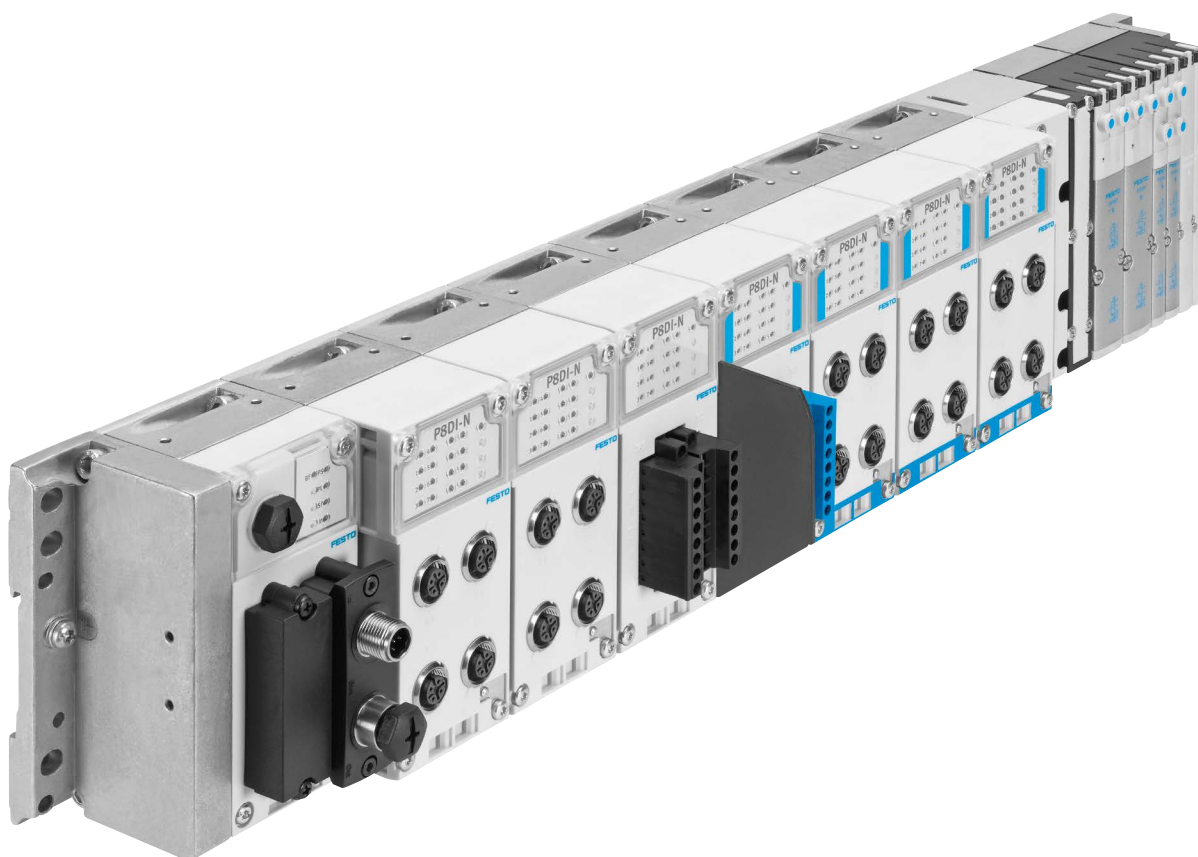


Terminal CPX-P

FESTO



Key features



Key features

Installation concept

- Economical from the smallest configuration up to the maximum number of modules
- Up to 9 electrical input/output modules plus bus node and pneumatic interface/electronics modules for valves
- Extensive range of functions and connection options for the electrical modules
- Choice of connection technology for technically and economically optimised connections
- Can be used as a dedicated remote I/O module

Electric

- High operating voltage tolerance ($\pm 25\%$)
- Open to all fieldbus protocols and Ethernet
- IT services and TCP/IP such as remote maintenance, remote diagnostics, web server, SMS and email alert
- Digital inputs and outputs, 4-way/8-way/16-way, optionally available with individual channel diagnostics
- Analogue inputs and outputs, 2-way/4-way
- Analogue inputs and outputs with HART protocol
- Input modules for connecting NAMUR sensors
- Pressure inputs
- Temperature inputs
- IP65 or IP20

Mounting

- Wall or DIN rail mounting, also on mobile units
- Conversions/extensions are possible at any time, individual links
- Modular system offering a range of configuration options
- Fully assembled and tested unit
- Reduced costs for selection, ordering, mounting and commissioning thanks to the central CPX-P terminal
- Choice of pneumatic components for optimised control chain

Operation

- Fast troubleshooting thanks to an extensive selection of LEDs (some of which are multi-coloured) on the bus node and on all I/O modules
- Suitable for direct machine mounting (IP65/IP67) or in a control cabinet with a terminal connection (IP20)
- Supports module and channel-related diagnostics
- Fieldbus/Ethernet remote diagnostics
- Innovative diagnostic support with integrated web server/web monitor or Festo Maintenance Tool (CPX-FMT) with USB adapter (NEFC) for PC
- Optimised commissioning thanks to parameterisable functions
- Reliable servicing with connection blocks and modules that are quick to replace without changing the wiring

Key features

Variants of the CPX-P terminal controller (with bus node, without preprocessing)

Bus node

Different bus nodes are used for integration in the control systems of various manufacturers.

The CPX-P terminal can therefore be operated on commonly used fieldbus systems:

- PROFIBUS-DP
- PROFINET

- DeviceNet®
- CANopen

Integration in universal networks based on Ethernet opens up new possibilities. Faster data transmission, real-time capability and above all additional IT services such as file transfer,

web server, as website integrated in the CPX-P terminal, text message/email alerts, etc. open up a wide range of synergies.

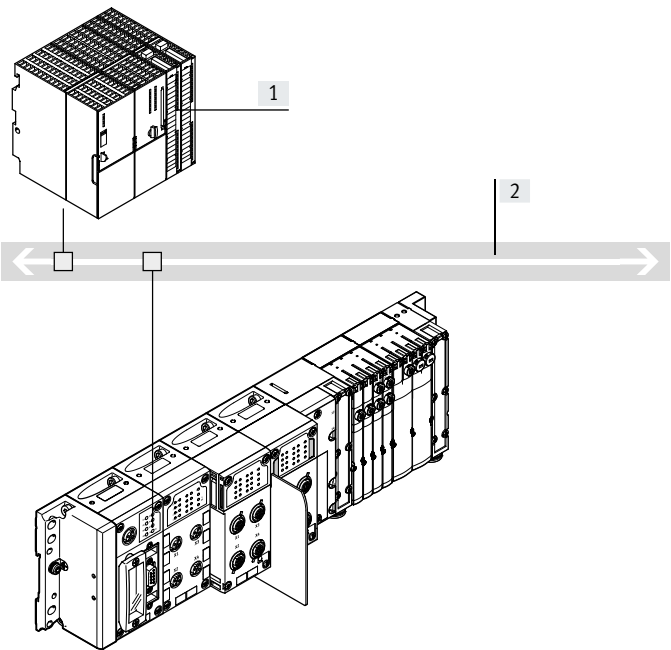
These include standardised and universal communication technology across all areas, including operating level, management level and field level

in the production environment, with protection to IP65.

The following protocols are supported:

- EtherNet/IP
- Modbus/TCP
- PROFINET
- EtherCAT®


Bus node



- [1] Higher-order controller (PLC)
- [2] Fieldbus

- Communication with the higher-order controller via fieldbus
- No preprocessing
- Fieldbus protocol dependent on CPX bus node used
- More than 90 I/Os, depending on bus node used

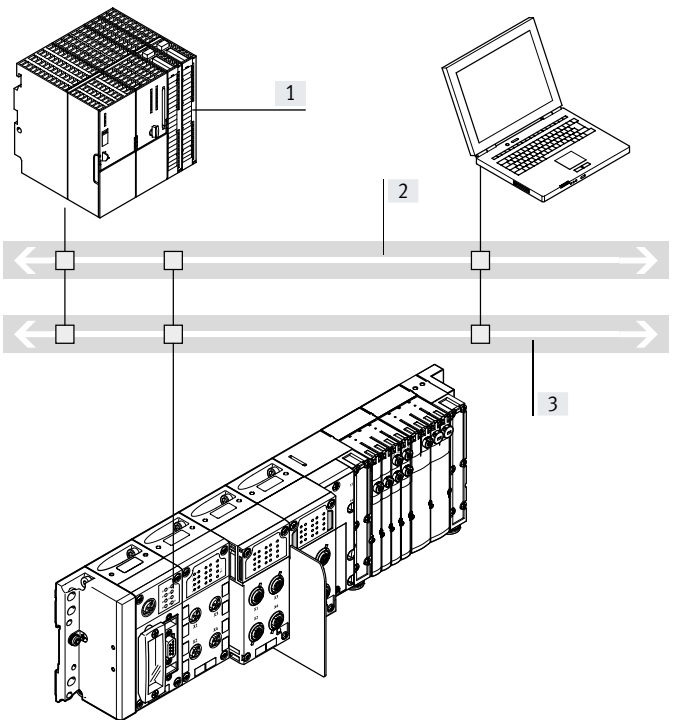Industrial Ethernet bus node



- [1] Higher-order controller (PLC)
- [2] Industrial Ethernet
- [3] IT services:

- Web
- Email
- Data transmission

- Connection to a higher-order controller directly via EtherNet/IP, Modbus/TCP, EtherCAT® or PROFINET
- No preprocessing
- Monitoring via Ethernet and web applications
- More than 300 I/Os

Note

Every electrical interface can be combined with an appropriate number of I/O modules and/or pneumatic components, depending on its address capacity.

Likewise, every pneumatic variant of the CPX-P terminal can be operated with every electrical interface variant.

Key features

Variants of the CPX-P terminal controller (with preprocessing in the control block)

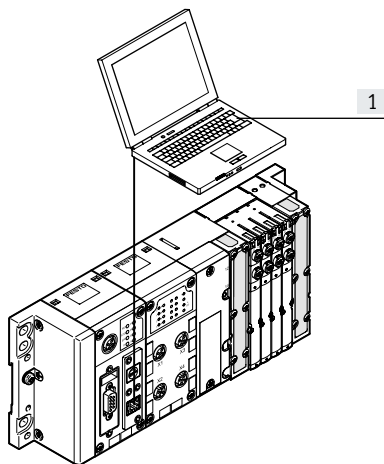
Control block

The optional front end controllers CPX-CEC enable simultaneous access via Ethernet, in parallel with a bus node, as well as autonomous preproc-

essing. Access via Modbus/TCP and EasyIP is also possible.

Commissioning, programming, and diagnostics using the Festo software tool FST with hardware configurator.

With control block in stand-alone mode




[1] CODESYS/FST

- Decentralised controller with direct machine mounting
- Downloading programs via Ethernet (or via the programming interface)
- Supports full expansion of all CPX peripherals
- More than 300 I/Os

Can be successfully used in the follow applications:

- Stand-alone individual workstations
- Interlinked, stand-alone sub-systems
- Automation using IT technology

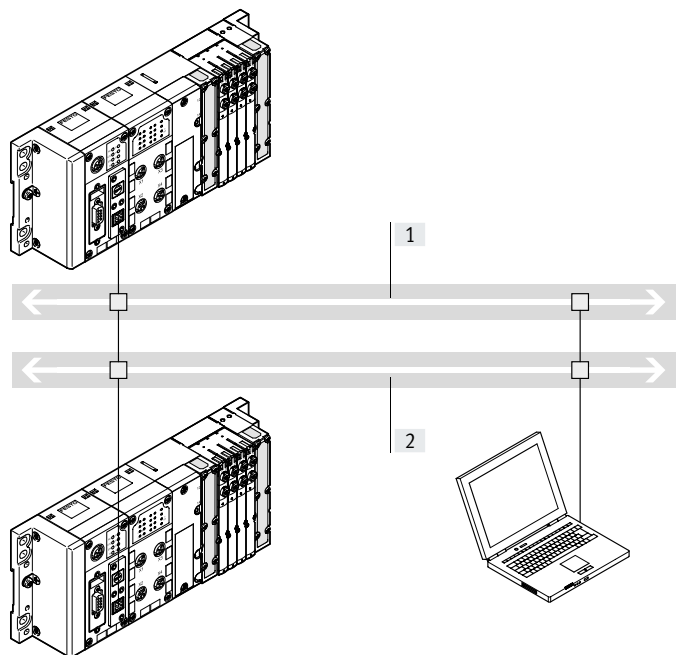With control block in Festo EasyIP mode



[1] Industrial Ethernet

[2] IT services:

- Web
- Email
- Data transmission

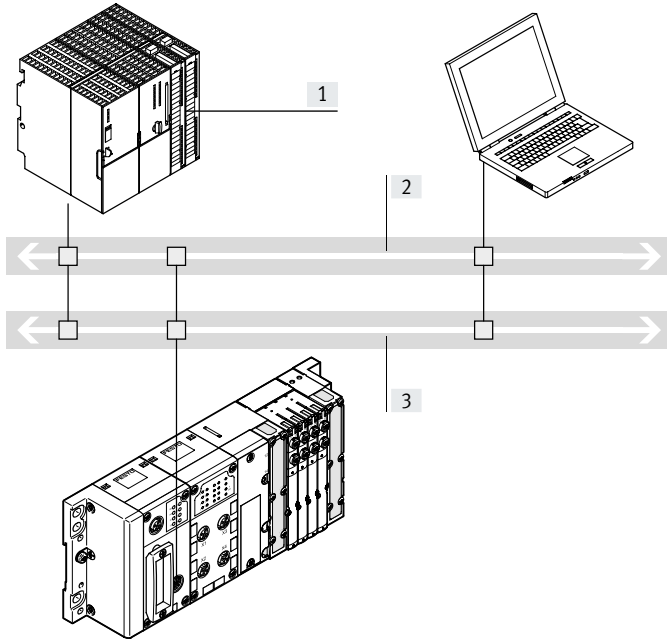
- Fast preprocessing of the CPX-P peripherals in the control block
- Exchange of any data between the control blocks via EasyIP
- Remote diagnostics
- No higher-order controller is required
- More than 300 I/Os per CPX-P control block

Key features

Variants of the CPX-P terminal controller (with preprocessing in the control block)

With control block as remote controller on Ethernet

Remote controller via Ethernet as the preprocessing unit for decentralised, stand-alone sub-systems using IT technology.



[1] Higher-order controller (PLC)

[2] Industrial Ethernet

[3] IT services:

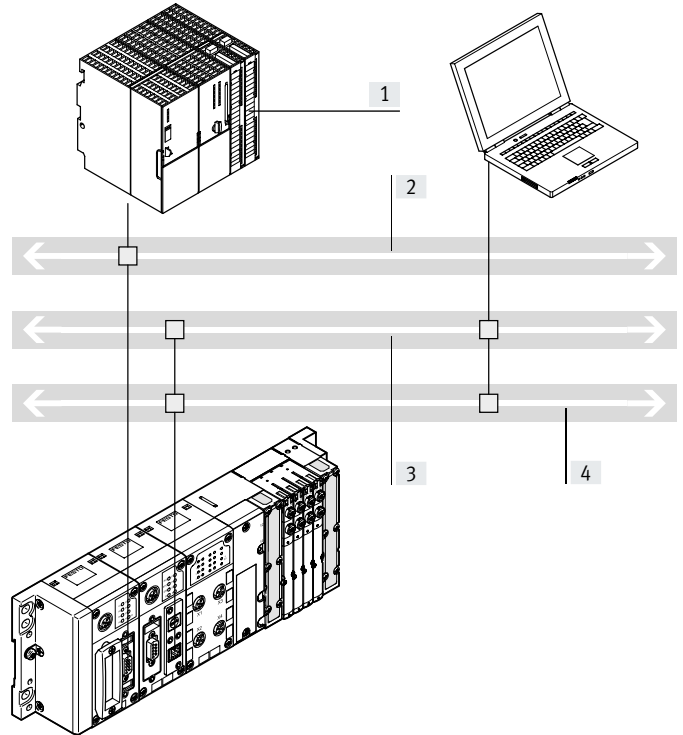
- Web
- Email
- Data transmission

- Connection to a higher-order controller via Ethernet, no further bus node is required
- Monitoring via Ethernet and web applications
- Preprocessing of the CPX-P peripherals by CPX-P control block
- More than 300 I/Os

With control block as remote controller on the fieldbus

Fieldbus remote controller (combination with bus nodes for PROFIBUS DP, PROFINET, CANopen, DeviceNet® or EtherCAT®) as the preprocessing unit

for decentralised, stand-alone sub-systems.



[1] Higher-order controller (PLC)

[2] Fieldbus

[3] Industrial Ethernet

[4] IT services:

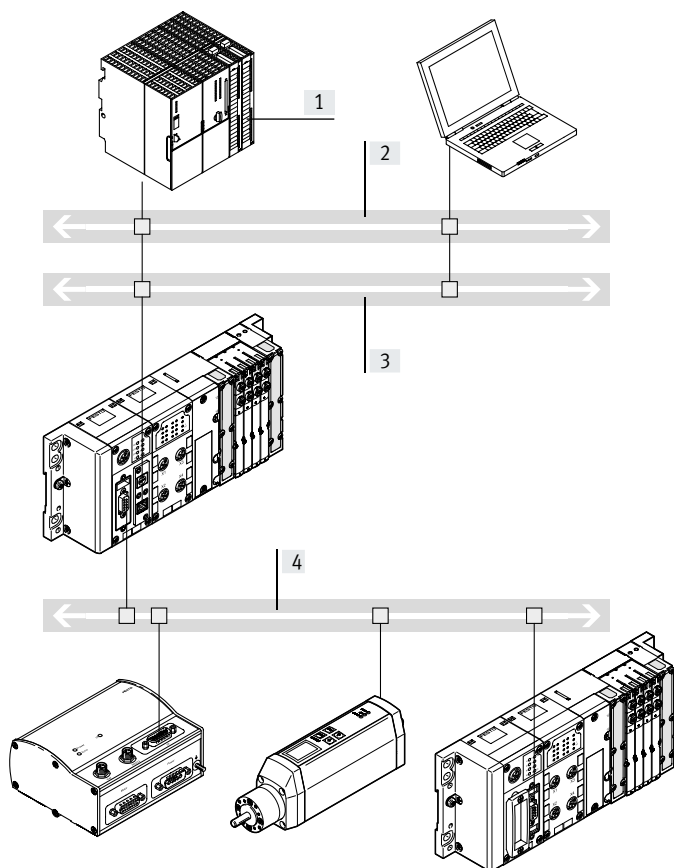
- Web
- Email
- Data transmission

- Fast preprocessing of the CPX-P peripherals in the control block
- Communication with the higher-order controller via fieldbus
- Optional additional monitoring via Ethernet and web applications
- Downloading programs via programming interface
- More than 300 I/Os, bus node is only used for communication with the higher-order PLC
- Option of two bus nodes for redundant communication configuration

Key features

Variants of the CPX-P terminal controller (with preprocessing in the control block)

With control block as CANopen fieldbus master



- [1] Higher-order controller (PLC)
- [2] Industrial Ethernet
- [3] IT services:
 - Web
 - Email
 - Data transmission
- [4] Fieldbus (CANopen)

Characteristics:

- Connection to a higher-order controller via Ethernet, no further bus node is required
- Monitoring via Ethernet
- Preprocessing of the CPX-P peripherals by CPX-P control block
- More than 300 I/Os
- Up to 128 stations with repeater technology on CANopen

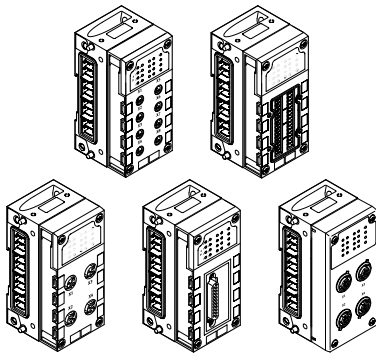
Operating modes:

- Remote controller on Ethernet
- Control block in Festo EasyIP mode


Key features

Interface of inputs and outputs to the CPX-P terminal


Digital and analogue CPX-P I/O modules



CPX modules for NAMUR sensors



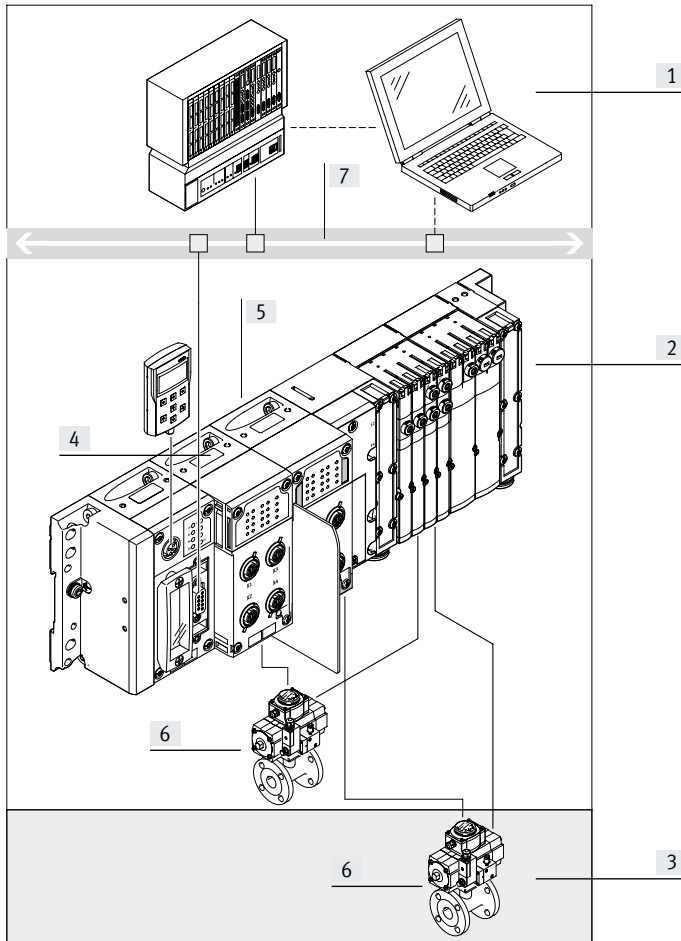CPX modules for NAMUR sensors, intrinsically safe circuits for ATEX applications



Electrical connection

The connection technology for sensors and additional actuators offers a wide range of digital and analogue input and output modules and is freely selectable, as appropriate to your standard or application.

The input/output modules can be combined as required with the connection blocks:

- M12, 5 pin
- M12 5-pin, with quick lock and metal thread
- M12, 8 pin
- M8, 3 pin
- M8, 4 pin
- Sub-D 25-pin
- CageClamp® (with cover also to IP65/67)
- Screw terminal and spring-loaded terminal

Electrical connection

The electronics modules for NAMUR sensors can only be combined with certain connection blocks.

The input modules can be combined as required with the connection blocks:

- M12, 4-pin
- Screw terminal and spring-loaded terminal

- [1] Higher-order controller (PLC)
- [2] Non-ATEX zone; non-intrinsically safe circuits are permitted
- [3] ATEX zone; only intrinsically safe circuits are permitted
- [4] CPX input module for NAMUR sensors, non-intrinsically safe design
- [5] CPX input module for NAMUR sensors, intrinsically safe design
- [6] Actuator/machine component with NAMUR sensors
- [7] Fieldbus

Note

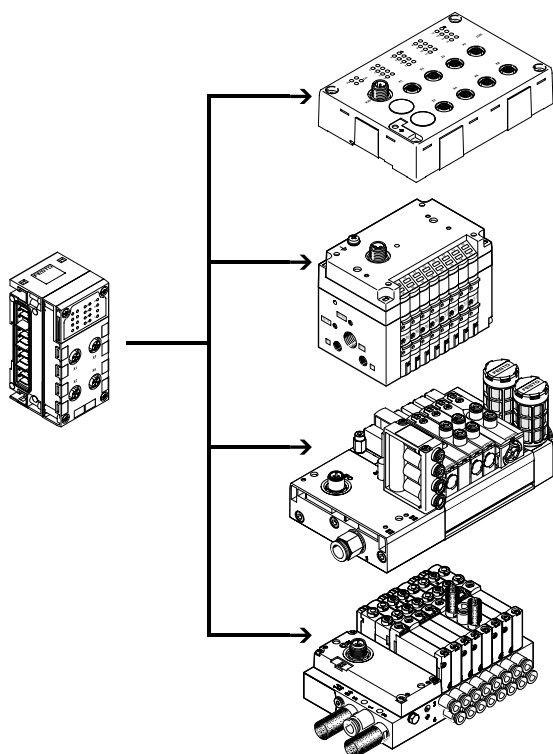
Intrinsically safe circuits are circuits which release so little energy during operation, or in the event of certain errors under specified test conditions, that no ignition can occur in a particular potentially explosive atmosphere.

CPX-P modules are suitable for configuring intrinsically safe or non-intrinsically safe circuits, depending on the design selected. This enables components from both safe and potentially explosive zones to be connected to the CPX-P terminal. The components for the intrinsically safe zone are marked in blue or completely coloured blue to distinguish them visually.

Key features

Interface of inputs and outputs to the CPX-P terminal


With CPX-CTEL interface



- Up to 4 devices with individual electronic protection per CPX-CTEL master
- Max. 64 inputs/64 outputs per I-Port interface
- The maximum length of a string is 20 m.
- Input modules with 16 digital inputs (connection technology M8 3-pin and M12 5-pin)
- Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)

Several CPX-P CTCL masters can be combined on one CPX-P terminal (depending on the controller used). Combination of central CPX-P I/O modules and decentrally mounted I/O modules with I-Port interface.

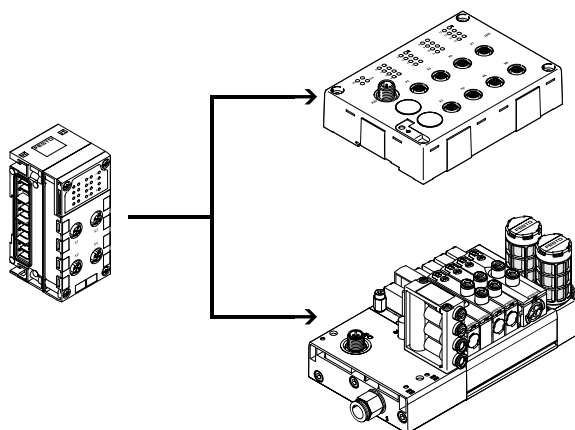With CPX-CTEL-2 interface




- Up to 2 IO-Link® devices with individual electronic protection per CPX-CTEL-2 interface
- Max. 16-byte inputs/16-byte outputs per IO-Link® device
- The maximum length of a string is 20 m.

Several CPX-CTEL-2 interfaces can be combined on one CPX-P terminal (depending on the controller used). Combination of central CPX-P I/O modules and decentrally mounted I/O modules with IO-Link interface.

Key features

Pneumatic variants of the terminal CPX-P

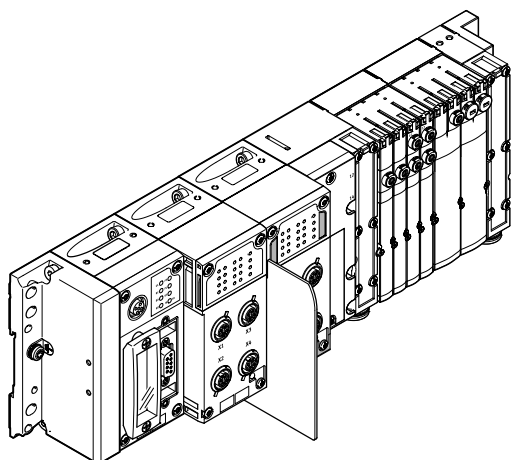With valve terminal MPA-S – centralised



The electrical terminal CPX-P is a modular peripheral system for valve terminals.

The system is specifically designed so that the valve terminal can be adapted to suit different applications.

With the modular design, the number of valves, inputs and additional outputs can be configured to suit the application.

Ordering

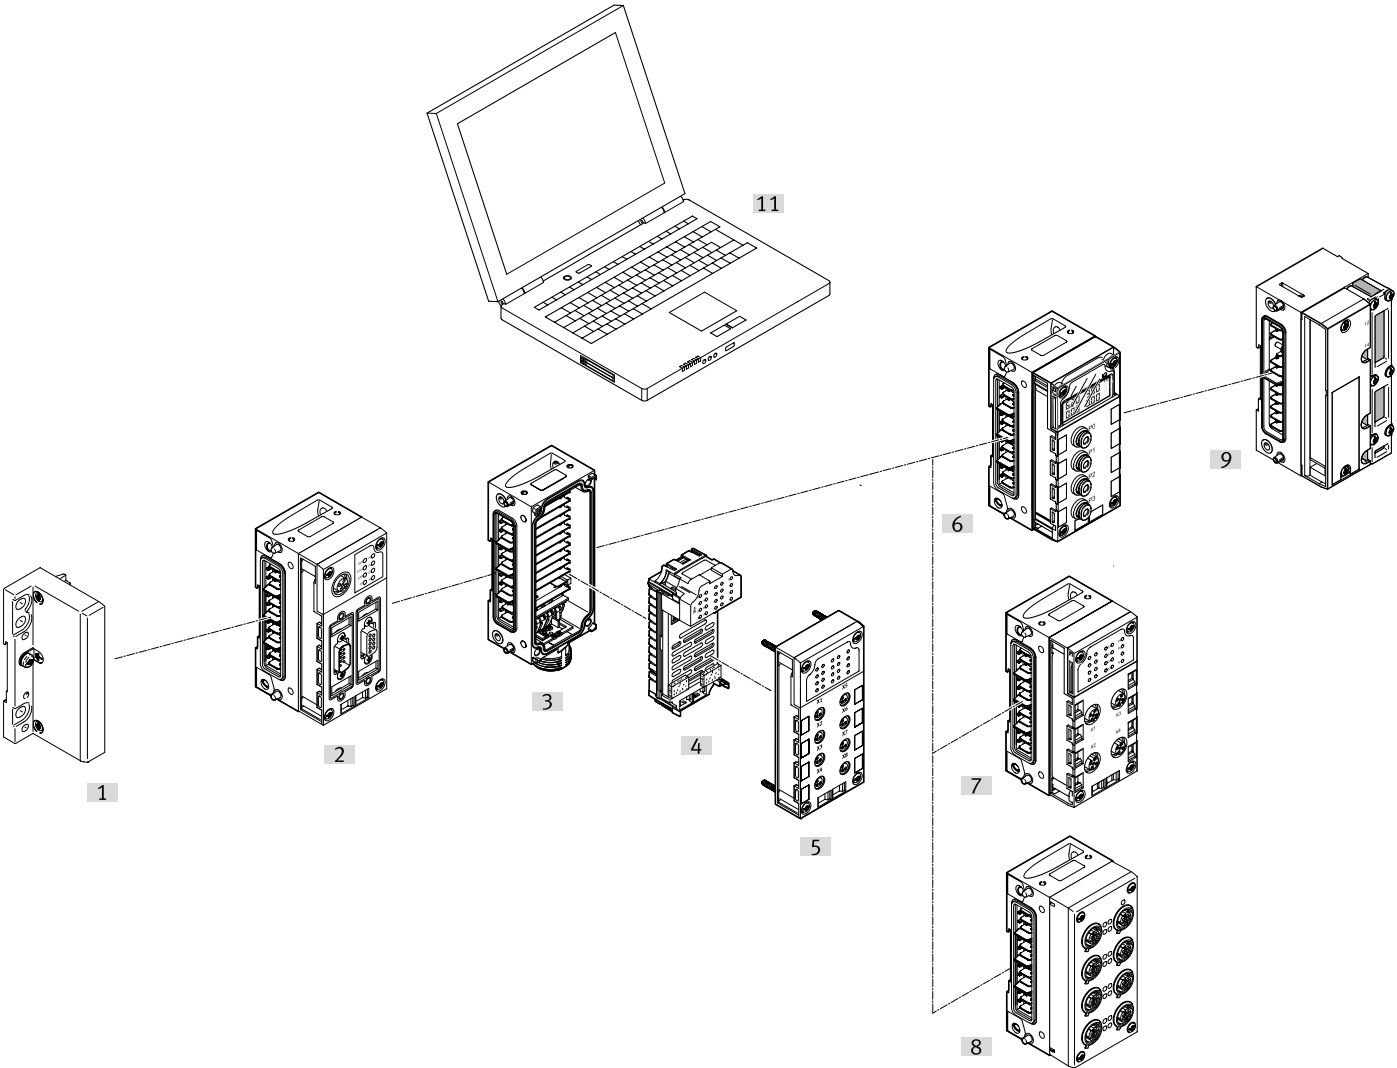
The CPX-P terminal with valve terminal is fully assembled according to your order specifications and individually tested. It consists of the electrical peripherals including the desired actuation and the selected components from the MPA-S modular system.

The CPX-P terminal with valve terminal is ordered using two separate order codes. One order code defines the electrical peripherals type CPX-P, while the other specifies the pneumatic components of the valve terminal.

The electrical peripherals type CPX-P can also be configured without a valve terminal and can be used on a field-bus. To order this, only the order code for the electrical peripherals is required.

The order lists for the pneumatic components can be found at
 → Internet: mpa-s
 (valve terminal MPA-S)

Peripherals overview



Designation	Type	Description	→ Page/Internet
[1] End plate	CPX-M-EPR-EV CPX-M-EPL-EV	• Mounting holes for wall mounting • Functional earth connection • Special earthing plate for safe and easy connection to the machine bed or DIN rail	40
[2] Bus node	CPX-FB CPX-M-FB	• Fieldbus/Industrial Ethernet connection using various types of connection technology • Setting fieldbus parameters via DIL switch • Display of fieldbus and peripheral equipment status via LED	52
Control block	CPX-CEC	• Preprocessing, stand-alone controller or remote unit CPX-CEC • Connection via Ethernet TCP/IP or Sub-D programming interface • Setting operating modes via DIL switch and program selection via rotary switch • CPX-CMX products for controlling axes	45
[3] Interlinking block	CPX-M-GE	• Internal linking of the power supply and serial communication • External power supply for the entire system or for outputs • Connection accessories for 7/8" • Individual linking with M6 screws, individually expandable	163

Peripherals overview


Designation	Type	Description	→ Page/Internet
[4] Electronics module	CPX-4DE	Input module with 4 digital inputs, positive logic (PNP)	104
	CPX-8DE	Input module with 8 digital inputs, positive logic (PNP)	
	CPX-8DE-D	Input module with 8 digital inputs, positive logic (PNP), enhanced diagnostic function	
	CPX-8NDE	Input module with 8 digital inputs, negative logic (NPN)	100
	CPX-P-8DE-N	NAMUR input module with 8 digital inputs	
	CPX-P-8DE-N-IS	Input module to NAMUR standard with 8 digital inputs, intrinsically safe version	115
	CPX-F8DE-P	PROFIsafe input module with 8 digital inputs	
	CPX-16DE	Input module with 16 digital inputs, internal electronic fuse per module	109
	CPX-M-16DE-D	Input module with 16 digital inputs, internal electronic fuse per channel pair, for CPX in metal	
	CPX-4DA	Output module with 4 digital outputs, 1 A per channel	120
	CPX-8DA	Output module with 8 digital outputs, 0.5 A per channel	
	CPX-8DA-H	Output module with 8 digital outputs, 2.1 A per channel pair	
	CPX-8DE-8DA	Input/output module with 8 digital inputs and 8 digital outputs	126
	CPX-2ZE2DA	Counter module with 2 digital inputs and 2 digital outputs	130
	CPX-4AE-4AA-H	HART input/output module with 4 analogue input/outputs	134
	CPX-2AE-U-I	Input module with 2 analogue current or voltage inputs	139
	CPX-4AE-U-I	Input module with 4 analogue current or voltage inputs	
	CPX-4AE-I	Input module with 4 analogue current inputs	
	CPX-4AE-T	Input module for temperature inputs	146
	CPX-4AE-TC	Input module for temperature inputs with cold junction compensation	150
	CPX-2AA-U-I	Output module with 2 analogue current or voltage outputs	154
	CPX-FVDA-P2	PROFIsafe shut-off module for shutting off the supply voltage for valves, with two digital outputs	158
[5] Polymer connection block	CPX-AB	- Choice of 8 connection technology variants - Degree of protection IP65, IP67 or IP20 - Can be combined with the electronics modules - Connection accessories for M8/M12/Sub-D - Connecting cables M8/M12/Sub-D, etc. - Modular system for M8/M12 connecting cables	–
[6] Analogue electronics module for pressure inputs	CPX-4AE-P	- Pneumatic connection QS-4 - Degree of protection IP 65, IP67 4 analogue pressure inputs (0 ... 10 bar, –1 ... +1 bar)	144
[7] CTEL interface	CPX-CTEL	- Interfaces for decentralised installation systems, thus optimising the pneumatic control chains (short tubes/short cycle times) - Actuation for I/O modules and valve terminals - Power supply and bus interface via the same cable - Connection technology M9, M12 - Degree of protection IP 65, IP67	86
[8] Metal connection block	CPX-M-AB	- Can be combined with the electronics modules - Connection technology M12x1, 5-pin - Degree of protection IP 65, IP67 - Connection accessories for M12 - Connecting cables M12 - Modular system for choice of connecting cables M12	–
[9] Pneumatic interface MPA-S	VMPA-FB	- Control of valve terminal MPA-S - Control of pressure sensors - Control of proportional pressure regulators	169
[11] Web monitor	–	- Website integrated in the CPX terminal - Dynamic status indication - Online diagnostics and SMS/email alert	–

Peripherals overview

Individual overview of modules

Bus node

→ Page 52




Bus node for

- PROFIBUS-DP
- DeviceNet®
- CANopen
- EtherNet/IP
- PROFINET
- EtherCAT®

Control block

→ Page 45




CPX-CEC

- Programming with CODESYS
- Ethernet interface
- Modbus/TCP
- EasyIP
- CANopen master

CTEL interface

→ Page 86




Interface CPX-CTEL

- CTEL master
- Max. 4 devices with individual electronic protection
- Max. 64 inputs/64 outputs per I-Port interface
- The maximum length of a string is 20 m

Electrical interface CPX-CTEL-2

→ Page 92




Interface CPX-CTEL-2

- Master for IO-Link®
- Max. 2 devices with individual electronic protection
- The process data length of the inputs and outputs is limited to 16 bytes for inputs and 16 bytes for outputs per port
- The maximum length of a string is 20 m

Modules for actuating pneumatic drive units

→ Page 97




CPX-CMIX

- Measuring module
- CAN input (Festo specification) for measuring signal

- Detecting the absolute position values or speed values of the connected drive

Polymer connection block



Direct machine mounting
(connection block to IP65/IP67)

- M8, 3-pin
- M8, 4 pin
- M12, 5-pin
- M12 5-pin quick lock, shielded with metal thread
- M12, 8-pin
- Sub-D 25-pin
- Spring-loaded terminal with cover


Protected fitting space
(degree of protection IP20)

- Spring-loaded terminal

Shielding concept

- Optional screening plate for connection block with M12 connection technology

Metal connection block



Direct machine mounting
(connection block to IP65/IP67)


- M12, 5-pin

Peripherals overview

Individual overview of modules

Digital electronics module for inputs/outputs

→ Page 104



Digital inputs

- 4 digital inputs
- 8 digital inputs
- 16 digital inputs

Digital outputs


- 4 digital outputs (1 A per channel, individual channel diagnostics)
- 8 digital outputs (0.5 A per channel, individual channel diagnostics)
- 8 digital outputs (2.1 A/50 W lamp load per channel pair, individual channel diagnostics)

Multi I/O modules

- 8 digital inputs and 8 digital outputs
- 2 digital inputs (counter channels, connection to various encoders) and 2 digital outputs (directly controlled by the input values)

Analogue electronics module for inputs/outputs

→ Page 139



Analogue inputs

- 2 analogue inputs (0 ... 10 V DC, 0 ... 20 mA, 4 ... 20 mA)
- 4 analogue inputs (1 ... 5 V, 0 ... 10 V, -5 ... +5 V, -10 ... +10 V, 0 ... 20 mA, 4 ... 20 mA, -20 ... +20 mA)
- 4 analogue inputs with HART protocol

Analogue temperature inputs


- 4 analogue inputs for temperature measurement (Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni500, Ni1000)
- 4 analogue inputs for temperature measurement (thermocouple and PT1000 sensor for cold junction compensation)

Analogue outputs

- 2 analogue outputs (0 ... 10 V DC, 0 ... 20 mA, 4 ... 20 mA)
- 4 analogue outputs with HART protocol

PROFIsafe input module

→ Page 115




Digital inputs

- 8 digital inputs
- 11 function modes
- 5 independent pulse outputs

PROFIsafe shut-off module

→ Page 158




Digital outputs

- 2 digital outputs
- Supply voltage for valves can be shut off

Peripherals overview

Individual overview of modules

Connection block for NAMUR sensors and HART input/output module



Direct machine mounting
(connection block to IP65)


- M12, 4-pin

Protected fitting space
(connection block to IP20)

- Screw terminal
- Spring-loaded terminal

Digital electronics module for
NAMUR sensors

→ Page 100




Digital inputs

- 8 digital inputs for NAMUR sensors or wired mechanical contacts
- Intrinsically safe design with additional protective measures in the event of failure

Metal interlinking block – Individual linking

→ Page 163



System linking

- Different voltages for supplying the modules
- Serial communication between the modules

System supply

- 7/8" 5-pin

In addition to system linking, power supply for the

- Electronics plus sensors (8 A)
- Valves plus actuators (8 A)

Additional supply

In addition to system linking, power supply for the

- Actuators (8 A per supply)

Extendibility

- Can be expanded as required by up to 10 interlinking blocks


 **Note**

The 7/8" supply is subject to the following restrictions due to the available accessories:

- 5-pin 8 A

Pneumatic interface MPA-S


→ Page 169



Valve terminal

- MPA1 (360 l/min)
- MPA14 (550 l/min)
- MPA2 (700 l/min)
- Up to 128 solenoid coils
- Up to 16 modules can be configured

End plate




End plate

- Left
- Right (for use without valves)

Peripherals overview

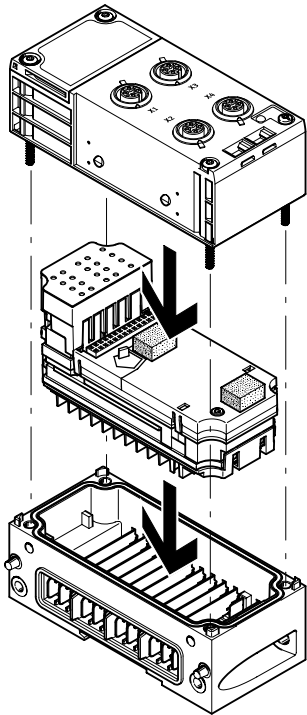General basic data and guidelines



Max. 11 modules in total:

- One bus node and/or one control block
- Up to 9 additional input/output modules
- In addition a pneumatic interface
 - Always positioned as the last module on the right-hand side
 - 16 MPA modules can be configured

- Address capacity max. 512 inputs and 512 outputs, depending on bus node or control block
- One interlinking block with system supply
- Several interlinking blocks with additional supplies
Always positioned to the right of the interlinking block with system supply

- The connection blocks can be combined with the electronics modules for inputs/outputs, with restrictions (→ table below)
- The electronics modules for inputs/outputs can be combined with various interlinking blocks

Combinations of connection blocks and digital input modules

	Digital electronics modules						
	CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE	CPX-F8DE-P	CPX-16DE	CPX-M-16DE-D
Connection blocks, polymer design							
CPX-AB-8-M8-3POL	■	■	■	■	–	–	–
CPX-AB-8-M8X2-4POL	–	–	–	–	–	■	–
CPX-AB-4-M12x2-5POL	■	■	■	■	–	–	–
CPX-AB-4-M12x2-5POL-R	■	■	■	■	–	–	–
CPX-P-AB-4XM12-4POL	–	–	–	–	–	–	–
CPX-P-AB-4XM12-4POL-8DE-N-IS	–	–	–	–	–	–	–
CPX-AB-4-M12-8POL	–	–	–	–	–	–	–
CPX-AB-8-KL-4POL	■	■	■	■	■	■	–
CPX-P-AB-2XKL-8POL	–	–	–	–	–	–	–
CPX-P-AB-2XKL-8POL-8DE-N-IS	–	–	–	–	–	–	–
CPX-AB-1-SUB-BU-25POL	■	■	■	■	–	■	–
Connection blocks, metal design							
CPX-M-AB-4-M12X2-5POL	■	■	■	■	■	–	–
CPX-M-AB-8-M12X2-5POL	–	–	–	–	–	–	■

Peripherals overview

Combination of connection blocks and digital input modules for NAMUR sensors		
	Digital electronics modules	
	CPX-P-8DE-N	CPX-P-8DE-N-IS
Connection blocks, polymer design		
CPX-AB-8-M8-3POL	–	–
CPX-AB-8-M8X2-4POL	–	–
CPX-AB-4-M12x2-5POL	–	–
CPX-AB-4-M12x2-5POL-R	–	–
CPX-P-AB-4XM12-4POL	■	–
CPX-P-AB-4XM12-4POL-8DE-N-IS	–	■
CPX-AB-4-M12-8POL	–	–
CPX-AB-8-KL-4POL	–	–
CPX-P-AB-2XKL-8POL	■	–
CPX-P-AB-2XKL-8POL-8DE-N-IS	–	■
CPX-AB-1-SUB-BU-25POL	–	–
Connection blocks, metal design		
CPX-M-AB-4-M12X2-5POL	–	–
CPX-M-AB-8-M12X2-5POL	–	–


Combination of connection blocks with digital output modules and multi I/O modules						
	Digital electronics modules					
	CPX-4DA	CPX-8DA	CPX-8DA-H	CPX-8DE-8DA	CPX-2ZE2DA	CPX-FVDA-P2
Connection blocks, polymer design						
CPX-AB-8-M8-3POL	■	■	–	–	–	–
CPX-AB-8-M8X2-4POL	■	■	■	–	–	–
CPX-AB-4-M12x2-5POL	■	■	–	–	–	–
CPX-AB-4-M12x2-5POL-R	■	■	■	–	–	–
CPX-P-AB-4XM12-4POL	–	–	–	–	–	–
CPX-P-AB-4XM12-4POL-8DE-N-IS	–	–	–	–	–	–
CPX-AB-4-M12-8POL	–	–	–	■	–	–
CPX-AB-8-KL-4POL	■	■	■	■	–	■
CPX-P-AB-2XKL-8POL	–	–	–	–	–	–
CPX-P-AB-2XKL-8POL-8DE-N-IS	–	–	–	–	–	–
CPX-AB-1-SUB-BU-25POL	■	■	■	■	–	–
Connection blocks, metal design						
CPX-M-AB-4-M12X2-5POL	■	■	■	–	–	■
CPX-M-AB-8-M12X2-5POL	–	–	–	–	–	–

Peripherals overview

Combinations of connection blocks and analogue electronics modules for inputs/outputs								
	Analogue electronics modules							
	CPX-4AE-4AA-H	CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I	CPX-2AA-U-I	CPX-4AE-P	CPX-4AE-T	CPX-4AE-TC
Connection blocks, polymer design								
CPX-AB-8-M8-3POL	–	–	–	–	–	–	–	–
CPX-AB-8-M8X2-4POL	–	–	–	–	–	–	–	–
CPX-AB-4-M12x2-5POL	–	■	■	■	■	–	■	■
CPX-AB-4-M12x2-5POL-R	–	■	■	■	■	–	■	■
CPX-P-AB-4XM12-4POL	■	–	–	–	–	–	–	–
CPX-P-AB-4XM12-4POL-8DE-N-IS	–	–	–	–	–	–	–	–
CPX-AB-4-M12-8POL	–	–	–	–	–	–	–	–
CPX-AB-8-KL-4POL	–	■	■	■	■	–	■	■
CPX-P-AB-2XKL-8POL	■	–	–	–	–	–	–	–
CPX-P-AB-2XKL-8POL-8DE-N-IS	–	–	–	–	–	–	–	–
CPX-AB-1-SUB-BU-25POL	–	■	■	■	■	–	–	–
Connection blocks, metal design								
CPX-M-AB-4-M12X2-5POL	–	■	■	■	■	–	■	■
CPX-M-AB-8-M12X2-5POL	–	–	–	–	–	–	–	–

Key features – Electrical components

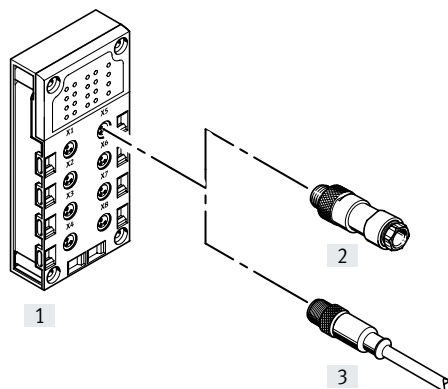Electrical connection – Connection block with M8, 3-pin connection
CPX-AB-8-M8-3POL



- Compact for pre-assembled individual connection
- 8 sockets
- 3-pin design for connecting one channel per socket

 **Note**

Festo delivers pre-assembled connecting cables M8/M12 (modular system NEBA) on request:

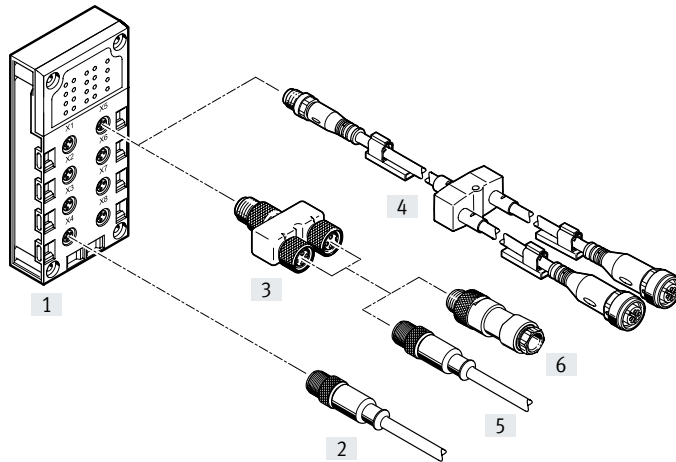
- Tailored to the application
- Perfect fit
- Easy to install

Combination of connection block and electrical connection technology			
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-AB-8-M8-3POL	Socket, M8, 3-pin	[2] NECB-S-M8G3-C2	Screw terminals
		[3] NEBA-...-M8G3 (Modular system for choice of connecting cables)	Socket, M8, 3-pin
			Socket, M8, 4-pin
			Socket M12, 5-pin
			Open cable end

Key features – Electrical components

Electrical connection – Connection block with M8, 4-pin connection

CPX-AB-8-M8X2-4POL




- Compact for pre-assembled individual connection
- 8 sockets
- 4-pin design for connection of 2 channels per socket

Combination of connection block and electrical connection technology					
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-AB-8-M8X2-4POL	Socket, M8, 4-pin	[2] NEBA-...-M8G4 (Modular system for choice of connecting cables)	Socket, M8, 3-pin	–	–
			Socket, M8, 4-pin	–	–
			Socket M12, 5-pin	–	–
			Open cable end	–	–
		[3] NEDY-L2R1-V1-M8G3-N-M8G4 (T-adapter)	1x plug, M8, 4-pin to 2x socket, M8, 3-pin	[6] NECB-S-M8G3-C2	Screw terminals
				[5] NEBA-...-M8G3 (Modular system for choice of connecting cables)	Socket, M8, 3-pin
					Socket, M8, 4-pin
					Socket M12, 5-pin
					Open cable end
		[4] NEDY-... (modular system for all types of sensor/actuator distributor)	2x socket, M8, 3-pin	–	–
			2x socket, M8, 4-pin	–	–
			2x socket, M12, 5-pin	–	–
			2x socket, type A	–	–
			2x socket, type B	–	–
			2x socket, type C	–	–
			2x socket, plug pattern H	–	–
			2x socket, plug pattern ZB	–	–
			2x socket, plug pattern ZC	–	–
			2x open cable end	–	–

Key features – Electrical components

Electrical connection – Connection block with M12, 5-pin connection

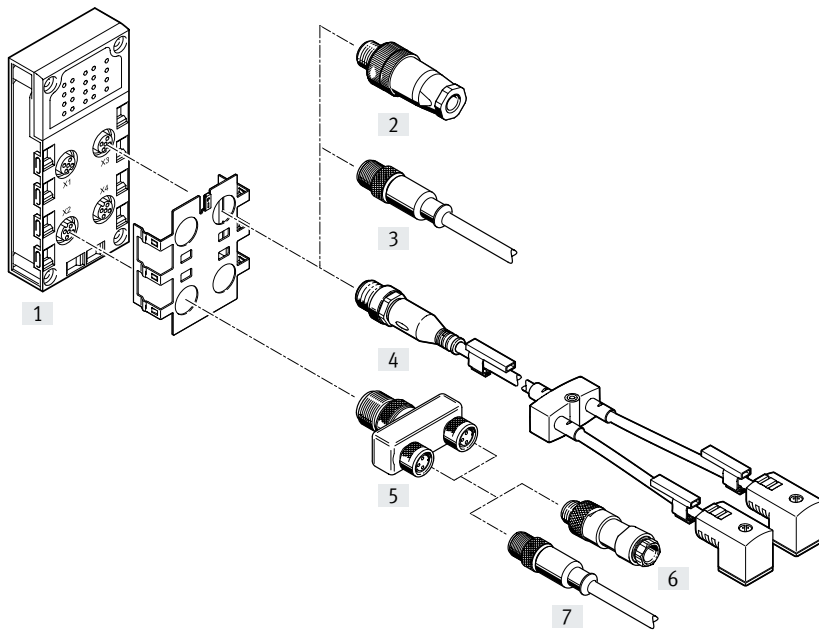CPX-AB-4-M12x2-5POL and CPX-AB-4-M12x2-5POL-R, polymer



- Suitable for self-assembly and sturdy with 2 channels per connection
- 4 sockets
- 5-pin design per connection
- Version ...-R with quick lock technology and metal thread for shielding
- With two channels per connection, the corresponding input signals can be easily connected via a T-adapter and conventional cables with M8 connection.


Key features – Electrical components

Combination of connection block and electrical connection technology					
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-AB-4-M12x2-5POL CPX-AB-4-M12x2-5POL-R	Socket M12, 5-pin	[2] NECB-S-M8G3-C2	Screw terminals	–	–
		[2] NECB-S-M12G4-C2	Screw terminals	–	–
		[2] NECB-S-M12G5-C2	Screw terminals	–	–
		[2] NECB-S-M12G4-C2-D	Screw terminals, for two cables	–	–
		[2] NECB-S-M12G5-C2-D	Screw terminals, for two cables	–	–
		[3] NEBA-...-M12G5 (Modular system for choice of connecting cables)	Socket, M8, 4-pin	–	–
			Socket M12, 5-pin	–	–
			Open cable end	–	–
		[4] NEDY-... (modular system for all types of sensor/actuator distribu- tor)	2x socket, M8, 3-pin	–	–
			2x socket, M8, 4-pin	–	–
			2x socket, M12, 5-pin	–	–
			2x socket, type A	–	–
			2x socket, type B	–	–
			2x socket, type C	–	–
			2x socket, plug pattern H	–	–
			2x socket, plug pattern ZB	–	–
			2x socket, plug pattern ZC	–	–
			2x open cable end	–	–
		[5] NEDY-L2R1-V1-M8G3-N- M12G4 (T-adapter)	Plug, M12, 4-pin to 2x socket, M8, 3-pin	[6] NECB-S-M8G3-C2	Screw terminals
				[7] NEBA-...-M8G3 (Modular system for choice of connecting cables)	Socket, M8, 3-pin Socket, M8, 4-pin Socket M12, 5-pin Open cable end
		[5] NEDY-L2R1-V1-M12G5-N- M12G4 (T-adapter)	Plug, M12, 4-pin to 2x socket, M12, 5-pin	[6] NECB-S-M12G4-C2	Screw terminals
				[6] NECB-S-M12G5-C2	Screw terminals
				[6] NECB-S-M12G4-C2-D	Screw terminals, for two cables
				[6] NECB-S-M12G5-C2-D	Screw terminals, for two cables
				[7] NEBA-...-M12G5 (Modular system for choice of connecting cables)	Socket, M8, 4-pin Socket M12, 5-pin Open cable end

Key features – Electrical components


Electrical connection – Connection block (metal design)

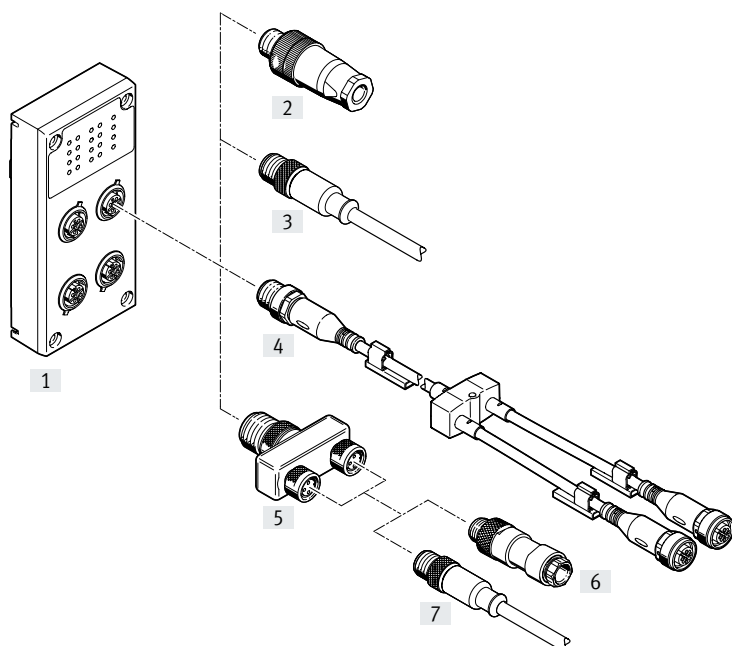CPX-M-AB-4-M12X2-5POL with connection socket M12, 5-pin



- Suitable for self-assembly and sturdy with 2 channels per connection
- 4 sockets
- 5-pin design per connection
- With two channels per connection, the corresponding input signals can be easily connected via a T-adapter and conventional cables with M8 connection.

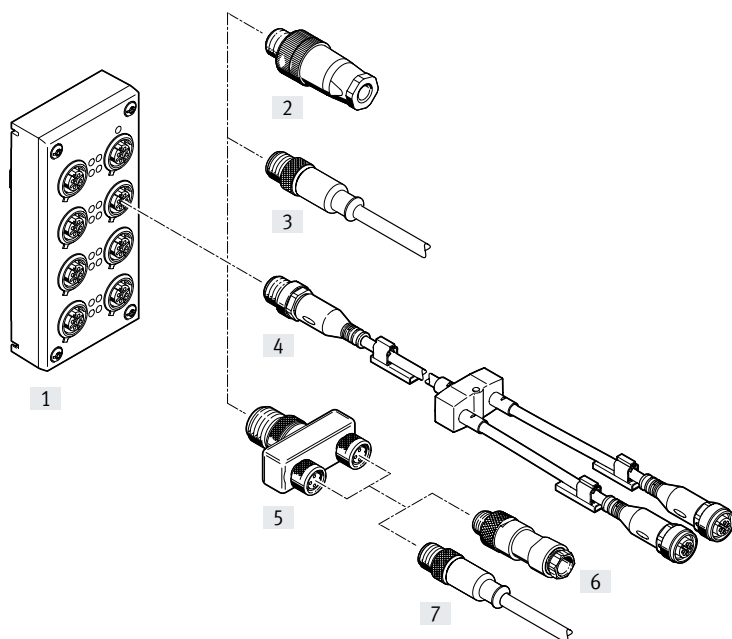CPX-M-AB-8-M12X2-5POL with connection socket M12, 5-pin



- Suitable for self-assembly and sturdy with 2 channels per connection
- 8 sockets
- 5-pin design per socket
- With two channels per connection, the corresponding input signals can be easily connected via a T-adapter and conventional connecting cables with M8 connection.

Note


Max. 4 T-adapters (NEDY) can be mounted on a connection block.

Key features – Electrical components

Combination of connection block and electrical connection technology					
Connection block	Connection technology	Plug connector/connecting cable	Connection technology	Plug connector/connecting cable	Connection technology
[1] CPX-M-AB-4-M12X2-5POL CPX-M-AB-8-M12X2-5POL	Socket, M12, 5-pin	[2] NECB-S-M12G4-C2	Screw terminals	–	–
		[2] NECB-S-M12G5-C2	Screw terminals	–	–
		[2] NECB-S-M12G4-C2-D	Screw terminals, for two cables	–	–
		[2] NECB-S-M12G5-C2-D	Screw terminals, for two cables	–	–
		[3] NEBA-...-M12G5 (Modular system for choice of connecting cables)	Socket, M8, 4-pin	–	–
			Socket M12, 5-pin	–	–
			Open cable end	–	–
		[4] NEDY-... (modular system for all types of sensor/actuator distributor)	2x socket, M8, 3-pin	–	–
			2x socket, M8, 4-pin	–	–
			2x socket, M12, 5-pin	–	–
			2x socket, type A	–	–
			2x socket, type B	–	–
			2x socket, type C	–	–
			2x socket, plug pattern H	–	–
			2x socket, plug pattern ZB	–	–
			2x socket, plug pattern ZC	–	–
			2x open cable end	–	–
		[5] NEDY-L2R1-V1-M8G3-N-M12G4 (T-adapter)	Plug M12, 4-pin to 2x socket, M8, 3-pin	[6] NECB-S-M8G3-C2	Solder lugs
				[7] NEBA-...-M8G3 (Modular system for choice of connecting cables)	Socket, M8, 3-pin Socket, M8, 4-pin Socket M12, 5-pin Open cable end
		[5] NEDY-L2R1-V1-M12G5-N-M12G4 (T-adapter)	Plug M12, 4-pin to 2x socket, M12, 5-pin	[6] NECB-S-M12G4-C2	Screw terminals
				[6] NECB-S-M12G5-C2	Screw terminals
				[6] NECB-S-M12G4-C2-D	Screw terminals, for two cables
				[6] NECB-S-M12G5-C2-D	Screw terminals, for two cables
				[7] NEBA-...-M12G5 (Modular system for choice of connecting cables)	Socket, M8, 4-pin
					Socket M12, 5-pin
					Open cable end

Key features – Electrical components


Electrical connection – Connection block with M12, 4-pin connection
CPX-P-AB-4XM12-4POL



- Suitable for self-assembly and sturdy
- 4 sockets
- 4-pin design per connection

Combination of connection block and electrical connection technology			
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-P-AB-4XM12-4POL	Socket, M12, 4-pin	[2] NECB-S-M12G4-C2	Screw terminal

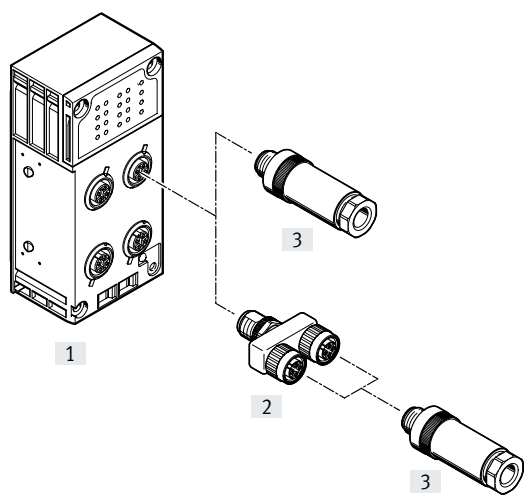Electrical connection – Connection block with M12, 4-pin connection
CPX-P-AB-4XM12-4POL-8DE-N-IS




- Suitable for self-assembly and sturdy with 2 channels per connection
- 4 sockets
- 4-pin design per connection
- With two channels per connection, the corresponding input signals can be easily connected via a T-adaptor.

Combination of connection block and electrical connection technology					
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-P-AB-4XM12-4POL-8DE-N-IS	Socket, M12, 4-pin	[3] NECU-M-S-A12G4-IS	Plug, M12, 4-pin	–	–
		[3] NECU-S-M12G4-...-IS	Plug, M12, 4-pin	–	–
		[2] NEDU-M12D4-M12T4-IS (T-adaptor)	1x plug M12, 4-pin to 2x socket, M12, 4-pin	[3] NECU-S-M12G4-...-IS	Plug, M12, 4-pin

Key features – Electrical components

Electrical connection – Connection block with M12, 8-pin connection

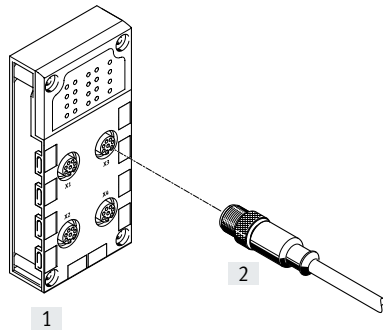CPX-AB-4-M12-8POL




- Connection to cylinder/valve combinations with max. 3 inputs and 2 outputs
- 4 sockets
- 8-pin design per socket

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-AB-4-M12-8POL	Socket, M12, 8-pin	[2] KM12-8GD8GS-2-PU (pre-assembled connecting cable)	Socket, M12, 8-pin

Electrical connection – Connection block with spring-loaded terminal connection

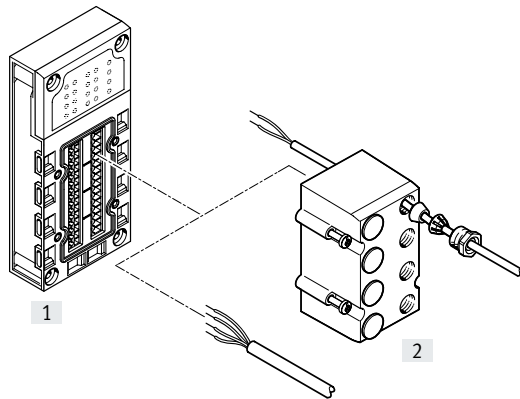CPX-AB-8-KL-4POL




- Quick connection technology for use in control cabinets
- 32 spring-loaded terminals
- 4 spring-loaded terminals per channel
- Core cross-sections 0.05 ... 1.5 mm²
- Optional cover with fittings for IP65/67 connection
 - 8 through-holes M9
 - 1 through-hole M16
 - Blanking plug
 - For I/O distributors, control desks or individual sensors/actuators

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-AB-8-KL-4POL	Spring-loaded terminals, 32-pin	[2] AK-8KL (cover)	–

Key features – Electrical components

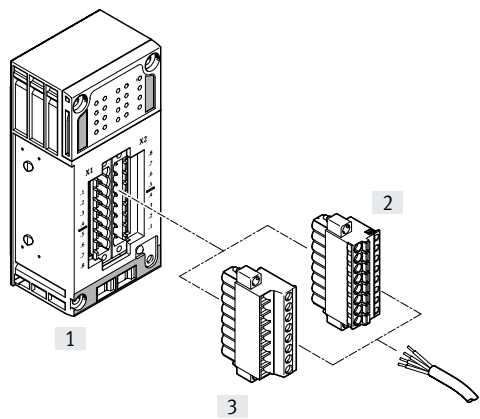
Electrical connection – Connection block with clamping connector
CPX-P-AB-2XKL-8POL and CPX-P-AB-2XKL-8POL-8DE-N-IS



- Quick connection technology for use in control cabinets
- Spring-loaded terminals or screw terminals
- Core cross-sections 0.2 ... 2.5 mm²

Combination of connection block and electrical connection technology			
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-P-AB-2XKL-8POL	Plug, 8-pin	[2] NECU-L3G8-C1	Spring-loaded terminals
		[3] NECU-L3G8-C2	Screw terminals
[1] CPX-P-AB-2XKL-8POL-8DE-N-IS	Plug, 8-pin	[2] NECU-L3G8-C1-IS	Spring-loaded terminals
		[3] NECU-L3G8-C2-IS	Screw terminals

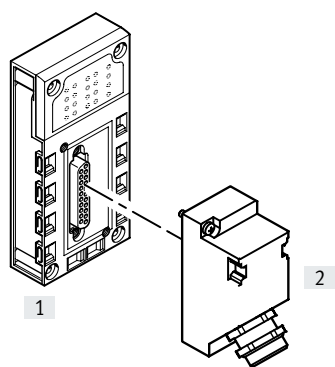Electrical connection – Connection block with Sub-D connection
CPX-AB-1-SUB-BU-25POL



- Multi-pin connection for I/O distributor or control panel
- One Sub-D socket
- 25-pin design


Combination of connection block and electrical connection technology			
Connection block	Connection technology	Plug connector/connecting cable	Choice of connection technology
[1] CPX-AB-1-SUB-BU-25POL	Socket, sub-D, 25-pin	[2] SD-SUB-D-ST25	Crimp contacts

Key features – Mounting

Hood

Description

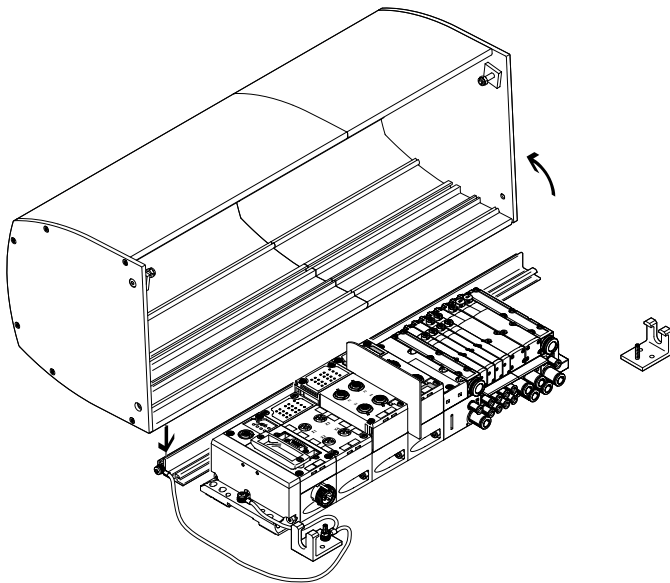→ 175



The CPX hood CAFC is a space- and cost-saving alternative to a control cabinet.

It is designed as an extruded aluminium profile and is installed on a mounting plate.

The valve terminal is well protected and is quick to install without the need for a complex cabinet through-feed for cables and tubing.

The rail and the two mounting brackets are mounted on a base plate. The hood is attached to the retaining rail and secured with two screws. There is also a stand-by position (detent of the hood in the open position).

The hood is locked using two side screws (which meet the requirements for a special fastener in compliance with ATEX).

The CPX hood can be ordered online using the valve terminal configurator.

Advantages of the CPX hood

- Impact protection (min. 7 J) for the modules underneath in combination with a suitable mounting plate provided by the user
- Protection against electrostatic discharge by using electrically conductive materials and the option of connecting an earth wire
- Protection against disconnection of live plugs (by securing the hood with at least one special fastener to EN 60079-0, 9.2 and 20)
- UV protection for the CPX-P and MPA modules underneath

Points to note when using the CPX hood

- CPX-P power supply via angled plugs, no T-plugs
- Electrical supply plate/additional supply only possible with angled plug
- No MPA vertical stacking
- Larger push-in fittings (for tubing O.D. larger than 12 mm) can only be used with the angled design
- Ducted exhaust air only with elbow connector
- The permissible ambient temperature range of the valve terminal is reduced by 5 °C.

Note

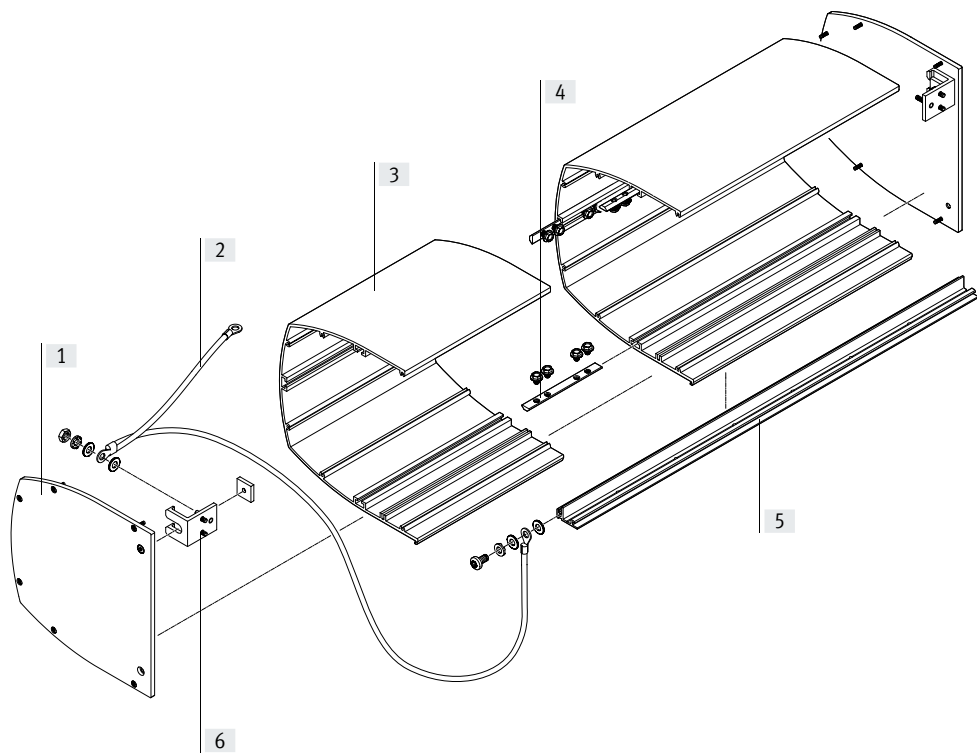
The CPX hood has no influence on the ATEX classification of the valve terminal or of the CPX-P terminal.

The CPX hood has no influence on the IP protection class of the valve terminal or of the CPX-P terminal.

The CPX hood does not protect against the effects of the weather in installations that are not in enclosed spaces.

Key features – Mounting

Hood
Mounting




- Procedure:
- Assemble the rail and mounting bracket included in the mounting kit
 - Attach the earthing cable
 - Assemble the hood (if applicable, screw together several hood sections and attach the side covers)
 - Attach and secure the hood

- [1] Side cover
- [2] Earthing cable
- [3] Hood section
- [4] Slot nut with screws, for joining the hood sections
- [5] Rail
- [6] Mounting bracket

Technical data

- Weight:
- Hood: approx. 500 g per 100 mm of length
 - Mounting rail: approx. 550 g per 1000 mm of length
 - Side pieces: approx. 500 g per side
 - Ambient temperature –5 ... +50 °C
 - RoHS-compliant

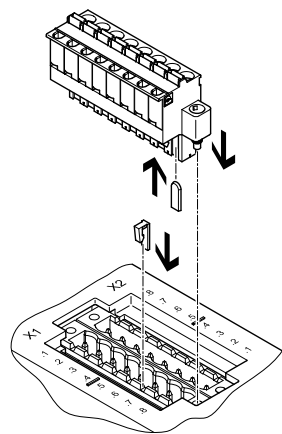Plug coding



The connection blocks CPX-P-AB-2XKL-8POL and CPX-P-AB-2XKL-8POL-8DE-N-IS, and the sockets NECU-L3G8, can be matched to one another using the coding elements CPX-P-KDS-AB-2XKL.

This reduces the possibility of the socket being plugged back into an incorrect slot after being disconnected from the CPX-P terminal (connection safeguard).

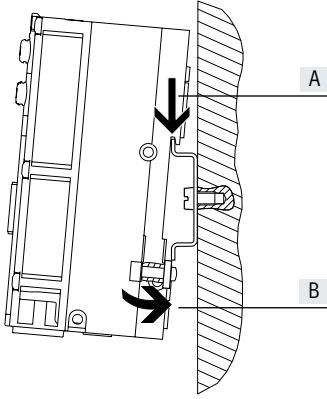
Key features – Mounting

Mounting options

The valve terminals with CPX-P terminal support different mounting options for direct machine mounting with a

high degree of protection and control cabinet installation.

DIN rail mounting




The DIN rail mounting is part of the rear profile of the CPX-P interlinking blocks. The CPX-P terminal can be attached to the DIN rail using the DIN rail mounting kit. The CPX-P terminal is mounted on the DIN rail (see arrow A) and

then swivelled onto the DIN rail and secured in place with the clamping element (see arrow B). The optional earthing plate enables a connection to be established to the machine potential/earth in one easy step.

The following mounting kit is needed for DIN rail mounting:


- CPX-CPA-BG-NRH
- This enables the CPX-P terminal to be mounted on DIN rails in accordance with EN 60715. An additional mounting kit may be required for combination with valve terminals.

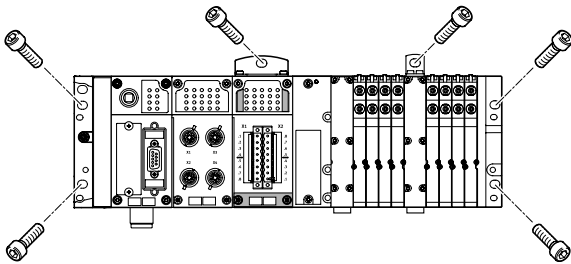Wall mounting



The end plates of the CPX-P terminal, the valve terminal and the pneumatic interface include mounting holes for wall mounting. Additional mountings for the CPX-P terminal are available for longer valve terminals.

Additional mountings




Additional mounting brackets for the CPX-P terminal that can be screwed onto the interlinking blocks are available for longer valve terminals.

Note

For CPX-P terminals with 4 or more interlinking blocks, additional mounting brackets of the type CPX-M-BG-RW must be used every 100 or 150 mm. These are supplied pre-assembled.

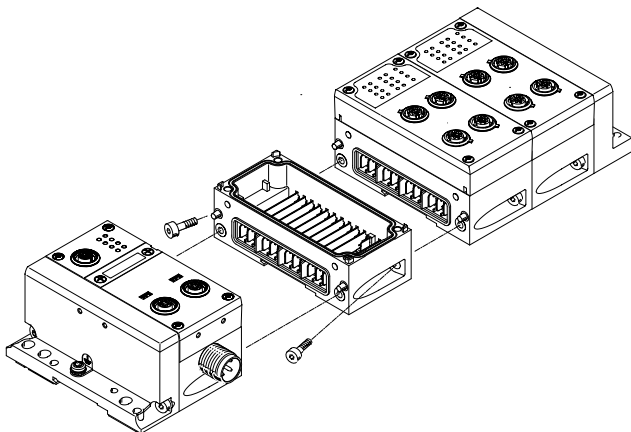
Linking with screws



The CPX-P modules are mechanically connected using an angled fitting. The CPX-P terminal can thus be expanded at any time.

Key features – Power supply

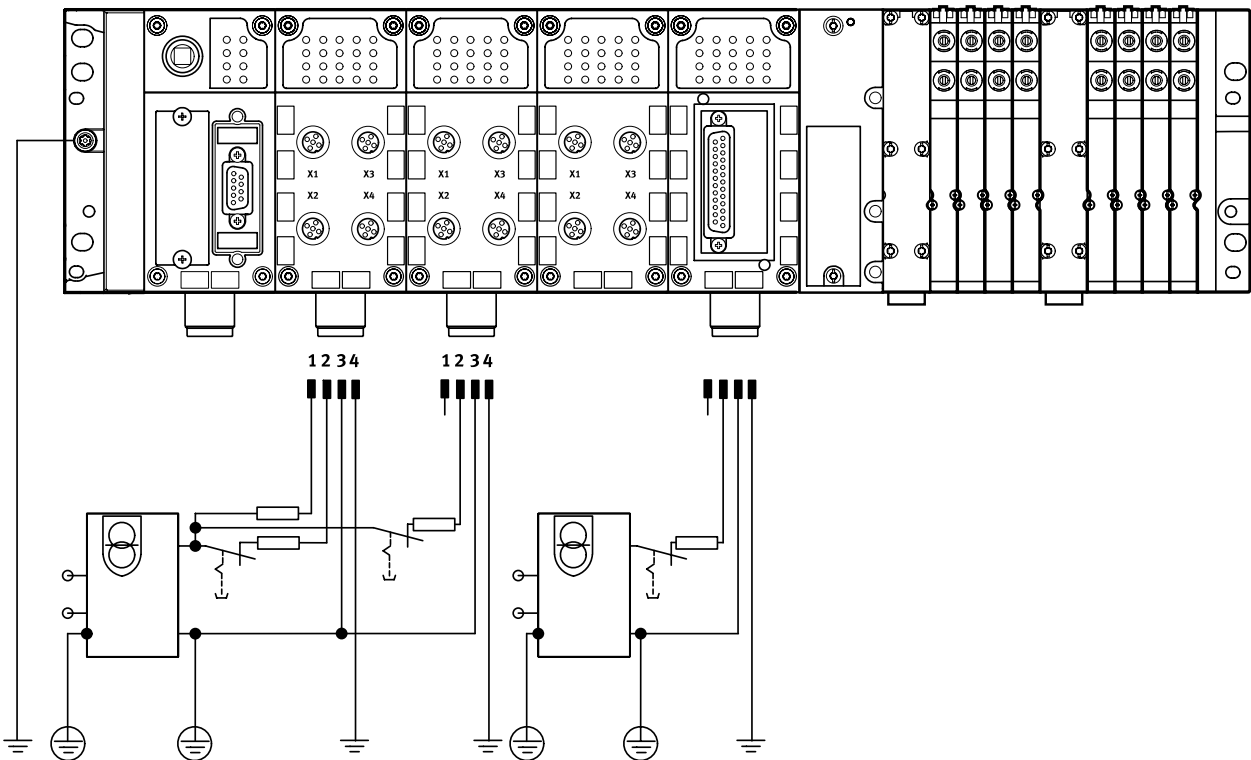Power supply concept
General



The use of decentralised devices on the fieldbus – particularly with a high degree of protection for direct mounting on the machine – requires a flexible power supply concept. A valve ter-

minal with CPX-P is, in principle, supplied with all voltages via a single connection.

A distinction is made between supply for

- Electronics plus sensors
- Valves plus actuators

Connection technology:

- 7/8"

Interlinking blocks

Interlinking blocks represent the backbone of the CPX-P terminal with all supply lines. They provide the power supply for the modules used on them as well as their bus connections.


Many applications require the CPX-P terminal to be segmented into voltage zones. This applies in particular to the separate disconnection of the outputs.

The interlinking blocks provide either an easy-to-install central power supply for the entire CPX-P terminal or galvanically isolated, all-pin disconnectable potential groups/voltage segments.

Key features – Power supply

Interlinking blocks

With system supply




- CPX-M-GE-EV-S-7/8-5POL
- CPX-M-GE-EV-S-7/8-5POL-VL
- For CPX-P terminal modules and connected sensors
- For valves that are connected to the CPX-P terminal via a pneumatic interface
- For actuators that are connected to output modules of the CPX-P terminal

Connection technology


- 7/8" 5-pin

Without power supply



- CPX-M-GE-EV
- CPX-M-GE-EV-FVO

With additional supply for outputs



- CPX-M-GE-EV-Z-7/8-5POL
- For actuators that are connected to output modules of the CPX-P terminal

Connection technology

- 7/8" 5-pin

- - Note

For 7/8":

- Commercially available accessories are often limited to max. 8 A

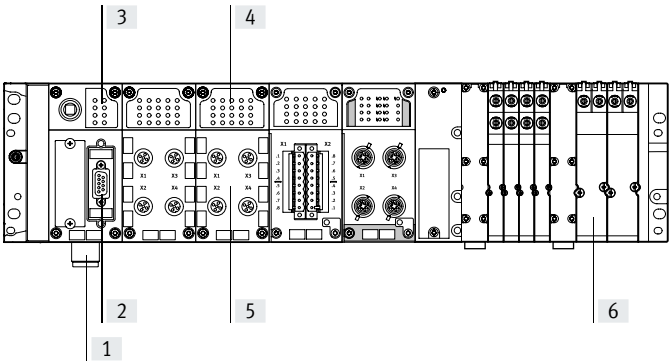
- - Note

The valve terminal MPA-S has either a 7/8" 5-pin, 7/8" 4-pin or M18 3-pin power supply for one or more valve voltage zones. Galvanically isolated,

all-pin disconnectable with voltage monitoring in the following MPA module.

Key features – Diagnostics

Diagnostics
System performance



- [1] Undervoltage monitoring
- [2] Diagnostics via bus interface
- [3] Diagnostic overview LED
 - Fieldbus status
 - CPX-P status
- [4] Status and diagnostic LED for module and I/O channels
- [5] Module and channel-specific diagnostics
- [6] Valve-specific diagnostic module and solenoid coils

Detailed diagnostic functions are needed in order to quickly locate the causes of errors in the electrical installation and therefore reduce downtimes in production plants. A basic distinction is made between on-the-spot diagnostics using LEDs or PC and diagnostics using a bus interface.


The CPX-P terminal supports on-the-spot diagnostics via a row of LEDs. This is separate from the connection area and therefore provides good visual access to status and diagnostic information.

Module and channel-specific diagnostics are supported, for example:

- Undervoltage detection for outputs and valves
- Short circuit detection for sensors, outputs and valves
- Open-load detection for a missing solenoid coil
- Storage of the last 40 causes of errors with error start and error end


The diagnostic messages can be read out via the bus interface in the higher-order controller and visualised for the central recording and evaluation of error causes. This is done using the individual fieldbus-specific channels. The CPX-CEC also offers the option of access via the integrated Ethernet interface (remote maintenance via PC/web applications).

Overview of LEDs on the bus node



- [1] Fieldbus-specific LEDs
On each bus node, a maximum of 4 fieldbus-specific LEDs display the fieldbus communication status of the CPX-P terminal with the higher-order controller.
- [2] CPX-P-specific LEDs
A further 4 CPX-P-specific LEDs provide non-fieldbus-specific information about the status of the CPX-P terminal, for example
 - Power system
 - Power load
 - System error
 - Modify parameters


Input/output module status and diagnostic LEDs



Key features – Parameterisation

Diagnostics

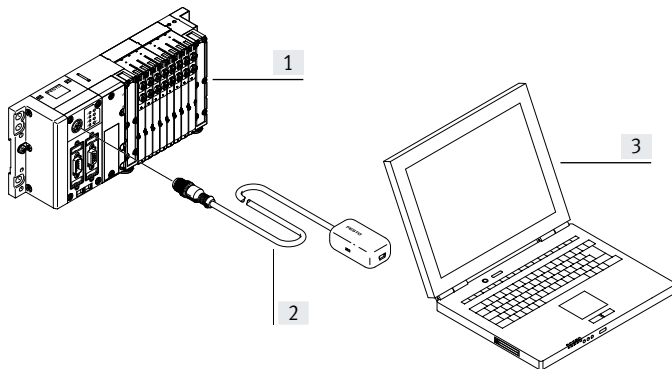Display on a PC



- [1] CPX-P terminal with valve terminal
 - [2] Adapter diagnostic interface to USB
 - [3] Laptop/portable device with USB interface and installed CPX-P Maintenance Tool (CPX-FMT) software
- Error location and type
 - Without programming
 - Storing the configuration
 - Preparing screenshots

Parameterisation

Changes to the application are often required during commissioning. The parameterisable characteristics of the CPX-P modules mean that functions can be very easily changed by using configuration software. This reduces the number of modules needed and,

consequently, the amount of storage space required.

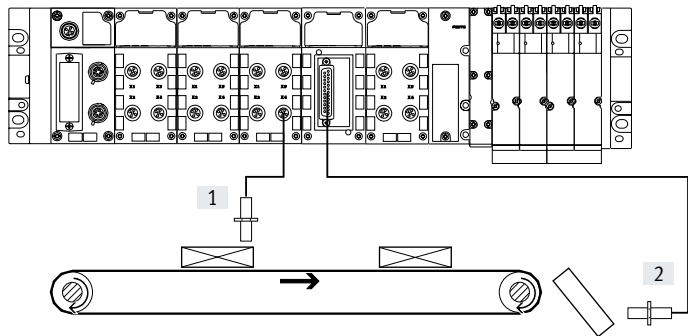
It is therefore possible, for example, to reduce the input debounce time for an input module – normally 3 ms – to 0.1 ms on a "fast" input module for faster processes, or to set the response

of a valve following a fieldbus interruption.

Depending on the modules used, parameterisation can be performed via the following interfaces:

- Ethernet
- Fieldbus

- Control block direct interface (programming interface)



- [1] Input debounce time 3 ms
- [2] Input debounce time 0.1 ms

Key features – Addressing

Addressing

The various CPX-P modules occupy a different number of I/O addresses within the CPX-P system. The maximum address space for bus nodes depends on the performance of the fieldbus systems.

Maximum system configuration:

- 1 bus node or control block
- 9 I/O modules
- 1 pneumatic interface (e.g. pneumatic interface MPA-S with up to 16 MPA sub-bases)

The maximum system configuration can be limited in individual cases by exceeding the address space.



Note

Please refer to the detailed description of the configuration/addressing rules in the technical data for CPX-P bus nodes.

Overview – Allocated addresses for CPX-P modules

	Inputs [bit]	Outputs [bit]
CPX-CTEL-4-M12-5POL	0, 64, 128, 192, 256 ¹⁾	0, 64, 128, 192, 256 ¹⁾
CPX-CTEL-2-M12-5POL-LK	64, 128, 192, 256 ¹⁾	64, 128, 192, 256 ¹⁾
CPX-CMIX-M1-1	48	48
CPX-4DE	4	–
CPX-8DE	8	–
CPX-8DE-D	8	–
CPX-8NDE	8	–
CPX-P-8DE-N	16	8
CPX-P-8DE-N (inputs configured as counters)	80	16
CPX-P-8DE-N-IS	16	8
CPX-P-8DE-N-IS (inputs configured as counters)	80	16
CPX-F8DE-P	48	56
CPX-16DE	16	–
CPX-M-16DE-D	16	–
CPX-4DA	–	4
CPX-8DA	–	8
CPX-8DA-H	–	8
CPX-8DE-8DA	8	8
CPX-2ZE2DA	96	96
CPX-4AE-4AA-H	0, 16, 32, 48, 64, 128, 144, 160, 176, 192 ¹⁾	0, 16, 32, 48, 64 ¹⁾
CPX-2AE-U-I	2 x 16	–
CPX-4AE-U-I	4 x 16	–
CPX-4AE-I	4 x 16	–
CPX-4AE-P-B2	4 x 16	–
CPX-4AE-P-D10	4 x 16	–
CPX-4AE-T	4 x 16	–
CPX-4AE-TC	4 x 16	–
CPX-2AA-U-I	–	2 x 16
CPX-FVDA-P2	48	48
VMPA1-FB-EMS-8	–	8
VMPA1-FB-EMG-8	–	8
VMPA2-FB-EMS-4	–	4
VMPA2-FB-EMG-4	–	4
VMPA1-FB-EMS-D2-8	–	8
VMPA1-FB-EMG-D2-8	–	8
VMPA2-FB-EMS-D2-4	–	4
VMPA2-FB-EMG-D2-4	–	4
VMPA-FB-PS-1	16	–
VMPA-FB-PS-3/5	16	–
VMPA-FB-PS-P1	16	–
VMPA-FB-EMG-P1	16	16

1) Dependent on the DIL switch setting on the module

Key features – Addressing

Overview – Address space for CPX-P bus node and control block							
	Protocol	Max. total		Max. digital		Max. analogue	
		Inputs	Outputs	Inputs	Outputs	Inputs	Outputs
CPX-CEC	• CODESYS Level 2 • TCP/IP • Easy IP • Modbus TCP	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB11	DeviceNet®	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB13	PROFIBUS	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB14	CANopen	256 bit	256 bit	64 DI (+ 64 DI)	64 DO (+ 64 DO)	8 AI (+ 8 AI)	8 AO (+ 8 AO)
CPX-FB36	EtherNet/IP	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB37	EtherCAT®	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB43	PROFINET RT	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-M-FB44	PROFINET RT	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-M-FB45	PROFINET RT	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO

 Note

The bandwidth of the bus nodes can be restricted by the choice of module and the maximum number of modules.

Datasheet

-  - Module width
50 mm

-  - Repair service



-  - **Note**
The data shown here apply to the CPX-P system. If components with lower values are used in the system, the specification for the entire system is reduced to the values of those components.

Example
Degree of protection IP65 applies only to the fully assembled system with fitted plugs or covers (which must also conform to IP65). If components with a lower degree of protection are used, the protection level of the entire system is reduced to the degree of protection of the component with the lowest degree of protection, for example CageClamp connection block with degree of protection IP20.

General technical data			
Module no.		562818	
Max. number of modules ¹⁾	Control block		1
	Bus node		1
	I/O modules		9
	Pneumatic interface		1
Max. address capacity	Inputs	[byte]	64
	Outputs	[byte]	64
Internal cycle time		[ms]	< 1
Configuration support		Fieldbus-specific	
LED indicators	Bus node/control block		Up to 4 LEDs, bus-specific 4 LEDs CPX-P-specific • PS = Power system • PL = Power load • SF = System error • M = Modify parameter/forcing active
	I/O modules		Min. one group diagnostic LED Channel-oriented status and diagnostic LED, depending on the module
	Pneumatic interface		One group diagnostic LED Valve status LED on valve
Diagnostics		• Channel- and module-orientated diagnostics for inputs/outputs and valves • Detecting the module undervoltage for the different potential values • Storage of the last 40 errors with timestamp (acyclic access)	

1) A maximum of 11 modules in total can be combined.
(e.g. 1 control block + 9 I/O modules + 1 pneumatic interface, or 1 control block + 1 bus node + 8 I/O modules + 1 pneumatic interface)

Datasheet

General technical data		
Module no.		562818
Parameterisation		Diagnostic behaviour
		Fail-safe response
		Forcing of channels
		Signal setup
Commissioning support		Forcing of inputs and outputs
Nominal operating voltage	[V DC]	24
Permissible voltage fluctuations	[%]	±25
Power supply	Interlinking block with system supply	
	Electronics plus sensors	[A] 8
	Actuators plus valves	[A] 8
	Additional supply	
	Actuators	[A] 8
Current consumption		Depending on the system configuration
Power failure buffering (bus electronics only)	[ms]	10
Power supply connection		7/8" 5-pin
Fuse concept		Per module with electronic fuses
Tests	Vibration test to DIN IEC 68	• With wall mounting: severity level 2 • With DIN rail mounting: severity level 1
	Shock test to DIN IEC 68	• With wall mounting: severity level 2 • With DIN rail mounting: severity level 1
PWIS classification		Free of paint-wetting impairment substances
Immunity to interference		EN 61000-6-2 (industry)
Interference emission		EN 61000-6-4 (industry)
Isolation test for galvanically isolated circuits to IEC 1131 Part 2	[V DC]	500
Galvanic isolation of electrical voltages	[V DC]	80
Protection against direct and indirect contact		PELV
Materials		End plates: Die-cast aluminium
LABS (PWIS) conformity		VDMA24364-B2-L
Grid dimension	[mm]	50
Operating and environmental conditions		
Module no.		562818
Ambient temperature	[°C]	−5 ... +50
Storage temperature	[°C]	−20 ... +70

Datasheet

Certifications and approvals – Maximum values	
Module no.	562818
ATEX category for gas	II 3G
Type of (ignition) protection for gas	Ex ec IIC T4 Gc X
Explosion-proof ambient temperature [°C]	–5 ≤ Ta ≤ +50
CE marking (see declaration of conformity) ¹⁾	To EU Explosion Protection Directive (ATEX)
	To EU EMC Directive ²⁾
	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK explosion regulations
	To UK EMC regulations
	To UK RoHS regulations
KC marking	KC EMC
Degree of protection to EN 60529	IP20, IP65
Certification	c UL us - Recognized (OL)
	RCM
Explosion protection certification outside the EU	EPL Gc (BR)
	EPL Gc (GB)
Certificate-issuing authority	DNV 15.0193 X

1) More information www.festo.com/catalogue/... → Support/Downloads.
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

 **Note**

The values indicated represent the maximum performance limits that can be achieved with the fully assembled product.

Depending on the individual components used, the actual value achieved for the overall product may be lower.

You can select e.g. the individual components required to achieve the ATEX category by choosing the corresponding features in the online product configurator:






→ Internet:[cpx-p](#)

Datasheet




Weight [g]			
Control block	CEC...V3	135	
Bus node	FB11	120	
	FB13	115	
	FB14	115	
	FB36	125	
	FB37	125	
	FB43	185	
	FB44	280	
	FB45	280	
I/O module	4 digital outputs	42	
	4 digital inputs	39	
	8 digital inputs	39	
	8 digital inputs, positive logic (PNP), enhanced diagnostic function	45	
	8 digital inputs, negative logic (NPN)	40	
	8 digital inputs to NAMUR	100	
	16 digital inputs, internal electronic fuse per module	41	
	16 digital inputs, internal electronic fuse per channel pair, for CPX in metal	46	
	8 digital inputs, 8 digital outputs	48	
	8 digital outputs, power supply 0.5 A per channel	49	
	8 digital outputs, power supply 2.1 A per channel pair	48	
	2 analogue current or voltage inputs	48	
	4 analogue current inputs	47	
	2 analogue current or voltage outputs	49	
	4 analogue inputs/outputs, HART	77.4	
	2 or 4 analogue temperature inputs	47	
	4 analogue temperature inputs, with 2-conductor connection for a PT1000 sensor for cold junction compensation	46	
	4 analogue pressure inputs	115	
	PROFIsafe	Shut-off module	50
		Input module	46

Counter module	2ZE2DA	130
CTEL interface	CTEL	110
Electrical interface	CTEL-2	110
Axis interface	CM-HPP	140
Measuring module	CMIX	140
Polymer connection block	8-way, M8 3-pin	62
	8-way, M8 4-pin	65
	4-way, M12 5-pin	60
	4-way, M12 5-pin, quick lock, shielded with metal thread	87
	4-way, M12 8-pin	65
	Spring-loaded terminal, 32-pin	75
	Sub-D 25-pin	72
	8-way, DIL switch	57
Connection block for NAMUR and HART module	4-way, M12 4-pin	120
	Clamping connector 8-pin	100
Metal connection block	4-way, M12 5-pin	112
	4-way, M12 5-pin, pulsed sensor supply	110
	8-way, M12 5-pin	152
Interlinking block, metal	Without power supply	169
	System supply, 7/8" 5-pin	187
Tie rods	1 valves	41
	2 valves	71
	3 valves	97
	4 valves	127
	5 valves	156
	6 valves	173
	7 valves	199
	8 valves	247
	9 valves	274
	10 valves	301
End plate for metal design	Left	113
	Right	113
End plate with extension	Left	190
	Right	175
Pneumatic interface	MPA-S	238.4

Datasheet

Ordering data – Accessories					
Designation			Part no.	Type	
Mounting					
	Attachment for wall mounting (for long valve terminals, 2 mounting brackets and 4 screws)		550217	CPX-M-BG-RW-2x	
	Mounting for DIN rail		526032	CPX-CPA-BG-NRH	
Interlinking block					
	Without power supply		550206	CPX-M-GE-EV	
	With system supply	7/8" connection, 5-pin	550208	CPX-M-GE-EV-S-7/8-5POL	
		For ATEX environment	8022165	CPX-M-GE-EV-S-7/8-5POL-VL	
	With additional supply for outputs	7/8" connection, 5-pin	550210	CPX-M-GE-EV-Z-7/8-5POL	
Mounting accessories					
	Screws for mounting the bus node/connection block on an interlinking block		Bus node/polymer connection block	550219	CPX-M-M3x22-4x
			Bus node/metal connection block	550216	CPX-M-M3x22-S-4x
End plates					
	End plate		Right	550214	CPX-M-EPR-EV
			Left	550212	CPX-M-EPL-EV
Power supply					
	Plug socket for mains connection 7/8", straight, 5-pin	0.25 ... 2.0 mm²	543107	NECU-G78G5-C2	
	Plug socket for mains connection 7/8", angled, 5-pin – open cable end, 5-pin	2 m	573855	NEBU-G78W5-K-2-N-LE5	
Inscription labels					
	Inscription labels 6x10 mm, 64 pieces, in a frame		18576	IBS-6x10	

Datasheet

Ordering data – Accessories				
Designation			Part no.	Type
Hood				
	Mounting rail for attaching the hood	1000 mm	572256	CAFC-X1-S
	Mounting kit for CPX hood		572257	CAFC-X1-BE
	Hood section for CPX-P terminal including mounting attachments for connecting several hood sections in series.	200 mm	572258	CAFC-X1-GAL-200
		300 mm	572259	CAFC-X1-GAL-300
User documentation				
	CPX-P system manual	German	526445	P.BE-CPX-SYS-DE
		English	526446	P.BE-CPX-SYS-EN
		Spanish	526447	P.BE-CPX-SYS-ES
		French	526448	P.BE-CPX-SYS-FR
		Italian	526449	P.BE-CPX-SYS-IT

Datasheet

User documentation

Comprehensive user documentation is vital for the fast and reliable use of fieldbus components.

The manuals provided by Festo contain step-by-step instructions for using the CPX-P terminal:

1. Installation
2. Commissioning and parameterisation
3. Diagnostics

Application-oriented explanations are provided for integrating the CPX-P terminal in the programming and configuration software of the various controller manufacturers.

Use the order code to select the language you want.

The manual for the configuration you have ordered is supplied automatically.

Device description files and icons are provided to support the integration of the CPX-P terminal in the configuration software of the various controller manufacturers.

The documents can be downloaded quickly and easily from the Festo website.

→ www.festo.com

Overview – User documentation

Type	Titel	Description
Pneumatics		
P.BE-MPA-...	Valve terminals with MPA-S pneumatics	Instructions on mounting, installation, commissioning and diagnostics of the MPA-S pneumatic components.
Electronics		
P.BE-CPX-SYS-...	System description, installation and commissioning	Overview of the design, components and mode of operation of the CPX-P terminal; installation and commissioning instructions as well as basic principles of parameterisation.
CPX-FVDA-P2-...	PROFIsafe shut-off module	Connection technology and assembly, installing and commissioning instructions for the PROFIsafe shut-off module of the type CPX-FVDA-P2.
P.BE-CPX-EA-...	CPX-P I/O modules, digital	Connection technology and mounting, installation and commissioning instructions for digital input and output modules of type CPX-... as well as the MPA pneumatic interface.
P.BE-CPX-P-EA-...	CPX-P I/O modules, NAMUR sensors	Connection technology and mounting, installation and commissioning instructions for digital input and output modules of type CPX-P-....
CPX-F8DE-P-...	Input module CPX-F8DE-N	Connection technology and mounting, installation and commissioning instructions for the PROFIsafe input module of type CPX-F8DE-P.
P.BE-CPX-2ZE2DA-...	I/O module CPX-2ZE2DA	Connection technology and mounting, installation and commissioning instructions for counter modules of type CPX-2ZE2DA.
P.BE-CPX-AX-...	CPX-P I/O modules, analogue	Connection technology and mounting, installation and commissioning instructions for analogue input and output modules of type CPX-... as well as pressure sensors and proportional pressure regulators.
P.BE-CPX-CTEL-...	CPX CTEL interface	Instructions on mounting, installation, commissioning and diagnostics of the CTEL master.
P.BE-CPX-CTEL-LK-...	Electrical interface CPX-CTEL-2	Instructions on mounting, installation, commissioning and diagnostics of the electrical interface for IO-Link®.
P.BE-CPX-CMIX-...	CPX measuring module	Instructions on mounting, installation, commissioning and diagnostics of the measuring module (CMIX).
P.BE-CPX-FB-... CPX-FB-...	CPX bus node	Instructions on mounting, installation, commissioning and diagnostics of the relevant bus node.
CPX-(M)-FB33_35/43_45...	CPX bus node for PROFINET	Instructions on mounting, installation, commissioning and diagnostics of the relevant bus node.
P.BE-CPX-CEC-...	CPX-CODESYS controller (control block)	Instructions on mounting, installation, commissioning and diagnostics of the relevant control block.

Datasheet – CPX-P maintenance tool

Function

The CPX Maintenance Tool (CPX-FMT) combines service software with a connecting adapter. The service software is a tool for the design, parameterisation and online diagnostics of the CPX-P terminal.

The USB-to-M12 adapter features built-in galvanic isolation (between CPX-P and PC) and enables a PC to be connected to the diagnostic interface of the CPX-P terminal.

- Adapter
- Software on CD-ROM



Application

Only from Festo

The CPX-FMT software enables access to CPX valve terminals via Ethernet with the bus nodes EtherNet/IP (FB 36) and PROFINET (FB 33, FB 34, FB 35). The bus nodes or control blocks can be connected directly to a PC via a USB adapter from Festo. Diagnostic data such as the error trace or module

diagnostics can be read out and parameters can be modified in plain text. The data can be used directly on a PC. There is an option, for example, to send screenshots of a configuration or the current error trace directly via email. In addition, CPX configurations can also be saved and archived

directly as a CPX-FMT project. Undocumented changes can subsequently be identified using the online/offline comparison function. On-site tests such as the actuation of valves or the emulation of sensor feedback (in both cases called "forcing"), for example, can be carried

out without an existing controller infrastructure. It must be noted that only local parameters on the CPX valve terminal can be changed and saved using the CPX-FMT. The configuration of the networks or controller software cannot be influenced.

General technical data		
Type		NEFC-M12G5-0.3-U1G5
System requirements	PC	IBM-compatible
	Drive	CD-ROM
	Interfaces	USB port (specification USB 1.1 or higher)
	Operating system	MS Windows 2000 or XP
Function range		• Configuration and parameterisation • Reading out of system, module, channel diagnostics and error trace • Saving the configuration as a project • Integration of plug-ins/links to self-executing programs
Scope of delivery		• Adapter, M12, 5-pin to mini USB socket • CD-ROM with installation program
Type of mounting		Screw-in
Electrical connection		Plug M12x1, 5-pin
Adapter cable composition		4 x 0.34 mm ²
Cable length	[m]	0.3
Degree of protection to EN 60529		IP20
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Ambient temperature	[°C]	–5 ... +50
Material	Housing	ABS
	Cable sheath	PUR
	Pin contact	Gold-plated brass
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B2-L

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet – CPX-P maintenance tool


Dimensions

Download CAD data → www.festo.com

The technical drawing illustrates the CPX-P maintenance tool from multiple perspectives. A side view shows the tool's profile with dimensions L1, L2, L3, D1, D2, and H1. A top view shows the circular base with diameter B1. A detail view of the USB connection is labeled [1] and a detail view of the M12x1, 5-pin plug is labeled [2].

[1] USB connection Mini B 5P [2] Plug M12x1, 5-pin

Type	B1	D1	D2	H1	L1	L2	L3
NEFC	31	M12x1	5	24	300	56	44.5

Ordering data		Part no.	Type
Designation			
	CPX-P maintenance tool (CPX-FMT), software and USB-to-M12 adapter	547432	NEFC-M12G5-0.3-U1G5

Datasheet – CODESYS controller

- Industrial Ethernet
- TCP/IP
- EasyIP
- Web interface
- Email
- Data transfer

The CODESYS controller is a modern control system for CPX-P terminals that enables programming with CODESYS to IEC 61131-3.

The power supply to and communication with other modules takes place via the interlinking block.

In addition to network connections, LEDs are also provided for the bus status, operating status of the PLC and CPX-P peripherals information, as are switching elements and a diagnostic interface for CPX-FMT.



Application			
Bus connection		Communication protocols	Operating modes
The CPX-CEC is a remote controller that can be connected to a higher-order PLC via the bus nodes of the CPX-P terminal or via Ethernet. At the same time, it is	possible to operate the CPX-CEC as a compact stand-alone controller directly on the machine.	• Fieldbus via CPX-P bus nodes • Modbus/TCP • EasyIP	• Stand-alone • Remote controller, fieldbus • Remote controller, Ethernet
Setting options			
The CPX-CEC has the following interfaces for monitoring, programming and commissioning:	• For the CPX-FMT • Ethernet interface for IT applications • Remote diagnostics	The operating mode and fieldbus protocol are set using the DIL switch on the CPX-CEC.	The integrated web server offers a convenient means of querying data saved in the CPX-CEC.
Characteristics			
• Easy actuation of valve terminal configurations with MPA, VTSA • Diagnostics with flexible monitoring options for pressure, flow rate, cylinder operating time, air consumption	• Activation of decentralised installation systems on the basis of CPI control of applications in proportional pneumatics • AS-Interface control via gateway	• Connection to all fieldbuses as a remote controller and for pre-processing • Control of electric actuators as individual axes via CANopen (CPX-CEC-C1/-M1)	• Early warnings and visualisation options • Servo-pneumatic applications

Datasheet – CODESYS controller

General technical data			
Protocol			CODESYS Level 2
			EasyIP
			Modbus TCP
			TCP/IP
Processing time			Approx. 200 µs/1 k instructions
Programming software			CODESYS provided by Festo
Programming language			To IEC 61131-3
			Sequential function chart (SFC)
			Instruction list (IL)
			Function chart (FCH), additional continuous function chart (CFC)
			Ladder diagram (LD)
			Structured text (ST)
Programming	Operating language		German, English
	Support for file handling		Yes
Device-specific diagnostics			Diagnostics memory
			Channel and module-oriented diagnostics
			Undervoltage/short circuit of modules
LED indicators	Bus-specific		TP: Link/traffic
	Product-specific	RUN:	PLC status
		STOP:	PLC status
		ERR:	PLC runtime error
		PS:	Electronics supply, sensor supply
		PL:	Load supply
		SF:	System fault
		M:	Modify/forcing active
IP address setting			DHCP
			Via CODESYS
			Via MMI
Function elements			CPX-P diagnostic status, copy CPX-P diagnostic trace, read CPX-P module diagnostics, and more
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 55

Materials			
Housing			Reinforced PA
			PC
Note on materials			RoHS-compliant
LABS (PWIS) conformity			VDMA24364-B2-L

Operating and environmental conditions			
Ambient temperature	[°C]	–5 ... +50	
Storage temperature	[°C]	–20 ... +70	
Relative humidity	[%]	95, non-condensing	
Corrosion resistance class CRC ¹⁾		2	

1) More information www.festo.com/x/topic/crc


Electrical data			
Nominal operating voltage	[V DC]	24	
Load voltage	Nominal operating voltage	[V DC]	24
	With pneumatics type VTSA	[V DC]	21.6 ... 26.4
	With pneumatics type MPA	[V DC]	18 ... 30
	Without pneumatics	[V DC]	18 ... 30
Power failure buffering	[ms]	10	
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 85	
Degree of protection to EN 60529		IP65, IP67	

Datasheet – CODESYS controller



Technical data					
Type			CPX-CEC-C1-V3	CPX-CEC-M1-V3	CPX-CEC-S1-V3
Additional functions			Motion functions for electric drives	SoftMotion functions for electric drives	Diagnostic functions
					RS232 communication function
CPU data	Flash	[MB]	32		
	RAM	[MB]	256		
	Processor	[MHz]	800		
Control interface			CAN bus	CAN bus	–
Parameterisation			CODESYS V3		
Configuration support			CODESYS V3		
Program memory, user program		[MB]	16		
Flags			CODESYS variable concept		
	Remanent data	[kB]	28		
Control elements			DIL switch for CAN termination		–
			Rotary switch for RUN/STOP		Rotary switch for RUN/STOP
Total number of axes			127	31	–
Ethernet	No. of		1		
	Connection technology		RJ45 socket, 8-pin		
	Data transmission speed	[Mbps]	1/100		
	Supported protocols		TCP/IP, EasyIP, Modbus TCP		
Fieldbus interface	No. of		1		1
	Connection technology		Sub-D plug, 9-pin		Sub-D socket, 9-pin
	Data transmission speed, can be set via software	[kbps]	125, 250, 500, 800, 1000		9.6 ... 230.4
	Supported protocols		CAN bus		RS232 interface
	Max. cable length	[m]	–		30
	Galvanic isolation		Yes		Yes

Datasheet – CODESYS controller

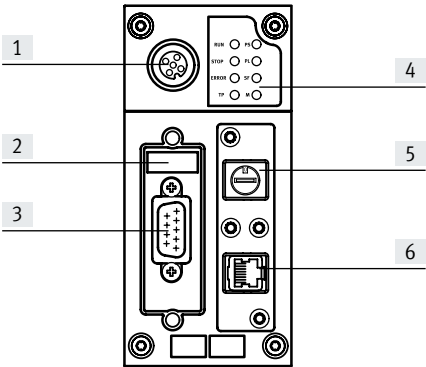Connection and display elements CPX-CEC-C1/-M1




- [1] CPX-FMT connection
- [2] DIL switch
- [3] Fieldbus interface (Sub-D plug, 9-pin)
- [4] Status LEDs, bus-specific and product-specific
- [5] RUN/STOP rotary switch
- [6] Ethernet interface (RJ45 socket, 8-pin)

Pin assignment – CPX-CEC-C1/-M1			
	Pin	Signal	Meaning
Fieldbus interface, Sub-D plug			
	1	n.c.	Not connected
	2	CAN_L	CAN low
	3	CAN_GND	CAN Ground
	4	n.c.	Not connected
	5	CAN_SHLD	Connection to functional earth FE
	6	CAN_GND	CAN Ground (optional) ¹⁾
	7	CAN_H	CAN High
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	Shielding	Plug housing must be connected to FE
Ethernet interface, RJ45 plug			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Shielding	Shielding

1) If a servo drive is connected to an external power supply, CAN ground (optional), pin 6, cannot be used on the CPX-CEC-C1/-M1.



Datasheet – CODESYS controller

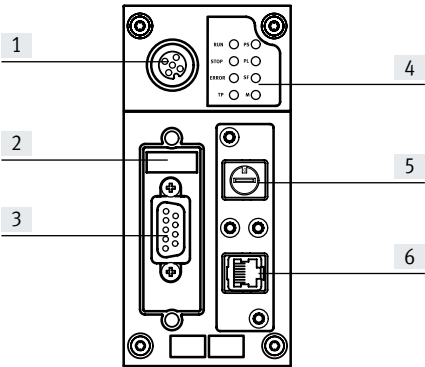Connection and display elements CPX-CEC-S1







- [1] CPX-FMT connection
- [2] DIL switch
- [3] RS232 interface (Sub-D socket, 9-pin)
- [4] Status LEDs, bus-specific and product-specific
- [5] RUN/STOP rotary switch
- [6] Ethernet interface (RJ45 socket, 8-pin)




Pin assignment – CPX-CEC-S1

Terminal assignment	Pin	Signal	Designation
RS 232 interface, Sub-D socket			
	1	n.c.	Not connected
	2	RxD	Received data
	3	TxD	Transmitted data
	4	n.c.	Not connected
	5	GND	Data reference potential
	6	n.c.	Not connected
	7	n.c.	Not connected
	8	n.c.	Not connected
	9	n.c.	Not connected
	Shielding	Shielding	Connection to functional earth
Ethernet interface, RJ45 plug			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Shielding	Shielding

Datasheet – CODESYS controller

Ordering data						
Designation				Part no.	Type	
Control block						
	Motion functions for electric drives		135 g	3473128	CPX-CEC-C1-V3	
	SoftMotion functions for electric drives		135 g	3472765	CPX-CEC-M1-V3	
	RS232 communication function		135 g	3472425	CPX-CEC-S1-V3	
Fieldbus interface						
	Sub-D plug, 9-pin, for CANopen			532219	FBS-SUB-9-BU-2x5POL-B	
	Micro style bus connection, 2xM12 for DeviceNet/CANopen			525632	FBA-2-M12-5POL	
	Socket for micro style connection, M12, 5-pin			8162291	NECB-M12G5-C2	
	Plug for micro style connection, M12, 5-pin			8162296	NECB-S-M12G5-C2	
	Open style bus connection for 5-pin terminal strip for DeviceNet/CANopen			525634	FBA-1-SL-5POL	
	Terminal strip for open style connection, 5-pin			525635	FBSD-KL-2x5POL	
Ethernet interface						
	RJ45 plug		Degree of protection IP 65, IP67		534494	FBS-RJ45-8-GS
	Cover for RJ45 connection		Degree of protection IP 65, IP67		534496	AK-RJ45
	Straight plug, RJ45, 8-pin	Straight plug, M12x1, 4-pin, D-coded	Degree of protection IP20	1 m	8040451	NEBC-D12G4-ES-1-S-R3G4-ET
				3 m	8040452	NEBC-D12G4-ES-3-S-R3G4-ET
				5 m	8040453	NEBC-D12G4-ES-5-S-R3G4-ET
				10 m	8040454	NEBC-D12G4-ES-10-S-R3G4-ET
	Straight plug, RJ45, 8-pin	Straight plug, RJ45, 8-pin	Degree of protection IP20	1 m	8040455	NEBC-R3G4-ES-1-S-R3G4-ET

Datasheet – Control block CPX-CEC

Ordering data		Part no.	Type
Covers and attachments			
	Inspection cover, transparent, for Sub-D connection	533334	AK-SUB-9/15-B
	Inscription label holder for connection block	536593	CPX-ST-1
User documentation			
	Description control block CPX-CEC	German	569121 P.BE-CPX-CEC-DE
		English	569122 P.BE-CPX-CEC-EN

Datasheet – DeviceNet® bus node



Bus node for handling communication between the electrical terminal CPX-P and a DeviceNet® network.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The fieldbus communication status is displayed via the three DeviceNet®-specific LEDs.



Application
Bus connection

The bus connection can be selected when ordering, either micro style as 2xM12 round plugs or open style as a terminal strip with IP20 protection.

Both connection types have the function of an integrated T-distributor with incoming and outgoing bus line.

DeviceNet® implementation

The CPX-FB11 operates with the Predefined Master/Slave Connection Set as a Group 2 Only Server.

The polled I/O, change of state or cyclic method is used for the transmission of cyclic I/O data. The type of transmission can be selected in the network configuration.

The device diagnostics for all bus nodes CPX-FB11 is effectively gathered via strobed I/O and displayed in the input table of the controller.

In addition to cyclic data transmission, acyclic communication is supported through explicit messaging, which enables detailed device diagnostics and parameterisation.

A comprehensive EDS file supports the display of acyclic data. It is also possible to display system information and assign parameters while the controller is running via the user program or the configuration software.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity of 64 byte inputs and 64 byte outputs, the CPX-FB11 supports any configuration of I/O modules, including pneumatic interface.

Points to note in connection with CPX-CEC

When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.

In this case, the bus node only provides the communication interface to the PLC.

Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and

takes up the following address capacity in the CPX-P system:

- 8 byte outputs
- 8 byte inputs

The following address capacity remains in the control block or CPX-P system for activating the peripherals:

- 56 byte inputs
- 56 byte outputs

Datasheet – DeviceNet® bus node


General technical data			
Type		CPX-FB11	
Fieldbus interface		Choice of • Micro style bus connection: 2xM12 with degree of protection IP65/IP67 • Open style bus connection: 5-pin terminal strip IP20	
Baud rates		[kbps]	125, 250, 500
Addressing range		0 ... 63 Set using DIL switch	
Product	Type	Communication adapter (12 dec.)	
	Code	4554 dec.	
Types of communication		Polled I/O, change of state/cyclic, strobed I/O and explicit messaging	
Configuration support		EDS file and bitmaps	
Max. address capacity	Inputs	[byte]	64
	Outputs	[byte]	64
LED displays (bus-specific)		MS = Module status NS = Network status IO = I/O status	
Device-specific diagnostics		Module and channel-oriented diagnostics via manufacturer-specific diagnostic object	
Parameterisation		• Module and system parameterisation via configuration interface in plain text (EDS) • Online in run or program mode	
Additional functions		• Storage of the last 40 errors with timestamp (access via EDS) • 8-bit system status in process image for inputs • 2-byte inputs and 2-byte outputs, system diagnostics in process image	
Control elements		DIL switches	
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Current consumption		[mA]	Typically 200
Degree of protection to EN 60529		IP65, IP67	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Reinforced PA, PC	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	120

 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Datasheet – DeviceNet® bus node

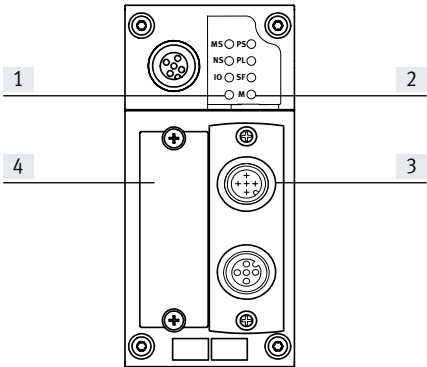Connection and display components







- [1] Bus-specific LEDs
- [2] CPX-P-specific status LEDs
- [3] Selectable fieldbus interface
Micro style
Open style
- [4] DIL switch cover


Pin assignment for the DeviceNet® interface				
Terminal assignment	Pin	Signal-related wire colour ¹⁾	Signal	Designation
Sub-D plug				
	1	–	n.c.	Not connected
	2	Blue	CAN_L	Received/transmitted data low
	3	Black	0 V bus	0 V CAN interface
	4	–	n.c.	Not connected
	5	Clear	Shielding	Connection to housing
	6	–	n.c.	Not connected
	7	White	CAN_H	Received/transmitted data high
	8	–	n.c.	Not connected
	9	Red	24 V DC bus	24 V DC supply CAN interface
Micro style bus connection (M12), incoming/outgoing				
	1	Clear	Shielding	Connection to housing
	2	Red	24 V DC bus	24 V DC supply CAN interface
	3	Black	0 V bus	0 V CAN interface
	4	White	CAN_H	Received/transmitted data high
	5	Blue	CAN_L	Received/transmitted data low
	1	Clear	Shielding	Connection to housing
	2	Red	24 V DC bus	24 V DC supply CAN interface
	3	Black	0 V bus	0 V CAN interface
	4	White	CAN_H	Received/transmitted data high
	5	Blue	CAN_L	Received/transmitted data low
Open style bus connection				
	1	Black	0 V bus	0 V CAN interface
	2	Blue	CAN_L	Received/transmitted data low
	3	Clear	Shielding	Connection to housing
	4	White	CAN_H	Received/transmitted data high
	5	Red	24 V DC bus	24 V DC supply CAN interface
7/8" bus connection				
	1	Black	Shielding	Connection to housing
	2	Blue	24 V DC	24 V DC supply CAN interface
	3	Clear	0 V	0 V CAN interface
	4	White	CAN_H	Received/transmitted data high
	5	Red	CAN_L	Received/transmitted data low

1) Typical for DeviceNet® cables

Datasheet – DeviceNet® bus node

Ordering data		Part no.	Type
Designation			
Bus node			
	DeviceNet® bus node	526172	CPX-FB11
Bus connection			
	Sub-D plug	532219	FBS-SUB-9-BU-2x5POL-B
	Connection block, Sub-D socket 9-pin, plug 7/8" 5-pin	571052	CPX-AB-1-7/8-DN
	Micro style bus connection, 2xM12	525632	FBA-2-M12-5POL
	Socket for micro style connection, M12, 5-pin	8162291	NECB-M12G5-C2
	Plug for micro style connection, M12, 5-pin	8162296	NECB-S-M12G5-C2
	Open style bus connection for 5-pin terminal strip	525634	FBA-1-SL-5POL
	Terminal strip for open style connection, 5-pin	525635	FBSD-KL-2x5POL
Covers			
	Cover cap for sealing unused M12 connections (10 pieces)	165592	ISK-M12
	Inspection cover, transparent, for Sub-D connection	533334	AK-SUB-9/15-B
Inscription labels			
	Inscription label holder for connection block	536593	CPX-ST-1
	Inscription labels 6x10 mm, 64 pieces, in a frame	18576	IBS-6x10

Datasheet – DeviceNet® bus node

Ordering data				
Designation			Part no.	Type
User documentation				
	User documentation for bus node CPX-FB11	German	526421	P.BE-CPX-FB11-DE
		English	526422	P.BE-CPX-FB11-EN
		Spanish	526423	P.BE-CPX-FB11-ES
		French	526424	P.BE-CPX-FB11-FR
		Italian	526425	P.BE-CPX-FB11-IT
Software				
	Adapter M12, 5-pin to mini USB socket, and controller software		547432	NEFC-M12G5-0.3-U1G5

Datasheet – PROFIBUS bus node



Bus node for handling communication between the electrical terminal CPX-P and a higher-order master via PROFIBUS DP.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The fieldbus communication status is displayed via the PROFIBUS-specific error LED.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket with a typical PROFIBUS allocation (to EN 50170).	The bus connector plug (with IP65/ IP67 degree of protection from Festo or IP20 degree of protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.	An active bus terminal can be connected using the DIL switch integrated in the plug.	The Sub-D interface is designed for controlling network components with a fibre-optic cable connection.
--	---	--	---

PROFIBUS DP implementation

The CPX-FB13 supports the PROFIBUS DP protocol to EN 50170 Volume 2 for cyclic I/O exchange, parameterisation and diagnostic functions (DPV0).	In addition to DPV0, acyclic communication to the advanced specification DPV1 is supported. DPV1 provides acyclic access to advanced system information and allows parameterisation while the controller is running via the user program.	An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.	With its address capacity of 64 byte inputs and 64 byte outputs, the CPX-FB13 supports any configuration of I/O modules, including pneumatic interface.
--	---	---	---

Points to note in connection with CPX-CEC

When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	takes up the following address capacity in the CPX-P system: • 8 byte outputs • 8 byte inputs	The following address capacity remains in the control block or CPX-P system for activating the peripherals: • 56 byte inputs • 56 byte outputs
---	---	--	---

Datasheet – PROFIBUS bus node


General technical data			
Type		CPX-FB13	
Fieldbus interface		Sub-D socket, 9-pin (EN 50170) Galvanically isolated 5 V	
Baud rates		[Mbps]	0.0096 ... 12
Addressing range		1 ... 125 Set using DIL switch	
Product family		4: Valves	
ID number		0x059E	
Types of communication		DPV0: Cyclic communication DPV1: Acyclic communication	
Configuration support		GSD file and bitmaps	
Max. address capacity	Inputs	[byte]	64
	Outputs	[byte]	64
LED displays (bus-specific)		BF: Bus fault	
Device-specific diagnostics		Identifier and channel-oriented diagnostics to EN 50170 (PROFIBUS standard)	
Parameterisation		- Start-up parameterisation via configuration interface in plain text (GSD) - Acyclical parameterisation via DPV1	
Additional functions		- Storage of the last 40 errors with timestamp (access via DPV1) 8-bit system status in process image for inputs 2-byte inputs and 2-byte outputs, system diagnostics in process image	
Control elements		DIL switches	
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Current consumption		[mA]	Typically 200
Degree of protection to EN 60529		IP65, IP67	
Temperature range	Operation	[°C]	−5 ... +50
	Storage/transport	[°C]	−20 ... +70
Materials		Reinforced PA, PC	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	115

 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Datasheet – PROFIBUS bus node

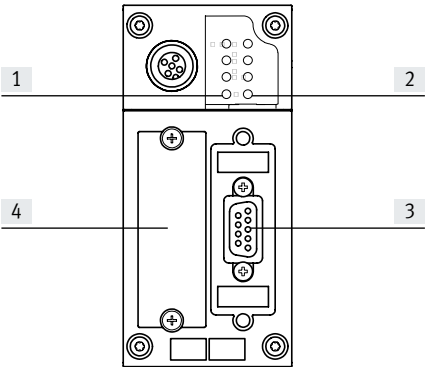Connection and display components










- [1] Bus status LEDs/bus fault
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface (Sub-D socket, 9-pin)
- [4] DIL switch cover


Pin assignment for PROFIBUS DP interface			
Terminal assignment	Pin	Signal	Designation
Sub-D socket			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	RxD/TxD-P	Received/transmitted data P
	4	CNTR-P ¹⁾	Repeater control signal
	5	DGND	Data reference potential (M5V)
	6	VP	Supply voltage (P5V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Received/transmitted data N
	9	n.c.	Not connected
Housing	Shielding	Connection to housing	
Bus connection M12 adapter (B-coded)			
Incoming 	1	n.c.	Not connected
	2	RxD/TxD-N	Received/transmitted data N
	3	n.c.	Not connected
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Shielding	Connection to FE (functional earth)
Outgoing 	1	VP	Supply voltage (P5V)
	2	RxD/TxD-N	Received/transmitted data N
	3	DGND	Data reference potential (M5V)
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Shielding	Connection to FE (functional earth)

1) The repeater control signal CNTR-P is realised as a TTL signal.

Datasheet – PROFIBUS bus node

Ordering data		Part no.	Type
Designation			
Bus node			
	PROFIBUS bus node	195740	CPX-FB13
Bus connection			
	Sub-D plug, straight	532216	FBS-SUB-9-GS-DP-B
	Sub-D plug, angled	533780	FBS-SUB-9-WS-PB-K
	Bus connection, adapter from 9-pin Sub-D plug to 5-pin M12 plug/socket, B-coded	533118	FBA-2-M12-5POL-RK
	Connection block, adapter from 9-pin Sub-D plug to 5-pin M12 plug/socket, B-coded	541519	CPX-AB-2-M12-RK-DP
	5-pin M12x1 straight socket, for self-assembly of a connecting cable compatible with FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP	1067905	NECU-M-B12G5-C2-PB
	Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable compatible with FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP	1066354	NECU-M-S-B12G5-C2-PB
	Terminating resistor, M12, B-coded for PROFIBUS	1072128	CACR-S-B12G5-220-PB
Covers			
	Cover cap for sealing unused M12 connections (10 pieces)	165592	ISK-M12
	Inspection cover, transparent, for Sub-D connection	533334	AK-SUB-9/15-B
Inscription label			
	Inscription label holder for connection block	536593	CPX-ST-1
	Inscription labels 6x10 mm, 64 pieces, in a frame	18576	IBS-6x10

Datasheet – CPX-FB13 bus node, PROFIBUS DP

Ordering data				
Designation			Part no.	Type
User documentation				
	User documentation for bus node CPX-FB13	German	526427	P.BE-CPX-FB13-DE
		English	526428	P.BE-CPX-FB13-EN
		Spanish	526429	P.BE-CPX-FB13-ES
		French	526430	P.BE-CPX-FB13-FR
		Italian	526431	P.BE-CPX-FB13-IT
Software				
	Adapter M12, 5-pin to mini USB socket, and controller software		547432	NEFC-M12G5-0.3-U1G5

Datasheet – CANopen bus node



Bus node for handling communication between the electrical terminal CPX-P and a CANopen network master or CANopen network.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The different CANopen statuses and the fieldbus communication status are visualised via 3 additional LEDs.



Application
Bus connection

The bus connection is established via a 9-pin Sub-D plug (pin) as per the CAN in Automation (CiA) specification DS 102 with additional 24 V CAN transceiver supply (option as per DS 102).	The bus connector plug (with IP65/ IP67 degree of protection from Festo or IP20 degree of protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.	There are 4 contacts available for the 4 conductors (CAN_L, CAN_H, 24 V, 0 V) of the incoming and outgoing bus cables respectively.
--	---	---

CANopen implementation

The CPX-FB14 supports the CANopen protocol in accordance with the specifications DS 301 V4.01 and DS 401 V2.0. Implementation is based on the CiA Predefined Connection Set. There are 4 PDOs available for fast I/O data exchange.	Enhanced system information can also be accessed via SDO communication. SDO communication also facilitates parameterisation before network start-up or while the controller is running via the user program. An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.	With its address capacity, the CPX-FB14 supports a large number of I/O module configurations, including pneumatic interface. By default, 8 byte digital inputs and 8 byte digital outputs can be addressed via PDO 1.	8 analogue input channels and 8 analogue output channels can be addressed via PDO 2 and 3. Status and diagnostic information can be evaluated via PDO 4. Additional 8 byte digital inputs and outputs as well as 8 analogue input and output channels can be addressed via mapping.
---	---	--	--

Points to note in connection with CPX-CEC

When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	takes up the following address capacity in the CPX-P system: • 8 byte outputs • 8 byte inputs	The following address capacity remains in the control block or CPX-P system for activating the peripherals: • 56 byte inputs • 56 byte outputs
---	---	---	--

Datasheet – CANopen bus node


General technical data			
Type			CPX-FB14
Fieldbus interface			Sub-D plug, 9-pin (to DS 102) Bus interface galvanically isolated via optocoupler 24 V supply for CAN interface via bus
Baud rates	[kbaud]		125, 250, 500 and 1000 can be set via DIL switch
Addressing range			Node ID 1 ... 127 Set using DIL switch
Product family			Digital inputs and outputs
Communication profile			DS 301, V4.01
Device profile			DS 401, V2.0
No. of	PDO		4 Tx/4 Rx
	SDO		1 server SDO
Configuration support			EDS file and bitmaps
Max. address capacity	Inputs	[byte]	16 digital, 16 analogue channels
	Outputs	[byte]	16 digital, 16 analogue channels
LED displays (bus-specific)			MS = Module status NS = Network status IO = I/O status
Device-specific diagnostics			Via emergency message Object 1001, 1002 and 1003
Parameterisation			Via SDO
Additional functions			- Storage of the last 40 errors with timestamp (access via SDO) 8-bit system status via transmit PDO 4 (default) 2-byte inputs and 2-byte outputs, system diagnostics via PDO 4 - Minimum boot-up - Variable PDO mapping - Emergency message - Node guarding - Heart beat
Control elements			DIL switches
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Current consumption		[mA]	Typically 200
Degree of protection to EN 60529			IP65, IP67
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials			Reinforced PA, PC
LABS (PWIS) conformity			VDMA24364-B2-L
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	115

 Note

Please observe the general limits and guidelines for the system when configuring the electric modules.

Datasheet – CANopen bus node

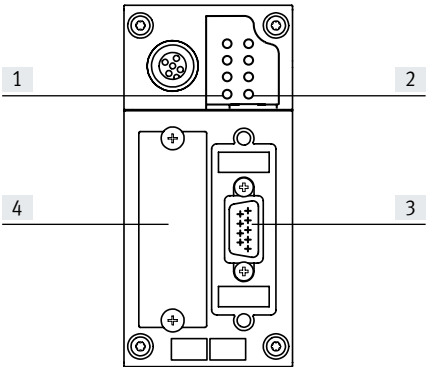Connection and display components










- [1] Bus-specific LEDs
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface (Sub-D plug, 9-pin)
- [4] DIL switch cover

Pin assignment – CANopen interface			
Terminal assignment	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	CAN_L	Received/transmitted data low
	3	CAN_GND	0 V CAN interface
	4	n.c.	Not connected
	5	CAN_Shld	Optional shielded connection
	6	GND	Ground ¹⁾
	7	CAN_H	Received/transmitted data high
	8	n.c.	Not connected
	9	CAN_V+	24 V DC supply CAN interface
Housing	Shielding		Connection to FE (functional earth)
Micro style bus connection (M12)			
	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Open style bus connection			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Shielding	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply CAN interface

1) Connected internally via Pin 3

Datasheet – CANopen bus node

Ordering data		Part no.	Type	
Designation				
Bus node				
	CANopen bus node	526174	CPX-FB14	
Bus connection				
	Sub-D socket for CANopen with terminating resistor and programming interface	574588	NECU-S1W9-C2-ACO	
	Sub-D socket	532219	FBS-SUB-9-BU-2x5POL-B	
	Sub-D socket, angled	533783	FBS-SUB-9-WS-CO-K	
	Connection block, Sub-D socket 9-pin, plug 7/8" 5-pin	571052	CPX-AB-1-7/8-DN	
	Micro style bus connection, 2xM12, 5-pin	525632	FBA-2-M12-5POL	
	Socket for micro style connection, M12, 5-pin	8162291	NECB-M12G5-C2	
	Plug for micro style connection, M12, 5-pin	8162296	NECB-S-M12G5-C2	
	Open style bus connection	525634	FBA-1-SL-5POL	
	Terminal strip for open style connection, 5-pin	525635	FBSD-KL-2x5POL	
	Inspection cover, transparent	533334	AK-SUB-9/15-B	
	Inscription label holder for connection block	536593	CPX-ST-1	
User documentation				
	User documentation for bus node CPX-FB14	German	526409	P.BE-CPX-FB14-DE
		English	526410	P.BE-CPX-FB14-EN
		Spanish	526411	P.BE-CPX-FB14-ES
		French	526412	P.BE-CPX-FB14-FR
		Italian	526413	P.BE-CPX-FB14-IT
Software				
	Adapter M12, 5-pin to mini USB socket, and controller software	547432	NEFC-M12G5-0.3-U1G5	

Datasheet – PROFINET bus node, M12, D-coded



Bus node for operating the CPX-P valve terminal on PROFINET.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The fieldbus communication status is displayed via three bus-specific LEDs.



Application			
Bus connection			
The bus connection is established via two M12 sockets, D-coded to IEC 61076-2-101 with degree of protection IP65, IP67.	Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality (crossover and patch cables can be used) that	are brought together via an internal switch.	• Maximum segment length 100 m • Transmission rate 100 Mbps
PROFINET implementation			
The bus node supports the PROFINET protocol based on the Ethernet standard and the TCP/IP technology to IEEE802.3.	equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred. The Ethernet bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel.	The bus node features LEDs for bus status and CPX-P peripheral information as well as switch elements and a diagnostic interface. PROFINET provides the user with access to all peripherals, diagnostic data and parameter data of the CPX-P valve terminal. The bus node can be used as a remote	I/O or remote controller. All information relevant to the CPX-P can be read out and, depending on the function, changed via the diagnostic interface.
This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process			
Points to note in connection with CPX-CEC			
When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	takes up the following address capacity in the CPX-P system: • 8 byte outputs • 8 byte inputs	The following address capacity remains in the control block or CPX-P system for activating the peripherals: • 56 byte inputs • 56 byte outputs

Datasheet – PROFINET bus node, M12, D-coded

General technical data			
Type			CPX-FB43
Fieldbus interface			2x socket, M12, 4-pin, D-coded
Baud rates		[Mbps]	100
Protocol			PROFINET RT
			PROFINET IRT
Max. address capacity	Inputs	[byte]	64
	Outputs	[byte]	64
LED indicators	(bus-specific)		M/P = Maintenance/PROFenergy NF = Network error TP1 = Network active, port 1 TP2 = Network active, port 2
	(product-specific)		M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System error
Device-specific diagnostics			- Channel and module-oriented diagnostics - Undervoltage of modules - Diagnostics memory
Configuration support			GSDML file
Parameterisation			- System parameters - Diagnostic behaviour - Signal setup - Fail-safe response - Forcing of channels
Additional functions			- Start-up parameterisation in plain text via fieldbus - Fast start-up (FSU) - Channel-oriented diagnostics via fieldbus - Acyclic data access via fieldbus - System status can be displayed using process data - Additional diagnostic interface for operator units - Asynchronous data access via Ethernet - I&M, LLDP, MRP, MRPD, MQTT, PROFIsafe, PROFenergy, S2 system redundancy
Control elements			DIL switches
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
Current consumption		[mA]	Typically 70
Degree of protection to EN 60529			IP65, IP67
Temperature range	Operation	[°C]	– 5... +50
	Storage/transport	[°C]	–20 ... +70
Certification			RCM
Materials	Housing		Die-cast aluminium
Note on materials			RoHS-compliant
LABS (PWIS) conformity			VDMA24364-B2-L
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	185

 Note

Please observe the general limits and guidelines for the system when configuring the electric modules.

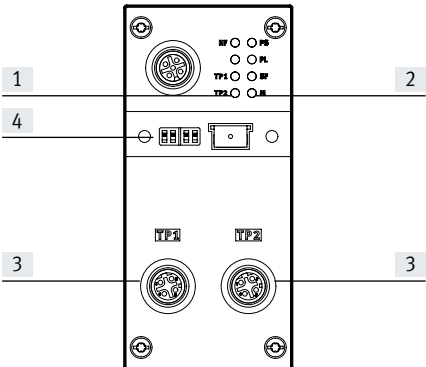
 Note

Always use the correct screws for the interlinking block; this depends on whether the block is made of metal or polymer:


- Self-tapping screws for polymer interlinking blocks
- Screws with metric thread for metal interlinking blocks

Datasheet – PROFINET bus node, M12, D-coded





Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface (M12 socket, 4-pin, D-coded)
- [4] Transparent DIL switch cover

Pin assignment for the fieldbus interface			
Terminal assignment	Pin	Signal	Designation
Socket, M12, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Housing		Shielding

Datasheet – PROFINET bus node, M12, D-coded

Ordering data					
Designation			Part no.	Type	
Bus node					
	PROFINET bus node	• I&M • LLDP • MRP • MRPD • PROFINergy • S2 system redundancy	8110369	CPX-FB43	
Bus connection					
	Plug M12x1, 4-pin, D-coded		543109	NECU-M-S-D12G4-C2-ET	
	Connecting cable, Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446	NEBC-D12G4-ES-0.5-S-D12G4-ET
			1 m	8040447	NEBC-D12G4-ES-1-S-D12G4-ET
			3 m	8040448	NEBC-D12G4-ES-3-S-D12G4-ET
			5 m	8040449	NEBC-D12G4-ES-5-S-D12G4-ET
			10 m	8040450	NEBC-D12G4-ES-10-S-D12G4-ET
		Straight plug, RJ45, 8-pin	1 m	8040451	NEBC-D12G4-ES-1-S-R3G4-ET
			3 m	8040452	NEBC-D12G4-ES-3-S-R3G4-ET
			5 m	8040453	NEBC-D12G4-ES-5-S-R3G4-ET
			10 m	8040454	NEBC-D12G4-ES-10-S-R3G4-ET
	Transparent cover for the DIL switches	Open end, 4-core	5 m	8040456	NEBC-LE4-ES-5-D12G4-ET
				548757	CPX-AK-P
	Cover cap for sealing unused bus connections (10 pieces)		165592	ISK-M12	
User documentation					
	Description electronics, CPX bus node	German	548759	CPX-(M)-FB33_35/43_45-DE	
		English	548760	CPX-(M)-FB33_35/43_45-EN	
		Spanish	548761	CPX-(M)-FB33_35/43_45-ES	
		French	548762	CPX-(M)-FB33_35/43_45-FR	
		Italian	548763	CPX-(M)-FB33_35/43_45-IT	

Datasheet – PROFINET bus node, push-pull RJ45



Bus node for operating the CPX-P terminal on PROFINET.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The fieldbus communication status is displayed via three bus-specific LEDs.



Application			
Bus connection			
The bus connection is established via two RJ45 push-pull sockets to IEC 61076-3-106 and IEC 60603 with degree of protection IP65, IP67.	Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality (crossover and patch cables can be used) that	are brought together via an internal switch.	• Maximum segment length 100 m • Transmission rate 100 Mbps
PROFINET implementation			
The bus node supports the PROFINET protocol based on the Ethernet standard and the TCP/IP technology to IEEE802.3.	equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred.	The bus node features LEDs for bus status and CPX-P peripheral information as well as switch elements and a diagnostic interface. PROFINET provides the user with access to all peripherals, diagnostic and parameter data of the CPX-P terminal. The bus node can be used as a remote I/O or	remote controller. All information relevant to the CPX-P can be read out and, depending on the function, changed via the diagnostic interface.
This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process	The Ethernet bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel.		
Points to note in connection with CPX-CEC			
When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC.	takes up the following address capacity in the CPX-P system:	The following address capacity remains in the control block or CPX-P system for activating the peripherals:
	Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	• 8/16 byte outputs • 8/16 byte inputs	• 56/48 byte inputs • 56/48 byte outputs

Datasheet – PROFINET bus node, push-pull RJ45

General technical data			
Type		CPX-M-FB44	
Fieldbus interface		2x RJ45 push-pull socket, AIDA	
Baud rate	[Mbps]	100	
Protocol		PROFINET RT	
		PROFINET IRT	
Max. address capacity	Inputs	[byte]	64
	Outputs	[byte]	64
LED indicators	(bus-specific)	M/P = Maintenance/PROFInergy NF = Network error TP1 = Network active, port 1 TP2 = Network active, port 2	
	(product-specific)	M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System error	
Device-specific diagnostics		- Channel and module-oriented diagnostics - Undervoltage of modules - Diagnostics memory	
Configuration support		GSDML file	
Parameterisation		- System parameters - Diagnostic behaviour - Signal setup - Fail-safe response - Forcing of channels	
Additional functions		- Start-up parameterisation in plain text via fieldbus - Fast start-up (FSU) - Channel-oriented diagnostics via fieldbus - Acyclic data access via fieldbus and via Ethernet - System status can be displayed using process data - Additional diagnostic interface for operator unit - I&M, LLDP, MRP, MRPD, MQTT, PROFIsafe, PROFInergy, S2 system redundancy	
Control elements		DIL switches	
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage		[mA]	Typ. 70
Degree of protection to EN 60529		IP65, IP67	
Temperature range	Operation	[°C]	– 5... +50
	Storage/transport	[°C]	–20 ... +70
Certification		RCM	
Material information: Housing		Die-cast aluminium	
Note on materials		RoHS-compliant	
LABS (PWIS) conformity		VDMA24364-B2-L	
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 80
Product weight		[g]	280

Note

Please observe the general limits and guidelines for the system when configuring the electric modules.

Note

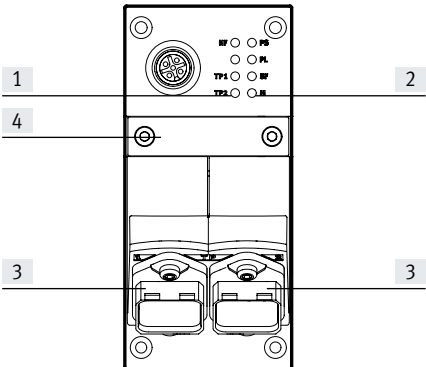
Always use the correct screws for the interlinking block; this depends on whether the block is made of metal or polymer:

- Self-tapping screws for polymer interlinking blocks


- Screws with metric thread for metal interlinking blocks

Datasheet – PROFINET bus node, push-pull RJ45





Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface (RJ45 socket, 8-pin)
- [4] DIL switch (under cover)

Pin assignment for the fieldbus interface			
Terminal assignment	Pin	Signal	Designation
RJ45 socket			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Shielding	Shielding

Datasheet – PROFINET bus node, push-pull RJ45

Ordering data			Part no.	Type
Designation				
Bus node				
	PROFINET bus node	• I&M • LLDP • MRP • MRPD • PROFINergy • S2 system redundancy	8110370	CPX-M-FB44
Bus connection				
	Plug RJ45, 8-pin, push-pull		552000	FBS-RJ45-PP-GS
	Cover cap for bus connection		548753	CPX-M-AK-C
	Cover cap for bus connection		2873540	CPX-M-AK-D
	Cover for DIL switches		548754	CPX-M-AK-M
User documentation				
	Description electronics, CPX bus node	German	548759	CPX-(M)-FB33_35/43_45-DE
		English	548760	CPX-(M)-FB33_35/43_45-EN
		Spanish	548761	CPX-(M)-FB33_35/43_45-ES
		French	548762	CPX-(M)-FB33_35/43_45-FR
		Italian	548763	CPX-(M)-FB33_35/43_45-IT

Datasheet – PROFINET bus node, push-pull SCRJ



Bus node for operating the CPX-P terminal on PROFINET.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The fieldbus communication status is displayed via three bus-specific LEDs.



Application			
Bus connection			
The bus connection is established via SCRJ push-pull sockets to IEC 61754-24 (fibre-optic cable, AIDA standard) with degree of protection IP65, IP67.	The connections on the bus node are equivalent 100BaseFX Ethernet ports that are brought together via an internal switch.	Fibre-optic cables made from plastic (POF, 980/1000 µm) are also suitable for transmission.	• Maximum segment length 50 m • Transmission rate 100 Mbps • Supports LLDP and SNMP
PROFINET implementation			
The bus node supports the PROFINET protocol based on the Ethernet standard and the TCP/IP technology to IEEE802.3. This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process	equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred. The Ethernet bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel.	The bus node features LEDs for bus status and CPX-P peripheral information as well as switch elements and a diagnostic interface. PROFINET provides the user with access to all peripherals, diagnostic and parameter data of the CPX-P terminal. The bus node can be used as a remote I/O or	remote controller. All information relevant to the CPX-P can be read out and, depending on the function, changed via the diagnostic interface.
Points to note in connection with CPX-CEC			
When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	takes up the following address capacity in the CPX-P system: • 8/16 byte outputs • 8/16 byte inputs	The following address capacity remains in the control block or CPX-P system for activating the peripherals: • 56/48 byte inputs • 56/48 byte outputs

Datasheet – PROFINET bus node, push-pull SCRJ

General technical data			
Type		CPX-M-FB45	
Fieldbus interface		2x SCRJ push-pull socket, AIDA	
Baud rate	[Mbps]	100	
Protocol		PROFINET RT	
		PROFINET IRT	
Max. address capacity	Inputs	[byte]	64
	Outputs	[byte]	64
LED indicators	(bus-specific)	M/P = Maintenance/PROFIenergy NF = Network error TP1 = Network active, port 1 TP2 = Network active, port 2	
	(product-specific)	M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System error	
Device-specific diagnostics		- Channel and module-oriented diagnostics - Undervoltage of modules - Diagnostics memory	
Configuration support		GSDML file	
Parameterisation		- System parameters - Diagnostic behaviour - Signal setup - Fail-safe response - Forcing of channels	
Additional functions		- Start-up parameterisation in plain text via fieldbus - Fast start-up (FSU) - Channel-oriented diagnostics via fieldbus - Acyclic data access via fieldbus and via Ethernet - System status can be displayed using process data - Additional diagnostic interface for operator unit - I&M - LLDP - MRP - MRPD - MQTT - PROFIsafe - PROFIenergy - S2 system redundancy	
Control elements		DIL switches	
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage		[mA]	Typ. 145
Certification		RCM	
Degree of protection to EN 60529		IP65, IP67	
Temperature range	Operation	[°C]	– 5... +50
	Storage/transport	[°C]	–20 ... +70
Material information: Housing		Die-cast aluminium	
Note on materials		RoHS-compliant	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 80
Product weight		[g]	280

 Note

Please observe the general limits and guidelines for the system when configuring the electric modules.

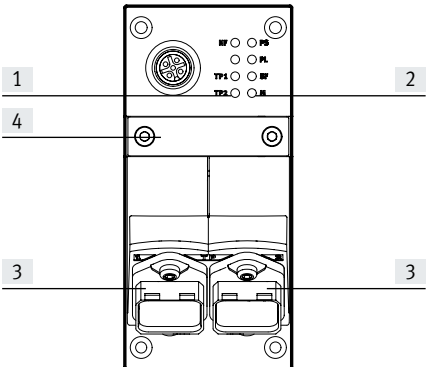
 Note

Always use the correct screws for the interlinking block; this depends on whether the block is made of metal or polymer:


- Self-tapping screws for polymer interlinking blocks
- Screws with metric thread for metal interlinking blocks

Datasheet – PROFINET bus node, push-pull SCRJ



Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface (SCRJ) socket, 2-pin
- [4] DIL switch (under cover)

Pin assignment for the fieldbus interface			
Terminal assignment	Pin	Signal	Designation
Socket SCRJ			
	1	Tx	Outgoing
	2	Rx	Incoming

Datasheet – PROFINET bus node, push-pull SCRJ

Ordering data				
Designation			Part no.	Type
Bus node				
	2x SCRJ push-pull socket, AIDA	• I&M • LLDP • MRP • MRPD • PROFlenergy • S2 system redundancy	8110371	CPX-M-FB45
Bus connection				
	Plug SCRJ, 2-pin, push-pull		571017	FBS-SCRJ-PP-GS
	Cover cap for bus connection		548753	CPX-M-AK-C
	Cover cap for bus connection		2873540	CPX-M-AK-D
	Cover for DIL switches		548754	CPX-M-AK-M
User documentation				
	Description electronics, CPX-P bus node	German	548759	CPX-(M)-FB33_35/43_45-DE
		English	548760	CPX-(M)-FB33_35/43_45-EN
		Spanish	548761	CPX-(M)-FB33_35/43_45-ES
		French	548762	CPX-(M)-FB33_35/43_45-FR
		Italian	548763	CPX-(M)-FB33_35/43_45-IT
Software				
	Adapter M12, 5-pin to mini USB socket, and controller software		547432	NEFC-M12G5-0.3-U1G5

Datasheet – EtherNet/IP bus node

- Industrial Ethernet
- EtherNet/IP
- Web

Bus node for handling communication between the electrical terminal CPX-P and the EtherNet/IP network.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.



Application
Bus connection

The bus connection is established via an M12 plug, D-coded to IEC 947-5-2 with degree of protection IP65, IP67.

EtherNet/IP is an open bus system based on the Ethernet standard and TCP/IP technology (IEEE802.3).

EtherNet/IP implementation

The CPX-FB36 supports the two operating modes: remote I/O and remote controller. In remote I/O operating mode, all functions of the CPX-P terminal are	directly controlled by the EtherNet/IP master (host). In addition to activation via a bus system, it is possible to use IT technologies. An integrated web server enables	diagnostic data to be visualised via HTML. Various programs support direct access to the device data from the automation network.	The EtherNet/IP node for CPX-P supports the transmission technology that conforms to DIN EN 50173/CAT 5 as an integrated interface.
---	--	---	---

Points to note in connection with CPX-CEC

When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	takes up the following address capacity in the CPX-P system: • 8 byte outputs • 8 byte inputs	The following address capacity remains in the control block or CPX-P system for activating the peripherals: • 56 byte inputs • 56 byte outputs
---	---	---	--

Datasheet – EtherNet/IP bus node


General technical data			
Type			CPX-FB36
Fieldbus interface			2x socket M12x1, 4-pin, D-coded
Baud rates	[Mbps]		10/100
Protocol			EtherNet/IP Modbus TCP
Max. address capacity, inputs	[byte]		64
Max. address capacity, outputs	[byte]		64
LED displays (bus-specific)			MS = Module status NS = Network status TP1 = Network active, port 1 TP2 = Network active, port 2
Device-specific diagnostics			- Module and channel-oriented diagnostics - Undervoltage of modules - Diagnostic memory
Configuration support			- EDS file - L5K export with CPX-FMT
Parameterisation			- Diagnostic behaviour - Fail-safe response - Forcing of channels - Idle mode characteristics - Signal setup - System parameters
Additional functions			- EtherNet/IP Quickconnect - Ring topology (DLR) - Acyclic data access via "Explicit Message" and Ethernet - Integrated switch - IP addressing via DHCP, DIL switch or operator unit - Channel-oriented diagnostics via fieldbus - Start-up parameterisation in plain text via fieldbus - System status can be displayed using process data - Additional diagnostic interface for operator units
Control elements			DIL switches
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
Current consumption at nominal voltage		[mA]	Typically 100
Degree of protection to EN 60529			IP65, IP67
Temperature range	Operation	[°C]	–5... +50
	Storage/transport	[°C]	–20 ... +70
Materials			Reinforced PA
Note on materials			RoHS-compliant
LABS (PWIS) conformity			VDMA24364-B2-L
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	125

 Note


Please observe the general limits and guidelines for the system when configuring the electrical modules.

Datasheet – EtherNet/IP bus node




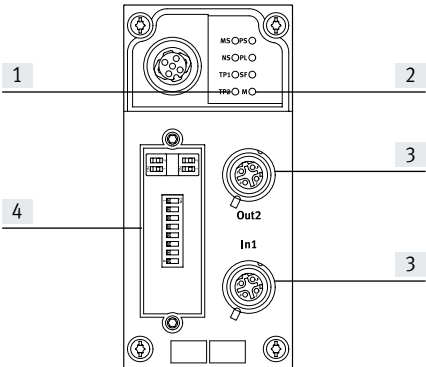
Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface (socket M12, 4-pin, D-coded)
- [4] Transparent DIL switch cover

Pin assignment for the fieldbus interface			
Terminal assignment	Pin	Signal	Designation
Socket M12, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Housing	FE	Shielding

Datasheet – EtherNet/IP bus node

Ordering data					
Designation			Part no.	Type	
Bus node					
	EtherNet/IP bus node		1912451	CPX-FB36	
Bus connection					
	Plug M12x1, 4-pin, D-coded		543109	NECU-M-S-D12G4-C2-ET	
	Connecting cable, Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446	NEBC-D12G4-ES-0.5-S-D12G4-ET
			1 m	8040447	NEBC-D12G4-ES-1-S-D12G4-ET
			3 m	8040448	NEBC-D12G4-ES-3-S-D12G4-ET
			5 m	8040449	NEBC-D12G4-ES-5-S-D12G4-ET
			10 m	8040450	NEBC-D12G4-ES-10-S-D12G4-ET
		Straight plug, RJ45, 8-pin	1 m	8040451	NEBC-D12G4-ES-1-S-R3G4-ET
			3 m	8040452	NEBC-D12G4-ES-3-S-R3G4-ET
			5 m	8040453	NEBC-D12G4-ES-5-S-R3G4-ET
			10 m	8040454	NEBC-D12G4-ES-10-S-R3G4-ET
			Open end, 4-core	5 m	8040456
	Inspection cover, transparent		533334	AK-SUB-9/15-B	
	Inscription label holder for connection block		536593	CPX-ST-1	
User documentation					
	User documentation for bus node CPX-FB36		German	8024074	CPX-FB36-DE
			English	8024075	CPX-FB36-EN
			Spanish	8024076	CPX-FB36-ES
			French	8024077	CPX-FB36-FR
			Italian	8024078	CPX-FB36-IT
			Chinese	8024079	CPX-FB36-ZH
Software					
	Adapter M12, 5-pin to mini USB socket, and controller software		547432	NEFC-M12G5-0.3-U1G5	

Datasheet – EtherCAT® bus node



Bus node for operating the CPX-P terminal on EtherCAT®.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX-P terminal is displayed as a common message via 4 CPX-P-specific LEDs.

The status of the fieldbus communication is displayed via 4 bus-specific LEDs.



Application			
Bus connection			
The bus connection is established via two sockets M12x1, D-coded to IEC 61076-2-101 with degree of protection IP65, IP67.	Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality (crossover and patch cable can be used) that	are brought together via an internal switch.	• Maximum segment length 100 m • Transmission rate 100 Mbps
EtherCAT® implementation			
The CPX-FB37 supports the EtherCAT® protocol on the basis of the Ethernet standard and TCP/IP technology to IEEE802.3. This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred.	The data bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel. The bus node features LEDs for bus status and CPX-P peripheral information as well as switch elements and a diagnostic interface. The bus node can be used as a remote I/O or remote controller. All information relevant to the CPX-P can be read out and, depending on the function, changed via the diagnostic interface.	The functions MDP (modular device profile) and CoE (CAN over EtherCAT®) enable easy access to parameters and diagnostic data via EtherCAT. Specific EtherCAT® functions: • CoE (parameters and diagnostics or fail-safe mode): all module parameters can be set • FoE (file over EtherCAT) makes it possible to download firmware easily	• EoE (Ethernet over EtherCAT): diagnostic data can be retrieved easily using a browser • MDP (modular device profile): easy configuration using a module selection box • Hot connect, easy replacement of an EtherCAT® CPX-P terminal • DC (distributed clocks), time-synchronised data transmission
Points to note in connection with CPX-CEC			
When a bus node is combined with a control block (CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX-P control block.	In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX-P bus node takes place by linking the CPX-P modules and	takes up the following address capacity in the CPX-P system: • 8/16 byte outputs • 8/16 byte inputs	The following address capacity remains in the control block or CPX-P system for activating the peripherals: • 56/48 byte inputs • 56/48 byte outputs

Datasheet – EtherCAT® bus node

General technical data				
Type			CPX-FB37	
Fieldbus interface			2x socket M12x1, 4-pin, D-coded	
Baud rates		[Mbps]	100	
Protocol			EtherCAT®	
Max. address capacity	Inputs	[byte]	64	
	Outputs	[byte]	64	
LED indicators	Bus-specific		Error	= Communication error
			L/A1	= Network active port 1
			L/A2	= Network active port 2
			Run	= Communication status
	Product-specific		M	= Modify, parameterisation
			PL	= Load supply
			PS	= Electronic supply, sensor supply
			SF	= System error
Device-specific diagnostics			• Channel and module-oriented diagnostics • Undervoltage of modules • Diagnostics memory	
Configuration support			ESI file	
Parameterisation			• System parameters • Diagnostic behaviour • Signal setup • Fail-safe response • Forcing of channels	
Additional functions			• System status can be displayed using process data • Additional diagnostic interface for operator units • Emergency message • Acyclic data access via fieldbus • Diagnostics object • Compatibility mode with CPX-FB38 • Modular device profile (MDP) • Variable PDO mapping	
Control elements			DIL switches	
Operating voltage	Nominal width	[V DC]	24	
	Permissible range	[V DC]	18 ... 30	
Current consumption		[mA]	Typically 100	
Degree of protection to EN 60529			IP65, IP67	
Temperature range	Operation	[°C]	–5... +50	
	Storage/transport	[°C]	–20 ... +70	
Materials	Housing		Reinforced PA	
Note on materials			RoHS-compliant	
LABS (PWIS) conformity			VDMA24364-B2-L	
Grid dimension		[mm]	50	
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 50	
Product weight		[g]	125	

 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

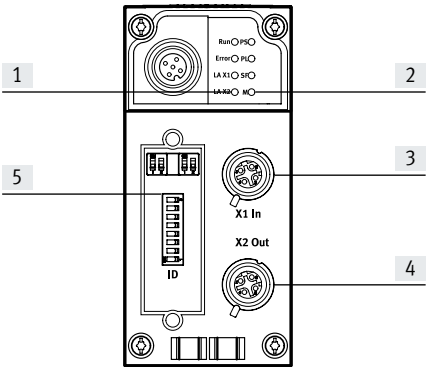
 Note

Always use the correct screws for the interlinking block; this depends on whether the block is made of metal or polymer:


- Self-tapping screws for polymer interlinking blocks
- Screws with metric thread for metal interlinking blocks

Datasheet – EtherCAT® bus node





Connection and display components




- [1] Bus-specific status LEDs
- [2] CPX-P-specific status LEDs
- [3] Fieldbus interface, input (socket M12x1, 4-pin, D-coded)
- [4] Fieldbus interface, output (socket M12x1, 4-pin, D-coded)
- [5] DIL switch

Pin assignment for the fieldbus interface			
Terminal assignment	Pin	Signal	Designation
Socket M12x1, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Housing	FE	Shielding

Datasheet – EtherCAT® bus node

Ordering data					
Designation			Part no.	Type	
Bus node					
	EtherCAT® bus node		2735960	CPX-FB37	
Bus connection					
	Plug M12x1, 4-pin, D-coded		543109	NECU-M-S-D12G4-C2-ET	
	Connecting cable, Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	8040446	NEBC-D12G4-ES-0.5-S-D12G4-ET
			1 m	8040447	NEBC-D12G4-ES-1-S-D12G4-ET
			3 m	8040448	NEBC-D12G4-ES-3-S-D12G4-ET
			5 m	8040449	NEBC-D12G4-ES-5-S-D12G4-ET
			10 m	8040450	NEBC-D12G4-ES-10-S-D12G4-ET
		Straight plug, RJ45, 8-pin	1 m	8040451	NEBC-D12G4-ES-1-S-R3G4-ET
			3 m	8040452	NEBC-D12G4-ES-3-S-R3G4-ET
			5 m	8040453	NEBC-D12G4-ES-5-S-R3G4-ET
			10 m	8040454	NEBC-D12G4-ES-10-S-R3G4-ET
		Open end, 4-core	5 m	8040456	NEBC-LE4-ES-5-D12G4-ET
	Inspection cover, transparent		533334	AK-SUB-9/15-B	
	Cover cap for sealing unused bus connections (10 pieces)		165592	ISK-M12	
	Inscription label holder for connection block		536593	CPX-ST-1	
User documentation					
	Description electronics, CPX-P bus node, type CPX-FB37		German	8029674	P.BE-CPX-FB37-DE
			English	8029675	P.BE-CPX-FB37-EN
			Spanish	8029676	P.BE-CPX-FB37-ES
			French	8029677	P.BE-CPX-FB37-FR
			Italian	8029678	P.BE-CPX-FB37-IT
			Chinese	8029679	P.BE-CPX-FB37-ZH
Software					
	Adapter M12, 5-pin to mini USB socket, and controller software		547432	NEFC-M12G5-0.3-U1G5	

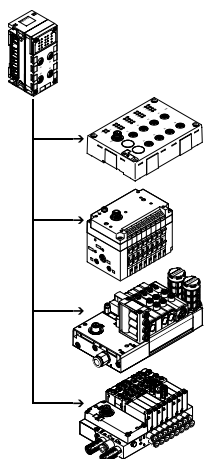Datasheet – I-Port interface



The electrical interface CPX-P CTEL master establishes the connection to modules of the CTEL/CTEU series that have an I-Port interface (device). The I/O data from the connected devices are transmitted to the connected CPX-P bus node and thus to the higher-order controller via fieldbus. A maximum of 4 devices can be connected to a CPX-P CTEL master via suitable M12 interfaces.



Application

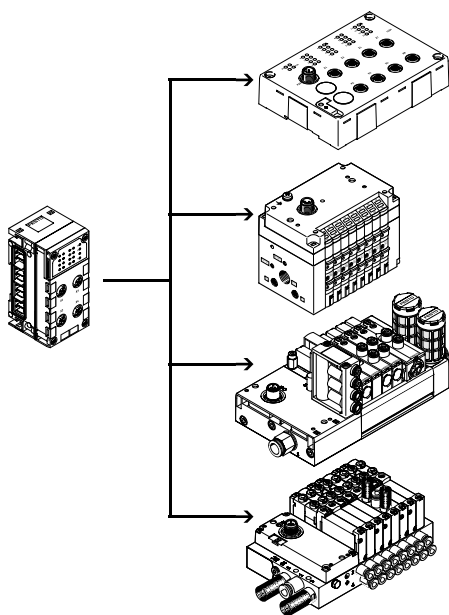
I-Port interface

As well as transmitting the communication data, the I-Port interfaces of a CPX-P CTEL master also transmit the power supply to the connected sensors

and the load supply to the valves (or outputs). Both circuits are supplied separately with 24 V, using a separate ground.

The connecting cables with a dual function as signal cable and supply cable must meet the corresponding increased requirements.

Configuration example – CPX-P CTEL master with CTEL modules



The CPX-P CTEL master provides 4 external I-Port interfaces, each of which can be connected to a device. I-Port is an interface for exchanging serial data for connecting decentralised modules or valve terminals from Festo. The I-Port interface is based on IO-Link® and is compatible with it in certain areas. The connection type corresponds to a star topology. In other words, only one module or valve terminal can be connected to each I-Port.

The limitations with respect to IO-Link® include:

- Permanently set baud rate of 230.4 kbps
- SIO mode is not supported
- Max. 32 bytes of input data and 32 bytes of output data
- Only one extract of the master commands is used
- Configuration via IODD is not supported.

Datasheet – I-Port interface

Implementation			
The CPX-P CTEL master from Festo enables modules with an I-Port interface to be connected to a CPX-P system: • Max. 4 devices with individual electronic protection • Max. 64 inputs/64 outputs per I-Port interface • The maximum length of a string is 20 m.	The following device variants are available: • Input modules with 16 digital inputs (connection technology M8 3-pin and M12 5-pin) • Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)	The decentralised layout of the modules and valve terminals with I-Port enables them to be mounted close to the cylinders and actuators or sensors to be controlled. This means that the compressed air supply lines and sensor connecting cables used can be shortened, and it may be possible to use smaller valves, thereby saving costs.	Several CPX-P CTEL masters can be combined in one CPX-P terminal, depending on the address capacity of the bus node. Example: • CPX-FB13 (512 I/O) • A maximum of 2 CPX-P CTEL masters is possible (each with 256 I/O)
Configuration			
Settings	Manual configuration		Automatic configuration
The precise number of the I/O bytes made available depends on the requirements of the connected devices or of the suitable selected operating mode. The operating mode or preset configuration of the CPX-P CTEL master can be specified by the user. Selecting the operating mode and setting the manual configuration takes place via the DIL switches. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.	In the case of manual configuration (tool change mode), the volume of inputs and outputs in the process image of the CPX-P system or of the higher-order fieldbus can be defined manually using the DIL switches.	The process image then always has the same scope, regardless of the connected devices. The I/O length specified always applies to all four I-Ports (max. 8 bytes per I-Port).	In the case of automatic configuration, the I/O length for each I-Port is determined individually and this value is used to select the appropriate or next highest configuration preset.
Power supply for I-Port devices			
The CPX-P CTEL master provides two separate power supplies for the connected devices: • For operating the device and the inputs connected to it • For the outputs and valves that are connected to the device	The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX-P terminal.	The power supply for the outputs and valves is provided by the power supply for the valves of the CPX-P terminal. The interlinking block with additional supply ensures a separate supply voltage for the valves and outputs. This	means it is possible to disconnect this supply voltage separately. The valves and outputs of the connected I-Port devices can therefore be disconnected separately without disconnecting the devices.

Datasheet – I-Port interface


General technical data			
Type		CPX-CTEL-4-M12-5POL	
Protocol		I-Port	
Maximum address volume	Outputs	[bit]	256
	Inputs	[bit]	256
I-Port connection		4x socket M12, 5-pin, A-coded	
Number of I-Port interfaces		4	
Maximum cable length		[m]	20
Internal cycle time		[ms]	1 per 8 bits of user data
Galvanic isolation	Channel – channel	No	
	Channel – internal bus	Yes, with intermediate air supply	
LED indicators		X1 ... 4 = Status of the I-Port interface 1 ... 4 PS = Electronic supply PL = Load supply -  - = Module error	
Diagnostics		• Communication error • Module short circuit • Module-oriented diagnostics • Undervoltage	
Parameterisation		• Diagnostic behaviour • Fail-safe per channel • Forcing per channel • Idle mode per channel • Module parameters • Tool change mode	
Additional functions		Tool change mode	
Control elements		DIL switches	
Operating voltage	Nominal width	[V DC]	24 (reverse polarity protected)
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Intrinsic current consumption at nominal operating voltage		[mA]	Typically 65
Max. power supply per channel		[A]	4x 1.6
Max. residual current of outputs per channel		[A]	4x 1.6
Degree of protection to EN 60529		IP65, IP67	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Reinforced PA, PC	
Note on materials		RoHS-compliant	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 55
Product weight		[g]	110

 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Datasheet – I-Port interface

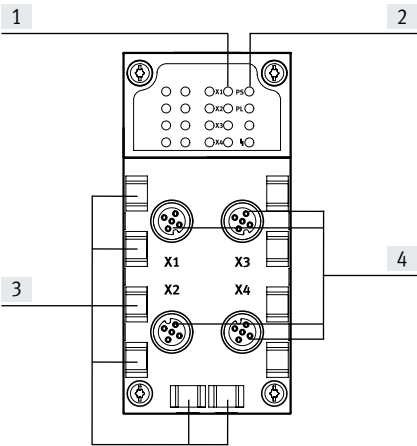Connection and display components




- [1] Status LEDs for I-Port interfaces
- [2] CPX-P-specific status LEDs
- [3] Holders for inscription labels (IBS 6x10)
- [4] I-Port interfaces for up to 4 devices


Combinations of bus nodes/control blocks with interface CPX-CTEL

Bus node/control block	Part no.	Interface	
		CPX-CTEL-4-M12-5POL	
CPX-CEC-C1-V3	3473128		■
CPX-CEC-M1-V3	3472765		■
CPX-CEC-S1-V3	3472425		■
CPX-FB11	526172		■
CPX-FB13	195740		■
CPX-FB14	526174		■
CPX-FB36	1912451		■
CPX-FB37	2735960		■
CPX-FB43	8110369		■
CPX-M-FB44	8110370		■
CPX-M-FB45	8110371		■





Pin assignment – I-Port interface

Terminal assignment	Pin	Signal	Designation
	1	24 V _{SEN}	24 V DC supply voltage for electronics and inputs
	2	24 V _{VAL}	24 V DC load voltage supply for valves and outputs
	3	0 V _{SEN}	0 V DC supply voltage for electronics and sensors
	4	C/Q I-Port	Communication signal C/Q, data transmission line
	5	0 V _{VALVES}	0 V DC load voltage supply for valves and outputs

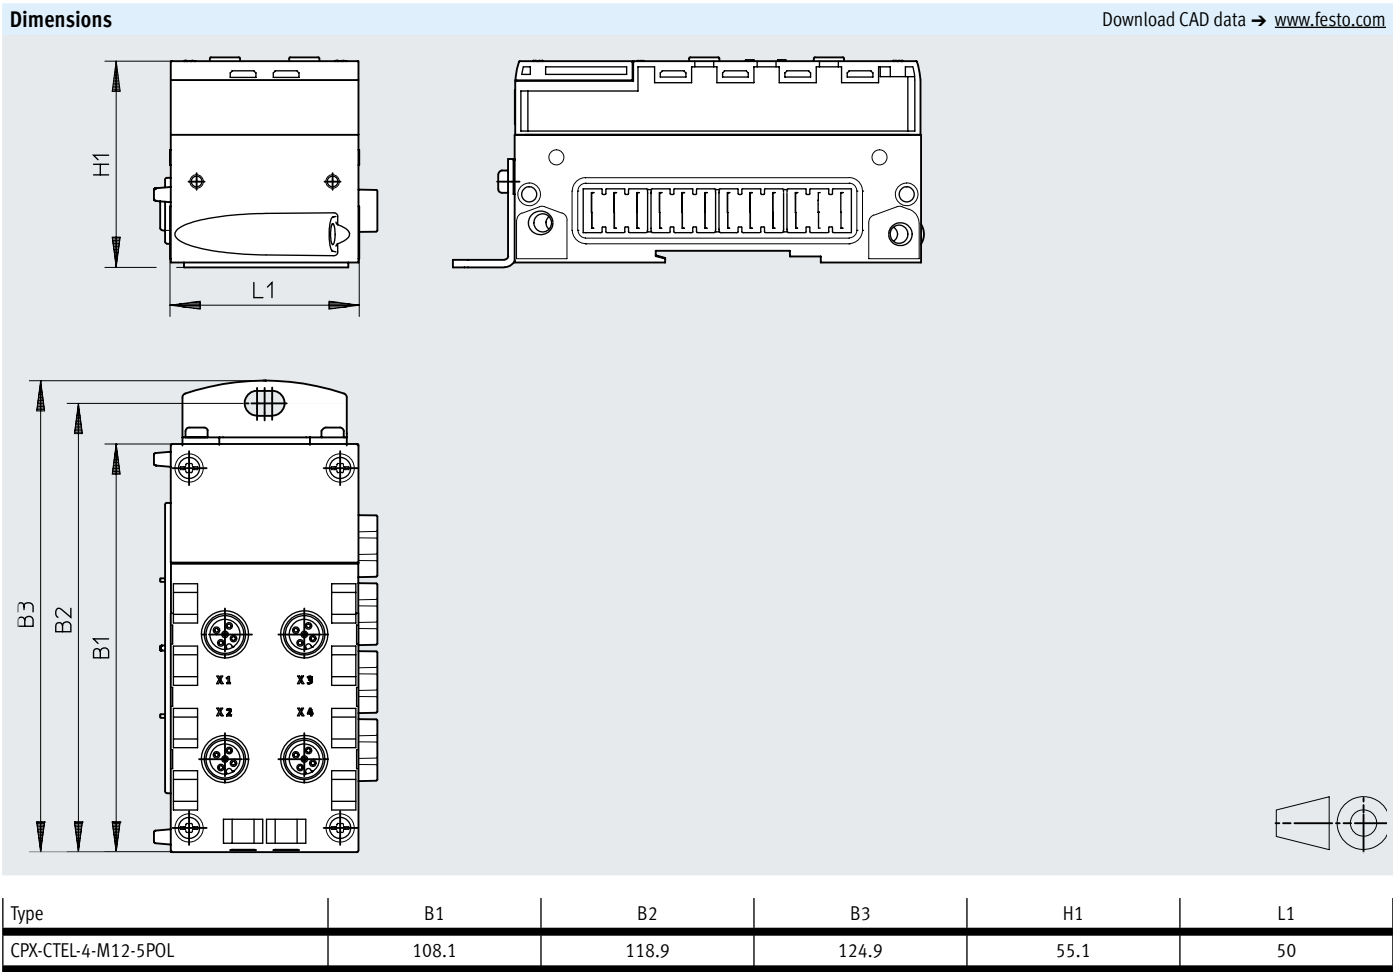
Datasheet – I-Port interface



Datasheet – I-Port interface

Ordering data				
Designation			Part no.	Type
CPX-P CTEL master				
	Interface for a maximum of 4 I/O modules and valve terminals with I-Port interface (devices)		1577012	CPX-CTEL-4-M12-5POL
Bus connection				
	Cover cap	M12	165592	ISK-M12
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba
	Connecting cable M12-M12, 5-pin • Straight socket • Straight plug	Cable characteristic: suitable for use with energy chains	5 m	574321 NEBU-M12G5-E-5-Q8N-M12G5
			7.5 m	574322 NEBU-M12G5-E-7.5-Q8N-M12G5
			10 m	574323 NEBU-M12G5-E-10-Q8N-M12G5
	Inscription label holder for connection block		536593	CPX-ST-1
User documentation				
	User documentation CPX-P CTEL master		German	574600 P.BE-CPX-CTEL-DE
			English	574601 P.BE-CPX-CTEL-EN
			Spanish	574602 P.BE-CPX-CTEL-ES
			French	574603 P.BE-CPX-CTEL-FR
			Italian	574604 P.BE-CPX-CTEL-IT

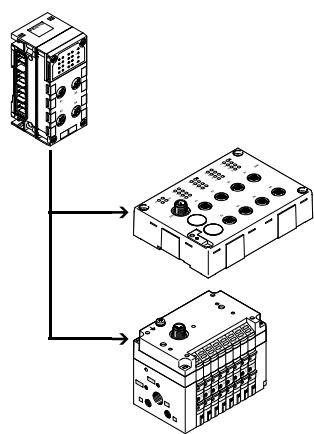Datasheet – IO-Link®interface



The electrical interface CPX-CTEL-2-... enables the connection of modules with IO-Link® interface (IO-Link device) to the CPX-P terminal. The I/O data from the connected devices are transmitted to the connected CPX-P bus node and thus to the higher-order controller via fieldbus. A maximum of two IO-Link® devices can be connected to an electrical interface CPX-CTEL-2-... via the suitable M12 interfaces.



Application			
IO-Link® interface			
The communication system IO-Link® is used to exchange serial data from decentralised function modules (devices) at the field level. The electrical interface CPX-CTEL-2-... provides two external IO-Link® inter-	faces, each of which can be connected to a device. The connection type corresponds to a star topology, which means that only one device can be connected to each port.	The address space that the module makes available and assigns accordingly in the CPX-P system can be configured according to various presettings.	Selecting the operating mode and setting the manual configuration takes place via the DIL switches. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.
Constraints			
The interfaces (ports) of electrical interface CPX-CTEL-2-... support the connection of IO-Link® devices with few limitations.	• The process data length of the inputs and outputs is limited to 16 bytes each per port	• The driver strength on the C/Q line is limited to 250 mA	• SIO mode is not supported
Power supply for devices			
The electrical interface CPX-CTEL-2-... provides two separate power supplies for the connected devices: • For operating the device and the inputs connected to it • For the outputs and valves that are connected to the device	The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX-P terminal. The power supply for the outputs and valves is provided by the power supply for the valves of the CPX-P terminal.	The interlinking block with additional supply ensures a separate supply voltage for the valves and outputs. This means it is possible to disconnect this supply voltage separately. The valves and outputs of the connected I-Port devices can therefore be dis-	connected separately without disconnecting the devices.

Datasheet – IO-Link® interface


General technical data			
Type			CPX-CTEL-2-M12-5POL-LK
Protocol			IO-Link®, master version V 1.0
Maximum address volume	Outputs	[bit]	256
	Inputs	[bit]	256
I-Port connection			2x socket M12, 5-pin, A-coded
Number of IO-Link® interfaces			2
Maximum cable length			[m] 20
Internal cycle time			[ms] 1 per 8 bits of user data
Galvanic isolation	Channel – channel		No
	Channel – internal bus		Yes, with intermediate air supply
LED indicators			X1 ... 2 = Status of the IO-Link® interface 1 ... 2 PS = Electronic supply PL = Load supply -  - = Module error
Diagnostics			• Communication error • Module short circuit • Module-oriented diagnostics • Undervoltage
Parameterisation			• Diagnostic behaviour • Fail-safe per channel • Forcing per channel • Idle mode per channel • Module parameters
Additional functions			–
Control elements			DIL switches
Operating voltage	Nominal width	[V DC]	24 (reverse polarity protected)
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Intrinsic current consumption at nominal operating voltage			[mA] Typically 65
Max. power supply per channel			[A] 2x 1.6
Max. residual current of outputs per channel			[A] 2x 1.6
Degree of protection to EN 60529			IP65, IP67
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials			Reinforced PA, PC
Note on materials			RoHS-compliant
LABS (PWIS) conformity			VDMA24364-B2-L
Grid dimension			[mm] 50
Dimensions (including interlinking block) W x L x H			[mm] 50 x 107 x 55
Product weight			[g] 110

**Note**

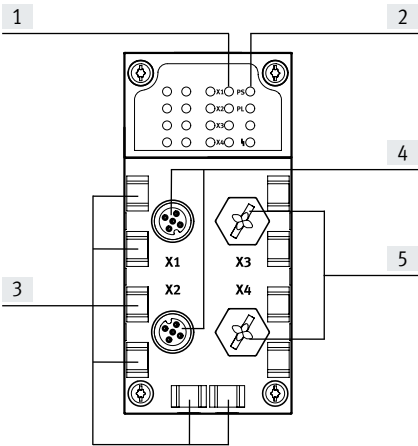Please observe the general limits and guidelines for the system when configuring the electrical modules.


Datasheet – IO-Link® interface

Connection and display components



- [1] Status LEDs for I-Port interfaces
- [2] CPX-P-specific status LEDs
- [3] Holders for inscription labels (IBS 6x10)
- [4] IO-Link interfaces for up to 2 devices
- [5] Unused connections


Combinations of bus nodes/control blocks with interface CPX-CTEL-2		
Bus node/control block	Part no.	Interface
		CPX-CTEL-2-M12-5POL-LK
CPX-CEC-C1-V3	3473128	■
CPX-CEC-M1-V3	3472765	■
CPX-CEC-S1-V3	3472425	■
CPX-FB36	1912451	■
CPX-FB43	8110369	■
CPX-M-FB44	8110370	■
CPX-M-FB45	8110371	■

Pin assignment– IO-Link® interface			
Terminal assignment	Pin	Signal	Designation
	1	24 V _{SEN}	24 V DC supply voltage for electronics and inputs
	2	24 V _{VAL}	24 V DC load voltage supply for valves and outputs
	3	0 V _{SEN}	0 V DC supply voltage for electronics and sensors
	4	C/Q I-Port	Communication signal C/Q, data transmission line
	5	0 V _{VALVES}	0 V DC load voltage supply for valves and outputs

Datasheet – IO-Link® interface






Dimensions

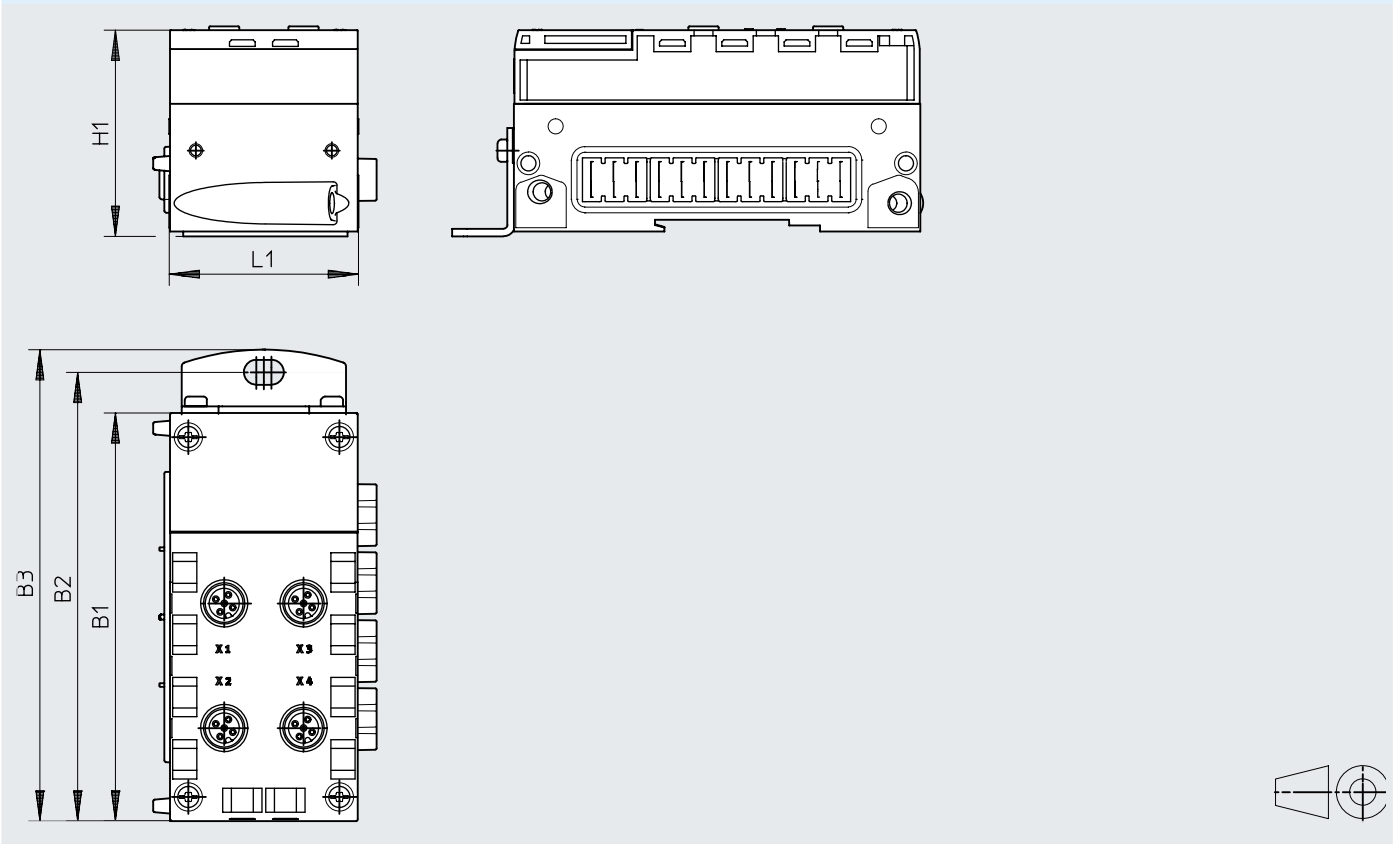Download CAD data → www.festo.com



Type	B1	B2	B3	H1	L1
CPX-CTEL-2-M12-5POL-LK	108.1	118.9	124.9	55.1	50

Datasheet – IO-Link® interface

Ordering data				
Designation			Part no.	Type
CPX-P CTCL master, IO-Link®				
	Interface for max. 2 I/O modules and valve terminals with IO-Link® interface (devices)		2900543	CPX-CTEL-2-M12-5POL-LK
Bus connection				
	Cover cap	M12	165592	ISK-M12
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba
	Connecting cable M12-M12, 5-pin • Straight socket • Straight plug	Cable characteristic: suitable for use with energy chains	5 m	574321 NEBU-M12G5-E-5-Q8N-M12G5
			7.5 m	574322 NEBU-M12G5-E-7.5-Q8N-M12G5
			10 m	574323 NEBU-M12G5-E-10-Q8N-M12G5
	Inscription label holder for connection block		536593	CPX-ST-1
User documentation				
	User documentation for CPX-P CTCL master	German	8034115	P.BE-CPX-CTEL-LK-DE
		English	8034116	P.BE-CPX-CTEL-LK-EN
		Spanish	8034117	P.BE-CPX-CTEL-LK-ES
		French	8034118	P.BE-CPX-CTEL-LK-FR
		Italian	8034119	P.BE-CPX-CTEL-LK-IT
		Swedish	8034120	P.BE-CPX-CTEL-LK-ZH

Datasheet – Measuring module for displacement encoder

The measuring module CPX-CMIX is intended exclusively for use in the CPX-P terminal.

It offers movement and measurement in one, as an integral component of the terminal CPX-P – the modular peripheral system for decentralised automation tasks.

The modular design means that valves, digital inputs and outputs, positioning modules, end-position controllers and measuring modules, as appropriate to the application, can be combined in almost any way on the CPX-P terminal.

Advantages:

- Pneumatics and electrics – movement and measurement on one platform
- Innovative measurement technology – piston rod drives, rodless drives, rotary drives
- Actuation via fieldbus
- Remote maintenance, remote diagnostics, web server, text message and email alert are all possible via TCP/IP
- Modules can be quickly exchanged and expanded without altering the wiring




General technical data				
Operating voltage				
Operating voltage range		[V DC]	18 ... 30	
Nominal operating voltage		[V DC]	24	
Current consumption at nominal operating voltage		[mA]	80	
Short circuit current rating			Yes	
Power failure buffering		[ms]	10	
No. of axis strings			1	
Axes per string			1	
Length of connecting cable to axis		[m]	≤ 30	
Max. number of modules			9	
Display			7-segment display	
Assigned addresses	Outputs	[Bit]	6x8	
	Inputs	[Bit]	6x8	
Diagnostics			Channel- and module-orientated	
			Via local 7-segment display	
			Undervoltage of modules	
			Undervoltage of measuring system	
Status indicator			Power load	
			Error	
Control interface				
Data			CAN bus with Festo protocol	
			Digital	
Electrical connection			5-pin	
			M9	
			Socket	
Materials: Housing			Reinforced PA	
Note on materials			RoHS-compliant	
LABS (PWIS) conformity			VDMA24364-B2-L	
Product weight		[g]	140	
Dimensions	Length	[mm]	107	
	Width	[mm]	50	
	Height	[mm]	55	

Datasheet – Measuring module for displacement encoder

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
Relative humidity	[%]	5 ... 95, non-condensing
Degree of protection to IEC 60529		IP65

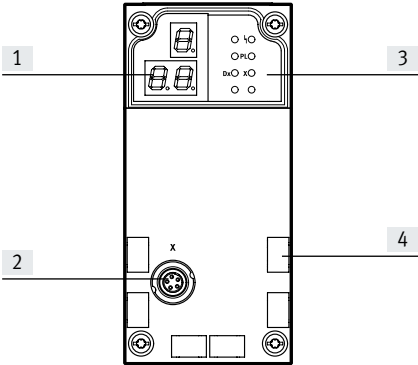Connection and display components



- [1] 3-digit display
- [2] Control interface
- [3] Status LEDs
- [4] Inscription labels

Pin assignment – Control interface






Terminal assignment	Pin	Signal	Designation
A circular diagram of the 5-pin control interface connector. Pin 1 is at the top, pin 2 is at the top right, pin 3 is at the bottom right, pin 4 is at the bottom left, and pin 5 is at the top left. The housing is indicated by a dashed line.	1	+24 V	Nominal operating voltage
	2	+24 V	Load voltage
	3	0 V	Ground
	4	CAN_H	CAN High
	5	CAN_L	CAN low
	Housing	Shielding	Cable shield

Permitted bus nodes/CEC

Bus node/CEC	Protocol	Max. number of CMIX modules
CPX-CEC...	–	9
CPX-FB11	DeviceNet ¹⁾	9
CPX-FB13	PROFIBUS ²⁾	9
CPX-FB14	CANopen	5
CPX-FB36	EtherNet/IP	9
CPX-FB37	EtherCAT®	9
CPX-FB43	PROFINET RT, M12	9
CPX-M-FB44	PROFINET RT, RJ45	9
CPX-M-FB45	PROFINET RT, SCRJ	9

1) As of revision 20 (R20)
2) As of revision 23 (R23)

Datasheet – Measuring module for displacement encoder

Ordering data			Part no.	Type
Designation				
Measuring module				
	Order code in the CPX-P configurator: T2		567417	CPX-CMIX-M1-1
Connecting cable				
	Connecting cable M9-M9, 5-pin • Angled socket • Angled plug	0.25 m	540327	KVI-CP-3-WS-WD-0.25
		0.5 m	540328	KVI-CP-3-WS-WD-0.5
		2 m	540329	KVI-CP-3-WS-WD-2
		5 m	540330	KVI-CP-3-WS-WD-5
		8 m	540331	KVI-CP-3-WS-WD-8
	Connecting cable M9-M9, 5-pin • Straight socket • Straight plug	2 m	540332	KVI-CP-3-GS-GD-2
		5 m	540333	KVI-CP-3-GS-GD-5
		8 m	540334	KVI-CP-3-GS-GD-8
	Connecting component M9-M9, 5-pin, for cabinet through-feed		543252	KVI-CP-3-SSD
	For displacement encoder MME: Connection between displacement encoder MME and measuring module CPX-CMIX	2 m	575898	NEBP-M16W6-K-2-M9W5
Screws				
	For mounting on the metal interlinking block		550219	CPX-M-M3X22-4X
Inscription labels				
	Inscription labels 6x10, in frames	64 pieces	18576	IBS-6X10
User documentation				
	User documentation for measuring module CPX-CMIX ¹⁾	German	567053	P.BE-CPX-CMIX-DE
		English	567054	P.BE-CPX-CMIX-EN
		Spanish	567055	P.BE-CPX-CMIX-ES
		French	567056	P.BE-CPX-CMIX-FR
		Italian	567057	P.BE-CPX-CMIX-IT

1) User documentation in paper form is not included in the scope of delivery

Datasheet – Input module, digital, NAMUR

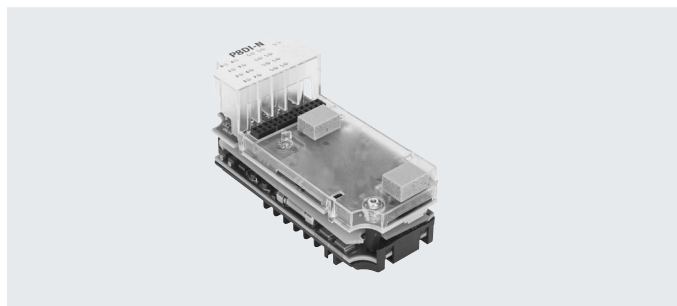
Function

Digital input modules enable the connection of up to eight NAMUR sensors (or wired mechanical contacts). In addition, the first 4 channels can alternatively be used as counters or for frequency measurement.

M12 and terminal strip connection technology can be used, in either intrinsically safe or non-intrinsically safe design.

Application area

- Input modules for 24 V DC sensor supply voltage
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse in each channel



General technical data		
Number of inputs		8
Maximum cable length	[m]	200
Input debounce time	[ms]	3 (0, 10, 20 parameterisable)
Fuse protection (short circuit)		Per channel
Intrinsic current consumption at nominal operating voltage	[mA]	typ. 75
Nominal operating voltage	[V DC]	24
Permissible voltage fluctuations	[%]	±25
Power failure buffering	[ms]	20
Residual ripple	[Vss]	0.4
Reverse polarity protection		For operating voltage
Galvanic isolation	Channel – channel	No
	Channel – internal bus	Yes
Input characteristics		To EN 60947-5-6
Switching level		To EN 60947-5-6
LED indicators	Group diagnostics	1
	Channel diagnostics	8
	Channel status	8
Diagnostics		Wire break per channel
		Limit value violation per channel
		Parameterisation error
		Short circuit per channel
Parameterisation		Data format
		Input debounce time per channel
		Input function per channel
		Replacement value in diagnostics case per channel
		Signal extension time per channel
		Gate time per channel
		Monitoring limit values per channel
		Monitoring short circuit per channel
		Monitoring wire break per channel
		Monitoring parameters
		Lower limit value per channel
		Upper limit value per channel
Control elements		DIL switches
Additional functions		Frequency measurement
		Counter function
Degree of protection		Depending on the connection block
Type of mounting		on interlinking bl. CPX-M-GE..
Grid dimension	[mm]	50
Dimensions (including interlinking block and connection block) W x L x H	[mm]	50 x 107 x 70
Product weight	[g]	100

Datasheet – Input module, digital, NAMUR

Explosion protection parameters of the module inputs			
Type		CPX-P-8DE-N	CPX-P-8DE-N-IS
Maximum output power	[mW]	–	42
Maximum output voltage	[V]	–	10
Maximum output current	[mA]	–	16.8
Maximum external inductance	[mH]	–	125
Maximum external capacity	[µF]	–	3

Certifications and approvals – Maximum values			
Type		CPX-P-8DE-N	CPX-P-8DE-N-IS
ATEX category for gas		–	II (1) G
Type of (ignition) protection for gas		–	[Ex ia Ga] IIC
ATEX category for dust		–	II (1) D
Type of (ignition) protection for dust		–	[Ex ia Da] IIIC
Explosion protection certification outside the EU		–	EPL Da (IEC-Ex)
		–	EPL Dc[Da] (GB)
		–	EPL Ga (IEC Ex)
		–	EPL Gc[Ga] (GB)
Explosion-proof ambient temperature	[°C]	–	–5 ≤ Ta ≤ +70
Certificate-issuing authority		–	ZELM 12 ATEX 0500 X
		–	IECEX ZLM 12.0007 X

Note

The module CPX-P-8DE-N-IS has additional safety measures for possible errors, such as non-resettable fuses, to ensure safe operation in accordance with the ignition protection type.
If the module is operated within the permissible parameters, these protective measures will be irrelevant.

Note

Only the end plate, the pneumatic interface or another module in intrinsically safe design are permitted directly to the right of modules in intrinsically safe design (CPX-P-8DE-N-IS) within the CPX-P terminal.

Note

The insulating plate CPX-P-AB-IP must be mounted between a module in intrinsically safe design (CPX-P-8DE-N-IS) and another, non-intrinsically safe CPX input or output module.

Note

The above-mentioned certifications for the module CPX-P-8DE-N-IS do not apply if the module is used outside the appropriately configured CPX-P terminal.


Materials	
Housing	Reinforced PA PC
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364 zone III

Operating and environmental conditions			
Type		CPX-P-8DE-N	CPX-P-8DE-N-IS
Ambient temperature	[°C]	–5 ... +50	–5 ... +50
Storage temperature	[°C]	–20 ... +70	–20 ... +70
Relative humidity	[%]	95, non-condensing	95, non-condensing
Note on vibration resistance		–	SG1 on DIN rail SG2 on direct mounting
Note on shock resistance		–	SG1 on DIN rail SG2 on direct mounting
CE marking (see declaration of conformity) ¹⁾		–	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) ¹⁾		–	To UK explosion regulations

1) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet – Input module, digital, NAMUR

Connection and display components








- [1] Status LEDs (green)
For assigning to inputs
→ Pin assignment of module
- [2] Channel-related error LEDs (red)
- [3] Error LED (red, module error)
- [4] Marking for intrinsically safe variant, CPX-P-8DE-N-IS (blue)

Combinations of connection blocks and digital input modules			
Connection blocks	Part no.	Digital input modules	
		CPX-P-8DE-N	CPX-P-8DE-N-IS
CPX-P-AB-4XM12-4POL	565706	■	–
CPX-P-AB-2XKL-8POL	565704	■	–
CPX-P-AB-4XM12-4POL-8DE-N-IS	565705	–	■
CPX-P-AB-2XKL-8POL-8DE-N-IS	565703	–	■

Pin assignment			
Connection block outputs		CPX-P-8DE-N and CPX-P-8DE-N-IS	
CPX-P-AB-4XM12-4POL and CPX-P-AB-4XM12-4POL-8DE-N-IS			
		X1.1: BN+ [0] X1.2: BU– [0] X1.3: BN+ [1] X1.4: BU– [1] X2.1: BN+ [2] X2.2: BU– [2] X2.3: BN+ [3] X2.4: BU– [3]	X3.1: BN+ [4] X3.2: BU– [4] X3.3: BN+ [5] X3.4: BU– [5] X4.1: BN+ [6] X4.2: BU– [6] X4.3: BN+ [7] X4.4: BU– [7]
CPX-P-AB-2XKL-8POL and CPX-P-AB-2XKL-8POL-8DE-N-IS			
		X1.1: BN+ [0] X1.2: BU– [0] X1.3: BN+ [1] X1.4: BU– [1] X1.5: BN+ [2] X1.6: BU– [2] X1.7: BN+ [3] X1.8: BU– [3]	X2.1: BN+ [4] X2.2: BU– [4] X2.3: BN+ [5] X2.4: BU– [5] X2.5: BN+ [6] X2.6: BU– [6] X2.7: BN+ [7] X2.8: BU– [7]

Datasheet – Input module, digital, NAMUR

Ordering data						
Designation				Part no.	Type	
Input module, digital, to NAMUR						
	8 digital inputs		 Note An intrinsically safe circuit may only be created using components and accessories approved for intrinsically safe operation.	565933	CPX-P-8DE-N	
	8 digital inputs, intrinsically safe design			565934	CPX-P-8DE-N-IS	
Connection block						
	Polymer	4x socket, M12, 4-pin	For non-intrinsically safe design	565706	CPX-P-AB-4XM12-4POL	
			For intrinsically safe design	565705	CPX-P-AB-4XM12-4POL-8DE-N-IS	
		2x plug, 8-pin	For non-intrinsically safe design	565704	CPX-P-AB-2XKL-8POL	
			For intrinsically safe design	565703	CPX-P-AB-2XKL-8POL-8DE-N-IS	
Plug						
	Push-in T-connector	1x plug M12, 4-pin	2x socket M12, 4-pin	562248	NEDU-M12D4-M12T4-IS ¹⁾	
	Socket, 8-pin	Spring-loaded terminal	Black	565712	NECU-L3G8-C1	
			Blue	565711	NECU-L3G8-C1-IS ¹⁾	
		Screw terminal	Black	565710	NECU-L3G8-C2	
			Blue	565709	NECU-L3G8-C2-IS ¹⁾	
	Plug M12, 4-pin	Spring-loaded terminal	For cable-Ø 4 ... 8 mm	575719	NECU-M-S-A12G4-IS ¹⁾	
		Screw terminal	For cable-Ø 2.5 ... 2.9 mm	570955	NECU-S-M12G4-P1-Q6-IS ¹⁾	
			For cable-Ø 4 ... 6 mm	570953	NECU-S-M12G4-P1-IS ¹⁾	
			For cable-Ø 6 ... 8 mm	570954	NECU-S-M12G4-P2-IS ¹⁾	
			For cable-Ø 2x3 mm or 2x5 mm	570956	NECU-S-M12G4-D-IS ¹⁾	
Covering						
	Cover cap for sealing unused connections (10 pieces)		For M12 connections	165592	ISK-M12	
Coding element						
	To ensure that a coded socket NECU-L3G8 can only be inserted in the matching coded connection block CPX-P-AB-2XKL (96 of each)		For NECU-L3G8	565713	CPX-P-KDS-AB-2XKL	
Screening plate						
	Insulating plate for safe separation of intrinsically safe and non-intrinsically safe areas of the CPX terminal			565708	CPX-P-AB-IP	
User documentation						
	User documentation		German	575378	P.BE-CPX-P-EA-DE	
			English	575379	P.BE-CPX-P-EA-EN	
			Spanish	575380	P.BE-CPX-P-EA-ES	
			French	575381	P.BE-CPX-P-EA-FR	
			Italian	575382	P.BE-CPX-P-EA-IT	
			Swedish	575383	P.BE-CPX-P-EA-SV	

1) Component preferred for operation in intrinsically safe circuits.

Datasheet – Input module, digital

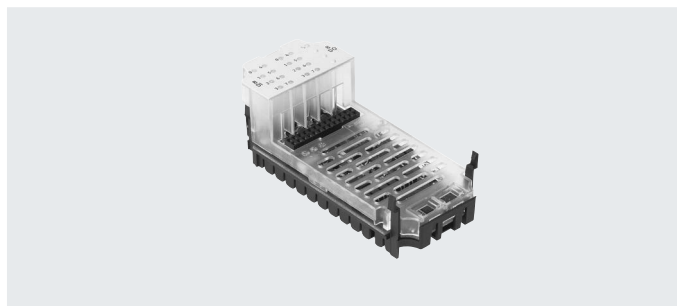
Function

Digital input modules enable the connection of two-wire and three-wire sensors (proximity switches, inductive or capacitive sensors, etc.).

Depending on the connection block selected, the module supports various connection concepts with different numbers of sockets (single or double allocation).

Application area

- Input modules for 24 V DC sensor supply voltage
- PNP or NPN logic
- Supports connection blocks with M12, M8, Sub-D and terminal connection
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse




General technical data						
Type			CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE
Number of inputs			4	8	8	8
Max. total current of inputs per module		[A]	0.7	1	0.7	0.7
Fuse protection			Internal electronic fuse per module	Internal electronic fuse per module	Internal electronic fuse per channel	Internal electronic fuse per module
Intrinsic current consumption at operating voltage		[mA]	typ. 15			
Operating voltage	Nominal width	[V DC]	24			
	Permissible range	[V DC]	18 ... 30			
Galvanic isolation	Channel – channel		No			
	Channel – internal bus		No			
Switching level	Signal 0	[V DC]	≤ 5			
	Signal 1	[V DC]	≥ 11			
Input debounce time		[ms]	3 (0.1, 10, 20 parameterisable)			
Input characteristic			IEC 1131-T2			
Switching logic			Positive logic (PNP)			
LED indicators	Group diagnostics		1	1	1	1
	Channel diagnostics		–	–	8	–
	Channel status		4	8	8	8
Diagnostics			Short circuit/overload per channel			
Parameterisation			• Module monitoring • Behaviour after short circuit • Input debounce time • Signal extension time			
Degree of protection to EN 60529			Depending on connection block			
Temperature range	Operation	[°C]	–5 ... +50			
	Storage/transport	[°C]	–20 ... +70			
Materials			Reinforced PA, PC			
LABS (PWIS) conformity			VDMA24364-B2-L			
Grid dimension		[mm]	50			
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50			
Product weight		[g]	39	39	45	40

Datasheet – Input module, digital


Connection and display components

CPX-4DE




[1] Status LEDs (green)

CPX-8DE




[2] Error LED (red; module error)

CPX-8DE-D



[3] Channel-related error LEDs (red)

CPX-8NDE



For assigning to inputs
→ Pin assignment of module

Combinations of connection blocks and digital input modules



Connection blocks	Part no.	Digital input modules			
		CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE
CPX-AB-8-M8-3POL	195706	■	■	■	■
CPX-AB-4-M12X2-5POL	195704	■	■	■	■
CPX-AB-4-M12X2-5POL-R	541254	■	■	■	■
CPX-AB-8-KL-4POL	195708	■	■	■	■
CPX-AB-1-SUB-BU-25POL	525676	■	■	■	■
CPX-M-AB-4-M12X2-5POL	549367	■	■	■	■

Pin assignment






Connection block inputs		CPX-4DE	CPX-8DE, CPX-8DE-D and CPX-8NDE	
CPX-AB-8-M8-3POL				
	X1.1: 24 V _{SEN}	X5.1: 24 V _{SEN}	X1.1: 24 V _{SEN x}	X5.1: 24 V _{SEN x+4}
	X1.3: 0 V _{SEN}	X5.3: 0 V _{SEN}	X1.3: 0 V _{SEN x}	X5.3: 0 V _{SEN x+4}
	X1.4: Input x	X5.4: Input x+2	X1.4: Input x	X5.4: Input x+4
	X2.1: 24 V _{SEN}	X6.1: 24 V _{SEN}	X2.1: 24 V _{SEN x+1}	X6.1: 24 V _{SEN x+5}
	X2.3: 0 V _{SEN}	X6.3: 0 V _{SEN}	X2.3: 0 V _{SEN x+1}	X6.3: 0 V _{SEN x+5}
	X2.4: Input x+1	X6.4: Input x+3	X2.4: Input x+1	X6.4: Input x+5
	X3.1: 24 V _{SEN}	X7.1: 24 V _{SEN}	X3.1: 24 V _{SEN x+2}	X7.1: 24 V _{SEN x+6}
	X3.3: 0 V _{SEN}	X7.3: 0 V _{SEN}	X3.3: 0 V _{SEN x+2}	X7.3: 0 V _{SEN x+6}
	X3.4: Input x+1	X7.4: Input x+3	X3.4: Input x+2	X7.4: Input x+6
	X4.1: 24 V _{SEN}	X8.1: 24 V _{SEN}	X4.1: 24 V _{SEN x+3}	X8.1: 24 V _{SEN x+7}
	X4.3: 0 V _{SEN}	X8.3: 0 V _{SEN}	X4.3: 0 V _{SEN x+3}	X8.3: 0 V _{SEN x+7}
	X4.4: n.c.	X8.4: n.c.	X4.4: Input x+3	X8.4: Input x+7
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL				
	X1.1: 24 V _{SEN}	X3.1: 24 V _{SEN}	X1.1: 24 V _{SEN x}	X3.1: 24 V _{SEN x+4}
	X1.2: Input x+1	X3.2: Input x+3	X1.2: Input x+1	X3.2: Input x+5
	X1.3: 0 V _{SEN}	X3.3: 0 V _{SEN}	X1.3: 0 V _{SEN x}	X3.3: 0 V _{SEN x+4}
	X1.4: Input x	X3.4: Input x+2	X1.4: Input x	X3.4: Input x+4
	X1.5: FE	X3.5: FE	X1.5: FE	X3.5: FE
	X2.1: 24 V _{SEN}	X4.1: 24 V _{SEN}	X2.1: 24 V _{SEN x+2}	X4.1: 24 V _{SEN x+6}
	X2.2: n.c.	X4.2: n.c.	X2.2: Input x+3	X4.2: Input x+7
	X2.3: 0 V _{SEN}	X4.3: 0 V _{SEN}	X2.3: 0 V _{SEN x+2}	X4.3: 0 V _{SEN x+6}
	X2.4: Input x+1	X4.4: Input x+3	X2.4: Input x+2	X4.4: Input x+6
	X2.5: FE	X4.5: FE	X2.5: FE	X4.5: FE

1) Speedon quick lock, additional shielding on metal thread




Datasheet – Input module, digital

Pin assignment		CPX-4DE		CPX-8DE, CPX-8DE-D and CPX-8NDE	
CPX-AB-8-KL-4POL					
	X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input x X1.3: FE X2.0: 24 V _{SEN} X2.1: 0 V _{SEN} X2.2: Input x+1 X2.3: FE X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input x+1 X3.3: FE X4.0: 24 V _{SEN} X4.1: 0 V _{SEN} X4.2: n.c. X4.3: FE	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input x+2 X5.3: FE X6.0: 24 V _{SEN} X6.1: 0 V _{SEN} X6.2: Input x+3 X6.3: FE X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input x+3 X7.3: FE X8.0: 24 V _{SEN} X8.1: 0 V _{SEN} X8.2: n.c. X8.3: FE	X1.0: 24 V _{SEN x} X1.1: 0 V _{SEN x} X1.2: Input x X1.3: FE X2.0: 24 V _{SEN x+1} X2.1: 0 V _{SEN x+1} X2.2: Input x+1 X2.3: FE X3.0: 24 V _{SEN x+2} X3.1: 0 V _{SEN x+2} X3.2: Input x+2 X3.3: FE X4.0: 24 V _{SEN x+3} X4.1: 0 V _{SEN x+3} X4.2: Input x+3 X4.3: FE	X5.0: 24 V _{SEN x+4} X5.1: 0 V _{SEN x+4} X5.2: Input x+4 X5.3: FE X6.0: 24 V _{SEN x+5} X6.1: 0 V _{SEN x+5} X6.2: Input x+5 X6.3: FE X7.0: 24 V _{SEN x+6} X7.1: 0 V _{SEN x+6} X7.2: Input x+6 X7.3: FE X8.0: 24 V _{SEN x+7} X8.1: 0 V _{SEN x+7} X8.2: Input x+7 X8.3: FE	
CPX-AB-1-SUB-BU-25POL					
	1: Input x 2: Input x+1 3: Input x+1 4: n.c. 5: 24 V _{SEN} 6: 0 V _{SEN} 7: 24 V _{SEN} 8: 0 V _{SEN} 9: 24 V _{SEN} 10: 24 V _{SEN} 11: 0 V _{SEN} 12: 0 V _{SEN} 13: FE	14: Input x+2 15: Input x+3 16: Input x+3 17: n.c. 18: 24 V _{SEN} 19: 24 V _{SEN} 20: 24 V _{SEN} 21: 24 V _{SEN} 22: 0 V _{SEN} 23: 0 V _{SEN} 24: 0 V _{SEN} 25: FE Housing: FE	1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: 24 V _{SEN x+1} 6: 0 V _{SEN x+1} 7: 24 V _{SEN x+3} 8: 0 V _{SEN x+3} 9: 24 V _{SEN x} 10: 24 V _{SEN x+2} 11: 0 V _{SEN x} 12: 0 V _{SEN x+2} 13: FE	14: Input x+4 15: Input x+5 16: Input x+6 17: Input x+7 18: 24 V _{SEN x+4} 19: 24 V _{SEN x+5} 20: 24 V _{SEN x+6} 21: 24 V _{SEN x+7} 22: 0 V _{SEN x+2 u. 3} 23: 0 V _{SEN x+2 u. 3} 24: 0 V _{SEN x+2 u. 3} 25: FE Housing: FE	

Datasheet – Input module, digital

Ordering data				
Designation			Part no.	Type
Input module, digital				
	4 digital inputs, positive logic (PNP)		195752	CPX-4DE
	8 digital inputs, positive logic (PNP)		195750	CPX-8DE
	8 digital inputs, positive logic (PNP), enhanced diagnostic function		541480	CPX-8DE-D
	8 digital inputs, negative logic (NPN)		543813	CPX-8NDE
Connection block				
	Polymer	8x socket M8, 3-pin	195706	CPX-AB-8-M8-3POL
		4x socket M12, 5-pin	195704	CPX-AB-4-M12X2-5POL
		4x socket, M12 with quick-lock technology, 5-pin	541254	CPX-AB-4-M12X2-5POL-R
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL
		1x Sub-D socket, 25-pin	525676	CPX-AB-1-SUB-BU-25POL
	Metal	4x socket M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL
Distributor				
	1x plug M12, 4-pin	2x socket M8, 3-pin	8005311	NEDY-L2R1-V1-M8G3-N-M12G4
		2x socket M12, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4
	Modular system for all types of sensor/actuator distributor		–	NEDY-... → Internet: nedy
Plug				
	M8, 3-pin	Screw terminal	8162298	NECB-S-M8G3-C2
	M12, 4-pin	For cable-Ø 2.1 ... 7 mm	8162294	NECB-S-M12G4-C2
		For 2x cable-Ø 2.1 ... 5.6 mm	8162295	NECB-S-M12G4-C2-D
	M12, 5-pin	For cable-Ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2
		For 2x cable-Ø 2.1 ... 5.6 mm	8162297	NECB-S-M12G5-C2-D
	Sub-D, 25-pin		527522	SD-SUB-D-ST25
Connecting cable				
	1x socket M8, 3-pin	1x plug M8, 3-pin	0.5 m	★ 8078282 NEBA-M8G3-U-0.5-N-M8G3
			1.0 m	★ 8078283 NEBA-M8G3-U-1-N-M8G3
			2.5 m	★ 8078286 NEBA-M8G3-U-2.5-N-M8G3
			5.0 m	★ 8078287 NEBA-M8G3-U-5-N-M8G3
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba

Datasheet – Input module, digital

Ordering data			Part no.	Type
Designation				
Covering				
	Covering hood for CPX-AB-8-KL-4POL (IP65, IP67)	• 8 cable through-feeds M9 • 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit		538220	VG-K-M9
Screening plate				
	Screening plate for M12 connections		526184	CPX-AB-S-4-M12
User documentation				
	User documentation	German	526439	P.BE-CPX-EA-DE
		English	526440	P.BE-CPX-EA-EN
		Spanish	526441	P.BE-CPX-EA-ES
		French	526442	P.BE-CPX-EA-FR
		Italian	526443	P.BE-CPX-EA-IT

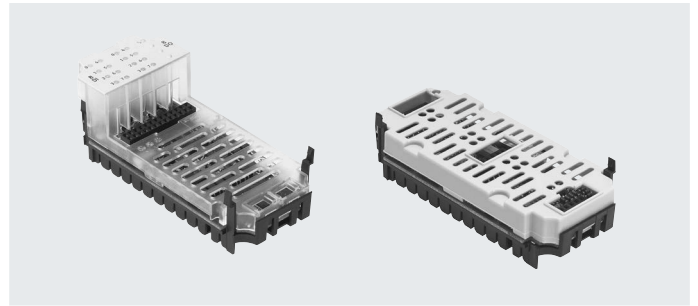
Datasheet – Input module, digital, 16 inputs

Function

Digital input modules enable the connection of two-wire and three-wire sensors (proximity switches, inductive or capacitive sensors, etc.). Depending on the connection block selected, the module supports various connection concepts with different numbers of sockets (single or double allocation).

Application area

- Input modules for 24 V DC sensor supply voltage
- PNP logic
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse




General technical data			
Type		CPX-16DE	CPX-M-16DE-D
Number of inputs		16	16
Max. total current of inputs per module	[A]	1.8	1.8
Intrinsic current consumption at operating voltage	[mA]	Typ. 15	Typ. 34
Fuse protection		Internal electronic fuse per module	
Nominal operating voltage		24	
Operating voltage range		18 ... 30	
Galvanic isolation	Channel – channel	No	
	Channel – internal bus	No	
Switching level	Signal 0	[V DC]	≤ 5
	Signal 1	[V DC]	≥ 11
Input debounce time		[ms]	3 (0.1, 10, 20 parameterisable)
Input characteristic		IEC 1131-T2	
Switching logic		Positive logic (PNP)	
LED indicators	Group diagnostics	1	1
	Channel diagnostics	–	16
	Channel status	16	16
Diagnostics		Short circuit/overload per channel	
Parameterisation		• Module monitoring • Behaviour after short circuit • Input debounce time • Signal extension time	
Degree of protection to EN 60529		Dependent on the connection block	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Reinforced PA, PC	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	41
			46

Datasheet – Input module, digital, 16 inputs

Connection and display components


CPX-16DE



2

[1] Status LEDs (green)
For assigning to inputs
→ Pin assignment of module
[2] Error LED (red; module error)


CPX-M-16DE-D



2

[1] Common status LEDs (green)/error
LEDs (red) for each input signal
[2] Error LED (red; module error)

Combinations of connection blocks and digital input modules			
Connection blocks	Part no.	Digital input modules	
		CPX-16DE	CPX-M-16DE-D
CPX-AB-8-M8X2-4POL	541256	■	–
CPX-AB-8-KL-4POL	195708	■	–
CPX-AB-1-SUB-BU-25POL	525676	■	–
CPX-M-AB-8-M12X2-5POL	549335	–	■


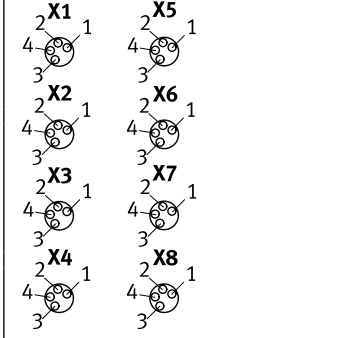
Pin assignment		
Connection block inputs		CPX-16DE
CPX-AB-8-M8x2-4POL		
	X1.1: 24 V _{SEN}	X5.1: 24 V _{SEN}
	X1.2: Input x+1	X5.2: Input x+9
	X1.3: 0 V _{SEN}	X5.3: 0 V _{SEN}
	X1.4: Input x	X5.4: Input x+8
	X2.1: 24 V _{SEN}	X6.1: 24 V _{SEN}
	X2.2: Input x+3	X6.2: Input x+11
	X2.3: 0 V _{SEN}	X6.3: 0 V _{SEN}
	X2.4: Input x+2	X6.4: Input x+10
	X3.1: 24 V _{SEN}	X7.1: 24 V _{SEN}
	X3.2: Input x+5	X7.2: Input x+13
	X3.3: 0 V _{SEN}	X7.3: 0 V _{SEN}
	X3.4: Input x+4	X7.4: Input x+12
	X4.1: 24 V _{SEN}	X8.1: 24 V _{SEN}
	X4.2: Input x+7	X8.1: Input x+15
	X4.3: 0 V _{SEN}	X8.3: 0 V _{SEN}
	X4.4: Input x+6	X8.4: Input x+14

110









www.festo.com/catalogue/...

2025/03







Datasheet – Input module, digital, 16 inputs

Pin assignment		CPX-16DE	
Connection block inputs			
CPX-AB-8-KL-4POL			
	X1.0: Input x+8 X1.1: 24 V_{SEN} X1.2: Input x X1.3: FE X2.0: Input x+9 X2.1: 24 V_{SEN} X2.2: Input x+1 X2.3: FE X3.0: Input x+10 X3.1: 24 V_{SEN} X3.2: Input x+2 X3.3: FE X4.0: Input x+11 X4.1: 24 V_{SEN} X4.2: Input x+3 X4.3: FE	X5.0: Input x+12 X5.1: 0 V_{SEN} X5.2: Input x+4 X5.3: FE X6.0: Input x+13 X6.1: 0 V_{SEN} X6.2: Input x+5 X6.3: FE X7.0: Input x+14 X7.1: 0 V_{SEN} X7.2: Input x+6 X7.3: FE X8.0: Input x+15 X8.1: 0 V_{SEN} X8.2: Input x+7 X8.3: FE	
CPX-AB-1-SUB-BU-25POL			
	1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: Input x+9 6: 24 V_{SEN} 7: Input x+11 8: 24 V_{SEN} 9: Input x+8 10: Input x+10 11: 24 V_{SEN} 12: 24 V_{SEN} 13: FE	14: Input x+4 15: Input x+5 16: Input x+6 17: Input x+7 18: Input x+12 19: Input x+13 20: Input x+14 21: Input x+15 22: 0 V_{SEN} 23: 0 V_{SEN} 24: 0 V_{SEN} 25: FE Housing: FE	



Datasheet – Input module, digital, 16 inputs

Pin assignment		Connection block inputs		CPX-M-16DE-D	
CPX-M-AB-8-M12X2-5POL					
		X1.1: 24 V _{Sx} X1.2: Input x+1 X1.3: 0 V _{Sx} X1.4: Input x X1.5: FE		X5.1: 24 V _{Sx+8} X5.2: Input x+9 X5.3: 0 V _{Sx+8} X5.4: Input x+8 X5.5: FE	
		X2.1: 24 V _{Sx+2} X2.2: Input x+3 X2.3: 0 V _{Sx+2} X2.4: Input x+2 X2.5: FE		X6.1: 24 V _{Sx+10} X6.2: Input x+11 X6.3: 0 V _{Sx+10} X6.4: Input x+10 X6.5: FE	
		X3.1: 24 V _{Sx+4} X3.2: Input x+5 X3.3: 0 V _{Sx+4} X3.4: Input x+4 X3.5: FE		X7.1: 24 V _{Sx+12} X7.2: Input x+13 X7.3: 0 V _{Sx+12} X7.4: Input x+12 X7.5: FE	
		X4.1: 24 V _{Sx+6} X4.2: Input x+7 X4.3: 0 V _{Sx+6} X4.4: Input x+6 X4.5: FE		X8.1: 24 V _{Sx+14} X8.2: Input x+15 X8.3: 0 V _{Sx+14} X8.4: Input x+14 X8.5: FE	

Datasheet – Input module, digital, 16 inputs

Ordering data				Part no.	Type
Designation					
Input module, digital					
	16 digital inputs, internal electronic fuse per module			543815	CPX-16DE
	16 digital inputs, internal electronic fuse per channel pair			550202	CPX-M-16DE-D
Connection block					
	Polymer	8x socket, M8, 4-pin	541256	CPX-AB-8-M8X2-4POL	
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL	
		1x Sub-D socket, 25-pin	525676	CPX-AB-1-SUB-BU-25POL	
	Metal	8x socket M12, 5-pin	549335	CPX-M-AB-8-M12X2-5POL	
Distributor					
	1x plug M8, 4-pin	2x socket M8, 3-pin	8005312	NEDY-L2R1-V1-M8G3-N-M8G4	
	Modular system for all types of sensor/actuator distributor		–	NEDY-... → Internet: nedy	
Plug					
	M8, 3-pin	Screw terminal	8162298	NECB-S-M8G3-C2	
		Screw-in	8162298	NECB-S-M8G3-C2	
	Sub-D, 25-pin		527522	SD-SUB-D-ST25	
Connecting cable					
	1x socket M8, 3-pin	1x plug M8, 3-pin	0.5 m	★ 8078282	NEBA-M8G3-U-0.5-N-M8G3
			1.0 m	★ 8078283	NEBA-M8G3-U-1-N-M8G3
			2.5 m	★ 8078286	NEBA-M8G3-U-2.5-N-M8G3
			5.0 m	★ 8078287	NEBA-M8G3-U-5-N-M8G3
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba	

Datasheet – Input module, digital, 16 inputs

Ordering data			Part no.	Type
Designation				
Covering				
	Covering hood for CPX-AB-8-KL-4POL (IP65/67)	• 8 cable through-feeds M9 • 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit for cover AK-8KL		538220	VG-K-M9
	Cover cap for sealing unused M8 connections (10 pieces)		177672	ISK-M8
User documentation				
	User documentation	German	526439	P.BE-CPX-EA-DE
		English	526440	P.BE-CPX-EA-EN
		Spanish	526441	P.BE-CPX-EA-ES
		French	526442	P.BE-CPX-EA-FR
		Italian	526443	P.BE-CPX-EA-IT

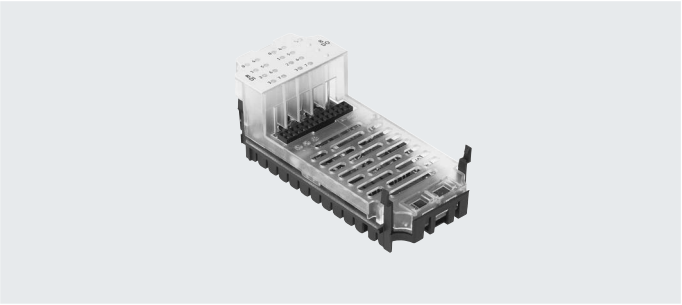
Datasheet – Input module, digital, PROFIsafe

Function

The PROFIsafe input module has 8 input channels whose signal status is detected for safety reasons, with the information transmitted to a suitable safety controller using the PROFIsafe safety protocol in combination with the appropriate fieldbus (PROFINET or PROFIBUS). This function is exclusively available for safety controllers using the PROFIsafe protocol, profile version 2.4.

Application area

- Input module for 24 V DC sensor supply voltage
- Supports connection blocks with M12 and terminal connection
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse



Description

Module-based passivation

While channel-based passivation is disabled, the input module, in accordance with PROFIsafe specification,

switches all information in the input image to the safe status, even when there is only one channel error.

Channel-based passivation

In the case of channel-based passivation, when a channel error occurs, the input module switches the input information of the affected channel pair to 0, depending on the function mode.

- The input information for unaffected channel pairs does not change
- The input module remains integrated.
- The input module indicates the current channel error status to the control unit via the input image.

Possible applications

The inputs on the PROFIsafe input module can be combined for multi-channel sensor applications. Every two inputs form a channel pair, which is set separately with one of 11 function modes.

The function mode has an influence on the evaluation of the input signals, and optionally on the generation of clock signals.

There are five independent clock outputs available for safe operation of passive sensors; the pulse patterns are used in some operating modes to detect crossovers in the signal paths.

The entire input module is designed to ensure that the input channels provide either secure data or no data at all, even when there is an error present in the system

Application areas

- Use as an input module for a higher-order safety controller. Several input modules can be used together and these monitor mutually independent sensors
- Use of multi-channel sensor applications with up to 8 secure inputs, which can be grouped and are suitable for configuration with the help of 11 different function modes
- Connection of various switches and sensors within the safety chain

Note
The safety integrity level, Performance Level and category for the system as a whole correspond to that of the component in the safety chain with the lowest characteristic value.

Application examples

- Two-hand control device for starting a function
- Emergency stop switch for incidents
- Operating mode selector switch with four positions
- Rotary indexing table
- Light curtain
- Acknowledge button with request
- End-position switch
- Safety door with two N/O switches

Datasheet – Input module, digital, PROFIsafe

General technical data			
Type			CPX-F8DE-P
Number of inputs			8
Safety function			Reliable detection and evaluation of input statuses
Maximum address volume	Inputs	[byte]	6
	Outputs	[byte]	7
Maximum cable length			[m] 200
Max. power supply	Per module	[A]	3
Current consumption of the module			[mA] Typ. 35 (power supply for electronics)
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	20.4 ... 28.8
Voltage drop per channel			[V] 0.6
Residual ripple			[Vss] 2 within voltage range
Galvanic isolation	Channel – channel		No
Input characteristics			To IEC 61131-2, type 2
Switching logic	Inputs		PNP (positive switching)
Safety Integrity Level	As per EN 62061		Reliable detection and evaluation of input statuses up to SIL CL3
	As per EN 61508		Reliable detection and evaluation of input statuses up to SIL3
Performance Level	As per ISO 13849		Reliable detection and evaluation of input statuses up to Cat 4 and PL e
Failure rate per hour (PFH)			1.0x 10 ⁻⁹
Certificate-issuing authority			01/205/5444.01/21
			German Technical Control Board (TÜV) Rh. UK 01/205U/5444.00/22
LED indicators	Group diagnostics		1
	Channel diagnostics		8
	Channel status		8
	Fail-safe protocol active		1
Diagnostics			• Short circuit per channel • Undervoltage • Overvoltage • Excessive temperature • Cross circuit per channel • Wire break per channel • Communication • Process data error • Self-test
Control elements			DIL switches
Degree of protection to EN 60529			Dependent on the connection block
Grid dimension			[mm] 50
Dimensions (including interlinking block and connection block) W x L x H			[mm] 50 x 107 x 55
Product weight			[g] 46


Datasheet – Input module, digital, PROFIsafe

Materials		
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B2-L
Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
CE marking (see declaration of conformity) ¹⁾		To EU Machinery Directive
		To EU EMC Directive
		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		According to UK regulations for machines
		To UK EMC regulations
		To UK RoHS regulations
Certification		c UL us - Recognized (OL)

1) More information www.festo.com/catalogue/... → Support/Downloads.

Connection and display components

CPX-F8DE-P



- [1] Channel-related status LEDs (green):
- [2] Channel-related error LEDs (red)
- [3] Fail-safe protocol active (green)
- [4] Error LED (red; module error)

Combinations of bus nodes/control blocks with PROFIsafe input module		
Bus node/control block	Part no.	PROFIsafe input module
		CPX-F8DE-P
CPX-FB13	195740	■
CPX-FB43	8110369	■
CPX-M-FB44	8110370	■
CPX-M-FB45	8110371	■


- Note


The PROFIsafe input module CPX-F8DE-P can only be connected as of software release 21 or release 30 (in the case of CPX-FB13).

Datasheet – Input module, digital, PROFI-safe

Combinations of connection blocks and PROFI-safe input module		
Connection blocks	Part no.	PROFI-safe input module
		CPX-F8DE-P
CPX-M-AB-4-M12X2-5POL	549367	■
CPX-AB-8-KL-4POL	195708	■






Pin assignment	
Connection block inputs	CPX-F8DE-P

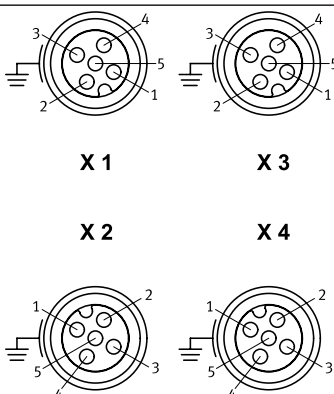CPX-M-AB-4-M12X2-5POL		
 X 1 X 3 X 2 X 4	X1.1: 24 V _{SEN} X1.2: Input x+1 X1.3: 0 V _{SEN} X1.4: Input x X1.5: FE	X3.1: 24 V _{SEN} X3.2: Input x+5 X3.3: 0 V _{SEN} X3.4: Input x+4 X3.5: FE
	X2.1: 24 V _{SEN} X2.2: Input x+3 X2.3: 0 V _{SEN} X2.4: Input x+2 X2.5: FE	X4.1: 24 V _{SEN} X4.2: Input x+7 X4.3: 0 V _{SEN} X4.4: Input x+6 X4.5: FE

CPX-AB-8-KL-4POL		
 X1 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X2 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X4 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X5 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X6 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X7 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 X8 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3 .0 .1 .2 .3	X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input x X1.3: FE X2.0: 24 V _{SEN x} X2.1: 24 V _{SEN x+1} X2.2: Input x+1 X2.3: FE X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input x+2 X3.3: FE X4.0: 24 V _{SEN x+2} X4.1: 24 V _{SEN x+3} X4.2: Input x+3 X4.3: FE	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input x+4 X5.3: FE X6.0: 24 V _{SEN x+4} X6.1: 24 V _{SEN x+5} X6.2: Input x+5 X6.3: FE X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input x+6 X7.3: FE X8.0: 24 V _{SEN x+6} X8.1: 24 V _{SEN x+7} X8.2: Input x+7 X8.3: FE

Datasheet – Input module, digital, PROFI-safe

Combinations of interlinking blocks and PROFIsafe input module				
Interlinking blocks		Part no.	PROFIsafe input module	
			CPX-F8DE-P	
CPX-M-GE-EV-S-7/8-5POL		550208	■	
CPX-M-GE-EV-S-7/8-5POL-VL		8022165	■	
CPX-M-GE-EV		550206	■	
CPX-M-GE-EV-FVO		567806	–	
CPX-M-GE-EV-Z-7/8-5POL		550210	■	

Ordering data				
Description		Part no.	Type	
PROFIsafe input module				
	8 digital inputs, positive logic (PNP), for reliable detection and evaluation of input statuses		2597424	CPX-F8DE-P
Connection block				
	Polymer	Spring-loaded terminal, 32-pin		195708 CPX-AB-8-KL-4POL
	Metal	4x socket M12, 5-pin	Unpulsed sensor supply	549367 CPX-M-AB-4-M12X2-5POL
Distributor				
	1x plug M12, 4-pin	2x socket M12, 5-pin		8005310 NEDY-L2R1-V1-M12G5-N-M12G4
	Modular system for all types of sensor/actuator distributor		–	NEDY-... → Internet: nedy
Plug				
	M12, 4-pin	For cable-ø 2.1 ... 7 mm	8162294	NECB-S-M12G4-C2
		For 2x cable-ø 2.1 ... 5.6 mm	8162295	NECB-S-M12G4-C2-D
	M12, 5-pin	For cable-ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2
		For 2x cable-ø 2.1 ... 5.6 mm	8162297	NECB-S-M12G5-C2-D
Connecting cable				
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba
User documentation				
	User documentation for PROFIsafe input module		German	8035496 CPX-F8DE-P-DE
			English	8035497 CPX-F8DE-P-EN
			Spanish	8035498 CPX-F8DE-P-ES
			French	8035499 CPX-F8DE-P-FR
			Italian	8035500 CPX-F8DE-P-IT
			Chinese	8035501 CPX-F8DE-P-ZH

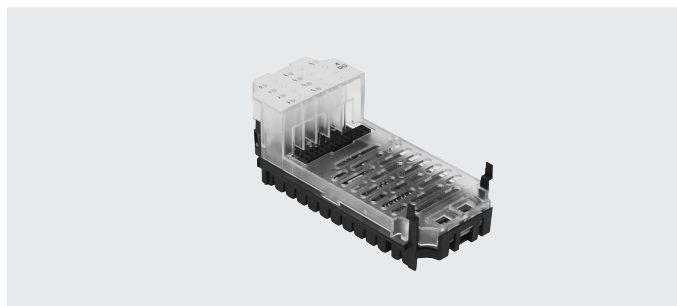
Datasheet – Output module, digital

Function

Digital outputs control actuators such as individual valves, hydraulic valves, heating controllers and many more. Separate circuits are created using additional power supply. By connecting the outputs of a module in parallel, consuming devices can be controlled with up to 4 A.

Application area

- Output module for 24 V DC supply voltage
- PNP logic
- Module features can be parameterised
- The output module receives the voltage supply for the electronics and the outputs from the interlinking block
- Module protection and diagnostics through integrated electronic fuse in each channel




General technical data			CPX-4DA	CPX-8DA	CPX-8DA-H
Type					
Number of outputs			4	8	8
Max. power supply	Per module	[A]	4		8.4
	Per channel	[A]	1 (24 W lamp load, 4 channels can be connected in parallel)	0.5 (12 W lamp load, 8 channels can be connected in parallel)	2.1 (50 W lamp load, per channel pair)
Fuse protection (short circuit)			Internal electronic fuse per channel		
Module current consumption (power supply for electronics)		[mA]	Typically 16		
Operating voltage	Nominal width	[V DC]	24		
	Permissible range	[V DC]	18 ... 30		
Galvanic isolation	Channel – channel		No		
	Channel – internal bus		Yes, with intermediate air supply		
Output characteristic			Based on IEC 1131-2		
Switching logic			Positive logic (PNP)		
LED indicators	Group diagnostics		1	1	1
	Channel diagnostics		4	8	8
	Channel status		4	8	8
Diagnostics			• Short circuit/overload, channel x • Undervoltage of outputs		
Parameterisation			• Module monitoring • Behaviour after short circuit • Fail-safe channel x • Force channel x • Idle mode channel x		
Degree of protection to EN 60529			Dependent on the connection block		
Temperature range	Operation	[°C]	–5 ... +50		
	Storage/transport	[°C]	–20 ... +70		
Materials			Reinforced PA, PC		
LABS (PWIS) conformity			VDMA24364-B2-L		
Grid dimension		[mm]	50		
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50		
Product weight		[g]	42	49	48


Datasheet – Output module, digital

Connection and display components

CPX-4DA



CPX-8DA



- [1] Status LEDs (yellow)
For assigning to outputs
→ Pin assignment of module
- [2] Channel-related error LEDs (red)
- [3] Error LED (red, module error)




Combinations of connection block and digital output module

Connection blocks	Part no.	Digital output module		
		CPX-4DA	CPX-8DA	CPX-8DA-H
CPX-AB-8-M8-3POL	195706	■	■	–
CPX-AB-8-M8X2-4POL	541256	■	■	■
CPX-AB-4-M12X2-5POL	195704	■	■	–
CPX-AB-4-M12X2-5POL-R	541254	■	■	■
CPX-AB-8-KL-4POL	195708	■	■	■
CPX-AB-1-SUB-BU-25POL	525676	■	■	■
CPX-M-AB-4-M12X2-5POL	549367	■	■	■

Pin assignment

Connection block outputs		CPX-4DA		CPX-8DA	
CPX-AB-8-M8-3POL					
X1 4 3 1 X2 4 3 1 X3 4 3 1 X4 4 3 1 X5 4 3 1 X6 4 3 1 X7 4 3 1 X8 4 3 1	X1.1: n.c. X1.3: 0 V _{OUT} X1.4: Output x	X5.1: n.c. X5.3: 0 V _{OUT} X5.4: Output x+2	X1.1: n.c. X1.3: 0 V _{OUT} X1.4: Output x	X5.1: n.c. X5.3: 0 V _{OUT} X5.4: Output x+4	
	X2.1: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1	X6.1: n.c. X6.3: 0 V _{OUT} X6.4: Output x+3	X2.1: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1	X6.1: n.c. X6.3: 0 V _{OUT} X6.4: Output x+5	
	X3.1: n.c. X3.3: 0 V _{OUT} X3.4: Output x+1	X7.1: n.c. X7.3: 0 V _{OUT} X7.4: Output x+3	X3.1: n.c. X3.3: 0 V _{OUT} X3.4: Output x+2	X7.1: n.c. X7.3: 0 V _{OUT} X7.4: Output x+6	
	X4.1: n.c. X4.3: 0 V _{OUT} X4.4: n.c.	X8.1: n.c. X8.3: 0 V _{OUT} X8.4: n.c.	X4.1: n.c. X4.3: 0 V _{OUT} X4.4: Output x+3	X8.1: n.c. X8.3: 0 V _{OUT} X8.4: Output x+7	

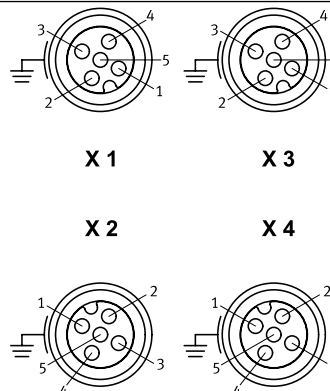
Datasheet – Output module, digital

Pin assignment		CPX-4DA		CPX-8DA and CPX-8DA-H	
Connection block outputs					
CPX-AB-8-M8X2-4POL					
	X1.1: 0 V _{OUT}	X5.1: 0 V _{OUT}	X1.1: 0 V _{OUT}	X5.1: 0 V _{OUT}	
	X1.2: Output x+1	X5.2: n.c.	X1.2: Output x+1	X5.2: n.c.	
	X1.3: 0 V _{OUT}	X5.3: 0 V _{OUT}	X1.3: 0 V _{OUT}	X5.3: 0 V _{OUT}	
	X1.4: Output x	X5.4: n.c.	X1.4: Output x	X5.4: n.c.	
	X2.1: 0 V _{OUT}	X6.1: 0 V _{OUT}	X2.1: 0 V _{OUT}	X6.1: 0 V _{OUT}	
	X2.2: n.c.	X6.2: n.c.	X2.2: Output x+3	X6.2: n.c.	
	X2.3: 0 V _{OUT}	X6.3: 0 V _{OUT}	X2.3: 0 V _{OUT}	X6.3: 0 V _{OUT}	
	X2.4: Output x+1	X6.4: n.c.	X2.4: Output x+2	X6.4: n.c.	
	X3.1: 0 V _{OUT}	X7.1: 0 V _{OUT}	X3.1: 0 V _{OUT}	X7.1: 0 V _{OUT}	
	X3.2: Output x+3	X7.2: n.c.	X3.2: Output x+5	X7.2: n.c.	
	X3.3: 0 V _{OUT}	X7.3: 0 V _{OUT}	X3.3: 0 V _{OUT}	X7.3: 0 V _{OUT}	
	X3.4: Output x+2	X7.4: n.c.	X3.4: Output x+4	X7.4: n.c.	
	X4.1: 0 V _{OUT}	X8.1: 0 V _{OUT}	X4.1: 0 V _{OUT}	X8.1: 0 V _{OUT}	
	X4.2: n.c.	X8.2: n.c.	X4.2: Output x+7	X8.2: n.c.	
	X4.3: 0 V _{OUT}	X8.3: 0 V _{OUT}	X4.3: 0 V _{OUT}	X8.3: 0 V _{OUT}	
	X4.4: Output x+3	X8.4: n.c.	X4.4: Output x+6	X8.4: n.c.	
CPX-AB-4-M12X2-5POL ¹⁾ and CPX-AB-4-M12X2-5POL-R ²⁾ and CPX-M-AB-4-M12X2-5POL					
	X1.1: n.c.	X3.1: n.c.	X1.1: n.c.	X3.1: n.c.	
	X1.2: Output x+1	X3.2: Output x+3	X1.2: Output x+1	X3.2: Output x+5	
	X1.3: 0 V _{OUT}	X3.3: 0 V _{OUT}	X1.3: 0 V _{OUT}	X3.3: 0 V _{OUT}	
	X1.4: Output x	X3.4: Output x+2	X1.4: Output x	X3.4: Output x+4	
	X1.5: FE	X3.5: FE	X1.5: FE	X3.5: FE	
	X2.1: n.c.	X4.1: n.c.	X2.1: n.c.	X4.1: n.c.	
	X2.2: n.c.	X4.2: n.c.	X2.2: Output x+3	X4.2: Output x+7	
	X2.3: 0 V _{OUT}	X4.3: 0 V _{OUT}	X2.3: 0 V _{OUT}	X4.3: 0 V _{OUT}	
	X2.4: Output x+1	X4.4: Output x+3	X2.4: Output x+2	X4.4: Output x+6	
	X2.5: FE	X4.5: FE	X2.5: FE	X4.5: FE	
CPX-AB-8-KL-4POL					
	X1.0: n.c.	X5.0: n.c.	X1.0: n.c.	X5.0: n.c.	
	X1.1: 0 V _{OUT}	X5.1: 0 V _{OUT}	X1.1: 0 V _{OUT}	X5.1: 0 V _{OUT}	
	X1.2: Output x	X5.2: Output x+2	X1.2: Output x	X5.2: Output x+4	
	X1.3: FE	X5.3: FE	X1.3: FE	X5.3: FE	
	X2.0: n.c.	X6.0: n.c.	X2.0: n.c.	X6.0: n.c.	
	X2.1: 0 V _{OUT}	X6.1: 0 V _{OUT}	X2.1: 0 V _{OUT}	X6.1: 0 V _{OUT}	
	X2.2: Output x+1	X6.2: Output x+3	X2.2: Output x+1	X6.2: Output x+5	
	X2.3: FE	X6.3: FE	X2.3: FE	X6.3: FE	
	X3.0: n.c.	X7.0: n.c.	X3.0: n.c.	X7.0: n.c.	
	X3.1: 0 V _{OUT}	X7.1: 0 V _{OUT}	X3.1: 0 V _{OUT}	X7.1: 0 V _{OUT}	
	X3.2: Output x+1	X7.2: Output x+3	X3.2: Output x+2	X7.2: Output x+6	
	X3.3: FE	X7.3: FE	X3.3: FE	X7.3: FE	
	X4.0: n.c.	X8.0: n.c.	X4.0: n.c.	X8.0: n.c.	
	X4.1: 0 V _{OUT}	X8.1: 0 V _{OUT}	X4.1: 0 V _{OUT}	X8.1: 0 V _{OUT}	
	X4.2: n.c.	X8.2: n.c.	X4.2: Output x+3	X8.2: Output x+7	
	X4.3: FE	X8.3: FE	X4.3: FE	X8.3: FE	






1) Not suitable for CPX-8DA-H.

2) Speedcon quick lock, additional shielding on metal thread



Datasheet – Output module, digital

Pin assignment								
Connection block outputs		CPX-4DA		CPX-8DA and CPX-8DA-H				
CPX-AB-1-SUB-BU-25POL								
	1:	Output x	14:	Output x+2	1:	Output x	14:	Output x+4
	2:	Output x+1	15:	Output x+3	2:	Output x+1	15:	Output x+5
	3:	Output x+1	16:	Output x+3	3:	Output x+2	16:	Output x+6
	4:	n.c.	17:	n.c.	4:	Output x+3	17:	Output x+7
	5:	n.c.	18:	n.c.	5:	n.c.	18:	n.c.
	6:	0 V _{OUT}	19:	n.c.	6:	0 V _{OUT}	19:	n.c.
	7:	n.c.	20:	n.c.	7:	n.c.	20:	n.c.
	8:	0 V _{OUT}	21:	n.c.	8:	0 V _{OUT}	21:	n.c.
	9:	n.c.	22:	0 V _{OUT}	9:	n.c.	22:	0 V _{OUT}
	10:	n.c.	23:	0 V _{OUT}	10:	n.c.	23:	0 V _{OUT}
	11:	0 V _{OUT}	24:	0 V _{OUT}	11:	0 V _{OUT}	24:	0 V _{OUT}
	12:	0 V _{OUT}	25:	FE	12:	0 V _{OUT}	25:	FE
	13:	FE	Housing:	FE	13:	FE	Housing:	FE

Datasheet – Output module, digital

Ordering data					
Designation				Part no.	Type
Output module, digital					
	4 digital outputs, power supply 1 A per channel			195754	CPX-4DA
	8 digital outputs, power supply 0.5 A per channel			541482	CPX-8DA
	8 digital outputs, power supply 2.1 A per channel pair			550204	CPX-8DA-H
Connection block					
	Polymer	8x socket, M8, 3-pin		195706	CPX-AB-8-M8-3POL
		8x socket, M8, 4-pin		541256	CPX-AB-8-M8X2-4POL
		4x socket, M12, 5-pin		195704	CPX-AB-4-M12X2-5POL
		4x socket, M12, 5-pin with quick-lock technology		541254	CPX-AB-4-M12X2-5POL-R
		Spring-loaded terminal, 32-pin		195708	CPX-AB-8-KL-4POL
	Metal	1x Sub-D socket, 25-pin		525676	CPX-AB-1-SUB-BU-25POL
4x socket, M12, 5-pin		549367	CPX-M-AB-4-M12X2-5POL		
Distributor					
	1x plug M8, 4-pin	2x socket M8, 3-pin		8005312	NEDY-L2R1-V1-M8G3-N-M8G4
	1x plug M12, 4-pin	2x socket M8, 3-pin		8005311	NEDY-L2R1-V1-M8G3-N-M12G4
		2x socket M12, 5-pin		8005310	NEDY-L2R1-V1-M12G5-N-M12G4
	Modular system for all types of sensor/actuator distributor			–	NEDY-... → Internet: nedy
Plug					
	M8, 3-pin	Screw terminal		8162298	NECB-S-M8G3-C2
		Insulation displacement connector	0.1 ... 0.14 mm²	564945	NECU-S-M8G3-HX-Q3
			0.14 ... 0.34 mm²	562024	NECU-S-M8G3-HX
	M12, 4-pin	For cable-ø 2.1 ... 7 mm		8162294	NECB-S-M12G4-C2
		For 2x cable-ø 2.1 ... 5.6 mm		8162295	NECB-S-M12G4-C2-D
	M12, 5-pin	For cable-ø 2.1 ... 7 mm		8162296	NECB-S-M12G5-C2
		For 2x cable-ø 2.1 ... 5.6 mm		8162297	NECB-S-M12G5-C2-D
	Sub-D, 25-pin			527522	SD-SUB-D-ST25
Connecting cable					
	1x socket M8, 3-pin	1x plug M8, 3-pin	0.5 m	★ 8078282	NEBA-M8G3-U-0.5-N-M8G3
			1.0 m	★ 8078283	NEBA-M8G3-U-1-N-M8G3
			2.5 m	★ 8078286	NEBA-M8G3-U-2.5-N-M8G3
			5.0 m	★ 8078287	NEBA-M8G3-U-5-N-M8G3
	Modular system for a choice of connecting cables			–	NEBA-... → Internet: neba


Datasheet – Output module, digital

Ordering data				
Designation			Part no.	Type
Covering				
	Covering hood for CPX-AB-8-KL-4POL (IP65/67)	• 8 cable through-feeds M9 • 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit, cover for AK-8KL		538220	VG-K-M9
	Cover cap for sealing unused connections (10 pieces)	For M8 connections	177672	ISK-M8
		For M12 connections	165592	ISK-M12
Screening plate				
	Screening plate for connection block • CPX-AB-4-M12X2-5POL • CPX-AB-4-M12X2-5POL-R		526184	CPX-AB-S-4-M12
User documentation				
	User documentation	German	526439	P.BE-CPX-EA-DE
		English	526440	P.BE-CPX-EA-EN
		Spanish	526441	P.BE-CPX-EA-ES
		French	526442	P.BE-CPX-EA-FR
		Italian	526443	P.BE-CPX-EA-IT

Datasheet – Input/output module, digital

Application area

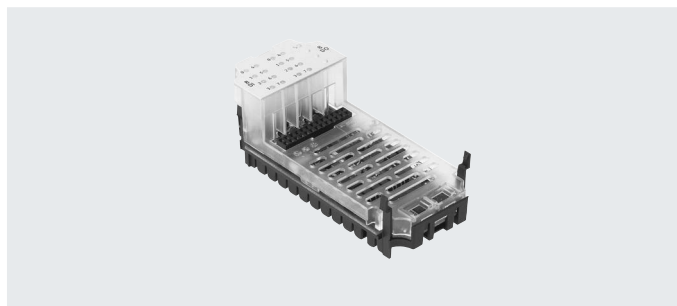- Digital multi I/O module for 24 V DC supply voltage
- Supports connection blocks with Sub-D, terminal connection and M12 connection (8-pin)
- Module features can be parameterised
- The inputs receive the voltage supply for the electronics and the sensors from the interlinking block
- The outputs receive the voltage supply for the electronics and the outputs from the interlinking block
- Module protection and diagnostics through integrated electronic fuse for the sensor power supply and integrated electronic fuse protection in each output channel




General technical data			
Type		CPX-8DE-8DA	
No. of	Inputs	8	
	Outputs	8	
Max. power supply Per module	Sensor supply	[A]	0.7
	Outputs	[A]	4
Max. power supply per channel		[A]	0.5 (12 W lamp load, channels A0 ... A03 can be connected in parallel to A4 ... A7)
Fuse protection (short circuit)		Internal electronic fuse per channel	
Intrinsic current consumption at nominal operating voltage		[mA]	typ. 22
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
Electrical isolation, inputs	Channel – channel	No	
	Channel – internal bus	No	
Electrical isolation, outputs	Channel – channel	No	
	Channel – internal bus	Yes, with intermediate air supply	
Characteristic curve	Inputs	IEC 1131-T2	
	Outputs	IEC 1131-T2	
Switching level, inputs	Signal 0	[V DC]	≤ 5
	Signal 1	[V DC]	≥ 11
Input debounce time		[ms]	3 (0.1 ms, 10 ms, 20 ms parameterisable)
Switching logic		Positive logic (PNP)	
LED indicators	Group diagnostics	1	
	Channel status	16	
Diagnostics		• Short circuit/overload per channel • Undervoltage of outputs	
Parameterisation		• Input debounce time • Fail-safe per channel • Forcing per channel • Idle mode per channel • Signal extension time • Module monitoring • Behaviour after short circuit	
Degree of protection to EN 60529		Depending on connection block	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Reinforced PA, PC	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	48

Datasheet – Input/output module, digital

Connection and display components

CPX-8DE-8DA



- [1] Status LEDs (green)
For assigning to inputs
→ Pin assignment of module
- [2] Status LEDs (yellow)
For assigning to outputs
→ Pin assignment of module
- [3] Error LED (red, module error)

Combinations of connection blocks and digital I/O module

Connection blocks	Part no.	Digital I/O module
		CPX-8DE-8DA
CPX-AB-4-M12-8POL	526178	■
CPX-AB-8-KL-4POL	195708	■
CPX-AB-1-SUB-BU-25POL	525676	■

Pin assignment



Connection block inputs/outputs

CPX-8DE-8DA







CPX-AB-4-M12-8POL

	X1.1: 24 V_{SEN} X1.2: Input x X1.3: Input x+1 X1.4: 0 V_{SEN} X1.5: Output x X1.6: Output x+1 X1.7: Input x+4 X1.8: 0 V_{OUT} X2.1: 24 V_{SEN} X2.2: Input x+2 X2.3: Input x+3 X2.4: 0 V_{SEN} X2.5: Output x+2 X2.6: Output x+3 X2.7: Input x+6 X2.8: 0 V_{OUT}	X3.1: 24 V_{SEN} X3.2: Input x+4 X3.3: Input x+5 X3.4: 0 V_{SEN} X3.5: Output x+4 X3.6: Output x+5 X3.7: n.c. X3.8: 0 V_{OUT} X4.1: 24 V_{SEN} X4.2: Input x+6 X4.3: Input x+7 X4.4: 0 V_{SEN} X4.5: Output x+6 X4.6: Output x+7 X4.7: n.c. X4.8: 0 V_{OUT}
--	---	---

Datasheet – Input/output module, digital

Pin assignment		CPX-8DE-8DA	
Connection block inputs/outputs			
CPX-AB-8-KL-4POL			
	X1.0: 24 V_{SEN} X1.1: 0 V_{SEN} X1.2: Input x X1.3: FE X2.0: Input x+4 X2.1: Input x+5 X2.2: Input x+1 X2.3: FE X3.0: 24 V_{SEN} X3.1: 0 V_{SEN} X3.2: Input x+2 X3.3: FE X4.0: Input x+6 X4.1: Input x+7 X4.2: Input x+3 X4.3: FE	X5.0: Output x+4 X5.1: 0 V_{OUT} X5.2: Output x X5.3: FE X6.0: Output x+5 X6.1: 0 V_{OUT} X6.2: Output x+1 X6.3: FE X7.0: Output x+6 X7.1: 0 V_{OUT} X7.2: Output x+2 X7.3: FE X8.0: Output x+7 X8.1: 0 V_{OUT} X8.2: Output x+3 X8.3: FE	
CPX-AB-1-SUB-BU-25POL			
	0V Valves 24V Valves 0V Output 24V Output 0V El./Sen. 24V El./Sen. FE	1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: Input x+4 6: Input x+5 7: Input x+6 8: Input x+7 9: 24 V_{SEN} 10: 24 V_{SEN} 11: 0 V_{SEN} 12: 0 V_{SEN} 13: FE	14: Output x 15: Output x+1 16: Output x+2 17: Output x+3 18: Output x+4 19: Output x+5 20: Output x+6 21: Output x+7 22: 0 V_{OUT} 23: 0 V_{OUT} 24: 0 V_{OUT} 25: FE Housing: FE

Datasheet – Input/output module, digital

Ordering data			Part no.	Type
Designation				
Input/output module, digital				
	8 digital inputs, 8 digital outputs		526257	CPX-8DE-8DA
Connection block				
	Polymer	4x socket M12, 8-pin	526178	CPX-AB-4-M12-8POL
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL
		1x socket, Sub-D, 25-pin	525676	CPX-AB-1-SUB-BU-25POL
Plug				
	Sub-D, 25-pin		527522	SD-SUB-D-ST25
Connecting cable				
	Connecting cable M12		525617	KM12-8GD8GS-2-PU
Covering				
	Covering hood for CPX-AB-8-KL-4POL (IP65, IP67)	• 8 cable through-feeds M9 • 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit		538220	VG-K-M9
Screening plate				
	Screening plate for M12 connections		526184	CPX-AB-S-4-M12
User documentation				
	User documentation	German	526439	P.BE-CPX-EA-DE
		English	526440	P.BE-CPX-EA-EN
		Spanish	526441	P.BE-CPX-EA-ES
		French	526442	P.BE-CPX-EA-FR
		Italian	526443	P.BE-CPX-EA-IT

Datasheet – Counter module, digital

Function

The counter module has two channels. Depending on the parameterisation, these can independently be used as counter inputs or as incremental value encoder inputs or SSI. The counter module additionally has one output per channel. The outputs can either be controlled by a counter channel or an incremental value encoder channel, i.e. through an event such as "Comparative value reached". Alternatively, outputs can also be controlled via process data.

Application area

- Continuous counting
- One-off counting to count limit
- One-off counting to count limit, return to load value
- Periodic counting
- Measuring frequencies
- Measuring rotational speeds
- Measuring duty cycle
- Measuring position
- Measuring speed
- Measuring with pulse generators
- Measurement with pulse generators and direction encoders
- Measurement with incremental encoders
- Measurement with SSI absolute encoders




Description			
Possible applications			
• Recording travel and speed of a conveyor • Position and speed synchronisation of conveyors and pick & place applications • Counting goods e.g. in packaging installations • Systems for filling by weight and volume • Monitoring motor speeds • Measuring equipment for determining the position of axis systems (linear, rotational) • Controlling fast-switching valves • Controlling the opening time of a valve • Activating semiconductor relays • Temperature monitoring and rotational speed control for drives • Change of direction in fast drives • Control of motors with pulse-width modulation (PWM)			
Supported devices			
• 5 V incremental encoder, single-ended or differential, with two 90° phase offset tracks • 24 V incremental encoder, single-ended, with two 90° phase offset tracks • 24 V pulse generator with or without direction level • 24 V direct current motors • Absolute encoder with SSI interface (13 bits to 25 bits)			

Datasheet – Counter module, digital

General technical data			
Type		CPX-2ZE2DA	
No. of	Inputs		2
	Outputs		2
Max. power supply Per module	Inputs	[A]	2
	Outputs	[A]	10
Max. power supply per channel		[A]	5 (adjustable, 20 W lamp load)
Max. cable length		[m]	30
Fuse protection (short circuit)			Internal electronic fuse per channel
Intrinsic current consumption at nominal operating voltage		[mA]	typ. 35
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	18 ... 30
Electrical isolation, inputs	Channel – channel		No
	Channel – internal bus		No
Electrical isolation, outputs	Channel – channel		No
	Channel – internal bus		Yes, with an intermediate supply
Characteristic curve	Inputs		To IEC 1131-2, type 02
	Outputs		IEC 1131-T2
Switching level	Signal 0	[V DC]	≤ 5
	Signal 1	[V DC]	≥ 11
Input debounce time		[μs]	0.1 (0.2 μs, 0.4 μs, 0.8 μs, 1 μs, 2 μs, 4 μs, 8 μs, 10 μs, 50 μs, 100 μs, 500 μs, 1 ms, 3 ms, 10 ms, 20 ms parameterisable)
Switching logic	Inputs		Positive logic (PNP)
	Outputs		• Negative logic (NPN) • Positive logic (PNP) • Push-pull driver
LED indicators	Group diagnostics		1
	Channel diagnostics		2
	Channel status		10
	Module diagnostics		2
Diagnostics			Operating mode-dependent diagnostics
Parameterisation			• Switch-on/off delay • Frequency output • Speed measurement • Pulse output • Pulse train • Rotational speed measurement • Frequency measurement • Period duration measurement • Motor operating mode • Determine position • Pulse-width modulation • One-off counting • Continuous counting • Periodic counting
Degree of protection to EN 60529			IP65, IP67
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Certification			UL – Recognized (OL)
Information on housing materials			Polymer
Note on materials			RoHS-compliant
LABS (PWIS) conformity			VDMA24364-B2-L
Grid dimension		[mm]	50
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	130

Datasheet – Counter module, digital

Connection and display components
CPX-2ZE2DA





- [1] Status LEDs (green)
For assigning to inputs
→ Pin assignment of module
- [2] Status LEDs (yellow, red)
For assigning to outputs
→ Pin assignment of module
- [3] Error LED (red, module error)

Pin assignment		CPX-2ZE2DA	
Inputs/outputs			
X1	X5	Duct 0	Duct 1
.0	.0	X1.0: Input	X5.0: Input
.1	.1	X1.1: Input	X5.1: Input
.2	.2	X1.2: Input	X5.2: Input
.3	.3	X1.3: Input	X5.3: Input
X2	X6	X2.0: Input	X6.0: Input
.0	.0	X2.1: Input	X6.1: Input
.1	.1	X2.2: 5 V DC	X6.2: 5 V DC
.2	.2	X2.3: 0 V	X6.3: 0 V
.3	.3	X3.0: 24 V DC	X7.0: 24 V DC
X3	X7	X3.1: 0 V	X7.1: 0 V
.0	.0	X3.2: 24 V DC for digital input DI	X7.2: 24 V DC for digital input DI
.1	.1	X3.3: Digital input DI	X7.3: Digital input DI
.2	.2	X4.0: 0 V for digital input DI	X8.0: 0 V for digital input DI
.3	.3	X4.1: Digital output DO	X8.1: Digital output DO
X4	X8	X4.2: Reference potential for DO	X8.2: Reference potential for DO
		X4.3: FE	X8.3: FE

Note

The assignment and designation of inputs differs fundamentally depending on which type of encoder is connected. Appropriate assignment diagrams can be found in the user documentation for the counter module.

Datasheet – Counter module, digital

Ordering data			
Designation		Part no.	Type
Counter module, digital			
	2 digital inputs, 2 digital outputs	576046	CPX-2ZE2DA
User documentation			
	User documentation for counter module CPX-2ZE2DA	German	8035733 P.BE-CPX-2ZE2DA-DE
		English	8035734 P.BE-CPX-2ZE2DA-EN
		Spanish	8035735 P.BE-CPX-2ZE2DA-ES
		French	8035736 P.BE-CPX-2ZE2DA-FR
		Italian	8035737 P.BE-CPX-2ZE2DA-IT
		Chinese	8035738 P.BE-CPX-2ZE2DA-ZH

Datasheet – HART input/output module

Function

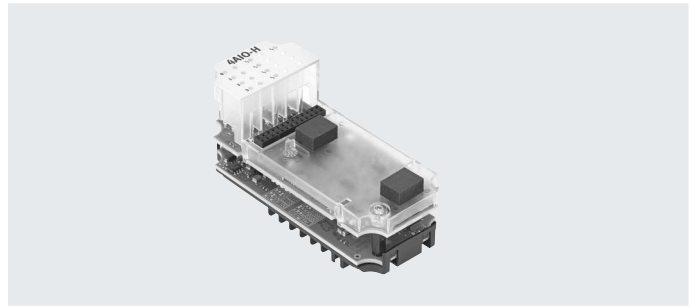
The HART input/output module allows the connection of up to 4 sensors or actuators. The corresponding communication channel is made available for sensors or actuators that communicate using the HART protocol.

With the HART protocol, a conventional analogue 4 ... 20 mA current signal is modulated by a second frequency-modulated signal.

Each of the 4 connections of the module can be configured as inputs or outputs.

Application area

- Multi I/O module for 24 V DC supply voltage
- Supports connection blocks with M12 and terminal connection
- Module features can be parameterised
- The module receives the voltage supply for the electronics, outputs and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse



General technical data				
Type		CPX-4AE-4AA-H		
Protocol		HART		
Number of selectable analogue inputs/outputs		4		
Type of sensor		0 ... 20 mA	4 ... 20 mA	4 ... 20 mA with HART
Operating voltage	Nominal width	[V DC]		24
	Permissible range	[V DC]		18 ... 30
Power failure buffering		[ms]		10
Intrinsic current consumption at nominal operating voltage		[mA]		Typically 170
Maximum short circuit current		[mA]		22
Maximum open circuit voltage		[V]		28.8
Minimum available sensor voltage		20.7 V DC at 20 mA		
Fuse protection (short circuit)		Internal electronic fuse per channel		
Reverse polarity protection		for all electrical connections		
Galvanic isolation	Channel – channel	No		
	Channel – internal bus	Yes		
Analogue input		0 ... 20 mA	4 ... 20 mA	4 ... 20 mA with HART
Data format		15 bits + prefix		
		Scalable to 15 bits		
Maximum load		[Ω]		750
Maximum input resistance		[Ω]		300
Maximum cable length		[m]		500
Basic error limit at 25 °C		[%]		±0.1
Operating error limit related to the ambient temperature range		[%]		±0.3
Repetition accuracy		0.05% at 20 °C		
LED indicators	Group diagnostics	1		
	Channel diagnostics	4		
	Channel status	4		
Control elements		DIL switches		
Diagnostics		• Wire break per channel • Limit value violation per channel • Short circuit/overload per channel • Parameterisation error • Overflow/underflow • Limit value violation to NE43 per channel		

Datasheet – HART input/output module

General technical data		
Parameterisation		• Data format • Fail-safe per channel • Forcing per channel • Limit value monitoring per channel • Idle mode per channel • Measured value smoothing • Signal range per channel • Monitoring overflow/underflow • Monitoring to NE43, inputs • Monitoring wire break per channel • Wire break per channel • Limit value violation per channel • Short circuit/overload per channel • Parameterisation error • Overflow/underflow • Limit value violation to NE43 per channel • Number of HART repetitions • Hysteresis for limit values • HART variables (4 pieces) • Behaviour after short circuit/overload
Degree of protection to EN 60529		Depending on connection block

Technical data – Mechanical components		
Type of mounting		On interlinking block
Product weight	[g]	77.4
Grid dimension	[mm]	50
Dimensions (including interlinking block and connection block) W x L x H	[mm]	50 x 107 x 70

Materials		
Housing		Reinforced PA, PC
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B2-L

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
Relative humidity	[%]	95, non-condensing
Corrosion resistance class CRC ¹⁾		1 (when installed)
CE marking (see declaration of conformity) ³⁾		To EU EMC Directive ²⁾

1) More information www.festo.com/x/topic/crc

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.


If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) More information www.festo.com/catalogue/... → Support/Downloads.

Safety characteristics		
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistant		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Datasheet – HART input/output module

Connection and display components
CPX-4EA-4AA-H



[1] Status LEDs:
– Inputs (green)
– Outputs (yellow)
→ Pin assignment of module



[2] Error LEDs (red)
Assigning to inputs/outputs
→ Pin assignment of module

[3] Error LED (red, module error)

Combinations of bus nodes/control blocks with HART input/output module					
Bus node/control block	Part no.	Protocol	Can be combined as of release	HART variables in process image only	Full HART functionality
CPX-CEC-C1-V3	3473128	CODESYS Level 2	3.5.12.174	–	■
CPX-CEC-M1-V3	3472765	CODESYS Level 2	3.5.12.174	–	■
CPX-CEC-S1-V3	3472425	CODESYS Level 2	3.5.12.174	–	■
CPX-FB11	526172	DeviceNet®	25	■	–
CPX-FB13	195740	PROFIBUS	34	–	■
CPX-FB14	526174	CANopen	30	■	–
CPX-FB36	1912451	EtherNet/IP	15	–	■
CPX-FB37	2735960	EtherCAT®	7	■	–
CPX-FB43	8110369	PROFINET RT, M12	45	–	■
CPX-M-FB44	8110370	PROFINET RT, RJ45	45	–	■
CPX-M-FB45	8110371	PROFINET RT, SCRJ	45	–	■

Combinations of connection blocks with HART input/output module		
Connection blocks	Part no.	HART input/output module
		CPX-4EA-4AA-H
CPX-P-AB-4XM12-4POL	565706	■
CPX-P-AB-2XKL-8POL	565704	■


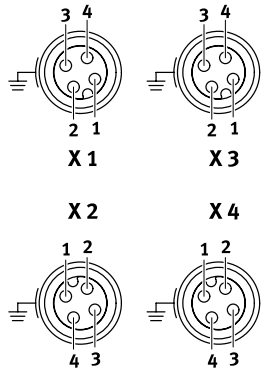

Datasheet – HART input/output module

Pin assignment		CPX-4AE-4AA-H			
Connection block inputs/outputs		Inputs		Outputs	
CPX-P-AB-4XM12-4POL					
		X1.1: 24 V _{SEN x} X1.2: 0 V X1.3: Input x X1.4: 0 V	X3.1: 24 V _{SEN x+2} X3.2: 0 V X3.3: Input x+2 X3.4: 0 V	X1.1: Output I0+ X1.2: 0 V X1.3: – X1.4: 0 V	X3.1: Output I2+ X3.2: 0 V X3.3: – X3.4: 0 V
		X2.1: 24 V _{SEN x+1} X2.2: 0 V X2.3: Input x+1 X2.4: 0 V	X4.1: 24 V _{SEN x+3} X4.2: 0 V X4.3: Input x+3 X4.4: 0 V	X2.1: Output I1+ X2.2: 0 V X2.3: – X2.4: 0 V	X4.1: Output I3+ X4.2: 0 V X4.3: – X4.4: 0 V
CPX-P-AB-2XKL-8POL					
		X1.1: 24 V _{SEN x} X1.2: 0 V X1.3: Input x X1.4: 0 V	X2.1: 24 V _{SEN x+2} X2.2: 0 V X2.3: Input x+2 X2.4: 0 V	X1.1: Output I0+ X1.2: 0 V X1.3: – X1.4: 0 V	X2.1: Output I2+ X2.2: 0 V X2.3: – X2.4: 0 V
		X1.5: 24 V _{SEN x+1} X1.6: 0 V X1.7: Input x+1 X1.8: 0 V	X2.5: 24 V _{SEN x+3} X2.6: 0 V X2.7: Input x+3 X2.8: 0 V	X1.5: Output I1+ X1.6: 0 V X1.7: – X1.8: 0 V	X2.5: Output I3+ X2.6: 0 V X2.7: – X2.8: 0 V

Note

In the case of mixed operation of inputs and outputs in one module, the connections are first assigned input signals and then output signals, in ascending order.

Datasheet – HART input/output module

Ordering data				Part no.	Type
Designation					
HART input/output module					
	4 analogue inputs/outputs			8059847	CPX-4AE-4AA-H
Connection block					
	Polymer	4x socket, M12, 4-pin	565706	CPX-P-AB-4XM12-4POL	
		2x plug, 8-pin	565704	CPX-P-AB-2XKL-8POL	
Plug connector					
	Socket, 8-pin	Spring-loaded terminal	Connection cross section 0.2 ... 2.5 mm²	565712	NECU-L3G8-C1
		Screw terminal	Connection cross section 0.2 ... 2.5 mm²	565710	NECU-L3G8-C2
	Plug M12x1, 4-pin, straight, A-coded	Screw terminal	For cable-Ø 2.1 ... 7 mm	8162294	NECB-S-M12G4-C2
Covering					
	Cover cap for sealing unused connections M12x1 (10 pieces)			165592	ISK-M12
Coding element					
	To ensure that a coded socket NECU-L3G8 can only be inserted in the matching coded connection block CPX-P-AB-2XKL (96 of each)		For NECU-L3G8	565713	CPX-P-KDS-AB-2XKL

Datasheet – Input module, analogue

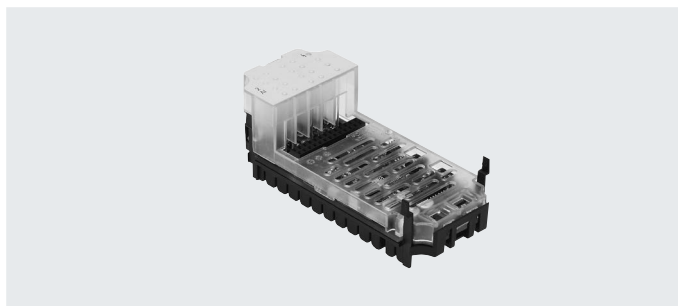
Function

Analogue modules are used to control devices with a standardised analogue interface such as pressure switches, temperature, flow rate, filling level, etc.

Depending on the connection block selected, the analogue module supports various connection concepts with different numbers of sockets or terminals.

Application area

- Analogue module for 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
- Supports connection blocks with Sub-D, terminal connection and M12 connection
- Analogue module features can be parameterised
- Different data formats available
- Operation with and without galvanic isolation possible
- The analogue module receives the voltage supply for the electronics and the sensors from the interlinking block
- Analogue module protection and diagnostics through integrated electronic fuse



General technical data						
Type	CPX-2AE-U-I		CPX-4AE-U-I		CPX-4AE-I	
	Voltage input	Current input	Voltage input	Current input	Current input	
Number of analogue inputs	2		4		4	
Max. power supply per module [A]	0.7					
Fuse protection	Internal electronic fuse					
Current consumption from 24 V sensor supply (quiescent current) [mA]	Typically 50					
Current consumption from 24 V sensor supply (at full load) [A]	Max. 0.7					
Nominal operating voltage for load voltage [V DC]	24 ±2%					
Nominal operating voltage [V DC]	24					
Operating voltage range [V DC]	18 ... 30					
Signal range (parameterisable for each channel with DIL switch or software)	0 ... 10 V	0 ... 20 mA 4 ... 20 mA	1 ... 5 V 0 ... 10 V –5 ... +5 V –10 ... +10 V	0 ... 20 mA 4 ... 20 mA –20 ... +20 mA	0 ... 20 mA 4 ... 20 mA	
Operational error limit [%]	±0.5	–	±0.3	±0.3	±0.6	
Basic error limit (at 25 °C) [%]	±0.3	–	±0.2	±0.2	±0.5	
Repetition accuracy (at 25 °C) [%]	0.15	0.15	0.1	0.1	0.15	
Input resistance	100 kΩ	≤ 100 Ω	100 kΩ	≤ 100 Ω	≤ 100 Ω	
Max. permissible input voltage [V DC]	30	–	–30 ... +30	–	–	
Max. permissible input current [mA]	–	40	–	internally limited to 60	40	
Conversion time per channel [μs]	Typically 150					
Cycle time (module) [ms]	≤ 4		≤ 0.5		≤ 10	
Data format	12 bits + prefix		15 bits + prefix		12 bits + prefix	
	Scalable to 15 bits		Scalable to 15 bits		Scalable to 15 bits	
Cable length [m]	Max. 30 (shielded)					


Datasheet – Input module, analogue

General technical data					
Type		CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I	
Galvanic isolation	Channel – channel	No			
	Channel – internal bus	Yes, with external sensor supply			
LED indicators	Group diagnostics	1			
	Channel diagnostics	Via flashing frequency of group diagnostics	4	Via flashing frequency of group diagnostics	
Diagnostics	Wire break per channel				
	Limit value violation per channel				
	Parameterisation error				
	Short circuit input signal	Overload at input	Short circuit input signal		
	–	Overflow/underflow	–		
	–	Short circuit in sensor supply	–		
Parameterisation	Data format				
	Forcing per channel				
	Limit value monitoring per channel				
	Measured value smoothing				
	Signal range per channel				
	Monitoring wire break per channel				
	Behaviour after short circuit				
	–	Behaviour after overload at input	–		
	–	Sensor supply active	–		
	Degree of protection to EN 60529		Depending on connection block		
Temperature range	Operation	[°C]	–5 ... +50		
	Storage/transport	[°C]	–20 ... +70		
Materials		Reinforced PA, PC			
Note on materials		–	RoHS-compliant	–	
LABS (PWIS) conformity		VDMA24364-B2-L	VDMA24364-B2-L	VDMA24364-B2-L	
Grid dimension		[mm]	50		
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50		
Product weight		[g]	48	46	47

Datasheet – Input module, analogue


Connection and display components

CPX-2AE-U-I and CPX-4AE-I



[1] Error LED (red; module error)

CPX-4AE-U-I





[1] Error LED (red; module error)
[2] Channel-related error LEDs (red)

Combinations of connection blocks and analogue module

Connection blocks	Part no.	Analogue module		
		CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I
CPX-AB-4-M12X2-5POL	195704	■	■	■
CPX-AB-4-M12X2-5POL-R	541254	■	■	■
CPX-AB-8-KL-4POL	195708	■	■	■
CPX-AB-1-SUB-BU-25POL	525676	■	■	■
CPX-M-AB-4-M12X2-5POL	549367	■	■	■

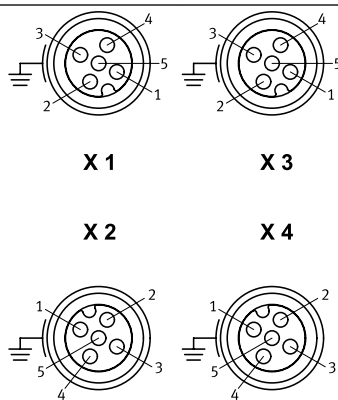
Pin assignment

Connection block inputs		CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I			
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL							
		X1.1: 24 V _{SEN} X1.2: Input U0+ X1.3: 0 V _{SEN} X1.4: Input U0- X1.5: FE ²⁾	X3.1: 24 V _{SEN} X3.2: Input U1+ X3.3: 0 V _{SEN} X3.4: Input U1- X3.5: FE ²⁾	X1.1: 24 V _{SEN} X1.2: Input 0+ X1.3: 0 V _{SEN} X1.4: Input 0- X1.5: FE ²⁾	X3.1: 24 V _{SEN} X3.2: Input 2+ X3.3: 0 V _{SEN} X3.4: Input 2- X3.5: FE ²⁾	X1.1: 24 V _{SEN} X1.2: Input I0+ X1.3: 0 V _{SEN} X1.4: Input I0- X1.5: FE ²⁾	X3.1: 24 V _{SEN} X3.2: Input I2+ X3.3: 0 V _{SEN} X3.4: Input I2- X3.5: FE ²⁾
		X2.1: 24 V _{SEN} X2.2: Input I0+ X2.3: 0 V _{SEN} X2.4: Input I0- X2.5: FE ²⁾	X4.1: 24 V _{SEN} X4.2: Input I1+ X4.3: 0 V _{SEN} X4.4: Input I1- X4.5: FE ²⁾	X2.1: 24 V _{SEN} X2.2: Input 1+ X2.3: 0 V _{SEN} X2.4: Input 1- X2.5: FE ²⁾	X4.1: 24 V _{SEN} X4.2: Input 3+ X4.3: 0 V _{SEN} X4.4: Input 3- X4.5: FE ²⁾	X2.1: 24 V _{SEN} X2.2: Input I1+ X2.3: 0 V _{SEN} X2.4: Input I1- X2.5: FE ²⁾	X4.1: 24 V _{SEN} X4.2: Input I3+ X4.3: 0 V _{SEN} X4.4: Input I3- X4.5: FE ²⁾
CPX-AB-8-KL-4POL							
		X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input U0- X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input U0+ X2.3: FE X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input I0- X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input I0+ X4.3: FE	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input U1- X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input U1+ X6.3: FE X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input I1- X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input I1+ X8.3: FE	X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input 0- X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input 0+ X2.3: FE X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input 1- X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input 1+ X4.3: FE	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input 2- X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input 2+ X6.3: FE X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input 3- X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input 3+ X8.3: FE	X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input I0- X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input I0+ X2.3: FE X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input I1- X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input I1+ X4.3: FE	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input I2- X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input I2+ X6.3: FE X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input I3- X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input I3+ X8.3: FE

1) Speedcon quick lock, additional shielding on metal thread






2) FE/shield additionally on metal thread

Datasheet – Input module, analogue

Pin assignment								
Connection block inputs		CPX-2AE-U-I		CPX-4AE-U-I		CPX-4AE-I		
CPX-AB-1-SUB-BU-25POL								
	1:	Input U0–	14:	Input U1–	1:	Input 0–	14:	Input 2–
	2:	Input U0+	15:	Input U1+	2:	Input 0+	15:	Input 2+
	3:	Input I0–	16:	Input I1–	3:	Input 1–	16:	Input 3–
	4:	Input I1+	17:	Input I1+	4:	Input 1+	17:	Input 3+
	5:	n.c.	18:	24 V _{SEN}	5:	n.c.	18:	24 V _{SEN}
	6:	n.c.	19:	n.c.	6:	n.c.	19:	n.c.
	7:	n.c.	20:	24 V _{SEN}	7:	n.c.	20:	24 V _{SEN}
	8:	n.c.	21:	n.c.	8:	n.c.	21:	n.c.
	9:	24 V _{SEN}	22:	0 V _{SEN}	9:	24 V _{SEN}	22:	0 V _{SEN}
	10:	24 V _{SEN}	23:	0 V _{SEN}	10:	24 V _{SEN}	23:	0 V _{SEN}
	11:	0 V _{SEN}	24:	0 V _{SEN}	11:	0 V _{SEN}	24:	0 V _{SEN}
	12:	0 V _{SEN}	25:	FE	12:	0 V _{SEN}	25:	FE
	13:	Shielding ¹⁾	Housing: FE	13:	Shielding ¹⁾	Housing: FE	13:	Shielding ¹⁾

1) Connect shield to functional earth FE

Datasheet – Input module, analogue

Ordering data					
Designation			Part no.	Type	
Input module, analogue					
	2 analogue current or voltage inputs		526168	CPX-2AE-U-I	
	4 analogue current or voltage inputs		573710	CPX-4AE-U-I	
	4 analogue current inputs		541484	CPX-4AE-I	
Connection block					
	Polymer	4x socket, M12, 5-pin	195704	CPX-AB-4-M12X2-5POL	
		4x socket, M12 with quick-lock technology, 5-pin	541254	CPX-AB-4-M12X2-5POL-R	
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL	
		1x Sub-D socket, 25-pin	525676	CPX-AB-1-SUB-BU-25POL	
	Metal	4x socket, M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL	
Plug					
	M12, 5-pin	For cable-ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2	
	Sub-D, 25-pin		527522	SD-SUB-D-ST25	
Connecting cable					
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba	
Covering					
	Covering hood for CPX-AB-8-KL-4POL (IP65/67)	8 cable through-feeds M9 1 cable through-feed for multi-pin plug	538219	AK-8KL	
	Fittings kit for cover AK-8KL		538220	VG-K-M9	
	Cover cap for sealing unused M12 connections (10 pieces)		165592	ISK-M12	
Screening plate					
	Screening plate for connection block - CPX-AB-4-M12X2-5POL - CPX-AB-4-M12X2-5POL-R		526184	CPX-AB-S-4-M12	
User documentation					
	User documentation		German	526415	P.BE-CPX-AX-DE
			English	526416	P.BE-CPX-AX-EN
			Spanish	526417	P.BE-CPX-AX-ES
			French	526418	P.BE-CPX-AX-FR
			Italian	526419	P.BE-CPX-AX-IT

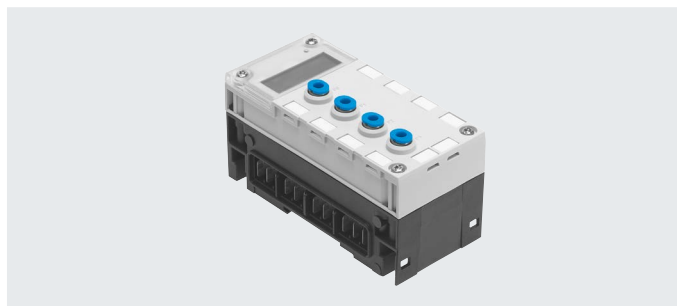
Datasheet – Input module, analogue, with pressure sensors

Function


The pressure input modules make it possible to process a maximum of 4 pressures. The internal measured value of the sensor (analogue value with 10-bit resolution) is converted into an internal numerical format as appropriate to the parameterisation and made available to the bus node as a process image. It is additionally also possible to combine 2 channels in each case to form a differential pressure channel.

Application area

- Measuring range: 0 ... 10 bar or –1 ... +1 bar
- Choice of units of measurement
- Processing a maximum of 4 pressures per module
- Pressure indication via LCD display
- Direct connection via QS4 push-in connectors
- Error message via CPX-P
- Channel-oriented diagnostics




General technical data				
Type			CPX-4AE-P-B2	CPX-4AE-P-D10
Number of analogue inputs			4	
Pneumatic connection			QS-4	
Nominal operating voltage		[V DC]	24	
Operating voltage range		[V DC]	18 ... 30	
Intrinsic current consumption		[mA]	Typically 50	
Measured variable			4x relative or 2x differential pressure measurement	
Displayable units			• kPa • mbar • psi	
Pressure measuring range	Start value	[bar]	−1	0
	End value	[bar]	1	10
Internal cycle time		[ms]	5	
Data format			• 15 bits + prefix • Binary notation in mbar, kPa, psi	
LED indicators			Group diagnostics	
Diagnostics			• Limit value violation per channel • Parameterisation error • Sensor limit per channel	
Parameterisation			• Diagnostics delay per channel • Hysteresis per module • Unit of measurement • Measured value smoothing per channel • Limit value monitoring per channel • Sensor limit per channel • Measurement of relative/differential pressure	
Degree of protection to EN 60529			IP65, IP67	
Operating medium			Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium			Lubricated operation possible (in which case lubricated operation will always be required)	
Ambient temperature		[°C]	−5 ... 50	
Storage temperature		[°C]	−20 ... 70	
Temperature of medium		[°C]	0 ... 50	
Materials			Reinforced PA, PC	
Note on materials			RoHS-compliant	
LABS (PWIS) conformity			VDMA24364-B2-L	
Grid dimension		[mm]	50	
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 55	
Product weight		[g]	115	

**Note**



Extreme pneumatic conditions, e.g. high cycle rates with high pressure amplitudes, can damage the sensors.

Datasheet – Input module, analogue, with pressure sensors

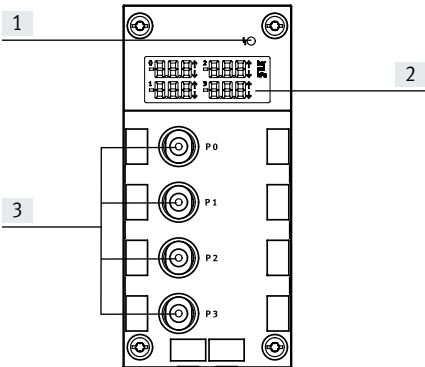Connection and display components



- [1] Error LED (red; module error)
- [2] LCD display with permanent display of the four measured pressures, unit of measurement and if applicable limit value violation
- [3] QS connections

Ordering data		Part no.	Type
Designation			
Input module, analogue			
	4 analogue pressure inputs, pressure range –1 ... +1 bar	560361	CPX-4AE-P-B2
	4 analogue pressure inputs, pressure range 0 ... 10 bar	560362	CPX-4AE-P-D10
Inscription labels			
	Inscription labels 6x10 mm, 64 pieces, in a frame	18576	IBS-6x10
User documentation			
	User documentation	German	526415 P.BE-CPX-AX-DE
		English	526416 P.BE-CPX-AX-EN
		Spanish	526417 P.BE-CPX-AX-ES
		French	526418 P.BE-CPX-AX-FR
		Italian	526419 P.BE-CPX-AX-IT

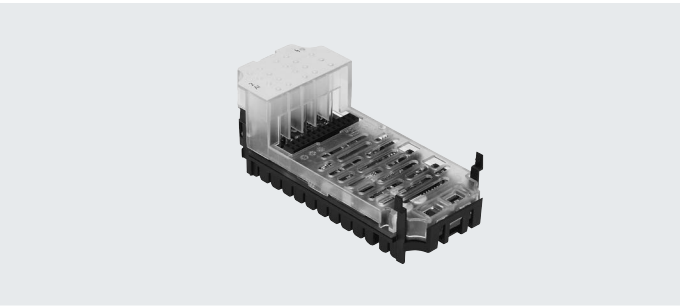
Datasheet – Input module, analogue, for temperature inputs

Function

The CPX-PT100 analogue input module with 4 channels for temperature measurement enables the connection of up to 4 temperature sensors of the type PT100-PT1000, Ni100-Ni1000, etc. The temperature module supports various connection concepts with different numbers of sockets or terminals as appropriate to the connection block selected.

Application area

- Temperature module for temperature sensors PT100, PT200, PT500, PT1000, Ni100, Ni120, Ni500, Ni1000
- Supports connection blocks with M12 and terminal connection
- Temperature module features can be parameterised
- 2-conductor, 3-conductor and 4-conductor connection
- The temperature module is provided with voltage supply for the electronics and the sensors via the interlinking block
- Temperature module protection and diagnostics through integrated electronic fuse




General technical data			
Type		CPX-4AE-T	
		Temperature input	
Number of analogue inputs		Choice of 2 or 4	
Max. power supply per module	[A]	0.7	
Fuse protection		Internal electronic fuse for sensor supply	
Current consumption from 24 V sensor supply (quiescent current)	[mA]	Typically 50	
Supply voltage for sensors	[V DC]	24 ±25%	
Sensor type (parameterisable for each channel with DIL switch)		PT100, PT200, PT500, PT1000 Ni100, Ni120, Ni500, Ni1000	
Temperature range	Pt standard	[°C]	–200 ... +850
	Pt climate	[°C]	–120 ... +130
	Ni	[°C]	–60 ... +180
Sensor connection technology		2-, 3- and 4-conductor technology	
Resolution		15 bits + prefix	
Operating error limit related to input range		[%]	
Basic error limit (25 °C)	Standard	[K]	±0.6
	Pt climate	[K]	±0.2
Temperature error relative to input range		[%]	
Linearity error (no software scaling)		[%]	
Repetition accuracy (at 25 °C)		[%]	
Max. line resistance per conductor		[Ω]	
Max. permissible input voltage		[V]	
Cycle time (module)		[ms]	

Datasheet – Input module, analogue, for temperature inputs

General technical data			
Data format		15 bits + prefix, complement of two, binary notation in tenths of a degree	
Cable length		[m]	Max. 200 (shielded)
Galvanic isolation	Channel – channel		No
	Channel – internal bus		Yes
LED indicators	Group diagnostics		1
	Channel diagnostics		4
Diagnostics		• Short circuit/overload, channel • Parameterisation error • Value falling below nominal range/scaling end value • Value exceeding nominal range/full-scale value • Wire break	
Parameterisation		• Unit of measurement and interference frequency suppression • Diagnostic message in the event of a wire break or short circuit • Limit monitoring per channel • Sensor connection technology • Sensor type/temperature coefficient, temperature range • Limit value per channel • Measured value smoothing	
Degree of protection to EN 60529		Depending on connection block	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Reinforced PA, PC	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	47












Connection and display components

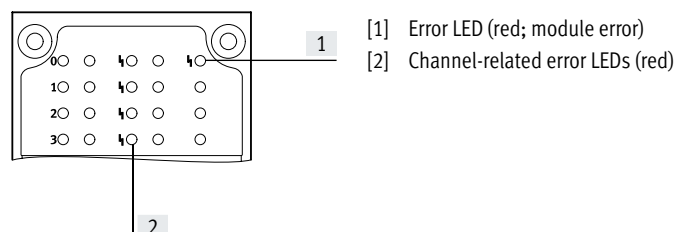CPX-4AE-T







Combinations of connection blocks and analogue module		
Connection blocks	Part no.	Temperature module
		CPX-4AE-T
CPX-AB-4-M12X2-5POL	195704	■
CPX-AB-4-M12X2-5POL-R	541254	■
CPX-AB-8-KL-4POL	195708	■
CPX-M-AB-4-M12X2-5POL	549367	■

Datasheet – Input module, analogue, for temperature inputs

Pin assignment		
Connection block inputs		CPX-4AE-T
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL		
 X 1  X 2	 X 3  X 4	X1.1: Input I0+ X1.2: Input U0+ X1.3: Input I0– X1.4: Input U0– X1.5: FE²⁾ X2.1: Input I1+ X2.2: Input U1+ X2.3: Input I1– X2.4: Input U1– X2.5: FE²⁾ X3.1: Input I2+ X3.2: Input U2+ X3.3: Input I2– X3.4: Input U2– X3.5: FE²⁾ X4.1: Input I3+ X4.2: Input U3+ X4.3: Input I3– X4.4: Input U3– X4.5: FE²⁾
CPX-AB-8-KL-4POL		
 X1  X2  X3  X4	 X5  X6  X7  X8	X1.0: Input I0+ X1.1: Input I0– X1.2: Input U0– X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input U0+ X2.3: FE X3.0: Input I1+ X3.1: Input I1– X3.2: Input U1– X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input U1+ X4.3: FE X5.0: Input I2+ X5.1: Input I2– X5.2: Input U2– X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input U2+ X6.3: FE X7.0: Input I3+ X7.1: Input I3– X7.2: Input U3– X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input U3+ X8.3: FE

1) Speedcon quick lock, additional shielding on metal thread
2) FE/shield additionally on metal thread

Datasheet – Input module, analogue, for temperature inputs

Ordering data					
Designation			Part no.	Type	
Input module, analogue					
	2 or 4 analogue temperature inputs		541486	CPX-4AE-T	
Connection block					
	Polymer	4x socket M12, 5-pin	195704	CPX-AB-4-M12X2-5POL	
		4x socket, M12 with quick-lock technology, 5-pin	541254	CPX-AB-4-M12X2-5POL-R	
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL	
	Metal	4x socket M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL	
Plug					
	M12, 5-pin	For cable-ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2	
Covering					
	Covering hood for CPX-AB-8-KL-4POL (IP65, IP67)		538219	AK-8KL	
	Fittings kit		538220	VG-K-M9	
Screening plate					
	Screening plate for M12 connections		526184	CPX-AB-S-4-M12	
User documentation					
	User documentation		German	526415	P.BE-CPX-AX-DE
			English	526416	P.BE-CPX-AX-EN
			Spanish	526417	P.BE-CPX-AX-ES
			French	526418	P.BE-CPX-AX-FR
			Italian	526419	P.BE-CPX-AX-IT

Datasheet – Input module, analogue, for thermocouple

Function

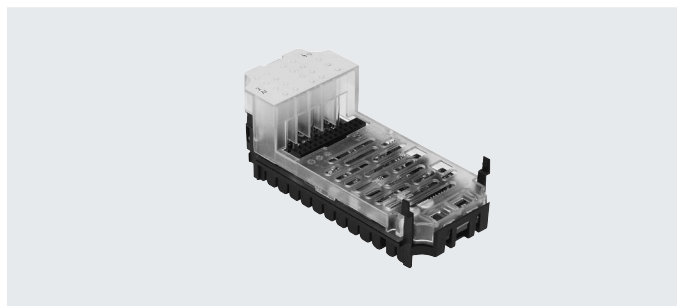
The CPX-4AE-TC analogue input module with 4 channels for temperature measurement enables up to 4 thermocouple sensors to be connected.

The channels feature wire break and short circuit detection.

If no cold junction compensation sensor is being used, an internal theoretical value of 25 °C can be used (accuracy is impaired).

Application area

- Supports connection blocks with M12 and terminal connection
- Temperature module features can be parameterised
- 2-conductor connection
- 2-conductor connection for a PT1000 sensor for cold junction compensation
- The temperature module is provided with voltage supply for the electronics and the sensors via the interlinking block
- Temperature module protection and diagnostics through integrated electronic fuse




General technical data		
Type		CPX-4AE-TC
		Temperature input
Number of analogue inputs		4
Fuse protection (short circuit)		Internal electronic fuse per channel
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Sensor type (parameterisable for each channel with software)		• Type B +400 ... +1820 °C, 8 µV/°C • Type E –270 ... +900 °C, 60 µV/°C • Type J –200 ... +1200 °C, 51 µV/°C • Type K –200 ... +1370 °C, 40 µV/°C • Type N –200 ... +1300 °C, 38 µV/°C • Type R 0 ... +1760 °C, 12 µV/°C • Type S 0 ... +1760 °C, 11 µV/°C • Type T –200 ... +400 °C, 40 µV/°C
Sensor connection technology		2-conductor technology
Operating error limit related to ambient temperature	[%]	Max. ±0.6
Basic error limit (at 25 °C)	[%]	Max. ±0.4
Repetition accuracy (at 25 °C)	[%]	±0.05
Max. line resistance per conductor	[Ω]	10
Max. total current per module	[mA]	30
Max. permissible input voltage	[V]	±30
Internal cycle time (module)	[ms]	250

Datasheet – Input module, analogue, for thermocouple

General technical data		
Data format		• 15 bits + prefix, complement of two • Binary notation in tenths of a degree
Cable length	[m]	Max. 50 (shielded)
Galvanic isolation	Channel – channel	No
	Channel – internal bus	Yes
LED indicators	Group diagnostics	1
	Channel diagnostics	4
Diagnostics		• Parameterisation error • Wire break per channel • Limit value violation per channel
Parameterisation		• Monitoring wire break per channel • Unit of measurement • Cold-junction compensation • Sensor type per channel • Limit value monitoring per channel • Measured value smoothing
Degree of protection to EN 60529		Depending on connection block
Temperature range	Operation	–5 ... +50
	Storage/transport	–20 ... +70
Materials		Reinforced PA, PC
LABS (PWIS) conformity		VDMA24364-B2-L
Grid dimension	[mm]	50
Dimensions (including interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50
Product weight	[g]	46

Connection and display components


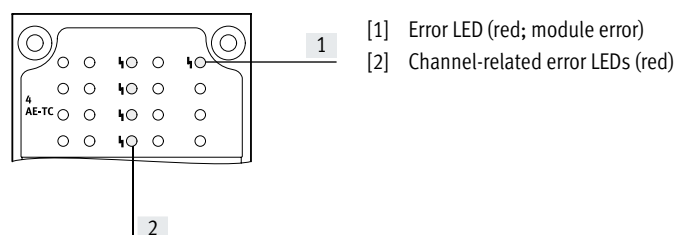
CPX-4AE-TC



Combinations of connection blocks and analogue module

Connection blocks	Part no.	Temperature module
		CPX-4AE-TC
CPX-AB-4-M12X2-5POL	195704	■
CPX-AB-4-M12X2-5POL-R	541254	■
CPX-AB-8-KL-4POL	195708	■
CPX-M-AB-4-M12X2-5POL	549367	■





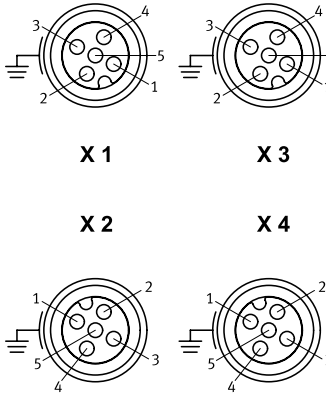

Datasheet – Input module, analogue, for thermocouple

Pin assignment		CPX-4AE-TC	
Connection block inputs		CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL	
		X1.1: Cold junction compensation 0+ X1.2: Input signal U0+ X1.3: Cold junction compensation 0– X1.4: Input signal U0– X1.5: FE²⁾ X2.1: Cold junction compensation 1+ X2.2: Input signal U1+ X2.3: Cold junction compensation 1– X2.4: Input signal U1– X2.5: FE²⁾	X3.1: Cold junction compensation 2+ X3.2: Input signal U2+ X3.3: Cold junction compensation 2– X3.4: Input signal U2– X3.5: FE²⁾ X4.1: Cold junction compensation 3+ X4.2: Input signal U3+ X4.3: Cold junction compensation 3– X4.4: Input signal U3– X4.5: FE²⁾
CPX-AB-8-KL-4POL			
		X1.0: Cold junction compensation 0+ X1.1: Cold junction compensation 0– X1.2: Input signal U0– X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input signal U0+ X2.3: FE X3.0: Cold junction compensation 1+ X3.1: Cold junction compensation 1– X3.2: Input signal U1– X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input signal U1+ X4.3: FE	X5.0: Cold junction compensation 2+ X5.1: Cold junction compensation 2– X5.2: Input signal U2– X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input signal U2+ X6.3: FE X7.0: Cold junction compensation 3+ X7.1: Cold junction compensation 3– X7.2: Input signal U3– X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input signal U3+ X8.3: FE

1) Speedcon quick lock, additional shielding on metal thread

2) FE/shield additionally on metal thread

Datasheet – Input module, analogue, for thermocouple

Ordering data				
Designation			Part no.	Type
Input module, analogue				
	4 analogue temperature inputs, with 2-conductor connection for a PT1000 sensor for cold junction compensation		553594	CPX-4AE-TC
Connection block				
	Polymer	4x socket M12, 5-pin	195704	CPX-AB-4-M12X2-5POL
		4x socket, M12 with quick-lock technology, 5-pin	541254	CPX-AB-4-M12X2-5POL-R
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL
	Metal	4x socket M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL
Cold junction compensation				
	PT1000 temperature sensor for cold junction compensation		553596	CPX-W-PT1000
Plug				
	M12, 5-pin	For cable-ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2
Covering				
	Covering hood for CPX-AB-8-KL-4POL (IP65, IP67)		538219	AK-8KL
	Fittings kit		538220	VG-K-M9
Screening plate				
	Screening plate for M12 connections		526184	CPX-AB-S-4-M12
User documentation				
	User documentation	German	526415	P.BE-CPX-AX-DE
		English	526416	P.BE-CPX-AX-EN
		Spanish	526417	P.BE-CPX-AX-ES
		French	526418	P.BE-CPX-AX-FR
		Italian	526419	P.BE-CPX-AX-IT

Datasheet – Output module, analogue

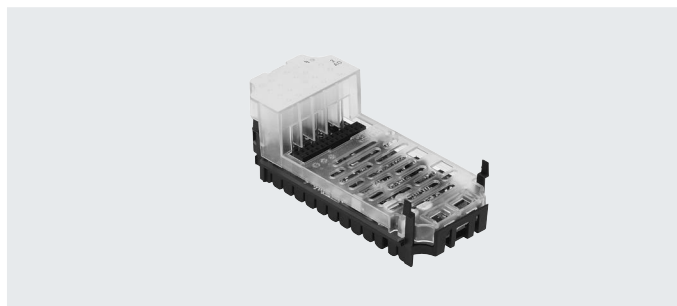
Function

Analogue modules are used to control devices with a standard analogue interface such as proportional valves, etc.

Depending on the connection block selected, the analogue module supports various connection concepts with different numbers of sockets or terminals.

Application area

- Analogue module for 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
- Supports connection blocks with Sub-D, terminal connection and M12 connection
- Analogue module features can be parameterised
- Different data formats available
- Operation with and without galvanic isolation possible
- The analogue module receives the voltage supply for the electronics and the actuators from the interlinking block
- Analogue module protection and diagnostics through integrated electronic fuse




General technical data				
Type			CPX-2AA-U-I	
			Voltage output	Current output
Number of analogue outputs			2	
Max. actuator supply per module [A]			2.8	
Fuse protection			Internal electronic fuse for actuator supply	
Current consumption from 24 V sensor supply (at full load) [mA]			Max. 150	
Current consumption from 24 V actuator supply (at full load) [A]			4 ... 10	
Supply voltage for actuators [V DC]			24 ±25%	
Signal range (parameterisable for each channel with DIL switch or software)			0 ... 10 V DC	0 ... 20 mA 4 ... 2 mA
Resolution [Bit]			12	
Number of units			4096	
Absolute accuracy [%]			±0.6	
Linearity error (no software scaling) [%]			±0.1	
Repetition accuracy (at 25 °C) [%]			0.05	
Encoder selection	Load resistance for ohmic load	[kΩ]	Min. 1	Max. 0.5
	Load resistance for capacitive load	[μF]	Max. 1	–
	Load resistance for inductive load	[mH]	–	Max. 1
	Short-circuit protection analogue output		Yes	–
	Short-circuit current of analogue output	[mA]	Approx. 20	–
	Open circuit voltage	[V DC]	–	18
	Destruction limit against externally applied voltage		15	
	Actuator connection		2 conductors	
Cycle time (module) [ms]			≤ 4	

Datasheet – Output module, analogue

General technical data			
Type		CPX-2AA-U-I	
		Voltage output	Current output
Settling time	For ohmic load	[ms]	0.1
	For capacitive load	[ms]	0.7
	For inductive load	[ms]	–
Data format		15 bits + prefix, linear scaling 12 bits right-justified 12 bits left-justified, S7 compatible 12 bits left-justified, S5 compatible	
Cable length		[m]	Max. 30 (shielded)
LED indicators	Group diagnostics	1	
	Channel diagnostics	Yes, via flashing frequency of group diagnostics	
Diagnostics		• Short circuit/overload, actuator supply • Parameterisation error • Value falling below nominal range/scaling end value • Value exceeding nominal range/full-scale value • Wire break	
Parameterisation		• Short circuit monitoring, actuator supply • Short circuit monitoring, analogue output • Behaviour after short circuit in actuator supply • Data format • Lower limit value/full-scale value • Upper limit value/full-scale value • Monitoring value falling below nominal range/full-scale value • Monitoring value exceeding nominal range/full-scale value • Monitoring wire break • Analogue input	
Degree of protection to EN 60529		Depending on connection block	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Reinforced PA, PC	
LABS (PWIS) conformity		VDMA24364-B2-L	
Grid dimension		[mm]	50
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Product weight		[g]	49

Connection and display components

CPX-2AA-U-I






[1] Error LED (red; module error)

Combinations of connection blocks and analogue module

Connection blocks	Part no.	Analogue module	
		CPX-2AA-U-I	
CPX-AB-4-M12X2-5POL	195704		■
CPX-AB-4-M12X2-5POL-R	541254		■
CPX-AB-8-KL-4POL	195708		■
CPX-AB-1-SUB-BU-25POL	525676		■
CPX-M-AB-4-M12X2-5POL	549367		■

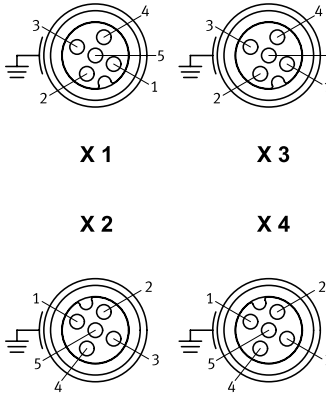Datasheet – Output module, analogue








Pin assignment	
Connection block outputs	CPX-2AA-U-I
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R¹⁾, CPX-M-AB-4-M12X2-5POL	
 X 1 X 3 X 2 X 4	X1.1: 24 V_{OUT} X1.2: Output U0+ X1.3: 0 V_{OUT} X1.4: Output GND X1.5: FE²⁾ X2.1: 24 V_{OUT} X2.2: Output I0+ X2.3: 0 V_{OUT} X2.4: Output GND X2.5: FE²⁾ X3.1: 24 V_{OUT} X3.2: Output U1+ X3.3: 0 V_{OUT} X3.4: Output GND X3.5: FE²⁾ X4.1: 24 V_{OUT} X4.2: Output I1+ X4.3: 0 V_{OUT} X4.4: Output GND X4.5: FE²⁾
CPX-AB-8-KL-4POL	
 X1 X5 X2 X6 X3 X7 X4 X8	X1.0: 24 V_{OUT} X1.1: 0 V_{OUT} X1.2: Output GND X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Output U0+ X2.3: FE X3.0: 24 V_{OUT} X3.1: 0 V_{OUT} X3.2: Output GND X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Output I0+ X4.3: FE X5.0: 24 V_{OUT} X5.1: 0 V_{OUT} X5.2: Output GND X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Output U1+ X6.3: FE X7.0: 24 V_{OUT} X7.1: 0 V_{OUT} X7.2: Output GND X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Output I1+ X8.3: FE
CPX-AB-1-SUB-BU-25POL	
	1: Output GND 2: Output U0+ 3: Output GND 4: Output I0+ 5: n.c. 6: n.c. 7: n.c. 8: n.c. 9: 24 V_{OUT} 10: 24 V_{OUT} 11: 0 V_{OUT} 12: 0 V_{OUT} 13: Shielding³⁾ 14: Output GND 15: Output U1+ 16: Output GND 17: Output I1+ 18: 24 V_{OUT} 19: n.c. 20: 24 V_{OUT} 21: n.c. 22: 0 V_{OUT} 23: 0 V_{OUT} 24: 0 V_{OUT} 25: FE Housing: FE

1) Speedcon quick lock, additional shielding on metal thread

2) FE/shield additionally on metal thread

3) Connect shield to functional earth FE

Datasheet – Output module, analogue

Ordering data					
Designation			Part no.	Type	
Output module, analogue					
	2 analogue current or voltage outputs		526170	CPX-2AA-U-I	
Connection block					
	Polymer	4x socket, M12, 5-pin	195704	CPX-AB-4-M12X2-5POL	
		4x socket, M12 with quick-lock technology, 5-pin	541254	CPX-AB-4-M12X2-5POL-R	
		Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL	
	Metal	1x Sub-D socket, 25-pin	525676	CPX-AB-1-SUB-BU-25POL	
4x socket, M12, 5-pin		549367	CPX-M-AB-4-M12X2-5POL		
Distributor					
	Modular system for all types of sensor/actuator distributor		–	NEDY-... → Internet: nedy	
Plug					
	M12, 5-pin	For cable-Ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2	
	Sub-D, 25-pin		527522	SD-SUB-D-ST25	
Connecting cable					
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba	
Covering					
	Covering hood for CPX-AB-8-KL-4POL (IP65/67)	• 8 cable through-feeds M9 • 1 cable through-feed for multi-pin plug	538219	AK-8KL	
	Fittings kit, cover for AK-8KL		538220	VG-K-M9	
	Cover cap for sealing unused M12 connections (10 pieces)		165592	ISK-M12	
Screening plate					
	Screening plate for connection block • CPX-AB-4-M12X2-5POL • CPX-AB-4-M12X2-5POL-R		526184	CPX-AB-S-4-M12	
User documentation					
	User documentation		German	526415	P.BE-CPX-AX-DE
			English	526416	P.BE-CPX-AX-EN
			Spanish	526417	P.BE-CPX-AX-ES
			French	526418	P.BE-CPX-AX-FR
			Italian	526419	P.BE-CPX-AX-IT

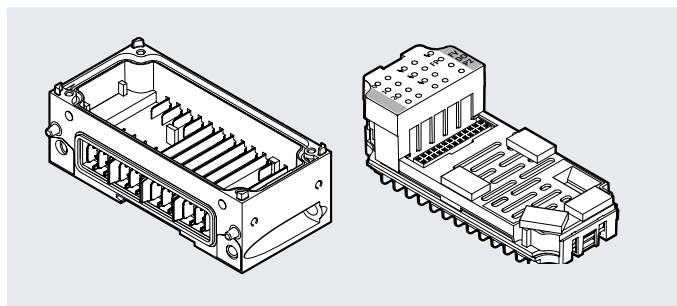
Datasheet – PROFIsafe shut-off module

Function

The PROFIsafe shut-off module interrupts the contact rails of the interlinking block for valves and outputs. The supply voltage for valves can be switched by the module within the CPX-P terminal and via a connection block to two consuming devices. Actuation takes place via the bus node (PROFINET) of the CPX-P terminal.

Application area

- Output module for 24 V DC supply voltage
- Shut-off module for supply voltage for valves
- Can only be used with PROFINET or PROFIBUS bus nodes
- The shut-off module is supplied with voltage for the electronics and the outputs by the interlinking block
- The outputs are powered from the power supply for valves (V_{Valves})



General technical data			
Type			CPX-FVDA-P2
Number of outputs			2
Note on outputs			1 internal channel for switching off the supply voltage for valves 2 external outputs
Maximum address volume	Inputs	[byte]	6
	Outputs	[byte]	6
Maximum cable length		[m]	200
Max. power supply	Per module	[A]	5
	Per channel	[A]	1.5
Fuse protection (short circuit)			Internal electronic fuse per channel
Current consumption of the module		[mA]	Typ. 65 (power supply for valves)
		[mA]	Typ. 25 (power supply for electronics)
Operating voltage	Nominal width	[V DC]	24
	Permissible range	[V DC]	20.4 ... 28.8
Voltage drop per channel		[V]	0.6
Residual ripple		[Vss]	2 within voltage range
Load capacity to FE		[nF]	400
Max. response time to switch-off command		[ms]	23
Galvanic isolation	Channel – channel		No
	Channel – internal bus		Yes, with intermediate air supply
Switching logic	Outputs		P-M switching
Safety Integrity Level			Safe switch-off, SIL3
Performance Level			Safe switch-off/category 3, Performance Level e
Failure rate per hour (PFH)			1.0×10^{-9}
Certificate-issuing authority			German Technical Control Board (TÜV) Rhld 01/205/5294.02/23
			German Technical Control Board (TÜV) Rhld 01/205U/5294.01/23
LED indicators	Group diagnostics		1
	Channel diagnostics		3
	Channel status		3
	Fail-safe protocol active		1
Diagnostics			• Short circuit/overload per channel • Undervoltage of valves • Cross circuit • Wire break per channel
Parameterisation			• Monitoring wire break per channel • Diagnostic behaviour
Degree of protection to EN 60529			Dependent on the connection block
Grid dimension		[mm]	50
Dimensions (including interlinking block and connection block) W x L x H		[mm]	50 x 107 x 55
Product weight		[g]	50


Datasheet – PROFIsafe shut-off module

Materials		
Housing		Reinforced PA, PC
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B2-L
Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
CE marking (see declaration of conformity) ¹⁾		To EU Machinery Directive
		To EU EMC Directive
		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		According to UK regulations for machines
		To UK EMC regulations
		To UK RoHS regulations
Certification		c UL us - Recognized (OL)

1) More information www.festo.com/catalogue/... → Support/Downloads.

Connection and display components

CPX-FVDA-P2



- [1] Status LEDs (yellow):
0: Supply voltage for valves
1: X1
2: X2
- [2] Channel-related error LEDs (red)
[3] Fail-safe protocol active (green)
[4] Error LED (red; module error)

Combinations of bus nodes/control blocks to PROFIsafe switch-off module		
Bus node/control block	Part no.	PROFIsafe shut-off module
		CPX-FVDA-P2
CPX-FB13	195740	■
CPX-FB43	8110369	■
CPX-M-FB44	8110370	■
CPX-M-FB45	8110371	■

Note

The PROFIsafe shut-off module CPX-FVDA-P2 can only be connected as of software release 21 or release 30 (in the case of CPX-FB13).

Datasheet – PROFIsafe shut-off module


Combinations of connection blocks for PROFIsafe disconnection module

Connection blocks	Part no.	PROFIsafe shut-off module
		CPX-FVDA-P2
CPX-M-AB-4-M12X2-5POL	549367	■
CPX-AB-8-KL-4POL	195708	■


Pin assignment

Connection block outputs CPX-FVDA-P2

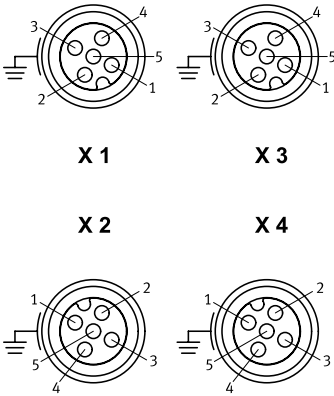CPX-M-AB-4-M12X2-5POL

 X 1 X 3 X 2 X 4	X1.1: 0 V_{OUT} 1 (cannot be switched off) X1.2: 24 V_{OUT} 1 (cannot be switched off) X1.3: 0 V_{OUT} 1 (can be switched off via fieldbus) X1.4: 24 V_{OUT} 1 (can be switched off via fieldbus) X1.5: FE	X3.1: n.c. X3.2: n.c. X3.3: n.c. X3.4: n.c. X3.5: FE
	X2.1: 0 V_{OUT} 2 (cannot be switched off) X2.2: 24 V_{OUT} 2 (cannot be switched off) X2.3: 0 V_{OUT} 2 (can be switched off via fieldbus) X2.4: 24 V_{OUT} 2 (can be switched off via fieldbus) X2.5: FE	X4.1: n.c. X4.2: n.c. X4.3: n.c. X4.4: n.c. X4.5: FE


CPX-AB-8-KL-4POL

 X1 0 1 2 3 X2 0 1 2 3 X3 0 1 2 3 X4 0 1 2 3 X5 0 1 2 3 X6 0 1 2 3 X7 0 1 2 3 X8 0 1 2 3	X1.0: 0 V_{OUT} 1 (cannot be switched off) X1.1: 0 V_{OUT} 1 (can be switched off via fieldbus) X1.2: 24 V_{OUT} 1 (can be switched off via fieldbus) X1.3: FE	X5.0: n.c. X5.1: n.c. X5.2: n.c. X5.3: n.c.
	X2.0: n.c. X2.1: n.c. X2.2: 24 V_{OUT} 1 (cannot be switched off) X2.3: FE	X6.0: n.c. X6.1: n.c. X6.2: n.c. X6.3: n.c.
	X3.0: 0 V_{OUT} 2 (cannot be switched off) X3.1: 0 V_{OUT} 2 (can be switched off via fieldbus) X3.2: 24 V_{OUT} 2 (can be switched off via fieldbus) X3.3: FE	X7.0: n.c. X7.1: n.c. X7.2: n.c. X7.3: n.c.
	X4.0: n.c. X4.1: n.c. X4.2: 24 V_{OUT} 2 (cannot be switched off) X4.3: FE	X8.0: n.c. X8.1: n.c. X8.2: n.c. X8.3: n.c.







Datasheet – PROFIsafe shut-off module

Combinations of interlinking blocks and PROFIsafe shut-off module			
Interlinking blocks	Part no.	PROFIsafe shut-off module	
		CPX-FVDA-P2	
CPX-M-GE-EV-S-7/8-5POL	550208	–	
CPX-M-GE-EV-S-7/8-5POL-VL	8022165	–	
CPX-M-GE-EV	550206	–	
CPX-M-GE-EV-FVO	567806	■	
CPX-M-GE-EV-Z-7/8-5POL	550210	–	

General technical data			
Type		CPX-M-GE-EV-FVO	
Nominal operating voltage	[V DC]	24	
Current carrying capacity (per contact/contact rail)	[A]	16	
Degree of protection to EN 60529		Depending on connection block	
Ambient temperature	[°C]	–5 ... +50	
Materials		Die-cast aluminium	
Note on materials		RoHS-compliant	
LABS (PWIS) conformity		VDMA24364-B2-L	
Type of mounting		Angled fitting	
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 107 x 35	
Product weight	[g]	170	

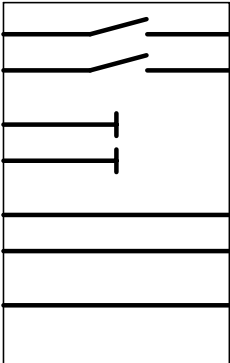Pin assignment			
Wiring		Pin	Assignment
	0V Valves	–	–
	24V Valves	–	–
	0V Output	–	–
	24V Output	–	–
	0V El./Sen.		
	24V El./Sen.		
	FE		

Datasheet – PROFIsafe shut-off module

Ordering data			Part no.	Type	
Description					
PROFIsafe shut-off module					
	Electronics module (can only be used with CPX-M-GE-EV-FVO)	PROFINET, PROFIBUS	1971599	CPX-FVDA-P2	
	Metal interlinking block (exclusively for CPX-FVDA-P2)		567806	CPX-M-GE-EV-FVO	
Connection block					
	Polymer	Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL	
	Metal	4x socket M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL	
Distributor					
	1x plug M12, 4-pin	2x socket M12, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4	
	Modular system for all types of sensor/actuator distributor		–	NEDY-... → Internet: nedy	
Plug					
	M12, 4-pin	For cable-ø 2.1 ... 7 mm	8162294	NECB-S-M12G4-C2	
		For 2x cable-ø 2.1 ... 5.6 mm	8162295	NECB-S-M12G4-C2-D	
	M12, 5-pin	For cable-ø 2.1 ... 7 mm	8162296	NECB-S-M12G5-C2	
		For 2x cable-ø 2.1 ... 5.6 mm	8162297	NECB-S-M12G5-C2-D	
Connecting cable					
	Modular system for a choice of connecting cables		–	NEBA-... → Internet: neba	
User documentation					
	User documentation for PROFIsafe shut-off module		German	8022606	CPX-FVDA-P2-DE
			English	8022607	CPX-FVDA-P2-EN
			Spanish	8022608	CPX-FVDA-P2-ES
			French	8022609	CPX-FVDA-P2-FR
			Italian	8022610	CPX-FVDA-P2-IT
			Chinese	8022611	CPX-FVDA-P2-ZH

Datasheet – Interlinking block with system supply

Function

Interlinking blocks ensure the electrical supply of all other CPX-P modules. They have contact rails from which the other CPX-P components on the interlinking modules are supplied with current.

The internal division of the power supply allows specific areas of the sensors and actuators to be switched off individually.

Application area



- 24 V DC supply voltage for electronics of the CPX-P terminal
- 24 V DC supply voltage for inputs
- 24 V DC supply voltage for valves
- 24 V DC supply voltage for outputs



General technical data			
Nominal operating voltage		[V DC]	24
Degree of protection to EN 60529			Depending on connection block
Ambient temperature		[°C]	–5 ... +50
Grid dimension		[mm]	50
Dimensions W x L x H		[mm]	50 x 107 x 35
Electrical connection			7/8", 5-pin
Power supply	Sensors and electronics	[A]	Max. 8
	Valves and outputs	[A]	Max. 8
Materials			Die-cast aluminium
Note on materials			RoHS-compliant
LABS (PWIS) conformity			VDMA24364-B2-L
Product weight		[g]	187

Pin assignment													
Wiring		Pin	Assignment										
Round plug, 5-pin													
	0V Valves 24V Valves 0V Output 24V Output 0V El./Sen. 24V El./Sen. FE												
	7/8" <table><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td>0V</td><td>0V</td><td>FE</td><td>24V</td><td>24V</td></tr></table>			1	2	3	4	5	0V	0V	FE	24V	24V
1	2	3	4	5									
0V	0V	FE	24V	24V									
		<table><tr><td>1</td><td>0 V valves and outputs</td></tr><tr><td>2</td><td>0 V electronics and sensors</td></tr><tr><td>3</td><td>FE</td></tr><tr><td>4</td><td>24 V DC supply voltage for electronics and sensors</td></tr><tr><td>5</td><td>24 V DC load voltage supply for valves and outputs</td></tr></table>		1	0 V valves and outputs	2	0 V electronics and sensors	3	FE	4	24 V DC supply voltage for electronics and sensors	5	24 V DC load voltage supply for valves and outputs
1	0 V valves and outputs												
2	0 V electronics and sensors												
3	FE												
4	24 V DC supply voltage for electronics and sensors												
5	24 V DC load voltage supply for valves and outputs												

Datasheet – Interlinking block with system supply

Ordering data					
Designation				Part no.	Type
Interlinking block with system supply					
	7/8" connection, metal interlinking block	5-pin	–	550208	CPX-M-GE-EV-S-7/8-5POL
			For ATEX environment	8022165	CPX-M-GE-EV-S-7/8-5POL-VL
Connection sockets 7/8"					
	Power supply socket	5-pin		543107	NECU-G78G5-C2
	Angled socket, 5-pin	Open cable end, 5-pin	2 m	573855	NEBU-G78W5-K-2-N-LE5
Mounting accessories					
	Screws for mounting the bus node/connection block on an interlinking block	Bus node/polymer connection block	550219	CPX-M-M3x22-4x	
		Bus node/metal connection block	550216	CPX-M-M3x22-S-4x	

Datasheet – Interlinking block without power supply

Function

Interlinking blocks ensure the electrical supply of all other CPX-P modules. They have contact rails from which the other CPX-P components on the interlinking modules are supplied with current.

The internal division of the power supply allows specific areas of the sensors and actuators to be switched off individually.

Application area


- All voltages are fed through to the next module via the interlinking blocks without supply.
- The connected electronics module for inputs/outputs or bus node taps off the required voltage.



General technical data		
Electrical connection		–
Nominal operating voltage	[V DC]	24
Current carrying capacity (per contact/contact rail)	[A]	16
Degree of protection to EN 60529		Depending on connection block
Ambient temperature	[°C]	–5 ... +50
Materials		Aluminium
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B2-L
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 107 x 35
Product weight	[g]	169

Pin assignment		
Wiring	Pin	Assignment
0V Valves 24V Valves 0V Output 24V Output 0V EL./Sen. 24V EL./Sen. FE		–
		–
		–
		–
		–

Datasheet – Interlinking block without power supply

Ordering data			
Designation		Part no.	Type
Interlinking block without power supply			
	Metal interlinking block	550206	CPX-M-GE-EV
Mounting accessories			
	Screws for mounting the bus node/connection block on an interlinking block	Bus node/polymer connection block	550219 CPX-M-M3x22-4x
		Bus node/metal connection block	550216 CPX-M-M3x22-S-4x

Datasheet – Interlinking block with additional supply for outputs

Function

Interlinking blocks ensure the electrical supply of all other CPX-P modules. They have contact rails from which the other CPX-P components on the interlinking modules are supplied with current.



The internal division of the power supply allows specific areas of the sensors and actuators to be switched off individually.

Application area



- 24 V DC supply voltage for outputs



General technical data		
Nominal operating voltage	[V DC]	24
Degree of protection to EN 60529		Depending on connection block
Ambient temperature	[°C]	–5 ... +50
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 107 x 35
Electrical connection		7/8", 5-pin
Power supply	Outputs	[A]
		Max. 8
Materials		Die-cast aluminium
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B2-L
Product weight	[g]	187

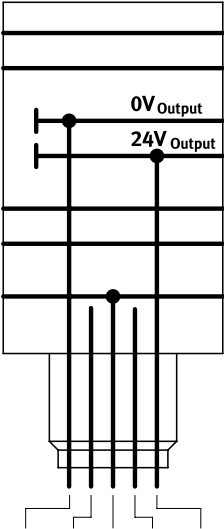Pin assignment – Metal interlinking blocks																								
Wiring	Pin	Assignment																						
Round plug, 5-pin																								
 <table><tr><td>7/8"</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr><tr><td></td><td>0V</td><td>n.c.</td><td>FE</td><td>n.c.</td><td>24V</td></tr></table>	7/8"	1	2	3	4	5		0V	n.c.	FE	n.c.	24V		 <table><tr><td>1</td><td>0 V outputs</td></tr><tr><td>2</td><td>n.c.</td></tr><tr><td>3</td><td>FE</td></tr><tr><td>4</td><td>n.c.</td></tr><tr><td>5</td><td>24 V DC load voltage supply for outputs</td></tr></table>	1	0 V outputs	2	n.c.	3	FE	4	n.c.	5	24 V DC load voltage supply for outputs
7/8"	1	2	3	4	5																			
	0V	n.c.	FE	n.c.	24V																			
1	0 V outputs																							
2	n.c.																							
3	FE																							
4	n.c.																							
5	24 V DC load voltage supply for outputs																							

Datasheet – Interlinking block with additional supply for outputs

Ordering data				Part no.	Type
Designation					
Interlinking block with additional supply for outputs					
	7/8" connection, metal interlinking block	5-pin		550210	CPX-M-GE-EV-Z-7/8-5POL
Connection sockets 7/8"					
	Power supply socket	5-pin		543107	NECU-G78G5-C2
	Angled socket, 5-pin	Open cable end, 5-pin	2 m	573855	NEBU-G78W5-K-2-N-LE5
Mounting accessories					
	Screws for mounting the bus node/connection block on an interlinking block	Bus node/polymer connection block	550219	CPX-M-M3x22-4x	
		Bus node/metal connection block	550216	CPX-M-M3x22-S-4x	

Datasheet – Pneumatic interface for valve terminal MPA-S

Function

The pneumatic interface VMPA-FB establishes the electromechanical connection between the CPX-P terminal and the valve terminal MPA-S.

The signals from the bus node are forwarded to the control electronics in the electrical modules of the valve terminal MPA-S via the integrated CPX-P bus. The bus signal for activating the solenoid coils is converted in the electronics module for max. 8 coils.

From a technical point of view, the individual MPA pneumatic modules each represent a separate electrical module with digital outputs. Galvanically isolated valves can be supplied with power via the interlinking block CPX-GE-EV-V.

Application area

- Interface to the valve terminal MPA-S
- Max. 128 solenoid coils
- Characteristics of the electronics module of the valve terminal MPA-S can be parameterised; for example, status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe), individual channel diagnostics can be activated, condition monitoring can be activated individually for each valve
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left interlinking block and feeds them through to the electronics modules of the valve terminal MPA-S
- Electronics modules of the valve terminal MPA-S:
 - Undervoltage of valves
 - Short circuit of valves
 - Open load of valves
 - Counter preset reached in condition monitoring




General technical data			
Type		VMPA-FB-EPL-G	VMPA-FB-EPL-E
Valve terminal design		Modular, valve sizes can be mixed	
Maximum number of valve positions		64	
Maximum number of pressure zones		17	
Signal status indication		LED	
Pilot air supply		Internal	External
Operating pressure	[MPa]	0.3 ... 0.8	–0.09 ... 1
	[bar]	3 ... 8	–0.9 ... 10
Pilot pressure	[MPa]	0.3 ... 0.8	0.3 ... 0.8
	[bar]	3 ... 8	3 ... 8
Product weight	[g]	320	
Degree of protection		IP67	




Technical data – Electrical components		
Nominal operating voltage	[V DC]	24
Permissible voltage fluctuations	[%]	±25

Materials	
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet – Pneumatic interface for valve terminal MPA-S

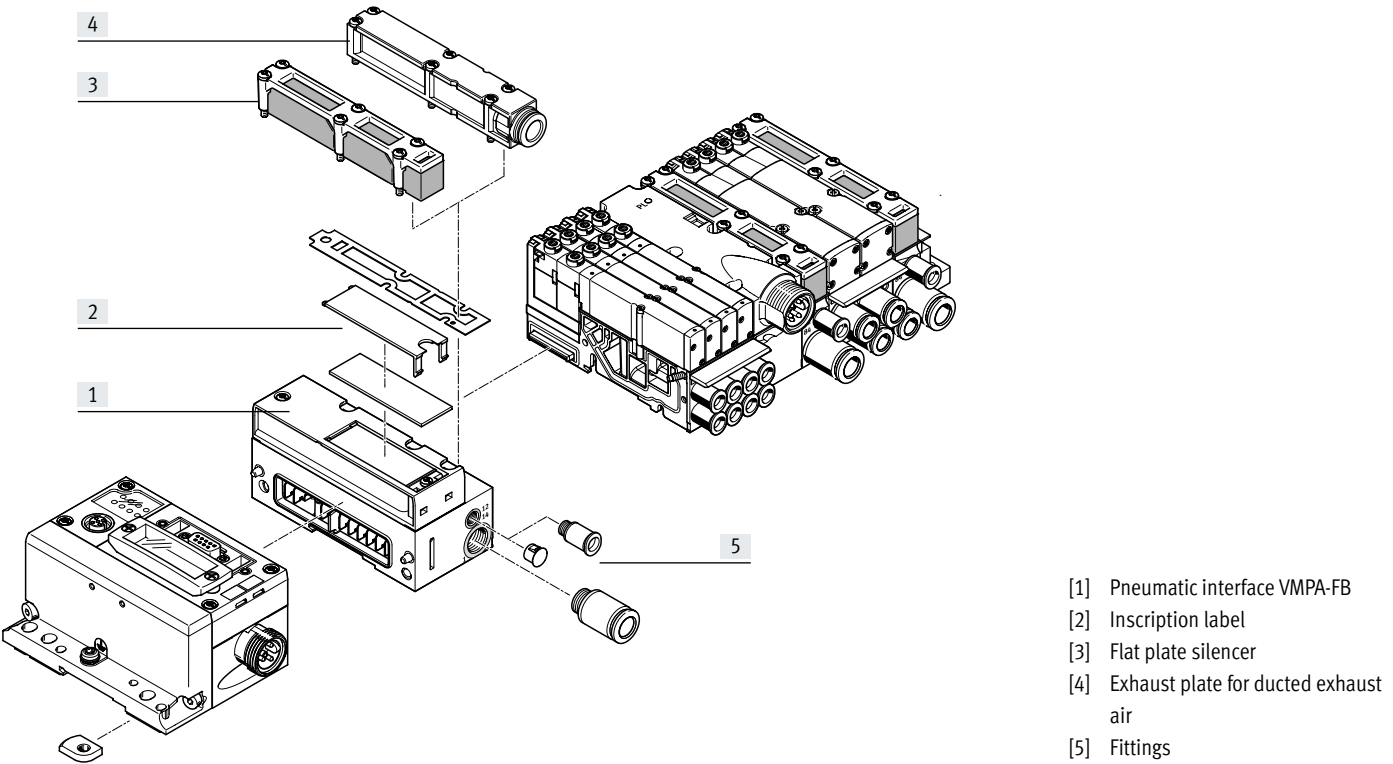Overview – Pneumatic interface VMPA-FB




Ordering data				
Designation			Part no.	Type
Pneumatic interface				
	Ducted exhaust air	Internal pilot air	552286	VMPA-FB-EPLM-G
		External pilot air	552285	VMPA-FB-EPLM-E
	Flat plate silencer	Internal pilot air	552288	VMPA-FB-EPLM-GU
		External pilot air	552287	VMPA-FB-EPLM-EU
Exhaust air plate				
	For ducted exhaust air, with push-in connector	for tubing-ø 10 mm	533375	VMPA-AP
		For tubing-ø 3/8"	541629	VMPA-AP-3/8
	Flat plate silencer		533374	VMPA-APU

Datasheet

Dimensions – Metal interlinking block

Download CAD data → www.festo.com

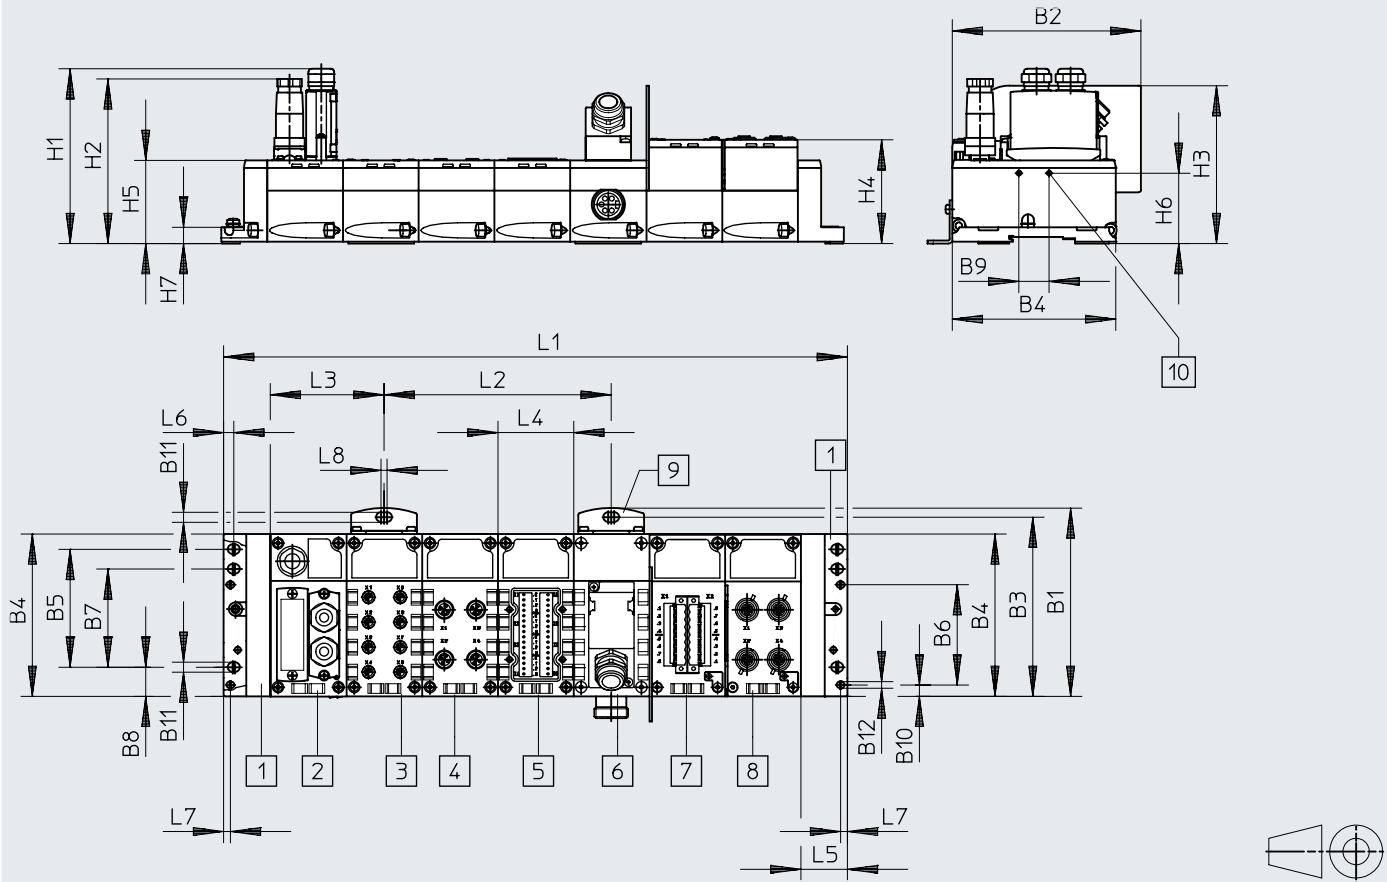With bus nodes and connection blocks



- | | | | |
|---|---|--|---|
| [1] End plate | [5] Connection block
CPX-AB-8-KL-4POL | [7] Connection block
CPX-P-AB-4-2XKL-8POL | [9] Mounting bracket for wall
mounting |
| [2] Bus node | [6] Connection block
CPX-AB-1-SUB-BU-25POL | [8] Connection block
CPX-P-AB-4XM12-4POL | [10] Hole for self-tapping screw
M2.5 |
| [3] Connection block
CPX-AB-8-M8-3POL | | | |
| [4] Connection block
CPX-AB-4-M12X2-5POL | | | |

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
CPX-P	124.9	124.6	118.9	108.1	78	66.3	65	19.3	20	7.9	6.6	4.4

Type	H1	H2	H3	H4	H5	H6	H7
CPX-P	116	109	106.2	69.2	55.1	46.6	10.8


Type	L1	L2	L3	L4	L5	L6	L7	L8
CPX-P	nx50.1	150.3	125.3	50.1	30.4	6.8	4.5	4

Datasheet

Dimensions

Download CAD data → www.festo.com

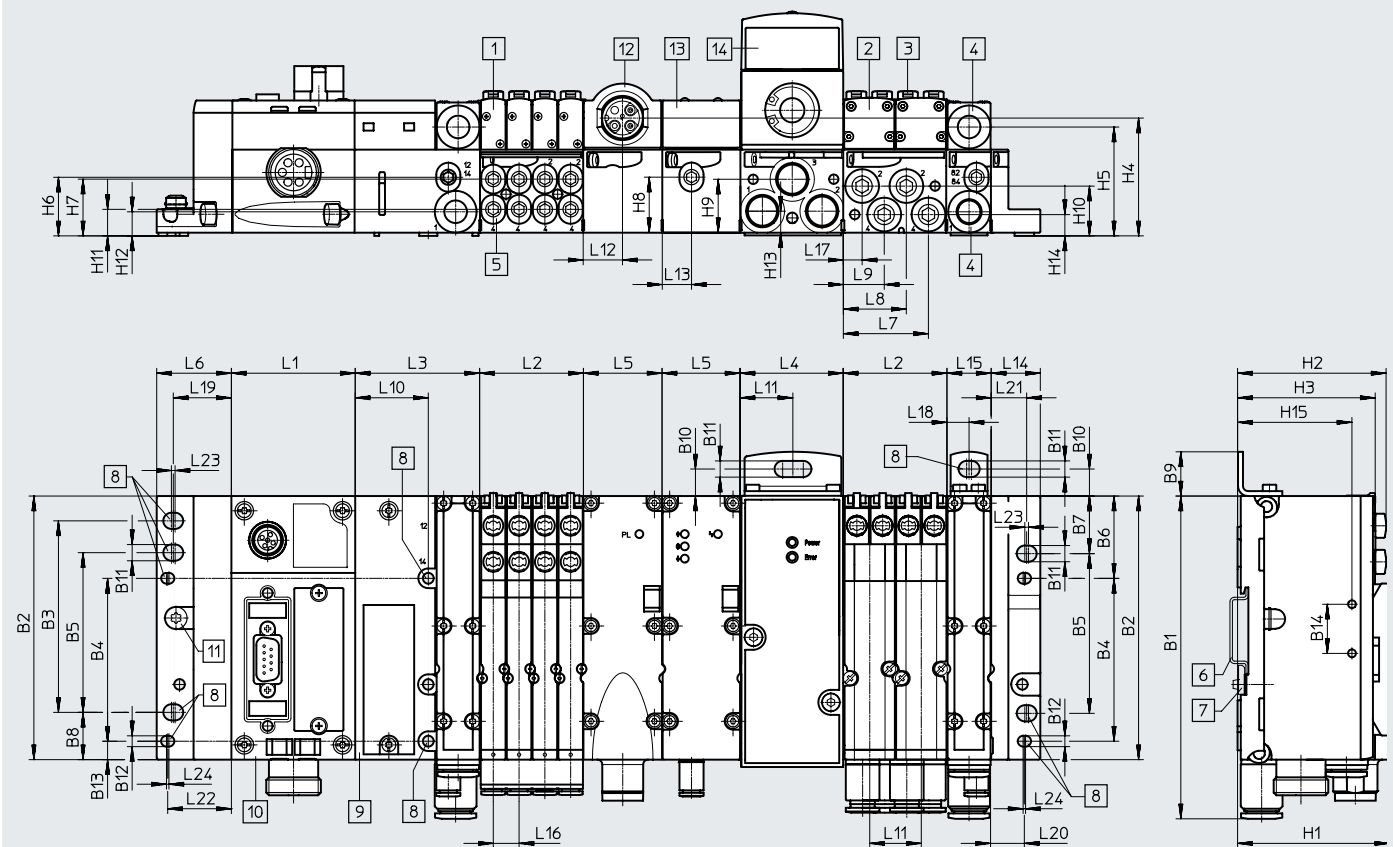With bus nodes and valve terminals MPA-S



- | | | | |
|--------------------------|---------------------------------|--------------------------------------|--|
| [1] Solenoid valve MPA1 | [6] DIN rail | [11] Earthing screw | n Number of sub-bases in a grid of 4 MPA1 or 2 MPA2 valves |
| [2] Solenoid valve MPA2 | [7] DIN mounting | [12] Electrical supply plate | m Number of CPX-P modules |
| [3] Manual override | [8] Mounting holes | [13] Pressure sensor | |
| [4] Supply/exhaust ports | [9] Pneumatic interface VMFA-FB | [14] Proportional-pressure regulator | |
| [5] Working ports | [10] CPX-P module | | |



Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14
CPX-P	131.4	107.3	78	66.3	65	33.5	23.5	19.3	18	11	6.6	4.4	7.5	20

Type	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15
CPX-P	62	60.5	56	48	44.3	23.9	23.1	22.6	21.8	20.3	10.8	9.8	8.8	8.7	46.6

Type	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
CPX-P	m x 50.1	n x 42	51.2	42	32	30.4	34.7	25.7	16.7	30	21	16





Type	L13	L14	L15	L16	L17	L18	L19	L20	L21	L22	L23	L24
CPX-P	12	20	18	10.5	7.7	9	23.7	13.5	14.5	25.9	1.5	1

Accessories

Ordering data						Part no.	Type
Designation							
Plugs							
	Sub-D socket, 9-pin			For DeviceNet®	532219	FBS-SUB-9-BU-2x5POL-B	
	Sub-D plug, 9-pin			For PROFIBUS DP	532216	FBS-SUB-9-GS-DP-B	
	Sub-D plug, angled			For PROFIBUS DP	533780	FBS-SUB-9-WS-PB-K	
	Bus connection, adapter to M12 plug/socket, 5-pin	Sub-D plug, 9-pin	B-coded	For PROFIBUS DP	533118	FBA-2-M12-5POL-RK	
		Sub-D socket, 9-pin	Micro style	For DeviceNet®	525632	FBA-2-M12-5POL	
	Socket M12, 5-pin	Screw terminal	For FBA-2-M12-5POL		8162291	NECB-M12G5-C2	
		Screw terminal	For FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP		1067905	NECU-M-B12G5-C2-PB	
	Plug M8, 3-pin	Screw terminal	For NEDY-L2R1-V1-M8G3-N-M8G4		8162298	NECB-S-M8G3-C2	
	Plug M12, 4-pin	Spring-loaded terminal	For cable-ø 4 ... 8 mm		575719	NECU-M-S-A12G4-IS ¹⁾	
			D-coded	For Ethernet	543109	NECU-M-S-D12G4-C2-ET	
					For cable-ø 2.5 ... 2.9 mm		570955
			For cable-ø 2.1 ... 7 mm		8162294	NECB-S-M12G4-C2	
			For cable-ø 2x3 mm or 2x5 mm		570956	NECU-S-M12G4-D-IS ¹⁾	
			For 2x cable-ø 2.1 ... 5.6 mm		8162295	NECB-S-M12G4-C2-D	
			For cable-ø 4 ... 6 mm		570953	NECU-S-M12G4-P1-IS ¹⁾	
			For cable-ø 6 ... 8 mm		570954	NECU-S-M12G4-P2-IS ¹⁾	
	Plug, M12, 5-pin	Screw terminal	For 2x cable-ø 2.1 ... 5.6 mm		8162297	NECB-S-M12G5-C2-D	
			For cable-ø 2.1 ... 7 mm		8162296	NECB-S-M12G5-C2	
			For FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP		1066354	NECU-M-S-B12G5-C2-PB	
	Connection block, adapter to 7/8" plug, 5-pin	Sub-D socket, 9-pin	–	For DeviceNet®	571052	CPX-AB-1-7/8-DN	
	Connection block, adapter to plug/socket M12	Sub-D plug, 9-pin	B-coded	For PROFIBUS DP	541519	CPX-AB-2-M12-RK-DP	
	Open style bus connection for 5-pin terminal strip			For DeviceNet®	525634	FBA-1-SL-5POL	
	Terminal strip, 5-pin			For open style connection	525635	FBSD-KL-2x5POL	







1) Component preferred for operation in intrinsically safe circuits.

Accessories

Ordering data					Part no.	Type	
Designation							
Plugs							
	RJ45 plug			534494	FBS-RJ45-8-GS		
	Socket, 8-pin	Spring-loaded terminal	Black	565712	NECU-L3G8-C1		
			Blue	565711	NECU-L3G8-C1-IS ¹⁾		
		Screw terminal	Black	565710	NECU-L3G8-C2		
			Blue	565709	NECU-L3G8-C2-IS ¹⁾		
	Sub-D plug, 25-pin			527522	SD-SUB-D-ST25		
Connecting cable							
	Modular system for all types of sensor/actuator distributor			–	NEDY-... → Internet: nedy		
	Modular system for a choice of connecting cables			–	NEBA-... → Internet: neba		
	T-plug connector	1x plug M8, 4-pin	2x socket M8, 3-pin	8005312	NEDY-L2R1-V1-M8G3-N-M8G4		
		1x plug M12, 4-pin	2x socket M8, 3-pin	8005311	NEDY-L2R1-V1-M8G3-N-M12G4		
			2x socket M12, 4-pin	562248	NEDU-M12D4-M12T4-IS ¹⁾		
			2x socket M12, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4		
	1x socket M8, 3-pin	1x plug M8, 3-pin	0.5 m	★ 8078282	NEBA-M8G3-U-0.5-N-M8G3		
			1.0 m	★ 8078283	NEBA-M8G3-U-1-N-M8G3		
			2.5 m	★ 8078286	NEBA-M8G3-U-2.5-N-M8G3		
			5.0 m	★ 8078287	NEBA-M8G3-U-5-N-M8G3		
	Connecting cable M12-M12	5-pin	Straight plug / straight socket	1.5 m	529044	KV-M12-M12-1.5	
				3.5 m	530901	KV-M12-M12-3.5	

1) Component preferred for operation in intrinsically safe circuits.

Accessories

Ordering data				Part no.	Type
Designation					
Plug connectors and accessories – Power supply					
	Power supply socket, straight	7/8" connection, 5-pin		543107	NECU-G78G5-C2
	7/8" power supply socket, 5-pin, angled socket	Open cable end, 5-pin	2 m	573855	NEBU-G78W5-K-2-N-LE5
Hood					
	Mounting rail for attaching the hood	1000 mm		572256	CAFC-X1-S
	Mounting kit for CPX hood			572257	CAFC-X1-BE
	Hood section for CPX-P terminal including mounting attachments for connecting several hood sections in series	200 mm	572258	CAFC-X1-GAL-200	
		300 mm	572259	CAFC-X1-GAL-300	
Screws					
	Screws for mounting the bus node/connection block on an interlinking block	Bus node/polymer connection block	550219	CPX-M-M3x22-4x	
		Bus node/metal connection block	550216	CPX-M-M3x22-S-4x	
Mounting					
	Attachment for wall mounting (for long valve terminals, 2 mounting brackets and 4 screws)	Version for metal manifold connecting blocks	550217	CPX-M-BG-RW-2x	
	Mounting for DIN rail			526032	CPX-CPA-BG-NRH
Function blocks					
	Terminating resistor, M12, B-coded for PROFIBUS			1072128	CACR-S-B12G5-220-PB
	Adapter M12, 5-pin to mini USB socket, and controller software			547432	NEFC-M12G5-0.3-U1G5

Accessories

Ordering data			Part no.	Type
Designation				
Covers and attachments				
	Covering hood for CPX-AB-8-KL-4POL (IP65/67)	8 cable through-feeds M9 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit for cover AK-8KL		538220	VG-K-M9
	Screening plate for connection block - CPX-AB-4-M12X2-5POL - CPX-AB-4-M12X2-5POL-R		526184	CPX-AB-S-4-M12
	Inspection cover, transparent		533334	AK-SUB-9/15-B
	Transparent cover for the DIL switches		548757	CPX-AK-P
	Cover for RJ45 connection		534496	AK-RJ45
	Cover cap for sealing unused connections (10 pieces)	For M8 connections	177672	ISK-M8
		For M12 connections	165592	ISK-M12
	Coding piece (96 pieces each)	For NECU-L3G8	565713	CPX-P-KDS-AB-2XKL
	Insulating plate for safe separation of intrinsically safe and non-intrinsically safe areas of the CPX terminal		565708	CPX-P-AB-IP ¹⁾
Inscription labels				
	Inscription label holder for connection block		536593	CPX-ST-1
	Inscription labels 6x10 mm, 64 pieces, in a frame		18576	IBS-6x10

1) Component preferred for operation in intrinsically safe circuits.