

Update of the FCT PlugIn "SBO...M Network" 1.0.0.427 to 1.1.0.242

Mitteilung

Dear ladies and gentlemen,

Projects created with the PlugIn SBOx-M Network, version 1.0.0.427, can no longer be opened with the new PlugIn 1.1.0.242.

Date

There is, however, a possibility to import films once created into the new software version, if the new PlugIn is installed **additionally** to the old one.

30.04.2007


Attention: If a project is opened that was created with the old PlugIn, setting up a connection to a camera with the firmware 1.0.1.0 is not possible!

Prerequisites:

- The old PlugIn 1.0.0.427 must still be installed on the computer.
- The files **Festo.FCT.PlugInImplementation.SBOX_M.Device.IC.V0100.dll** and **Festo.FCT.PlugInImplementation.SBOX_M.Device.IC.V0100.TranslationTable.xml** must be contained in the installation directory of the PlugIn

Sender

TE-VP/MASN

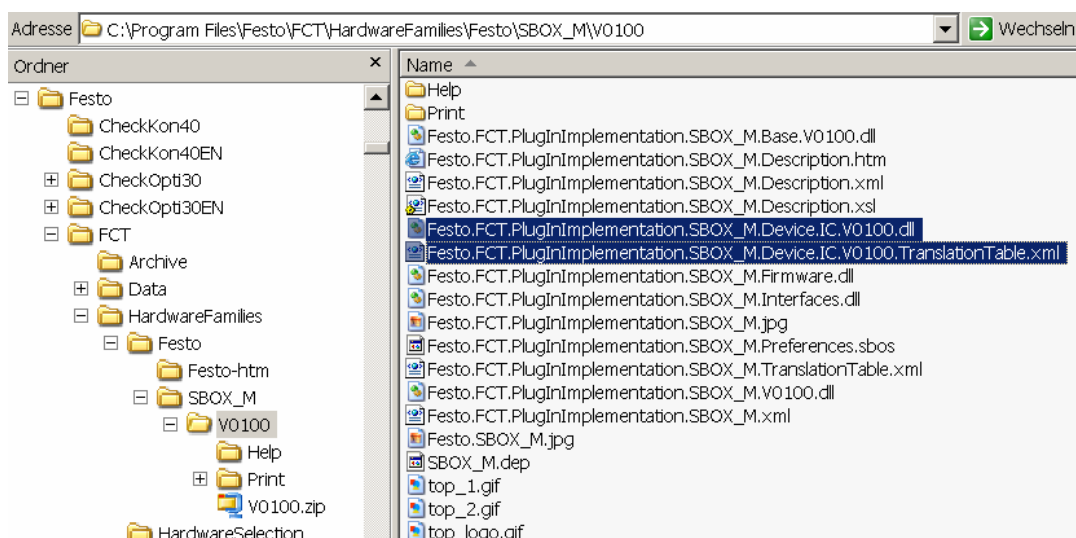

Telephone

-1219


Telefax

-54 1219


How to proceed:

Mitteilung

1. Open the project into which the films have to be imported or create a new project.
2. Select the register "Aufnahmearchiv".
3. Select the push button "Import".

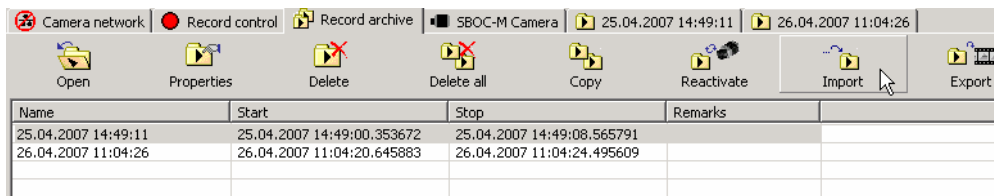

4. A file dialog opens: Select the directory which contains the project to be imported (the name of the directory corresponds to the name of the project), and in this directory structure move down until you can select the file "**SBOx-M Network.sbob**"

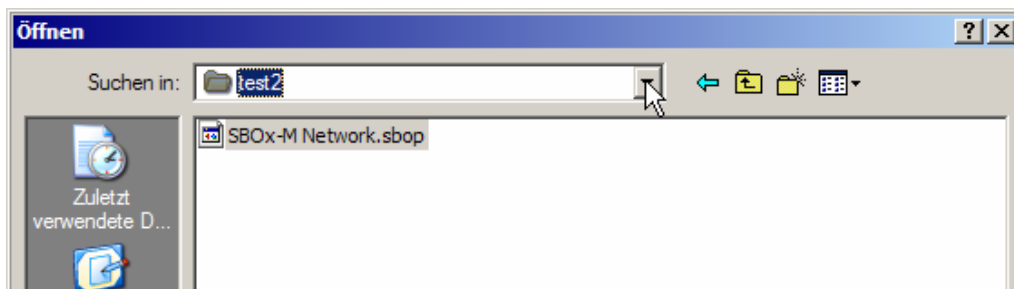

5. As soon as the file has been selected, all films of the old project will be imported into the currently opened project.
6. Save the new project.