



- Compact design
- User-friendly
- Defined interfaces
- Individual integration

Checkbox Compact CHB-C

Key features


Key features

High functionality

The integrated inspection units in detail


The Checkbox Compact consists of a housing which comprises all the necessary components. In addition to the user interface (keys, LEDs, displays), the connectors for the electrical connection of actuators, buffer zone sensors, diagnostics PC, voltage supply, encoder and master PLC, there is the entire imaging sensor system (optics, lighting and camera).

The optical channel underneath the Checkbox Compact is open towards the rear side, thus it can be easily integrated in the material flow.

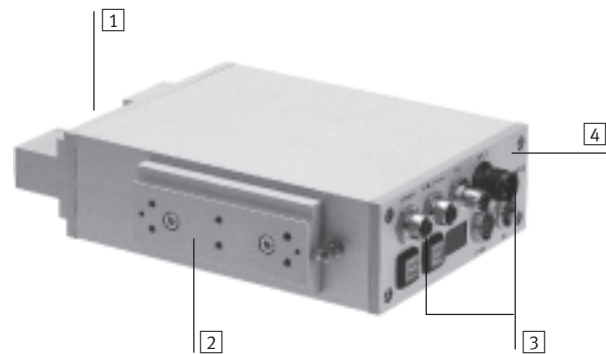

- | | |
|---|--|
| <p>1 Optical channel</p> <p>2 Mounting elements</p> <ul style="list-style-type: none"> – 6xM5 threaded hole – Dowel pins – Dovetail guide for connecting kit HMSV-12 | <p>3 Electrical connections</p> <ul style="list-style-type: none"> – Digital I/O – Diagnostic interface – Encoder – Voltage supply <p>4 Front plate with the user interface</p> <ul style="list-style-type: none"> – Buttons – Control LEDs – Display |
|---|--|

The Checkbox Compact Flex has the same structure and functionality, but is equipped with a C-mount lens and has no lighting.

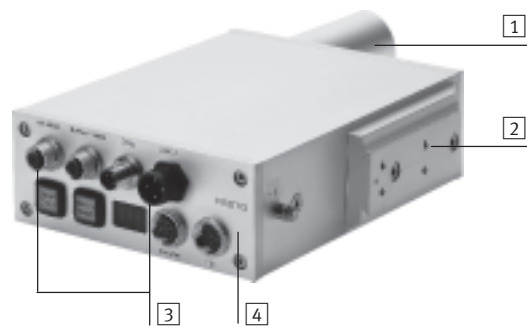

- | | |
|---|--|
| <p>1 Lens in protective tube</p> <p>2 Mounting elements</p> <ul style="list-style-type: none"> – 6xM5 threaded hole – Dowel pins – Dovetail guide for connecting kit HMSV-12 | <p>3 Electrical connections</p> <ul style="list-style-type: none"> – Digital I/O – Diagnostic interface – Encoder – Voltage supply <p>4 Front plate with the user interface</p> <ul style="list-style-type: none"> – Buttons – Control LEDs – Display |
|---|--|

Checkbox Compact CHB-C

Key features


FESTO

Optimum inspection of parts


Economical, variable, reliable

Components are scanned as they pass through the “optical channel”. Compared with recognition by means of an area scan camera, this image detection concept has major advantages: A mixture of any number of parts as well as objects of considerable length (up to 1 000 mm) can be recognized and processed without the need to observe minimum distances.

In order to obtain a reliable and reproducible inspection result, the speed of the parts to be checked must be constant and their position stable. A fluctuating object speed can be compensated by means of connecting an encoder (PLC-/Plus-/Flex-version).

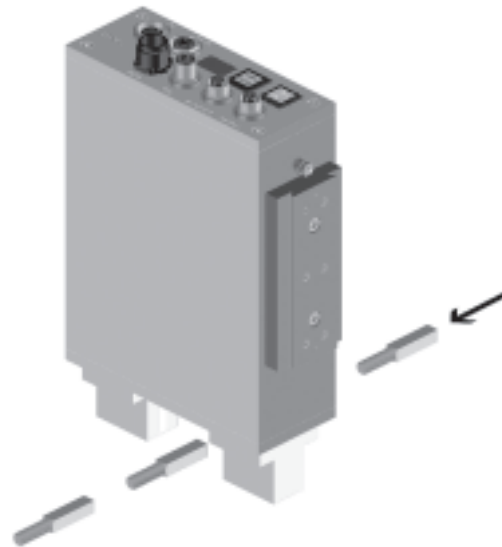

The vertical arrangement of the lens in the Checkbox Compact Flex permits the inspection of flat parts such as gearwheels, flat plates and rubber seals, for example in combination with a transparent conveyor belt or in top light mode.

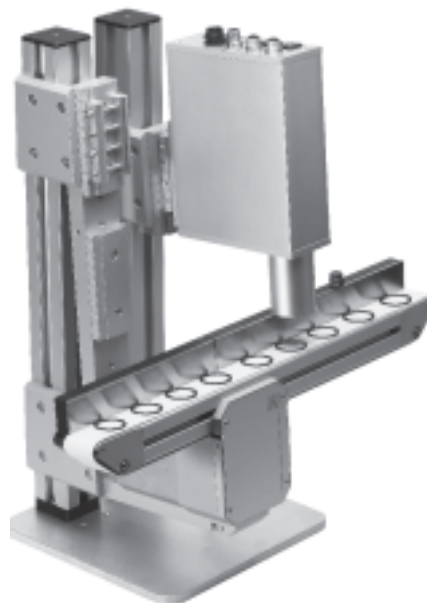

Checkbox Compact CHB-C

Key features

FESTO

Which parts are suitable?



Here is a small selection of the many possibilities:

- | | | |
|------------------------|---------------------|---------------------------|
| • Axes | • Lipstick casings | • Sockets |
| • Bolts | • Lock nuts | • Spring washers |
| • Brushes | • Mouldings | • Springs |
| • Buttons | • Mountings | • Stampings |
| • Ceramic seals | • Needles | • Switch contacts |
| • Curtain hangers | • O-rings | • Tablets |
| • Drill bits | • Pen tops | • Threaded pins |
| • Drills | • Plastic housings | • Toothbrush components |
| • Fuses | • Plug connectors | • Turned parts |
| • Game pieces | • Screws | • Wall plugs |
| • Glass ampoules | • Self-locking nuts | • Washers |
| • Inserts | • Sensor housings | • Wooden dowels |
| • Insulating terminals | • Shafts | • Zip-fastener components |
| • Lever stoppers | • Sleeves | |
| • Link plates | • Small wares | |

In which branches of industry is the Checkbox Compact used?

- | | |
|-----------------------------------|----------------------------------|
| • Metalworking industry | • Cosmetics industry |
| • Electrical engineering industry | • Jewellery industry |
| • Woodworking industry | • Textile and clothing industry |
| • Electroplating industry | • Assembly-systems industry |
| • Injection moulding industry | • Food industry |
| • Packaging industry | • Precision engineering industry |
| • Pharmaceutical industry | |

Checkbox Compact CHB-C

Key features


FESTO

What does the camera see?

Part to be checked
Insulating terminal insert



Camera image
Insulating terminal insert



Part to be checked
Valve spring



Camera image
Valve spring



Part to be checked
Glass ampoule



Camera image
Glass ampoule



Part to be checked
Glow bar



Camera image
Glow bar



Part to be checked
O-ring



Camera image
O-ring



Part to be checked
Aroma valve



Camera image
Aroma valve



Checkbox Compact CHB-C

Technical data

FESTO

Technical data

Checkbox Compact Classic
CHB-C-C



- X - Repair service

Checkbox Compact PLC
CHB-C-P

Checkbox Compact Plus
CHB-C-X

Checkbox Compact Flex
CHB-C-F

- X - Repair service

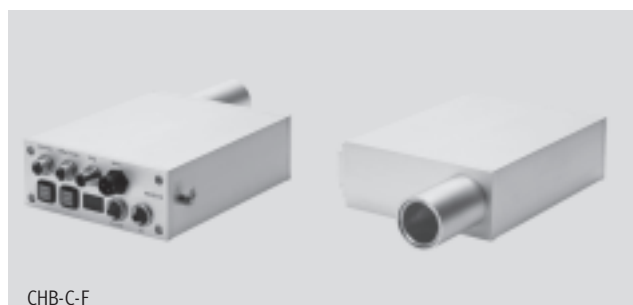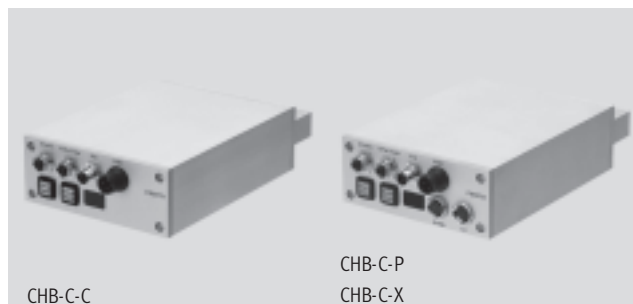

| General technical data | | | | | | |
|-------------------------------------|------|---|---|----|---------|------------|
| Type | | CHB-C-C | CHB-C-P | | CHB-C-X | CHB-C-F |
| Component Ø | [mm] | 0.5 ... 25 | | | | 0.5 ... 45 |
| Component length | [mm] | Depending on belt speed and required resolution | | | | |
| Part range | | Flat and rotationally symmetrical parts and pre-oriented parts of any shape | | | | |
| Operating distance | [mm] | – | | | | 95 ... 99 |
| Field of vision | [mm] | – | | | | 42 ... 45 |
| Internal passage of optical channel | [mm] | 60 | | | | – |
| Internal height of optical channel | [mm] | 40 | | | | – |
| Camera resolution | [mm] | 0.06 | | | | 0.04 |
| Exposure time | [µs] | 128 ... 1 024 | | | | |
| Number of part memories | | 1 | 4 | 16 | | |
| Counting function | | – | Yes | | | |
| Quantity pre-selection | | – | Desired quantities of good parts can be preselected via the diagnostic interface | | | |
| Counting range | | – | 1 ... 2 billion | | | |
| Orientation | | Max. 8 different orientations per part type | | | | |
| | | – | Part orientation function within checking and counting process can be switched off via diagnostic interface | | | |

| Electrical connection technology | | | | | |
|--|------|---------------|---------|---------|---------|
| Type | | CHB-C-C | CHB-C-P | CHB-C-X | CHB-C-F |
| Operating voltage | | 24 V DC ±15% | | | |
| Current consumption at load-free outputs | [mA] | Typically 750 | | | |
| Internal fuse protection | | 8 A fuse | | | |

| Operating and environmental conditions | | | | | |
|--|------|--|---------|---------|---------|
| Type | | CHB-C-C | CHB-C-P | CHB-C-X | CHB-C-F |
| Temperature range | [°C] | −10 ... +50 | | | |
| Protection class | | IP 64 | | | |
| Installation site | | Dry, screened from extreme external light sources, cleanest possible ambient air | | | |

Checkbox Compact CHB-C

Technical data

FESTO

| Interfaces to EN 61 131-2 | | | | |
|---------------------------|---|---------------------------|---------|---------|
| Type | CHB-C-C | CHB-C-P | CHB-C-X | CHB-C-F |
| Outputs | Part acceptable and correctly oriented | | | |
| | Part acceptable but incorrectly oriented | | | |
| | Wrong part | | | |
| | Feeder control | | | |
| | Conveyor belt control/ready for operation | | | |
| | – | “Warning” status signal | | |
| | | Error output | | |
| | | Preselect counter reached | | |
| | All outputs electronically limited to max. 700 mA | | | |
| – | Max. sum current at “PLC” connection 1A | | | |
| Inputs | Buffer sensor 1 | | | |
| | – | Buffer sensor 2 | | |
| | | Camera enable | | |
| | | External error | | |
| | | Counter reset | | |
| | | External start | | |
| | | External sensor | | |
| | | Key lock | | |
| | | Type select 0 | | |
| | | Type select 1 | | |
| Connection for encoder | – | To RS 485 specification | | |
| Diagnosis interface | RS 232 interface (230 kBaud) | | | |

Checkbox Compact CHB-C


Technical data

FESTO

Dimensions


CHB-C-C/-P/-X

Download CAD data → www.festo.com/en/engineering

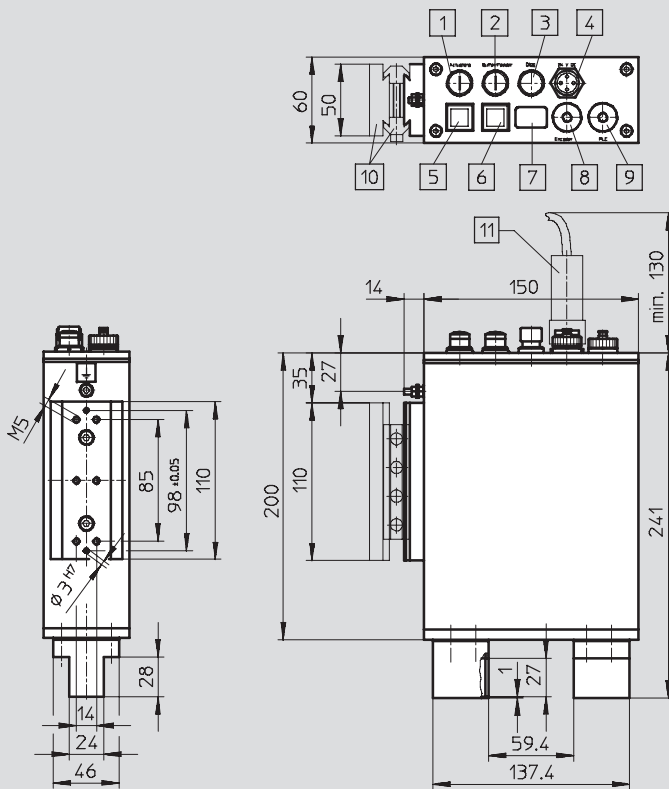

- 1 Actuator connection
- 2 Buffer/feeder connection
- 3 Diagnostics connection
- 4 24 V DC connection
- 5 Start/stop button
- 6 Status/Teach button
- 7 Display
- 8 Encoder connection
(type CHB-C-P/X only)
- 9 PLC connection
(type CHB-C-P/X only)
- 10 Connecting kit 177 658
HMSV-12 (not included in
scope of delivery)
- 11 Connector plug, 4-pin M18
socket (not included in scope
of delivery)

CHB-C-F

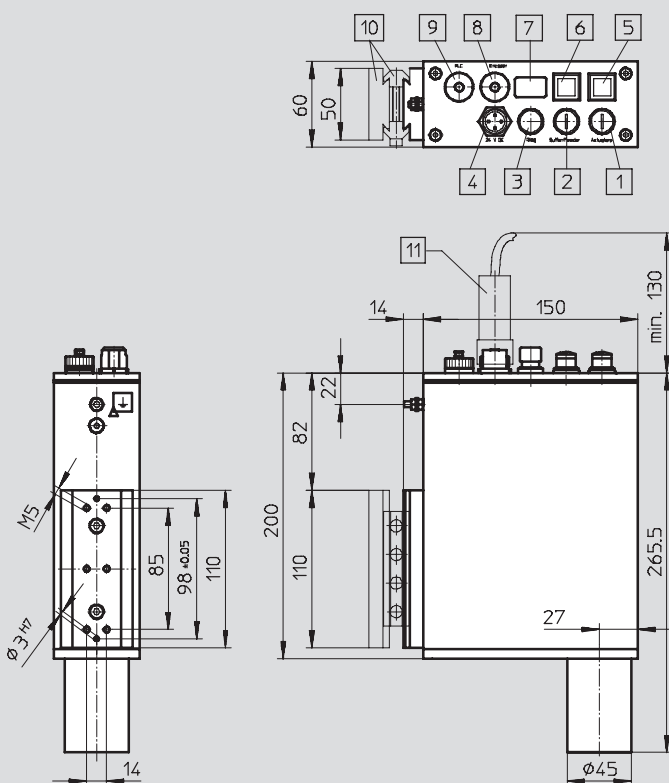



- 1 Actuator connection
- 2 Buffer/feeder connection
- 3 Diagnostics connection
- 4 24 V DC connection
- 5 Start/stop button
- 6 Status/Teach button
- 7 Display
- 8 Encoder connection
- 9 PLC connection
- 10 Connecting kit 177 658
HMSV-12 (not included in
scope of delivery)
- 11 Connector plug, 4-pin M18
socket (not included in scope
of delivery)

Checkbox Compact CHB-C

Technical data


FESTO

| Ordering data | | | |
|----------------------------------|--|----------|-----------------|
| Version | | Part No. | Type |
| Checkbox Compact Classic | User documentation included in scope of delivery | 532 271 | CHB-C-C |
| Checkbox Compact PLC | | 532 270 | CHB-C-P |
| Checkbox Compact Plus | | 536 084 | CHB-C-X |
| Checkbox Compact Flex | | 539 076 | CHB-C-F |
| | | | |
| User documentation (for reorder) | | Part No. | Type |
| German | | 533 411 | P.BE-CB-COMP-DE |
| English | | 533 412 | P.BE-CB-COMP-EN |
| French | | 533 413 | P.BE-CB-COMP-FR |
| Spanish | | 533 414 | P.BE-CB-COMP-ES |
| Italian | | 533 415 | P.BE-CB-COMP-IT |

| Ordering data – Software | | | | |
|--|--------------------------------|-----------------|----------|-----------------|
| | Version | Language | Part No. | Type |
|  | CheckKon software with manual | German, english | 194 496 | P.SW-CB-KON |
|  | CheckOpti software with manual | German | 192 144 | P.SW-CB-OPTI-DE |
| | | English | 192 145 | P.SW-CB-OPTI-EN |

Connecting kit HMSV-12


Material:
Adapter plate, dovetail clamps:
Wrought aluminium alloy
Centring sleeves: High-alloy steel
Screws: Galvanised steel

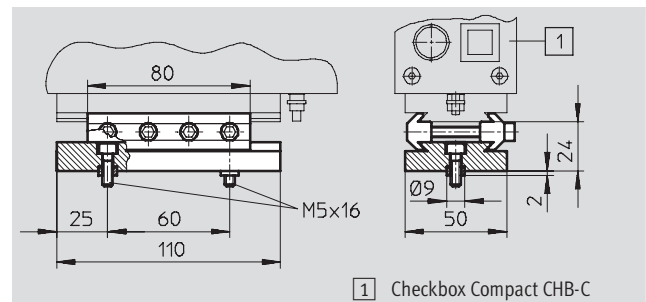

| Ordering data | | | |
|------------------|------------|----------|---------|
| Type of mounting | Weight [g] | Part No. | Type |
| Dovetail | 283 | 177 658 | HMSV-12 |

Programming cable KDI

Material:
Cable sheath: Polyvinyl chloride
Round connector:
Polybutylenterephthalate
Socket: Steel

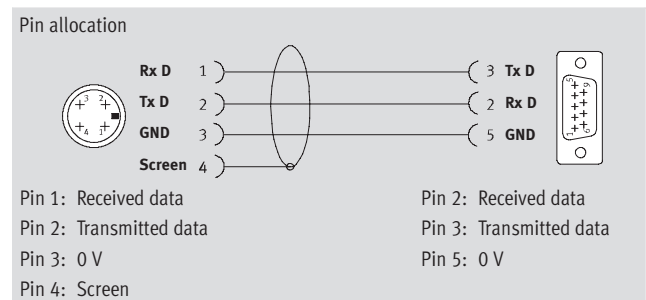

| Ordering data | | | | | |
|------------------|------------|--------|------------|----------|---------------|
| Cable length [m] | Plug | Socket | Weight [g] | Part No. | Type |
| 5 | M12, 4-pin | 9-pin | 181 | 150 268 | KDI-SB202-BU9 |

Checkbox Compact CHB-C

Technical data

FESTO

Software to meet individual requirements

CheckKon




Performance characteristics

Using this software the processes within the Checkbox Compact can be displayed, logged and adapted from the camera image evaluation through to the I/O parameters.

This means:

- Transfer of new programs to the Checkbox Compact
- Display and editing of system parameters
- Display of the evaluation of the last inspected parts recorded
- Display and logging of part contour and characteristics derived
- Display and print-out of system configuration

CheckOpti



Software program

“CheckOpti” is used in cases where the standard Checkbox Compact learning program reaches its limits due to the fact that contour differences are too small, meaning that part orientation or quality features cannot be reliably recognised. “CheckOpti” enables a complete analysis of the Checkbox Compact recognition processes based on the contour data of the parts to be inspected.

Additional, high performance test features can be defined and optimised if necessary. The new configuration can subsequently be transferred to the Checkbox Compact.

Checkbox Compact CHB-C

Application examples

FESTO


Application examples

Orientation detection and quality inspection of electrocoils

The Checkbox Compact checks the electrocoils and controls the complete supply process, e.g. a following turning station for turning incorrectly orientated good parts and a reject nozzle for sorting out bad parts.

The following features are checked:

- Orientation
- Diameter
- Length

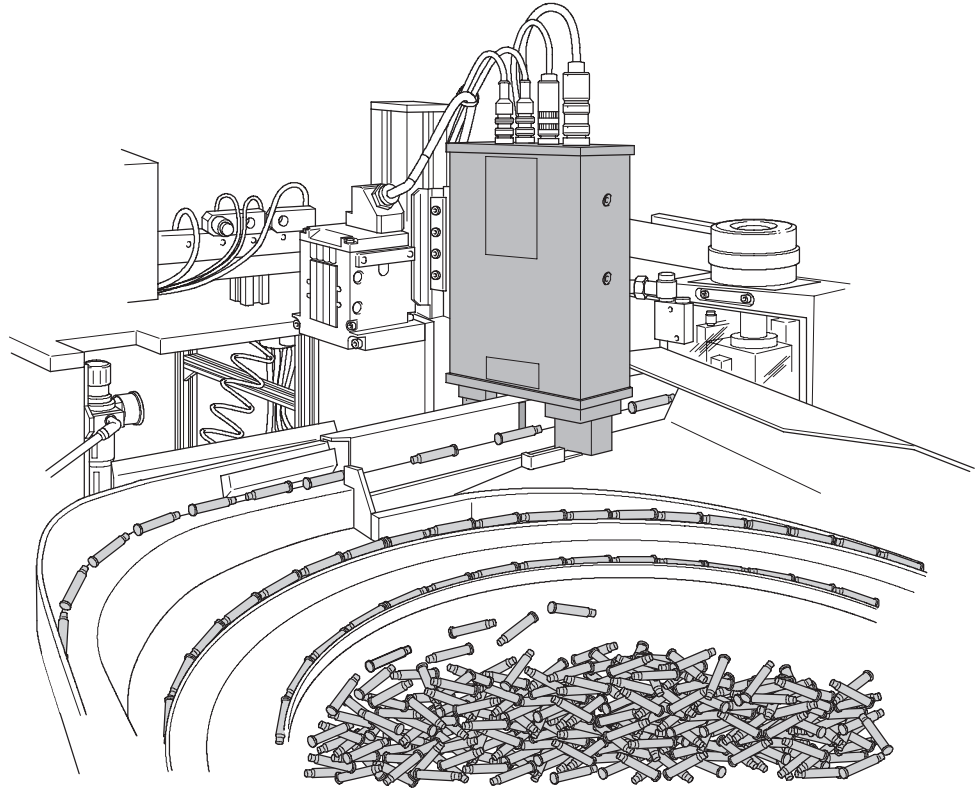

Position and quality check of fibre optic parts

The Checkbox Compact checks the transparent display elements, controls the parts flow and removes incorrectly orientated or faulty parts reliably by means of reject nozzles.

The following features are checked:

- Orientation
- Form
- Diameter

