

Control block CPX-CMXX



Control block CPX-CMXX

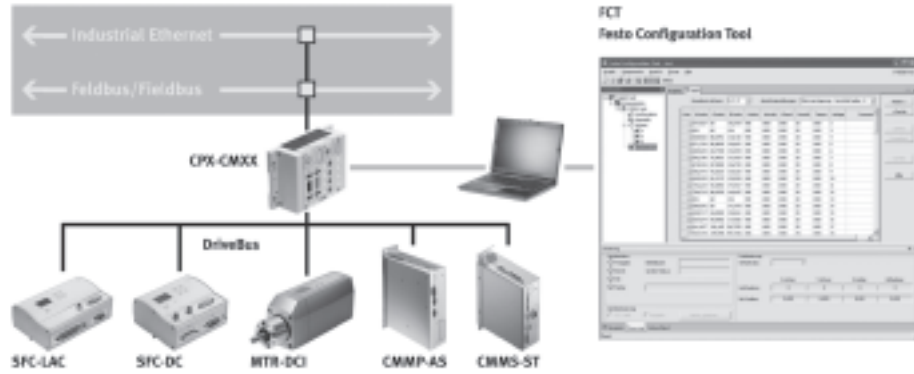
Key features

Co-ordinated movement of multiple electrical axes

The control block CPX-CMXX is an intelligent module in the CPX terminal for controlling electric drive units from Festo.

Both individual axis movements and co-ordinated movements can be controlled via CAN bus. Cartesian kinematic systems are supported. With just a small number of control signals from a higher-order controller or a control unit in the CPX terminal, the control block co-ordinates the entire motion sequence.

Two axes groups with max. four axes per group can be controlled.



Advantages for users

Simple, yet efficient

CPX-CMXX provides a PLC-compatible interface for multi-dimensional axis control within the CPX system. This is achieved physically via various fieldbus nodes for easy adaptation to the general control technology.

Convenient

- The control block does not have to be programmed, but instead receives the sequence via parameterisation or teach-in.
- Easy application configuration with the Festo Configuration Tool (FCT).
- There are 1024 position sets available per axes group.
- Operating function in the FCT for commissioning without connection to the controller.
- Preliminary test of the application is possible without controller.

Flexible

Different operating modes guarantee universal use of the control block.

- Record Select mode: the user can simply select the record number of the position set and the control block takes care of the motion sequence.
- Direct mode: with the higher-order controller, position values, speed and acceleration are assigned to the individual axes and loaded in a selected position set. The position set is executed as in Record Select mode.

Optimised

Co-ordinated movement in conjunction with the CPX-CMXX means:

- Synchronous movement: the values for movement of the axes are calculated so that the axes reach their destination simultaneously.
- Linking: position sets can be executed in sequence without an additional start signal.

Control block CPX-CMXX

Technical data

The control block CPX-CMXX is an intelligent module in the CPX terminal for controlling electric drive units. Individual axis and simple multi-axis applications can easily be implemented. Programming is not necessary. Configuration, parameterisation and commissioning of the application is easily achieved with the Festo Configuration Tool (FCT).

- Configuration of two axes groups with up to four axes each is possible
- There are 1024 position sets available per axes group
- Input or Teach-In of positions in specified set structure
- Parameterisation via Ethernet
- Communication protocol: FHPP-MAX, Festo handling and positioning profile for multi-axis movements.
- Control of drive units via CANopen



General technical data		
Protocol		FHPP-Max
Maximum address volume for inputs	[byte]	16
Maximum address volume for outputs	[byte]	16
LED displays (bus-specific)	RUN:	Program is executed
	STOP:	Program is stopped
	ERR:	Error in the program execution
	TP:	Status of Ethernet connection
LED displays (product-specific)	M:	Modify, parameterisation
	PS:	Electronic supply, sensor supply
Device-specific diagnostics	Diagnostic memory	
	Channel and module-oriented diagnostics	
	Undervoltage/short circuit of modules	
Parameterisation	System parameters	
Operating elements	Rotary switch for RUN/STOP	
Configuration support	Festo Configuration Tool (FCT)	
Additional functions	System status can be displayed using process data	
	Additional diagnostic interface for FCT	
Supported kinematic system	2-axis gantries (X-Z / Y-Z / X-Y)	
	3-axis gantries (X-Y-Z)	
Total number of axes	8	
Distribution of axes	2 groups with max. 4 axes	
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Power failure bridging	[ms]	10
Intrinsic current consumption at nominal operating voltage	[mA]	Typ. 85
Protection class to EN 60529	IP65/IP67	
Dimensions W x L x H (including interlinking block)	[mm]	50 x 107 x 55
Product weight	[g]	155
Materials		
Housing	Reinforced polyamide, polycarbonate	
Note on materials	RoHS-compliant	

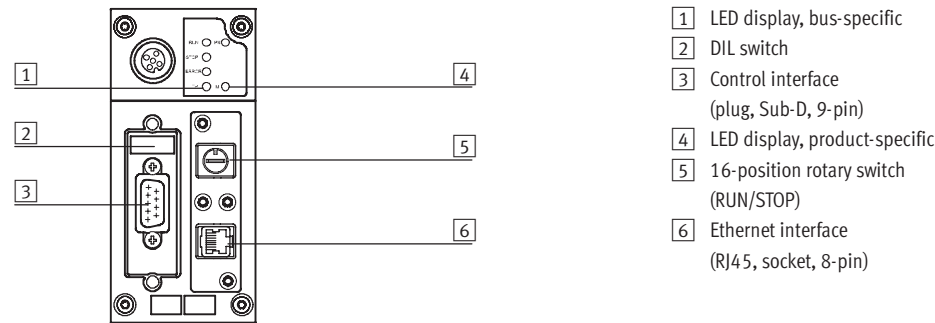
Control block CPX-CMXX

Technical data

Technical data – Interfaces		
Ethernet		
Ethernet interface		Socket RJ45, 8-pin, for configuration only
Baud rate	[Mbit/s]	10/100
Interface		
Control interface		CAN bus
Baud rate	[Mbit/s]	1


Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
Certification		cULus listed (OL)
CE mark (see declaration of conformity)		To EU Low Voltage Directive

Connection and display components



- 1 LED display, bus-specific
- 2 DIL switch
- 3 Control interface (plug, Sub-D, 9-pin)
- 4 LED display, product-specific
- 5 16-position rotary switch (RUN/STOP)
- 6 Ethernet interface (RJ45, socket, 8-pin)


Pin allocation – Control interface


	Pin	Signal	Meaning
Sub-D plug			
	1	n.c.	Not connected
	2	CAN_L	CAN low
	3	CAN_GND	CAN ground
	4	n.c.	Not connected
	5	CAN_SHLD	Connection to functional earth (FE)
	6	CAN_GND	CAN ground (optional) ¹⁾
	7	CAN_H	CAN high
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	Screened	Plug housing must be connected to FE

1) If a drive controller is connected to an external power supply, CAN ground (optional), pin 6, cannot be used on the CPX-CMXX.

Control block CPX-CMXX

Technical data












Pin allocation – Ethernet interface			
	Pin	Signal	Meaning
Plug RJ45			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screened	Screened


Ordering data			
Designation		Part No.	Type
	Control block	555667	CPX-CMXX

Control block CPX-CMXX

Accessories

FESTO

Ordering data – Bus connection			
Designation		Part No.	Type
	Sub-D plug, 9-pin	532219	FBS-SUB-9-BU-2x5POL-B
	Bus connection, plug 2xM12, 5-pin	525632	FBA-2-M12-5POL
	Plug socket for fieldbus connection, M12, 5-pin	18324	FBSD-GD-9-5POL
	Plug M12, 5-pin	175380	FBS-M12-5GS-PG9
	Bus connection, 5-pin	525634	FBA-1-SL-5POL
	Bus connection, screw terminal, 5-pin	525635	FBSD-KL-2x5POL
	Plug RJ45, 8-pin	534494	FBS-RJ45-8-GS
	Cover for RJ45 connection	534496	AK-RJ45
	Inspection cover, transparent for plug/socket Sub-D	533334	AK-SUB-9/15-B
	Cover for plug/socket Sub-D	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1

Documentation			
Designation		Language	Part No. Type
	Description of control block CPX-CMXX	German	564221 P.BE-CPX-CMXX-DE
		English	564222 P.BE-CPX-CMXX-EN
	Description of Festo handling and positioning profile for multi-axis movements FHPP-MAX	German	564223 P.BE-CMXX-FHPP-SW-DE
		English	564224 P.BE-CMXX-FHPP-SW-EN