

Motor units MTR-DCI, intelligent servo motors



# Motor units MTR-DCI, intelligent servo motors

Key features

FESTO

## General information

The motor unit MTR-DCI is an innovative motor with integrated power electronics for positioning tasks.

### Four components in one housing

Integrated in the MTR-DCI are the motor, gear unit, controller and power electronics. This means that there is no need for a control cabinet or extensive cabling.

### Reliable

The integrated power electronics and controller removes the need for motor cables and improves the electromagnetic compatibility. Additional monitoring functions are integrated.

### Uncomplicated

The complete commissioning process can be performed directly on the MTR-DCI via the optional LCD display or on a PC via the user-friendly menus in the FCT (Festo Configuration Tool). No matter which approach is used, all parameters are continuously controlled.

## At a glance

- Compact design
- Smooth profile prevents the ingress of dirt
- DC motor with planetary gear unit and encoder
- Gear unit ratio: 7:1; 14:1, 22:1
- Protection class IP54

### Positioning functionality

- 16 traversing records (including homing)
- Constant acceleration and braking
- Positioning control

### Protective functions

- Temperature monitoring
- Current monitoring
- Voltage failure detection
- Following error monitoring
- Software end-position detection

### Easy actuation via

- I/O interface
- Profibus
- CANopen
- DeviceNet




- 1 Control panel with integrated display (optional)
- 2 Input for reference limit switches
- 3 RS232 interface
- 4 Operator interface: I/O interface
- 5 Power supply
- 6 Gear unit




## Typical applications

Adjusting sorting conveyors

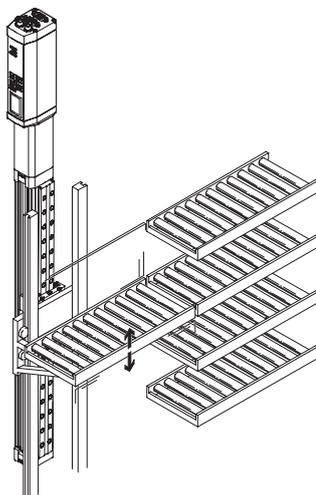


Programming formats for paper or foil cutting machines

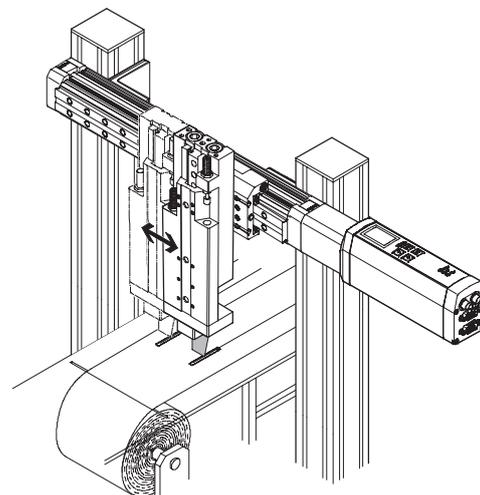

# Motor units MTR-DCI, intelligent servo motors

Type codes

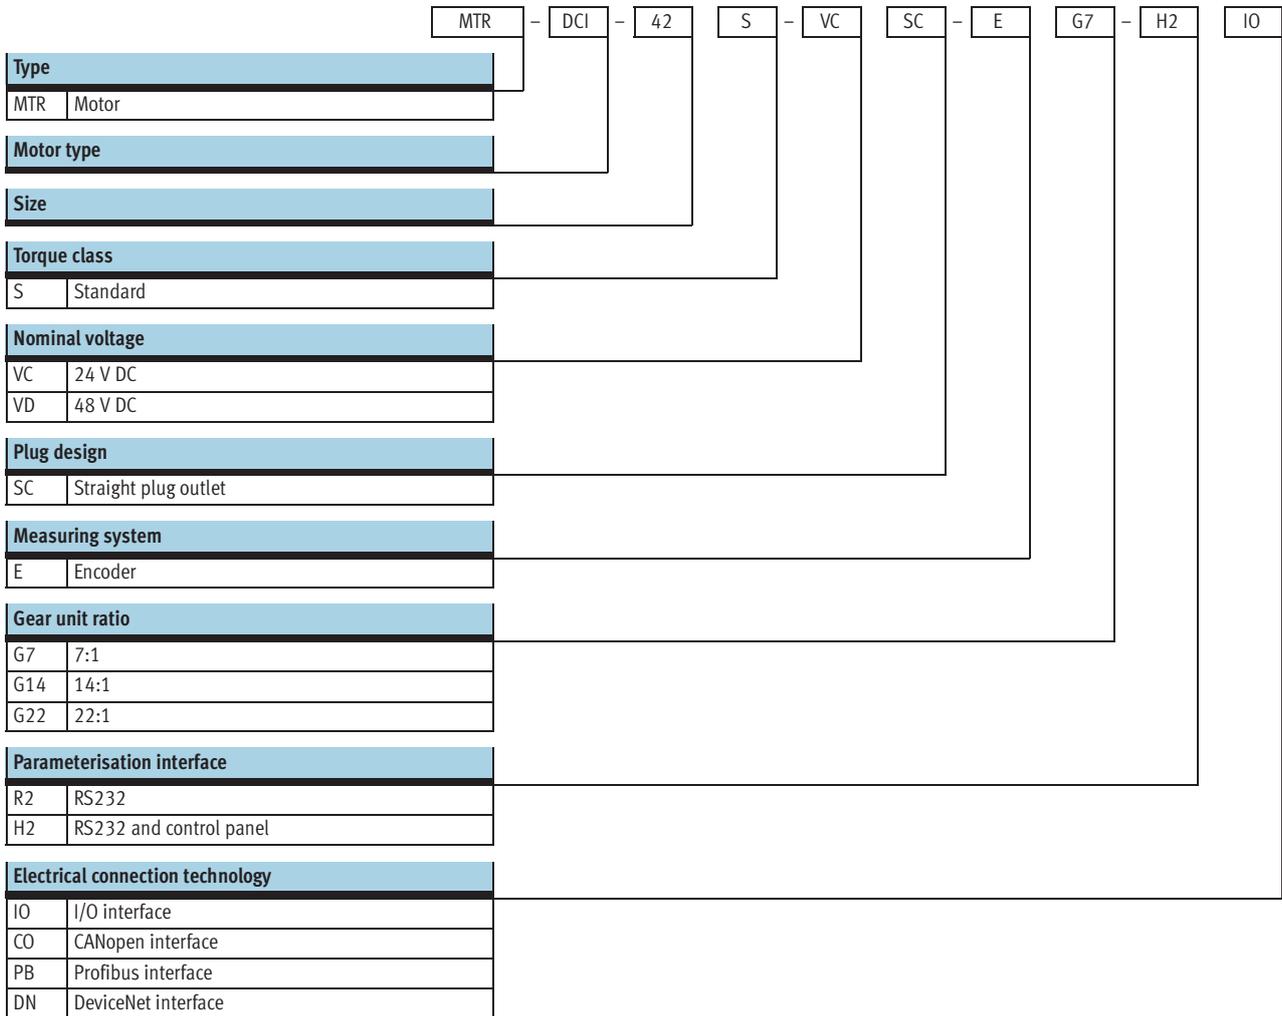

# Motor units MTR-DCI, intelligent servo motors

FESTO

Technical data

Size  
32 ... 62 mm

Voltage  
24, 48 V DC

Fieldbus interfaces



CANopen

DeviceNet



General technical data				
Size	32	42	52	62
Rotary position generator	Optical encoder			
No. of increments/revolution	300 (1,200) <sup>1)</sup>		500 (2,000) <sup>1)</sup>	
Controller operating mode	PWM MOSFET power amplifier			
Display resolution	128 x 64 pixels			
Type of mounting	Can be bolted on or clamped to gearing unit flange			
Gearing unit type	Planetary gearing			
Gear unit ratio	G7	6.75 (7:1); 1-stage		
	G14	13.73 (14:1); 2-stage		
	G22	–		

1) Internal 4-fold evaluation

Electrical data – Motor				
Size	32	42	52	62
Nominal voltage [V DC]	24 ±10%			48 –10%/+5%
Nominal current (motor) [A]	0.73	2	5	6.19
Peak current [A]	2.1	3.8	7.7	20
Motor constant [Ncm/A]	4.5	6.1	6.4	12.1
Nominal power (motor) [W]	17	48	122	316
Max. current (digital logic outputs) [mA]	200		60	
Parameterisation interface	RS232; 9,600 baud			

Mechanical data – Motor									
Size	32		42		52		62		
Gear unit ratio	G7	G14	G7	G14	G7	G14	G7	G14	G22
Gearing unit output speed [rpm]	481	237	444	218	444	218	504	248	153
Gearing unit torsional backlash [°]	≤ 1.9	≤ 1.55	≤ 1.3	≤ 0.95	≤ 1.1	≤ 0.75	≤ 1	≤ 1.5	≤ 1.5
Gearing unit output torque [Nm]	0.15	0.29	0.59	1.13	1.62	3.08	3.78	7.2	11.66
Gearing unit efficiency	0.75	0.7	0.8	0.75	0.8	0.75	0.8	0.75	0.75
Mass moment of inertia (rotor) [kg cm <sup>2</sup> ]	0.024		0.323		1.209		3.3		
Mass moment of inertia (gearing unit) [kg cm <sup>2</sup> ]	0.00089	0.00149	0.00235	0.00441	0.01132	0.01711	0.017	0.035	0.022
Radial shaft load [N]	40	70	160	230	200	320	240	360	360
Axial shaft load [N]	10	20	50	80	60	100	50	70	70
Product weight [kg]	0.72	0.74	1.72	1.83	3.1	3.3	7.6	8.0	8.0

# Motor units MTR-DCI, intelligent servo motors

Technical data

Operating and environmental conditions				
Size	32	42	52	62
Digital logic outputs	Not electrically isolated		Electrically isolated	
Insulation protection class to VDE 60034	F			
Protection class	IP54			
Protective functions	I <sup>2</sup> T monitoring			
	Following error monitoring			
	Software end position detection			
	Voltage failure detection			
	Current monitoring			
	Temperature monitoring: Silicon absolute temperature sensor, switches off at temperatures >70 °C			
Ambient temperature [°C]	0 ... +50			
Storage temperature [°C]	-25 ... +60			
Relative air humidity [%]	0 ... 95 (non-condensing)			
CE mark (see declaration of conformity)	In accordance with EU EMC directive			
Certification	C-Tick			
Note on materials	Contains paint wetting impairment substances			

Materials	
Motor unit housing	Anodised aluminium
Motor unit cover	Aluminium, precision casting, coated (size 62 milled)

Technical data – I/O/fieldbus interface				
Type	MTR-DCI-...-IO	MTR-DCI-...-CO	MTR-DCI-...-PB	MTR-DCI-...-DN
Interface	I/O interface for 15 traversing records and homing	CANopen	Profibus DP	DeviceNet
Number of digital logic inputs	6	–	–	–
Number of digital logic outputs	2	–	–	–
Max. current of digital logic outputs (size)	32/42	200	–	–
	52/62	60	–	–
Bus terminating resistor <sup>1)</sup>	–	Not integrated in the device	Not integrated in the device	Not integrated in the device
Communication profile	–	DS301 / FHPP	DP-V0/V1 / FHPP	FHPP
	–	DS301; DSP402	Step7 functional modules	Device type 0C <sub>h</sub>
Max. fieldbus baud rate [kbps]	–	1,000	12,000	500


1) Details of bus terminating resistor → 10

# Motor units MTR-DCI, intelligent servo motors


Technical data

## Torque M as a function of rotational speed n


Size 32

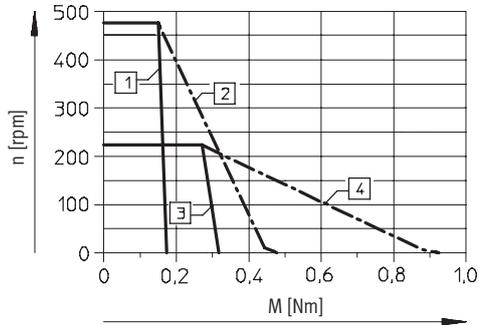


Size 42

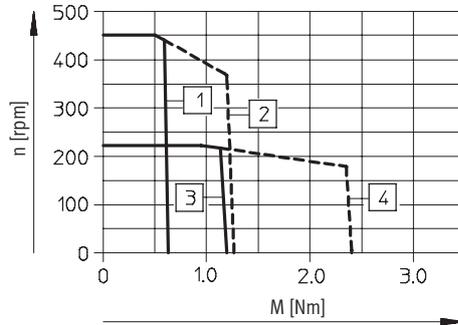

Size 52

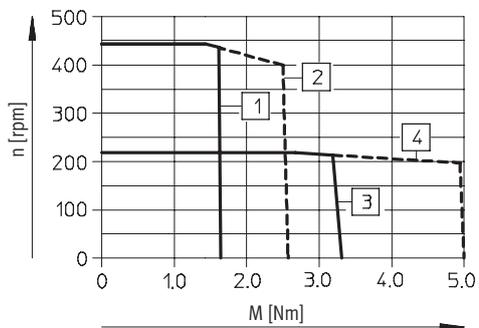

Size 62

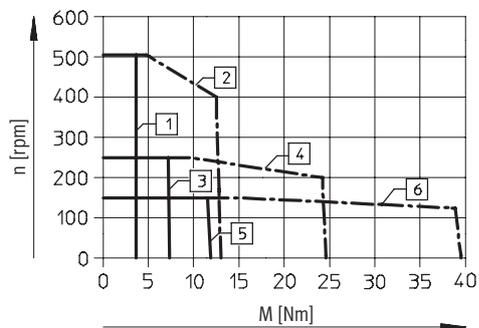

Gear unit ratio 7:1

- 1 Torque, nom.
- 2 Torque, max.

Gear unit ratio 14:1

- 3 Torque, nom.
- 4 Torque, max.


Gear unit ratio 22:1

- 5 Torque, nom.
- 6 Torque, max.

# Motor units MTR-DCI, intelligent servo motors

Technical data

## Pin allocation

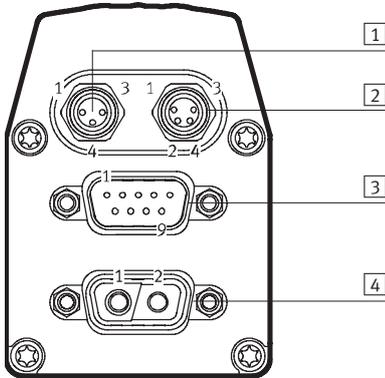

### 1 Reference switch, 3-pin M8 socket

Pin	Function
1	24 V
4	Reference input
3	0 V
-	

### 2 RS 232 interface, 4-pin M8 socket

Pin	Function
1	0 V
2	Transmitted data (TxD)
3	Received data (RxD)
4	-

### 3 I/O interface, 9-pin Sub-D plug

Pin	Function
1	Traversing record coding, bit 0
2	Traversing record coding, bit 1
3	Traversing record coding, bit 2
4	Traversing record coding, bit 3
5	Start bit
6	Enable bit
7	Ready signal output
8	MC signal output
9	0 V

### 3 CANopen interface, 9-pin Sub-D plug

Pin	Function
1	-
2	CAN_L
3	CAN_GND
4	-
5	CAN_SHLD
6	CAN_V-
7	CAN_H
8	-
9	CAN_V+

### 3 Profibus interface, 9-pin Sub-D socket

Pin	Function
1	-
2	Logic_GND
3	RxD/TxD-P
4	CNTR-P
5	DGND
6	VP
7	Logic_V (24 V DC)
8	RxD/TxD-N
9	-

### 3 DeviceNet interface, 9-pin Sub-D plug

Pin	Function
1	-
2	CAN_L
3	CAN_GND
4	-
5	CAN_SHLD
6	CAN_V-
7	CAN_H
8	-
9	CAN_V+

### 4 Power supply, 2-pin plug

Pin	Function
1	24 V DC (for MTR-DCI-32/42/52), 48 V DC (for MTR-DCI-62)
2	0 V
-	
-	
-	
-	
-	
-	
-	

# Motor units MTR-DCI, intelligent servo motors


Technical data

FESTO


## Dimensions

Download CAD Data → [www.festo.com/us/cad](http://www.festo.com/us/cad)


### Size 42

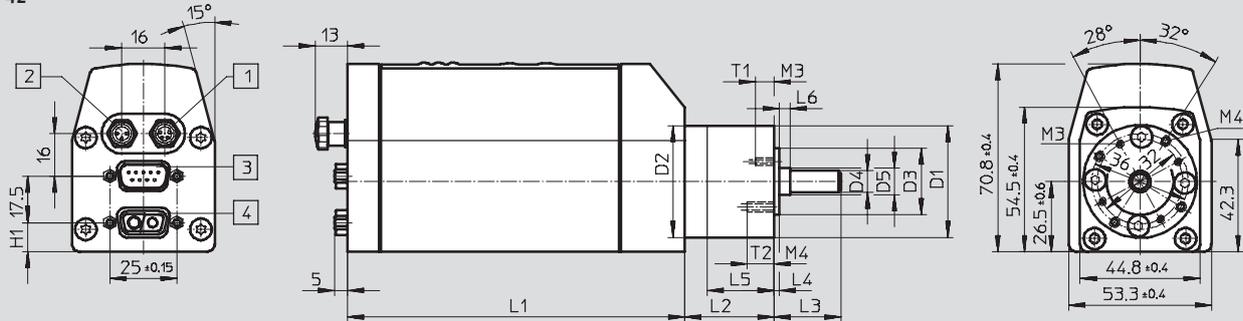


### Size 32

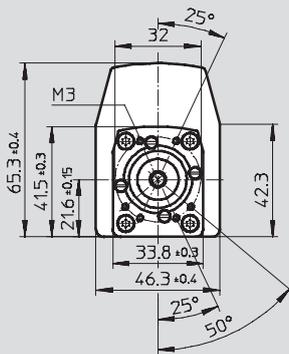

### Size 52

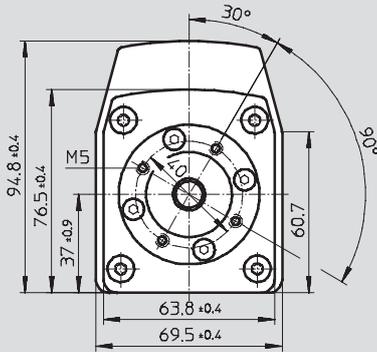

### Size 62

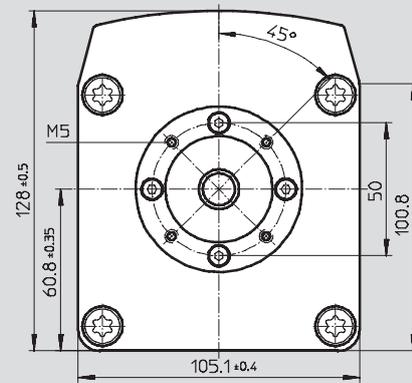

- 1 M8x1, 4-pin
- 2 M8x1, 3-pin

- 3 Sub-D, 9-pin
- 4 Sub-D, 2-pin

Type	D1 ∅ g10	D2 ∅ ±0.1	D3 ∅ h8	D4 ∅ h7	D5 ∅	H1	L1 ±1	L2 ±1	L3	L4	L5	L6	T1	T2 +2
MTR-DCI-32S-...-G7	-	-	21.5	6	-	13±0.2	175.5	-	18.7±0.6	2.5±0.3	-	-	6	-
MTR-DCI-32S-...-G14	-	-	21.5	6	-	13±0.2	175.5	-	18.7±0.6	2.5±0.3	-	-	6	-
MTR-DCI-42S-...-G7	42	42	25	8	-	11	176	33.3	25±1	2±0.1	25	-	7+2	10
MTR-DCI-42S-...-G14	42	42	25	8	-	11	176	46.3	25±1	2±0.1	25	-	7+2	10
MTR-DCI-52S-...-G7	52	52	32	12	-	17.3	194	39	33±1	3±0.3	31	-	10	-
MTR-DCI-52S-...-G14	52	52	32	12	-	17.3	194	53	33±1	3±0.3	31	-	10	-
MTR-DCI-62S-...-G7	62	62	40	14	15	61.3	270	47	39±1	5±0.3	31.3	9	10	-
MTR-DCI-62S-...-G14	62	62	40	14	15	61.3	270	47	39±1	5±0.3	31.3	9	10	-
MTR-DCI-62S-...-G22	62	62	40	14	15	61.3	270	47	39±1	5±0.3	31.3	9	10	-

# Motor units MTR-DCI, intelligent servo motors

Ordering data – Modular products

M Mandatory data										
Module No.	Motor unit		Flange/size		Nominal voltage		Measuring system		Parameterisation interface	
	Motor type		Torque class		Plug design		Gearing unit		Electrical connection technology	
533 736	MTR	DCI	32	S	VC	SC	E	G7	R2	IO
533 742			42		VD			G14	H2	CO
533 748			52					G22		PB
533 754			62							DN
<b>Order example</b>										
<b>533 742</b>	<b>MTR</b>	<b>- DCI</b>	<b>- 42</b>	<b>S</b>	<b>- VC</b>	<b>SC</b>	<b>- E</b>	<b>G7</b>	<b>- R2</b>	<b>IO</b>

Ordering table										
Size	32	42	52	62	Conditions	Code	Enter code			
M	Module No.	533 736	533 742	533 748	533 754					
	Motor unit	Motor unit					MTR	MTR		
	Motor type	DC servo motor with integrated position controller					-DCI	-DCI		
	Flange/size	32	42	52	62		-...			
	Torque class	Standard torque class					S	S		
	Nominal voltage	24 DC		-			-VC			
		-		48 DC			-VD			
	Plug design	Straight plug					SC	SC		
	Measuring system	Encoder					-E	-E		
	Gearing unit	Integrated planetary gearing i = 6.75					G7			
		Integrated planetary gearing i = 13.73					G14			
		-		Integrated planetary gearing i = 22.21			G22			
	Parameterisation interface	RS232 interface					-R2			
		RS232 interface + control panel					-H2			
	Electrical connection technology	I/O interface					IO			
		CANopen					CO			
		Profibus DP					PB			
		DeviceNet					DN			


Transfer order code


	MTR	-	DCI		S		SC	-	E		-		-	
--	-----	---	-----	--	---	--	----	---	---	--	---	--	---	--

# Motor units MTR-DCI, intelligent servo motors

FESTO

Accessories

Ordering data – Cables				
	Brief description	Cable length	Part No.	Type
	Supply cable Allocation →7	2.5 m	537 931	KPWR-MC-1-SUB-9HC-2,5
		5 m	537 932	KPWR-MC-1-SUB-9HC-5
		10 m	537 933	KPWR-MC-1-SUB-9HC-10
	Control cable for I/O connection to any PLC controller Allocation →7	2.5 m	537 923	KES-MC-1-SUB-9-2,5
		5 m	537 924	KES-MC-1-SUB-9-5
		10 m	537 925	KES-MC-1-SUB-9-10
	Programming cable For parameterisation and commissioning via the RS232 interface using FCT software Allocation →7	2.5 m	537 926	KDI-MC-M8-SUB-9-2,5

Ordering data – Plugs				
	Brief description	Part No.	Type	
Fieldbus adapter for Profibus				
	<ul style="list-style-type: none"> <li>– 9-pin Sub-D plug to 5-pin round M12 plug/socket, plus round M12 plug for logic voltage supply</li> <li>– Bus terminating resistor must be connected externally</li> </ul>	537 934	FBA-PB-SUB-9-3XM12	
Fieldbus adapter for CANopen and DeviceNet				
	<ul style="list-style-type: none"> <li>– 9-pin Sub-D plug to 5-pin round M12 plug</li> <li>– Bus terminating resistor must be connected externally</li> </ul>	540 324	FBA-CO-SUB-9-M12	

# Motor units MTR-DCI, intelligent servo motors

Accessories

Ordering data – Software			
	Brief description	Part No.	Type
	Operator package contains: – CD-ROM – with user documentation for MTR-DCI, in the languages de, en, es, fr, it, sv – with FCT (Festo Configuration Tool) configuration software – Brief description This package is included in the scope of delivery.	550 905	P.BP-MTR-DCI

Ordering data – Documentation <sup>1)</sup>							
	Language	Part No.		Type	Part No.	Type	
		For I/O interface				For Profibus interface	
	DE	539 615	P.BE-MTR-DCI-IO-DE		539 623	P.BE-MTR-DCI-PB-DE	
	EN	539 616	P.BE-MTR-DCI-IO-EN		539 624	P.BE-MTR-DCI-PB-EN	
	ES	539 617	P.BE-MTR-DCI-IO-ES		539 625	P.BE-MTR-DCI-PB-ES	
	FR	539 618	P.BE-MTR-DCI-IO-FR		539 626	P.BE-MTR-DCI-PB-FR	
	IT	539 619	P.BE-MTR-DCI-IO-IT		539 627	P.BE-MTR-DCI-PB-IT	
	SV	539 620	P.BE-MTR-DCI-IO-SV		539 628	P.BE-MTR-DCI-PB-SV	
			For CANopen interface			For DeviceNet interface	
	DE	539 629	P.BE-MTR-DCI-CO-DE		553 530	P.BE-MTR-DCI-DN-DE	
	EN	539 630	P.BE-MTR-DCI-CO-EN		553 531	P.BE-MTR-DCI-DN-EN	
	ES	539 631	P.BE-MTR-DCI-CO-ES		553 532	P.BE-MTR-DCI-DN-ES	
	FR	539 632	P.BE-MTR-DCI-CO-FR		553 533	P.BE-MTR-DCI-DN-FR	
	IT	539 633	P.BE-MTR-DCI-CO-IT		553 534	P.BE-MTR-DCI-DN-IT	
	SV	539 634	P.BE-MTR-DCI-CO-SV		553 535	P.BE-MTR-DCI-DN-SV	

1) User documentation in paper form is not included in the scope of delivery

# Product Range and Company Overview

## A Complete Suite of Automation Services


Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



**Custom Automation Components**  
Complete custom engineered solutions



**Custom Control Cabinets**  
Comprehensive engineering support and on-site services

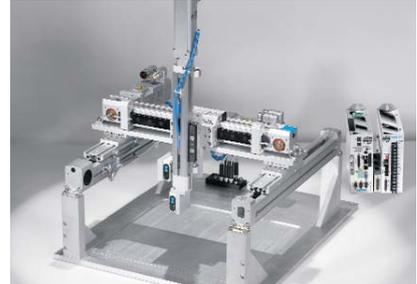

**Complete Systems**  
Shipment, stocking and storage services

## The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



**Electromechanical**  
Electromechanical actuators, motors, controllers & drives



**Pneumatics**  
Pneumatic linear and rotary actuators, valves, and air supply



**PLCs and I/O Devices**  
PLC's, operator interfaces, sensors and I/O devices


## Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

## Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

# Festo North America

## Festo Regional Contact Center

5300 Explorer Drive  
Mississauga, Ontario L4W 5G4  
Canada

### USA Customers:

For ordering assistance,

**Call:** 1.800.99.FESTO (1.800.993.3786)

**Fax:** 1.800.96.FESTO (1.800.963.3786)

**Email:** [customer.service@us.festo.com](mailto:customer.service@us.festo.com)

For technical support,

**Call:** 1.866.GO.FESTO (1.866.463.3786)

**Fax:** 1.800.96.FESTO (1.800.963.3786)

**Email:** [product.support@us.festo.com](mailto:product.support@us.festo.com)

### Canadian Customers:

**Call:** 1.877.GO.FESTO (1.877.463.3786)

**Fax:** 1.877.FX.FESTO (1.877.393.3786)

**Email:** [festo.canada@ca.festo.com](mailto:festo.canada@ca.festo.com)

---

## USA Headquarters

Festo Corporation  
395 Moreland Road  
P.O. Box 18023  
Hauppauge, NY 11788, USA  
[www.festo.com/us](http://www.festo.com/us)

---

## USA Sales Offices

### Appleton

North 922 Tower View Drive, Suite N  
Greenville, WI 54942, USA

### Boston

120 Presidential Way, Suite 330  
Woburn, MA 01801, USA

### Chicago

1441 East Business Center Drive  
Mt. Prospect, IL 60056, USA

### Dallas

1825 Lakeway Drive, Suite 600  
Lewisville, TX 75057, USA

### Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320  
Auburn Hills, MI 48326, USA

### New York

395 Moreland Road  
Hauppauge, NY 11788, USA

### Silicon Valley

4935 Southfront Road, Suite F  
Livermore, CA 94550, USA

## United States



**USA Headquarters, East:** Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: [info@festo-usa.com](mailto:info@festo-usa.com)

[www.festo.com/us](http://www.festo.com/us)

## Canada



**Headquarters:** Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: [festo.canada@ca.festo.com](mailto:festo.canada@ca.festo.com)

[www.festo.ca](http://www.festo.ca)

## Mexico



**Headquarters:** Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,  
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: [festo.mexico@mx.festo.com](mailto:festo.mexico@mx.festo.com)

[www.festo.com/mx](http://www.festo.com/mx)

---

## Central USA

Festo Corporation  
1441 East Business  
Center Drive  
Mt. Prospect, IL 60056, USA  
Phone: 1.847.759.2600  
Fax: 1.847.768.9480



## Western USA

Festo Corporation  
4935 Southfront Road,  
Suite F  
Livermore, CA 94550, USA  
Phone: 1.925.371.1099  
Fax: 1.925.245.1286



---

## Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark  
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia  
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore  
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

[www.festo.com](http://www.festo.com)