

Fibre-optic units SOE4

Product overview



- High precision fibre-optic units
- Switching frequencies up to 8,000 Hz
- Working ranges up to 2,000 mm
- Variants with LED display, switching and analogue outputs
- Setting via teach-in
- Comprehensive range of fibre-optic cables

Detailed product information

➔ www.festo.com/catalog/SOE4

Product overview						
Version	Type	Type of display	Timer function	Switching output	Analogue output	➔ Page/Internet
Fibre-optic unit	SOE4-FO-L	LED	–	PNP NPN	–	3
	SOE4-FO-D	LED display	1 ... 2,000 ms	PNP NPN	–	3
	SOE4-FO-D	LED display	1 ... 2,000 ms	PNP NPN	0 ... 10 V	3

Fibre-optic units SOE4

Type codes

SOE4 - FO - D - H F2 - 1PU - K

Type	
SOE4	Fibre-optic unit

Input	
FO	Fibre-optic cable

Type of display	
L	LED
D	LED display

Type of mounting	
H	H-rail mounting or via through-holes

Fibre-optic cable connection	
F2	Fibre-optic cable Ø 2 mm

Electrical output	
1P	1 switching output PNP
1N	1 switching output NPN
1PU	1 switching output PNP and 0 ... 10 V analogue
1NU	1 switching output NPN and 0 ... 10 V analogue

Electrical connection	
K	Cable, 2 m long
M8	Plug M8x1

Fibre-optic units SOE4

Technical data

FESTO


General technical data		
Type of display	LED	LED display
Working range	Depends on the measuring mode and fibre-optic cables, value tables → 5, 6	Depends on the measuring mode and fibre-optic cables, value tables for standard mode → 5, 6 Standard mode: 100% Fine mode: approx. 40% Fast mode: approx. 40% High-distance mode: approx. 190%
Mutual interference	–	Protected against interference with up to four devices mounted directly next to one another
Light type	Red	
Setting options	Teach-in Teach-in via electrical connection	

Electrical data		
Type of display	LED	LED display
Max. switching frequency [Hz]	1,500	Standard mode: 1,000 Fine mode: 125 Fast mode: 8,000 High-distance mode: 125
Timer function [ms]	–	1 ... 2,000
Operating voltage range [V DC]	10 ... 30	
Max. output current [mA]	100	
Protection against short circuit	Pulsed	
Protection against polarity reversal	For operating voltage	
Protection class	IP64	

Operating and environmental conditions		
Ambient temperature [°C]	–20 ... +60	
Ambient temperature with flexible cable installation [°C]	–5 ... +60	
CE symbol (see declaration of conformity)	In accordance with EU EMC directive ¹⁾	
Certification	C-UL-US listed (OL) C tick	

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

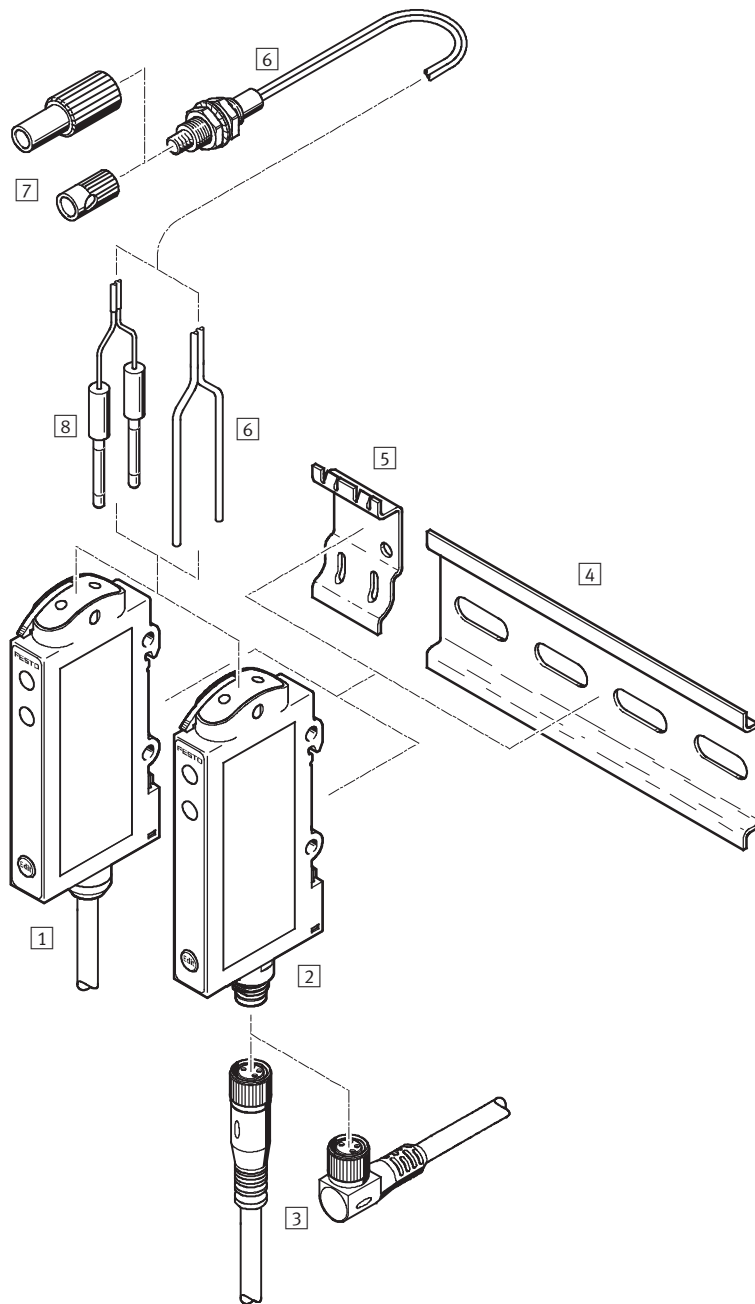
Materials	
Housing	Acrylic butadiene styrene
Cable sheath	TPE-U (PUR)

Ordering data						
Version	Type of display	Switching output, switching function	Analogue output	Electrical connection	Part No.	Type
	LED	PNP, switchable	–	Cable, 4-wire	552 795	SOE4-FO-L-HF2-1P-K
				Plug M8x1, 4-pin	552 796	SOE4-FO-L-HF2-1P-M8
		NPN, switchable	–	Cable, 4-wire	552 797	SOE4-FO-L-HF2-1N-K
				Plug M8x1, 4-pin	552 798	SOE4-FO-L-HF2-1N-M8
	LED display	PNP, switchable	–	Plug M8x1, 4-pin	552 799	SOE4-FO-D-HF2-1P-M8
				Plug M8x1, 4-pin	552 800	SOE4-FO-D-HF2-1N-M8
		PNP, switchable	0 ... 10 V	Cable, 5-wire	552 801	SOE4-FO-D-HF2-1PU-K
				Cable, 5-wire	552 802	SOE4-FO-D-HF2-1NU-K

Fibre-optic units SOE4

Peripherals overview

FESTO



Accessories	Brief description	→ Page/Internet
1	Fibre-optic unit SOE4-...-K With cable	3
2	Fibre-optic unit SOE4-...-M8 With plug M8x1, 4-pin	3
3	Connecting cable With socket M8x1, 4-pin	8
4	Mounting rail to DIN EN 60715 For wall mounting of more than 2 fibre-optic units	-
5	Adapter plate SXE3-W For wall mounting of max. 2 fibre-optic units	8
6	Fibre-optic cable As diffuse sensor, through-beam sensor, fixed focus or series designs	5
7	Ancillary lens For adapting the optical characteristics of fibre-optic cables	7
8	Adapter For fibre-optic cables with O.D. 1.0 and 1.25 ... 1.3 mm	7
-	Fibre-optic cutter For fibre-optic cables made from plastic with O.D. 1.0 and 1.25 ... 1.3 as well as 2.2 mm	7

Fibre-optic units SOE4

Accessories




FESTO

Technical data – Fibre-optic cable (diffuse sensor)					
Special feature of fibre-optic cable		Standard	Coaxial	Large working range	Flexible
Working range ¹⁾	[mm]	140	75	200	130
Min. object diameter ²⁾	[mm]	0.1	0.1	0.1	0.1
Min. bending radius	[mm]	25	15	40	2
Outer Ø	[mm]	2.2	1.25	2.2	1.3
Head size		M6	M4	M6	M4
Protection class		IP66			
Ambient temperature	[°C]	-55 ... +70			-40 ... +70
Material	Housing	High-alloy stainless steel	Nickel-plated brass	Nickel-plated brass	High-alloy stainless steel
	Fibre-optic cable	Polyethylene			

- 1) With SOE4-FO-L and SOE4-FO-D in standard mode
 2) An attempt was made to obtain a signal at 10% of the range using a copper wire. The smallest wire diameter that was still detected corresponds to the diameter of the smallest detectable object.

Technical data – Fibre-optic cable (diffuse sensor)						
Special feature of fibre-optic cable		High temperature	Precision		Series	Fixed focus
Working range ¹⁾	[mm]	150	12	65	130	2 ... 10
Min. object diameter ²⁾	[mm]	0.1	0.05	0.1	0.15	0.1
Min. bending radius	[mm]	25	10	15	25	25
Outer Ø	[mm]	2.2	1.0	1.25	2.2	2.2
Head size		M6	M3	M4	19x25x6 mm	13x19.6x5 mm
Protection class		IP66				
Ambient temperature	[°C]	-55 ... +115		-55 ... +70		
Material	Housing	High-alloy stainless steel			Nickel-plated brass	Acrylic butadiene styrene
	Fibre-optic cable	Polyethylene				

- 1) With SOE4-FO-L and SOE4-FO-D in standard mode
 2) An attempt was made to obtain a signal at 10% of the range using a copper wire. The smallest wire diameter that was still detected corresponds to the diameter of the smallest detectable object.

Ordering data – Fibre-optic cable (diffuse sensor)							
Measuring method	Special feature of fibre-optic cable	Outer Ø ¹⁾ [mm]	Sleeve length [mm]	Fibre-optic cable length			
				1 m		2 m	
				Part No.	Type	Part No.	Type
	Standard	2.2	–	552 838	SOOC-DS-M6-1-R25	552 836	SOOC-DS-M6-2-R25
			40	552 839	SOOC-DS-M6-1-R25-S4	552 837	SOOC-DS-M6-2-R25-S4
	Coaxial	1.25	–	–	552 842	SOOC-DS-C-M4-2-R15	–
	Large working range	2.2	–	552 841	SOOC-DS-H-M6-1-R40	552 840	SOOC-DS-H-M6-2-R40
	Flexible	1.3	–	–	552 843	SOOC-DS-F-M4-2-R2	–
	High temperature	2.2	–	–	552 809	SOOC-DS-M6-2-R25-T1	–
	Precision	1.25	–	552 804	SOOC-DS-P-M3-1-R10	552 844	SOOC-DS-P-M3-2-R10
			40	–	552 803	SOOC-DS-P-M3-2-R10-S4	–
1		–	552 807	SOOC-DS-P-M4-1-R15	552 805	SOOC-DS-P-M4-2-R15	
		40	552 808	SOOC-DS-P-M4-1-R15-S4	552 806	SOOC-DS-P-M4-2-R15-S4	
	Series	2.2	–	–	–	552 810	SOOC-DS-M-A11-2-R25
	Fixed focus	2.2	–	–	–	552 811	SOOC-DS-Q-2-R25

- 1) The scope of delivery for fibre-optic cables with fibre-optic cable Ø < 2.2 mm includes an adapter SASA

Fibre-optic units SOE4

Accessories

FESTO

Technical data – Fibre-optic cable (through-beam sensor)					
Special feature of fibre-optic cable		Standard	Large working range	Flexible	High temperature
Working range ¹⁾	[mm]	400	650	300	400
Min. object diameter ²⁾	[mm]	0.35	0.2	0.15	0.35
Min. bending radius	[mm]	25	40	2	25
Outer Ø	[mm]	2.2			
Head size		M4			
Protection class		IP66			
Ambient temperature	[°C]	-55 ... +70		-40 ... +70	-55 ... +115
Material	Housing	High-alloy stainless steel		Nickel-plated brass	High-alloy stainless steel
	Fibre-optic cable	Polyethylene			




1) With SOE4-FO-L and SOE4-FO-D in standard mode

2) An attempt was made to obtain a signal at 10% of the range using a copper wire. The smallest wire diameter that was still detected corresponds to the diameter of the smallest detectable object.

Technical data – Fibre-optic cable (through-beam sensor)					
Special feature of fibre-optic cable		Precision		Series	Fork light barrier
Working range ¹⁾	[mm]	30	120	250	5
Min. object diameter ²⁾	[mm]	0.05	0.2	0.1	0.2
Min. bending radius	[mm]	10	15	25	10
Outer Ø	[mm]	1.0	2.2	2.2	1.25
Head size		M3	M4	10x10x5 mm	41x15x7 mm
Fork pit size		-			5x29 mm
Protection class		IP66			
Ambient temperature	[°C]	-55 ... +70			
Material	Housing	High-alloy stainless steel		Nickel-plated brass	Acrylic butadiene styrene
	Fibre-optic cable	Polyethylene			

1) With SOE4-FO-L and SOE4-FO-D in standard mode


2) An attempt was made to obtain a signal at 10% of the range using a copper wire. The smallest wire diameter that was still detected corresponds to the diameter of the smallest detectable object.

Ordering data – Fibre-optic cable (through-beam sensor)							
Measuring method	Special feature of fibre-optic cable	Outer Ø ¹⁾ [mm]	Sleeve length [mm]	Fibre-optic cable length			
				1 m		2 m	
				Part No.	Type	Part No.	Type
Through-beam sensor							
	Standard	2.2	-	552 814	SOOC-TB-M4-1-R25	552 812	SOOC-TB-M4-2-R25
			40	552 815	SOOC-TB-M4-1-R25-S4	552 813	SOOC-TB-M4-2-R25-S4
	Large working range	2.2	-	552 817	SOOC-TB-H-M4-1-R40	552 816	SOOC-TB-H-M4-2-R40
	Flexible	2.2	-	-	-	552 818	SOOC-TB-F-M4-2-R2
	High temperature	2.2	-	-	-	552 826	SOOC-TB-M4-2-R25-T1
	Precision	1	-	552 821	SOOC-TB-P-M3-1-R10	552 819	SOOC-TB-P-M3-2-R10
			40	552 822	SOOC-TB-P-M3-1-R10-S4	552 820	SOOC-TB-P-M3-2-R10-S4
	2.2	-	552 825	SOOC-TB-P-M4-1-R15	552 823	SOOC-TB-P-M4-2-R15	
		40	-	-	-	552 824	SOOC-TB-P-M4-2-R15-S4
	Series	2.2	-	-	-	552 827	SOOC-TB-M-A5-2-R25
	Fork light barrier	1.25	-	-	-	552 828	SOOC-TB-P-C5-2-R10

1) The scope of delivery for fibre-optic cables with fibre-optic cable Ø < 2.2 mm includes an adapter SASA

Fibre-optic units SOE4

Accessories

Technical data and order codes – Ancillary lenses								
	Lens function		Protection class	Ambient temperature [°C]	Material Housing	Part No.	Type	
	Increasing working range	Factor 4 ¹⁾	IP66	-30 ... +150	Nickel-plated brass	552 829	SASF-L1-LD-M2	
		Factor 8 ¹⁾						Anodised aluminium
	Light exit 90°					Nickel-plated brass	552 830	
	Focussing ²⁾					Anodised aluminium	552 831	SASF-L1-LS2-M4


1) Depending on the fibre-optic cable

2) Light spot diameter 0.7 mm at a distance of 10 mm, depending on the fibre-optic cable


Compatibility table – Ancillary lenses					
Fibre-optic cable	SASF-L1-LD-M2	SASF-L1-LD-M4	SASF-L1-LA-M2	SASF-L1-LS2-M4	→ Page/Internet
Diffuse sensor					
SOOC-DS-P-M4-2-R15	■	–	–	■	5
SOOC-DS-P-M4-1-R15	■	–	–	■	
SOOC-DS-C-M4-2-R15	■	–	–	■	
Through-beam sensor					
SOOC-TB-M4-2-R25	■	■	■	■	6
SOOC-TB-M4-1-R25	■	■	■	■	
SOOC-TB-H-M4-2-R40	■	■	■	■	
SOOC-TB-H-M4-1-R40	■	■	■	■	
SOOC-TB-F-M4-2-R2	■	■	■	■	
SOOC-TB-P-M4-2-R15	■	■	■	■	
SOOC-TB-P-M4-1-R15	■	■	■	■	
SOOC-TB-M4-2-R25-T1	■	■	■	■	

Note

Only the fibre-optic cables listed here are suitable for combination with an ancillary lens.

Technical data and order codes – Adapter ¹⁾							
	Outer Ø	Suitable for fibre-optic cable	Protection class	Ambient temperature [°C]	Material Housing	Part No.	Type
	[mm]	Ø [mm]					
	2.2	1.0	IP64	-20 ... +60	Acrylic butadiene styrene	552 834	SASA-L1-10
		1.25 ... 1.3					

1) Included in the scope of delivery for fibre-optic cables SOOC with fibre-optic cable Ø < 2.2 mm



Technical data and order codes – Fibre-optic cable cutter							
	Use	Suitable for fibre-optic cable	Radius of bending tool ¹⁾	Ambient temperature [°C]	Material Housing	Part No.	Type
		Ø [mm]					
	For polymer fibre-optic cables	1.0; 1.25 ... 1.3; 2.2	5, 8, 10	10 ... 60	Acrylic butadiene styrene, reinforced	552 835	SATC-L1-C


1) Bending tool for fibre-optic cable sleeves

Fibre-optic units SOE4

Accessories

FESTO

Ordering data – Connecting cables			
Technical data → Internet: nebu			
	Number of wires	Cable length [m]	Part No. Type
M8x1, straight socket			
	4	2.5	541 342 NEBU-M8G4-K-2.5-LE4
		5	541 343 NEBU-M8G4-K-5-LE4
M8x1, angled socket			
	4	2.5	541 344 NEBU-M8W4-K-2.5-LE4
		5	541 345 NEBU-M8W4-K-5-LE4

Ordering data – Adapter plate		
	Part No.	Type
	540 214	SXE3-W

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com