
# **FESTO**



Key features

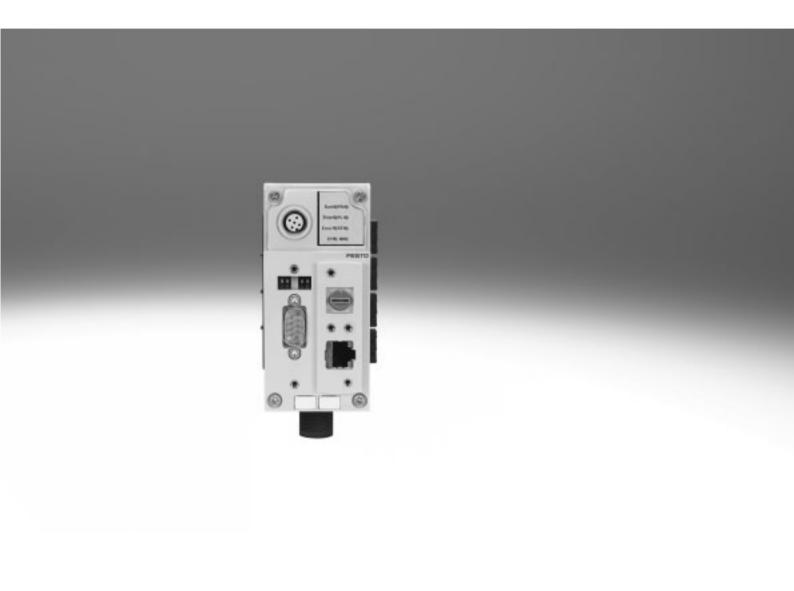

### **Application**

Controller



The CODESYS controllers are modern control systems for CPX terminals that enable programming with CODESYS to IEC 61131-3.

### Programming in a global language

CODESYS provided by Festo offers a convenient user interface with the following functions:

- Integrated module libraries
- Library Manager for integrating further libraries
- · Visualisation editor
- Simulation mode
- Integrated project documentation
- Debugging functions for fault finding
- Configuration and parameterisation of the controller using the control configuration

#### Basic functions

The CODESYS controllers offer the following basic functions:

- Programming with CODESYS to IEC 61131-3
- Communication via Ethernet (Modbus/TCP, EasylP, TCP/IP)
- Process visualisation using operator unit CDPX or OPC server
- Communication via fieldbus in combination with a fieldbus node in the CPX terminal
- Diagnostics and quick commissioning of CPX modules via handheld CPX-FMT

### CPX-CEC-C1 offers

- All basic functions
- CANopen master for controlling up to 127 CANopen stations. Electric axes can be controlled in point-topoint mode

### CPX-CEC offers

- All basic functions
- RS232 interface for operating external devices



Note

When using external devices, data communication must be programmed by the user.

#### Bus connection

The CODESYS controllers are remote controllers that can be connected to a higher-order PLC via the fieldbus nodes of the CPX terminal or via Ethernet, for example:

- PROFINET
- EtherNet/IP
- EtherCAT
- PROFIBUS
- DeviceNet

### Operating modes

- Stand-alone
- Remote controller on the fieldbus
- Remote controller on Ethernet

### System expansion

CANopen connects CPX-CEC with valve terminals and electric drive controllers from Festo:


- CPX, CPV
- CMMP-AS, CMMS-ST, etc.
- AS-Interface gateway

Ethernet connects CPX-CEC with additional controllers and operator units from Festo:


- CDPX
- Camera SBO...-Q

### System expansion (examples)

CPX-CEC/CPX-CEC as a stand-alone or remote controller



### CPX-CEC-C1 as a CANopen fieldbus master







### Advantages for users

Increased performance

Improved cycle times - more connectable actuators. Compatibility with almost all control systems on the market is ensured via the CPX terminal.

The extensive CODESYS function library provides diagnostics and condition monitoring options.

#### Reduced costs

For standardised pre-processing: reduces installation costs as an intelligent remote I/O terminal to IP65/IP67 directly at the machine.

CPX-CEC is ideally adapted to CPX and motion applications with up to 31 axes.

### Simple, yet efficient: decentralised structures

The modular I/O system with up to 512 I/Os and CAN master functionality (CPX-CEC) offers complete flexibility, whether for open-loop or closed-loop

Stand-alone for low-cost automation of manual workstations, for example, or remote control with pre-processing.


### The only one in the world to IP65

The fully integrated automation platform for standard, proportional and servopneumatic, sensor and motion control to IP65.

Included: simple commissioning.

### Classification of CPX-CEC in the portfolio for multi-axis controllers for electric drive technology

CPX-CEC in the world of electric drive technology




Embedded controller

CPX-CEC permits the flexible connection of valve actuators and electric drives on the terminal - programmable in CODESYS and can, if necessary, be directly installed at the machine to IP65. The ideal complement to the gateway module CPX-CM-HPP.

CoDeSys



Type codes

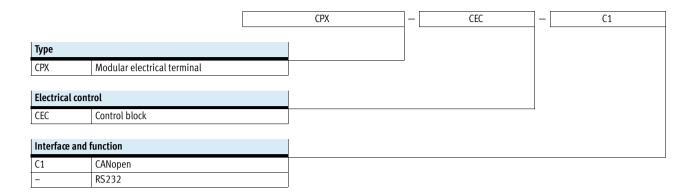

Technical data






#### IT services.



The CODESYS controller is a modern control system for CPX terminals that enables programming with CODESYS to IEC 61131-3.

tion with other modules takes place via the interlinking block. In addition to network connections, LEDs are also provided for the bus status, operating status of the PLC and CPX peripherals information, as are switching elements and a diagnostic interface for CPX-FMT.

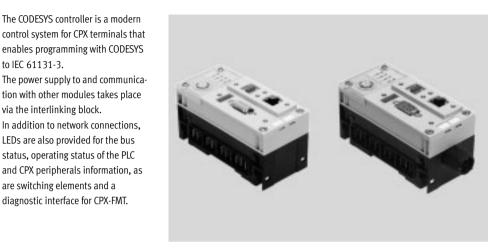

### **Application**

#### Bus connection

The CPX-CEC is a remote controller that can be connected to a master PLC via the fieldbus nodes of the CPX terminal or via Ethernet. At the same

time, it is possible to operate the CPX-CEC as a compact stand-alone controller directly on the machine.

### Communication protocols

- Fieldbus via CPX bus nodes
- Modbus/TCP
- EasyIP

### Operating modes

- Stand-alone
- Remote controller, fieldbus
- · Remote controller, Ethernet

### Setting options

The CPX-CEC has the following interfaces for monitoring, programming and commissioning:

- For the CPX-FMT
- Ethernet interface for IT applications
- Remote diagnostics

The operating mode and fieldbus protocol are set using the DIL switch on the CPX-CEC.

The integrated web server offers a convenient means of querying data saved in the CPX-CEC.

#### Features

- Easy actuation of valve terminal configurations with MPA, VTSA
- Diagnostics with flexible monitoring options for pressure, flow rate, cylinder operating time, air consumption
- Actuation of decentralised installation systems based on CPI actuation of applications in proportional pneumatics
- AS-Interface actuation via gateway
- Connection to all fieldbuses as a remote controller and for pre-processing
- · Actuation of electric drives as individual axes via CANopen (CPX-CEC-C1)
- Early warnings and visualisation options
- Closed-loop pneumatic applications



Technical data

General technical data		CODESYS Level 2			
Protocol		EasylP			
		Modbus TCP			
		TCP/IP			
Processing time		Approx. 200 μs/1 k instruction			
Programming software		CODESYS provided by Festo V2.3			
Programming language		To IEC 61131-3			
		Sequential function chart (SFC)			
		Instruction list (IL)			
		Function chart (FCH), additional continuous function chart (CFC)			
		Ladder diagram (LD)			
		Structured text (ST)			
Programming	Operating language	German, English			
	Support for file handling	Yes			
Device-specific diagnostics		Diagnostic memory			
		Channel and module-oriented diagnostics			
		Undervoltage/short circuit of modules			
LED displays	Bus-specific	TP: Link/traffic			
	Product-specific	RUN: PLC status			
		STOP: PLC status			
		ERR: PLC runtime error			
		PS: Electronics supply, sensor supply			
		PL: Load supply			
		SF: System fault			
		M: Modify/forcing active			
IP address setting		DHCP			
		Via CODESYS			
		Via MMI			
Function blocks		CPX diagnostic status, copy CPX diagnostic trace, read CPX module diagnostics,			
		etc.			
Product weight	[g]	155			
Dimensions (incl. interlinking block) W x L x H [mm]		50 x 107 x 55			

Materials				
Housing Reinforced PA				
	PC			
Note on materials	RoHS-compliant			

Operating and environmental conditions		
Ambient temperature	[°C]	−5 +50
Storage temperature	[°C]	-20 +70
Relative air humidity	[%]	95, non-condensing
Corrosion resistance class CRC <sup>1)</sup>		2

<sup>1)</sup> Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



Technical data


Electrical data			
Nominal operating voltage [V DC]		[V DC]	24
Load voltage	Nominal operating voltage	[V DC]	24
	With pneumatics type VTSA	[V DC]	21.6 26.4
	With pneumatics type MPA	[V DC]	18 30
	Without pneumatics	[V DC]	18 30
Power failure buffering		[ms]	10
Intrinsic current consumption at nominal operating voltage [m		[mA]	Typically 85
Degree of protection to EN 60529			IP65, IP67

Technical data			,	
Туре			CPX-CEC	CPX-CEC-C1
Additional functions			RS232 communication function	Motion functions for electric drives
CPU data	Flash	[MB]	32	32
	RAM	[MB]	32	32
	Processor	[MHz]	400	400
Control interface			-	CAN bus
Parameterisation			CODESYS V2.3	
Configuration support			CODESYS V2.3	
Program memory, user program		[MB]	4	
Flags			CODESYS variable concept	
	Remanent data	[kB]	30	30
	Global data memory	[MB]	8	8
Control elements			_	DIL switch for CAN termination
			Rotary switch for RUN/STOP	Rotary switch for RUN/STOP
Total number of axes			_	31
Ethernet	Number		1	
	Connection technology		RJ45 socket, 8-pin	
	Data transmission speed	[Mbps]	10/100	
	Supported protocols		TCP/IP, EasyIP, Modbus TCP	
Fieldbus interface	Number		_	1
	Connection technology		_	Sub-D plug connector, 9-pin
	Data transmission speed, can be	[kbps]	_	125, 250, 500, 800, 1000
	set via software			
	Supported protocols		_	CAN bus
	Galvanic isolation		-	Yes
Data interface	Number		1	-
	Connection technology		Sub-D socket, 9-pin	-
	Data transmission speed, can be	[kbps]	9.6 230.4	-
	set via software			
	Supported protocols		RS232 interface	-
	Galvanic isolation		Yes	-



Technical data

### Connection and display components CPX-CEC-C1



- 1 CPX-FMT connection
- 2 DIL switch
- 3 Fieldbus interface (Sub-D plug connector, 9-pin)
- 4 Status LEDs, bus-specific and product-specific
- 5 RUN/STOP rotary switch
- 6 Ethernet interface (RJ45 socket, 8-pin)


Pin allocation – CPX-CEC-C1			
3.7. 3.2. 3.	Pin	Signal	Meaning
Fieldbus interface, Sub-D plug conr	nector	-	
	1	n.c.	Not connected
+ 1	2	CAN_L	CAN low
6 + 2	3	CAN_GND	CAN ground
7 + 3	4	n.c.	Not connected
8 + 4	5	CAN_SHLD	Connection to functional earth FE
9 +	6	CAN_GND	CAN ground (optional) 1)
	7	CAN_H	CAN high
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	Screening	Plug connector housing must be connected to FE
		-	•
Ethernet interface, RJ45 plug conne	ector		
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
<b>└</b> , 8 <b>■</b>	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screening	Screening

<sup>1)</sup> If a drive controller with external power supply is connected, CAN ground (optional), pin 6, on the CPX-CEC-C1, CPX-CEC-M1 must not be used.

**FESTO** 

Technical data

### Connection and display components CPX-CEC



- 1 CPX-FMT connection
- 2 DIL switch
- RS232 interface (Sub-D socket, 9-pin)
- 4 Status LEDs, bus-specific and product-specific
- 5 RUN/STOP rotary switch
- 6 Ethernet interface (RJ45 socket, 8-pin)

Pin allocation – CPX-CEC			
	Pin	Signal	Meaning
RS232 interface, Sub-D socke	et		
	1	n.c.	Not connected
(1 o	2	RXD	Received data
2006	3	TXD	Transmitted data
30 7	4	n.c.	Not connected
4008	5	GND	Data reference potential
5009	6	n.c.	Not connected
	7	n.c.	Not connected
	8	n.c.	Not connected
	9	n.c.	Not connected
	Screening	Screening	Connection to functional earth
Ethernet interface, RJ45 plug	connector		
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
` ა  ■	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screening	Screening



Accessories

Ordering data			
Designation		Part No.	Туре
Control block			
	Motion functions for electric drives	567347	CPX-CEC-C1
	RS232 communication function	567346	CPX-CEC
Fieldbus interface			
	Sub-D plug connector, 9-pin, for CANopen	532219	FBS-SUB-9-BU-2x5POL-B
	Connecting cable for RS232 interface	539642	FEC-KBG7
	Connecting cable for RS232 interface	539643	FEC-KBG8
	Micro Style bus connection, 2xM12 for DeviceNet/CANopen	525632	FBA-2-M12-5POL
	Socket for Micro Style connection, M12	18324	FBSD-GD-9-5POL
	Plug connector for Micro Style connection, M12	175380	FBS-M12-5GS-PG9
	Open Style bus connection for 5-pin terminal strip for DeviceNet/CANopen	525634	FBA-1-SL-5POL
	Terminal strip for Open Style connection, 5-pin	525635	FBSD-KL-2x5POL
Ethernet interface			
Entrice internace	RJ45 plug connector	534494	FBS-RJ45-8-GS
	Cover for RJ45 connection	534496	AK-Rj45

**FESTO** 

Accessories

Ordering data						
Designation		Part No.	Туре			
Covers and attachmer	nts		ı			
	Inspection cover, transparent, for Sub-D connection			AK-SUB-9/15-B		
	Inscription label holder for manifold block			CPX-ST-1		
User documentation						
	Manual for control block CPX-CEC German  English			P.BE-CPX-CEC-DE		
				P.BE-CPX-CEC-EN		