# Proximity sensors SME-10, for C-slot





★/☆

Festo core product range Covers 80% of your automation tasks

Worldwide:Always in stockSuperb:Festo quality at an attractive priceEasy:Simplified procurement and warehousing

★ Generally ready for dispatch from the factory within 24 hours In stock at 13 Service Centres worldwide More than 2200 products

☆ Generally ready for dispatch from the factory within 5 days Assembled for you at 4 Service Centres worldwide Up to 6 × 10<sup>12</sup> variants per product family Just look for the star!

## Proximity sensors SME-10, for C-slot

## Product range overview

esign	Type of mounting	Measuring principle	Туре	Operating voltage range	Switching output	Switching element function	→ Page/ Internet				
r C-slot	Standard										
	Insertable in the slot from	Magneto-resistive	SMT-10M	5 30 V DC	PNP	N/O contact	-				
	above, flush with the				NPN						
	cylinder profile				Non-contacting, 2-wire						
		Magnetic reed	SME-10M	5 30 V AC/DC	Contacting, bipolar	N/O contact	-				
	Insertable in the slot	Magneto-resistive	SMT-10G	10 30 V DC	PNP, NPN	N/O contact	-				
	lengthwise	Magnetic reed	SME-10	12 27 V AC/DC	Contacting	N/O contact	6				
T-slot	Standard										
	Insertable in the slot from	Magneto-resistive	SMT-8M	10 30 V DC	PNP	N/O contact	T-slot				
	above, flush with the					N/C contact	1				
	cylinder profile				NPN	N/O contact	1				
		Magnetic reed	SME-8M	5 30 V AC/DC	Contacting, bipolar	N/O contact	1				
						N/C contact	1				
	Insertable in the slot lengthwise, flush with the	Magneto-resistive	SMT-8	10 30 V DC	PNP	N/O contact					
	cylinder profile				NPN	-					
	Insertable in the slot	Magnetic reed	SME-8	12 30 V AC/DC	Contacting, bipolar	N/O contact					
	lengthwise, flush with the					N/C contact	1				
	cylinder profile			3 230 V AC/DC		N/O contact	1				
				5 250 V AC/DC							
	Insertable in the slot	Magneto-resistive	SMT-8G	10 30 V DC	PNP	N/O contact	1				
	lengthwise	Magneto-resistive	SMT-8-SL	10 30 V DC	PNP	N/O contact	1				
		Magnetic reed	SME-8-SL	10 30 V AC/DC	Contacting, bipolar	N/O contact	1				
	Insertable in the slot from above	Magnetic reed	SME-8-FM	10 30 V AC/DC	Contacting, bipolar	N/O contact					
	Via accessories	Magneto-resistive	SMTO-8E	10 30 V DC	PNP	N/O contact	1				
					NPN	7					
		Magnetic reed	SMEO-8E	12 30 V DC	Contacting, bipolar	N/O contact	1				
				3 250 V DC							
				3 230 V AC							
	Corrosion-resistant	1	1	1		1					
	Insertable in the slot lengthwise, flush with the cylinder profile	Magneto-resistive	CRSMT-8	10 30 V DC	PNP	N/O contact	T-slot				
	Welding field immune	1		ŀ		-	1				
	Via accessories	Magneto-inductive	SMTSO-8E	10 30 V DC	PNP NPN	N/O contact	T-slot				
	Heat resistant up to 120°C	•			·	·					
	Insertable in the slot lengthwise, flush with the cylinder profile	Magnetic reed	SME-8S6	0 30 V AC/DC	Contacting, bipolar	N/O contact	T-slot				
	Via accessories	Magnetic reed	SMEO-8ES6	0 30 V DC	Contacting	N/O contact	T-slot				
	-			0 30 V AC							

## Product range overview

#### T-slot sensors can be used for drives with T-slot

#### Exceptions



- DFM-B: SMTO-8E, SMTSO-8E, SMEO-8E and SMPO-8E cannot be used
- DHDS: SME-8M can only be used on Ø 50
- DHPS: SME-8M can only be used on Ø 20 ... 35
- HGDD-63-A: SMT-8M-A cannot be used
- HGPT-B: only SMT-8G can be used for size 40 and upwards
- SDBT-BSW- ... -PU/NU can only be used on a limited number of drive series

#### C-slot sensors can be used for drives with C-slot

Exceptions

- ADVC Ø 100: SMT-10M and SME-10M cannot be used (ADVC has a T-slot and C-slot)
- DSM/DSM-B-6/8/10: SME-10M cannot be used
- DSM/DSM-B-1 0/16: SMT-10M cannot be used
- HGPT-B: only SMT-10G can be used for sizes up to and including size 35

#### For drives with sensor rail: these are available with 2 cylinder barrel contours

Only T-slot sensors CRSMT-8M and SMT-8M-A can be used, and only with the profile identified as suitable.



3


#### Example: CDC



Suitable

Not suitable

## Peripherals overview

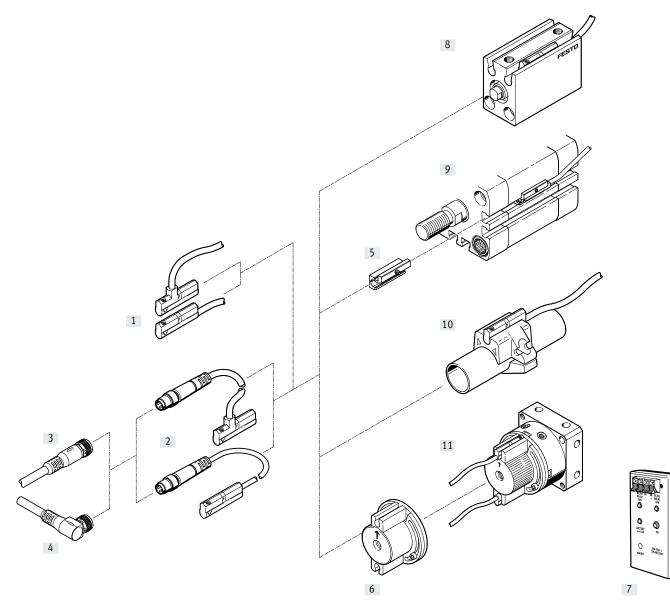

Moun	ting components and accessories	→ Page/ Internet	
Proxi	mity sensor		
[1]	SME-10, with cable	6	
[2]	SME-10, with cable and plug	6	
Conne	ecting cables		
<b>Conne</b> [3]	ecting cables Connecting cable NEBU-MG	11	
		11 11	
[3] [4]	Connecting cable NEBU-MG		
[3] [4]	Connecting cable NEBU-MG Connecting cable NEBU-MW		

Mount	ing components and accessories	→ Page/ Internet
Access	ories	
[7]	Sensor tester SM-TEST-1	11
-	Positioning element SMM-10	10
-	Clip SMBK-10	11
-	Inscription label ASLR	11
-	Safety clip NEAU	11
Drives		
[8]	Drives with C-slot	-
[9]	Drives with T-slot	-
[10]	Round cylinder	-
[11]	Semi-rotary drive DSM	-
		·

## Type codes


001	Series
SME	Proximity sensor
002	Design type
10	For round slot, insertable in the slot lengthwise
003	Electrical connection, cable length, outlet orientation of connection
KL	Cable, 2.5 m, in-line
KQ	Cable, 2.5 m, lateral
SL	Plug M8x1 with cable, 0.3 m, in-line
SQ	Plug M8x1 with cable, 0.3 m, lateral

004	Switching status indication	-
LED	Yellow LED	
005	Rated operating voltage	
24	24 V DC	


### Data sheet - Magnetic reed

Function N/O contact, 3-wire, with cable

- Magneto-resistive measuring
   principle
- Insertable in the slot lengthwise



#### N/O contact, 3-wire, with plug



### General technical data

Design	For C-slot
Conforms to standard	EN 60947-5-2
Certification	RCM compliance mark
CE marking (see declaration of conformity)	To EU EMC Directive
Note on materials	Free of copper and PTFE

#### Input signal/measuring element

Measuring principle		Magnetic reed
Ambient temperature	[°C]	-20 +70

#### Switching output

• •		
Switching output		Contacting, bipolar
Switching element function	÷	N/O contact
Reproducibility of	[mm]	±0.1
switching value		
Switch-on time	[ms]	≤0.6
Switch-off time	[ms]	≤0.05
Max. output current	[mA]	100
Max. switching frequency	[Hz]	500
Max. switching capacity DC	[W]	1
Voltage drop	[V]	0

#### Output, additional data

Short circuit protection	No
Overload protection	Not present

#### Electronics

Operating voltage range DC	[V]	12 27
Operating voltage range AC	[V]	12 27
Reverse polarity protection		No

#### Electromechanical components

Туре		SME-10K	SME-10S
Electrical connection		Cable, 3-wire	Cable with plug
			M8x1, 3-pin
Outlet direction of connection		In-line, lateral	In-line, lateral
Cable length	[m]	2.5	0.3
Information on materials: cable sheath		TPE-U (PUR)	





1

I

T


1

## Data sheet – Magnetic reed

Mechanical components				
Туре		SME-10K	SME-10S	
Type of mounting		Clamped in C-slot, insertable in the slot lengt	wise	
Tightening torque	[Nm]	0.18		
Information on materials: housing		PPS, high-alloy stainless steel	PPS, TPE-U(PU) High-alloy stainless steel Nickel-plated brass	
Display/operation				
<b>Display/operation</b> Switching status indication		Yellow LED		
Switching status indication Immission/emission				
Switching status indication	[°C]	Yellow LED		
Switching status indication Immission/emission Ambient temperature with flexible cable installation	[°C]			
Switching status indication Immission/emission Ambient temperature with flexible cable installation	[°C]	-5 +70		
Switching status indication Immission/emission Ambient temperature with	[°C] [V]	-5+70 IP65		
Switching status indication Immission/emission Ambient temperature with flexible cable installation Degree of protection		-5+70 IP65 IP67		

	Pin	Wire colour	Allocation
4	1	Brown	+
1 + 1 + 3	3	Blue	-
	4	Black	Output

### Data sheet - Magnetic reed

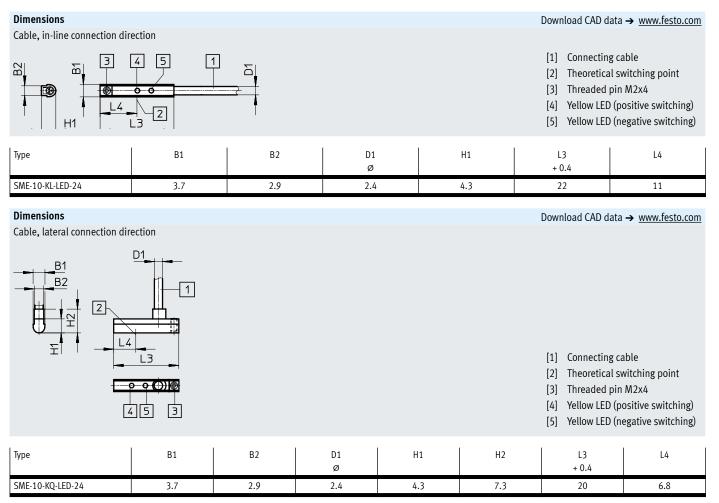

## Data sheet – Magnetic reed

Dimensions	-						Downloa	ad CAD data → <u>y</u>	www.festo.com
Plug M8x1, in-line c	onnection direction								
				B2			N [2] Th [3] Th [4] Ye	ug to fit connect EBU-M8 neoretical switch nreaded pin M2> ellow LED (positiv ellow LED (negati	ing point 4 /e switching)
Туре	B1	B2	D1 Ø	D2	H1	L1	L2 ± 1	L3 + 0.4	L4
SME-10-SL-LED-24	3.7	2.9	2.4	M8	4.3	310	34	22	11
Dimensions Plug M8x1, lateral connection direction									
Туре	B1	B2	D2	H1	H2	L1 -10 30	L2 ± 1	L3 + 0.4	L4
SME-10-SQ-LED-24	3.7	2.9	M8	4.3	7.3	310	34	20	6.8
Ordering data	Switching output	Electrical connectio Cable		le with plug M8x1	Cable ler [m]	ngth Part no	. Type	!	
In-line connection dire									
	N/O contact Contacting, bipolar	3-wire			2.5	173	3210 SME-1	0-KL-LED-24	
	contacting, pipotal	-	3-pi	n	0.3			0-SL-LED-24	
		<u> </u>							
Lateral connection dir	N/O contact								
	Contacting, bipolar	3-wire	-		2.5	173	3211 SME-1	0-KQ-LED-24	
		-	3-pi	n	0.3			0-SQ-LED-24	
U#*									

### Proximity sensors SME-10, for C-slot

### Accessories

Accessories								
Mounting SMBN-10 for mounting proxim SME/SMT-10 on driv	nity sensors					D1	-©1	
Material: Rail: anodised wrou alloy Screws: high-alloy s Note on materials: Free of copper and F RoHS-compliant	tainless steel	Y	e					Ĩ
<b>Dimensions and orde</b> For piston Ø	ering data D1	B1	H1	L1	=©1	Part no.	Туре	
125 320	M3	9.3	8.6	19	1.5	537809	SMBN-10	
Positioning elemen insertable in the slo Ambient temperatur Materials: Housing: anodised v alloy Screws: high-alloy s Note on materials: RoHS-compliant	t lengthwise re: −40 +120°C wrought aluminium							
Dimensions and orde	ering data			1			_	(

Dimensions and ordering data											
	B1	D1	H1	H2	L1	=©1	CRC <sup>1)</sup>	Part no.	Туре	PU <sup>2)</sup>	
	3.75	3.0	12.23	7.6	4.0	1.5	3	547942	SMM-10	10	

1) Corrosion resistance class CRC 3 to Festo standard FN 940070

High corrosion stress. Outdoor exposure under moderate corrosive conditions. Externally visible parts with primarily functional surface requirements which are in direct contact with a normal industrial environment.

2) Packaging unit

## Accessories

#### Ordering data – Connecting cables

	Data sheets → Internet: neb							
	Туре	Number of wires	Cable length [m]	Part no.	Туре			
Socket M8x1, 3-pin								
	For SMT/SME-10	3	2.5	★ 541333	NEBU-M8G3-K-2.5-LE3			
OT LINE A			5	★ 541334	NEBU-M8G3-K-5-LE3			
	For SMT/SME-10	3	2.5	★ 541338	NEBU-M8W3-K-2.5-LE3			
			5	★ 541341	NEBU-M8W3-K-5-LE3			

Ordering data – Mo	unting component	ts		
	For Ø	Description	Part no.	Туре
	6	Mounting kit for mounting proximity sensors on semi-rotary drive DSM	173205	WSM-6-SME-10
and the second	8		173206	WSM-8-SME-10
mar low "	10		173207	WSM-10-SME-10
	-	For fixing connecting cables in place	534255	SMBK-10
(F)				
0				

Ordering data – Sale	- Salety clips for Alex zone								
	Size	Description	Part no.	Туре	PU <sup>1)</sup>				
and the	M8	• Protects "equipment that is not intrinsically safe" in zones 2 and 22 against simple disconnection	548067	NEAU-M8-GD	1				
AN A	M12	ATEX category: gas: II 3G / dust: II 3D	548068	NEAU-M12-GD	1				

1) Packaging unit

Or	dering data – Sens	sor tester		
		Description	Part no.	Туре
0	100 O. 11	<ul> <li>Testing the functionality of proximity sensors using the integrated voltage supply</li> <li>Adjusting the proximity sensors on the cylinder</li> </ul>	158481	SM-TEST-1

Ordering data – Ins	Ordering data – Inscription labels							
	Size	Part no.	Туре	PU <sup>1)</sup>				
	23x4 mm	541598	ASLR-L-423	34				

1) Packaging unit

Generally ready for dispatch from the factory within 24 hours

Т