

Position transmitters SDAT-MHS for T-slot

FESTO



Position transmitters SDAT-MHS for T-slot




Key features

General


Position transmitters are used to provide feedback on piston movement in pneumatic drives. They are situated between simple cylinder	switches and expensive displacement encoders, both in terms of price and complexity. They are the ideal solution for applications in	which reliable analogue feedback on the piston stroke is required with high repetition accuracy, such	as in press-fitting, screwing, riveting, ultrasonic welding, good/bad selection and other applications.
--	--	---	---

Ultrasonic welding

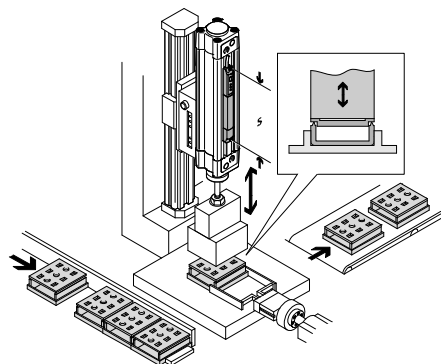


The SDAT-MHS is a position transmitter which continuously records the movement of the piston within the sensing range and makes it available as an output signal proportional to the displacement. The sensing ranges are 50, 80, 100, 125 and 160 mm, making them perfectly harmonised to the stroke of the best-selling Festo cylinders. The SDAT has a 4-20mA analogue output, so it can be connected to analogue inputs without accessories. An IO-Link/switching output is available as a second interface. There is thus a choice between: switching

Bending

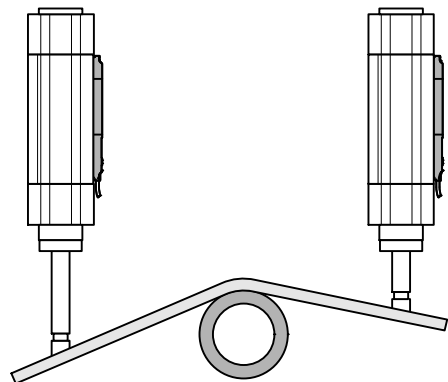

output 24 V or IO-Link operation. The switching output is directly programmed into the device using a teach button; the IO-Link function is programmed by means of a graphic user interface in the controller. The programming options in the two operating modes are: cylinder switch function, window comparator, hysteresis comparator. The IO-Link/switching output is therefore the universal interface for simple programming of routine application functions without needing to evaluate the analogue output.

Switching output

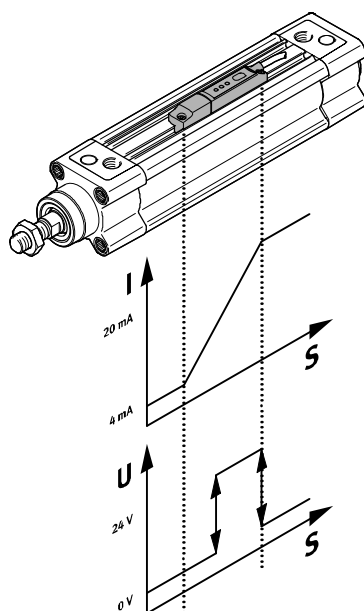

Everything in a single device

- Analogue 4-20mA
- IO-Link
- Switching output

Programming options:

- Cylinder switch function
- Window comparator
- Hysteresis comparator
- NO/NC

Repetition accuracy 0.1 mm



Note
Sensors that detect magnetic fields, such as the position transmitter SDAT, must not be secured onto the drive using mountings made from ferritic materials, as this can lead to malfunction.

Position transmitters SDAT-MHS for T-slot

Key features


FESTO

For drive	Piston Ø
Standard cylinders	
ADN	Ø 12, 16, 20, 25, 32, 40, 50, 63, 80 Ø 100, 125
DSNU	Ø 8, 10, 12, 16, 20, 25, 32, 40, 50 Ø 63
DNC	Ø 32, 40, 50, 63, 80, 100, 125
DNCB	Ø 32, 40, 50, 63, 80, 100
DNG	Ø 32, 40, 50, 63, 80, 100, 125
DSBC	Ø 32, 40, 50, 63, 80, 100, 125
DSBG	Ø 32, 40, 50, 63, 80, 100, 125, 160 Ø 200, 250, 320
Cylinders with piston rod	
ADVC	Ø 40, 50, 63, 80, 100
ADVU	Ø 12, 16, 20, 25, 32, 40, 50 Ø 63, 80, 100, 125
DMM	Ø 10, 16, 20, 25, 32
DZF	Ø 12, 18, 25, 32, 40, 50, 63
DZH	Ø 16, 20, 25
Function-oriented drives	
DFST	Ø 50, 63, 80
STAF	Ø 50, 80

For drive	Piston Ø
Rodless cylinders	
DGC-K	Ø 18, 25, 32, 40, 50, 63, 80
DGC-KF	Ø 18, 25, 32, 40, 50, 63
DGC-G	Ø 18, 25, 32, 40, 50, 63
DGC-GF	Ø 18, 25, 32, 40, 50, 63
Drives with linear guide	
DFM	Ø 12, 16, 20, 25, 32, 40, 50, 63, 80 Ø 100
DFM-B	Ø 12, 16, 20, 25, 32, 40, 50, 63
DGST	Ø 16, 20, 25
DPZ	Ø 10, 16, 20, 25, 32
SLE	Ø 32, 40, 50
Swivel/linear drive units	
DSL	Ø 16, 20, 25, 32, 40
Semi-rotary drives with rack and pinion	
DRQD	Ø 16, 20, 25, 32, 40, 50
DRRD	Ø 16, 20, 25, 32, 40, 50, 63
Mechanical grippers	
DHPS	Ø 35
DHRS	Ø 32, 40
DHWS	Ø 32, 40
HGP	Ø 35
HGR	Ø 32, 40
HGW	Ø 32, 40
HGPL	Ø 63
HGPL-...-B	Ø 14, 25, 40, 63
HGPT-...-G	Ø 63, 80
HGRT	Ø 40, 50

Position transmitters SDAT-MHS for T-slot

Peripherals overview

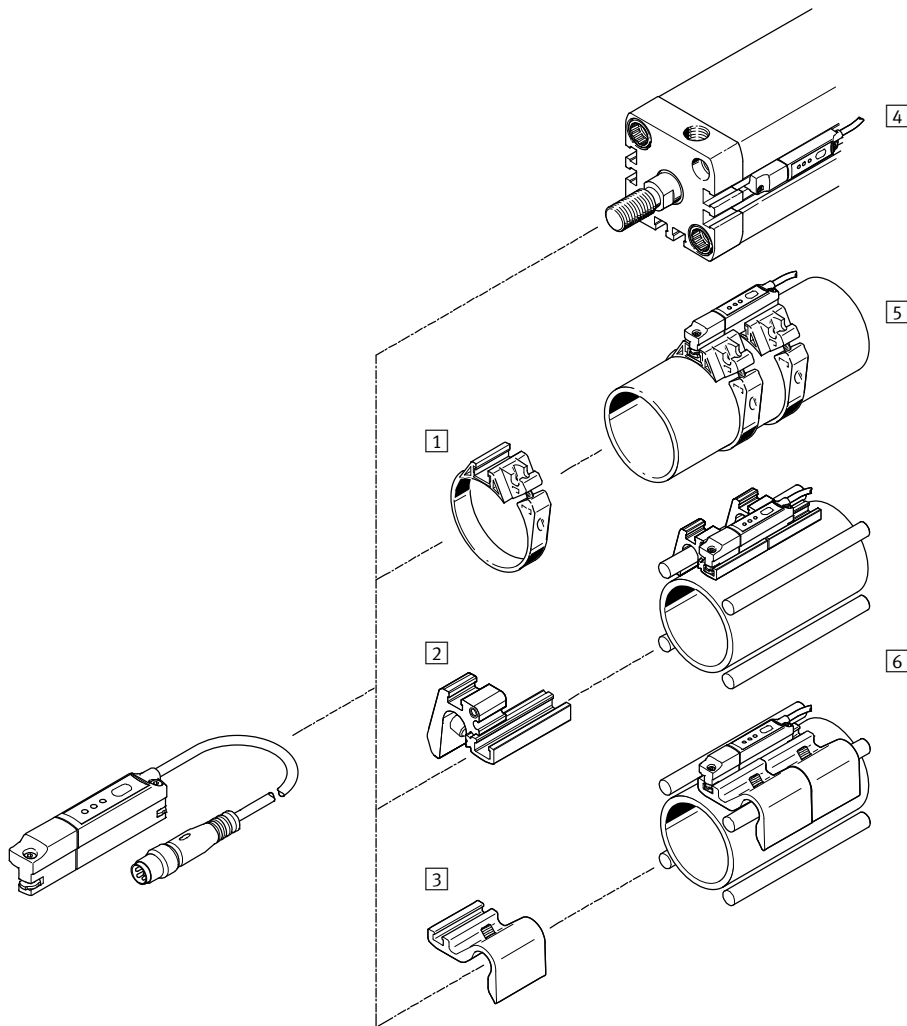

Accessories	→ Page/Internet
1 Mounting kit SMBR	9
2 Mounting SMBZ-8	9
3 Sensor retainer DASP-M4-...	9
4 Standard cylinder DNCB	dncb
Standard cylinder DNC	dnc
Compact cylinder ADN	adn
Short-stroke cylinder ADVC/AEVC	advc
Compact cylinder ADVU/AEVU	advu
Flat cylinder DZF	dzf
Linear drive DGC	dgc
Linear/swivel clamp CLR	clr
Guided drive DFM	dfm

Accessories	→ Page/Internet
5 Standard cylinder/round cylinder DSNU	dsnu
Linear unit SLE	sle
6 Standard cylinder DSBG	dsbg

Position transmitters SDAT-MHS for T-slot



Type code

		SDAT	-	M	HS	-		-	1	L	-	SA	-	E	-	0,3	-	M8																	
Type																																			
SDAT	Position transmitter, magnetic																																		
Sensor design																																			
M	Insertable in slot																																		
Sensor principle																																			
HS	Hall sensor																																		
Measuring range																																			
M50	0 ... 50																																		
M80	0 ... 80																																		
M100	0 ... 100																																		
M125	0 ... 125																																		
M160	0 ... 160																																		
Nominal operating voltage																																			
1	24 V DC																																		
Display																																			
L	LED																																		
Switching input/output																																			
SA	PNP or NPN, 1 analogue output 4 ... 20 mA, IO-Link																																		
Cable properties																																			
E	Suitable for use with energy chains/robot applications																																		
Cable length																																			
0,3	0.3 m																																		
Electrical connection																																			
M8	M8 plug																																		


Position transmitters SDAT-MHS for T-slot



Technical data

Function

Normal operation



General technical data					
Type	M50	M80	M100	M125	M160
Design	For T-slot				
Type of mounting	Insertable in the slot from above, secured with screw				
Mounting position	Any				
Approval certificate	RCM trademark c UL us - Listed (OL)				
Degree of protection	IP65, IP68				
CE marking (see declaration of conformity)	To EU EMC Directive				
KC marking	KC EMC				
Note on materials	Halogen-free, RoHS-compliant				
Weight [g]	19	23	26	30	35

Input signal/measuring element					
Type	M50	M80	M100	M125	M160
Measuring principle	Magnetic Hall				
Measured variable	Position				
Sensing range [mm]	0 ... 50	0 ... 80	0 ... 100	0 ... 125	0 ... 160
Ambient temperature [°C]	-25 ... 70				
Ambient temperature with flexible cable installation [°C]	-20 ... 70				

Signal processing		
Typical sampling interval [ms]	1	
Max. speed of travel [m/s]	3	

Output, general		
Displacement resolution [mm]	0.05	

Analogue output					
	M50	M80	M100	M125	M160
Analogue output [mA]	4 ... 20				
Sensitivity [mA/mm]	0.32	0.2	0.16	0.128	0.1
Typ. linearity error [mm]	±0.25				
Repetition accuracy of analogue value [mm]	0.1				
Max. load resistance of current output [Ω]	500				

Position transmitters SDAT-MHS for T-slot



Technical data

Output, additional data	
Protection against short circuit	Yes
Overload protection	Yes

Electronic components		
Operating voltage range	[V DC]	15 ... 30
Reverse polarity protection		For all electrical connections
Switching output		PNP
Switching element function		N/C or N/O contact, switchable
Residual ripple	[%]	10
Switch-on time	[ms]	< 2
Switch-off time	[ms]	< 2
Max. switching frequency	[kHz]	1
Max. output current	[mA]	100
Max. switching capacity DC	[W]	2.7
Voltage drop	[V]	2.5

Electromechanical components	
Electrical connection	4-pin
	M8x1, A-coded, to EN 61076-2-104
	Screw locking
Connection direction	In-line
Cable properties	Suitable for use with energy chains/robot applications
Cable test conditions	Bending strength: according to Festo standard
	Energy chain: 5 million cycles, bending radius 28 mm
	Torsional strength: > 300,000 cycles, $\pm 270^\circ/Q1$ m

Display/operation	
Setting options	IO-Link
	Pushbutton
Ready status display	Green LED
Switching status display	Yellow LED
Status display	Red LED

Materials	
Housing	High-alloy stainless steel
	Nickel-plated brass
	Reinforced PA
	Polyester
Union nut	Nickel-plated brass
Cable sheath, grey	TPE-U(PUR)
Foil	Polyester
Pin contacts	Gold-plated copper alloy

Pin allocation		
Plug M8x1, 4-pin		Wire colours
	1 Operating voltage +24 V DC	1 BN = brown
	2 Analogue output 4 ... 20 mA	2 WH = white
	3 0 V	3 BU = blue
	4 IO-Link/switching output	4 BK = black


Position transmitters SDAT-MHS for T-slot



Technical data

IO-Link	
Protocol	IO-Link
	I-Port
Protocol version	Device V 1.1
Profile	Smart sensor profile
Function classes	Binary data channel (BDC)
	Diagnostics
	Identification
	Process data variable (PDV)
	Teach channel
Communication mode	COM3 (230.4 kBaud)
SIO mode support	Yes
Port class	A
Process data width IN	2 bytes
Process data content IN	12 bit PDV (position measured value)
	4 bit BDC (position monitoring)
Minimum cycle time [ms]	1

Dimensions	Download CAD data → www.festo.com
SDAT-MHS-M... -1L-SA-E-0,3-M8	

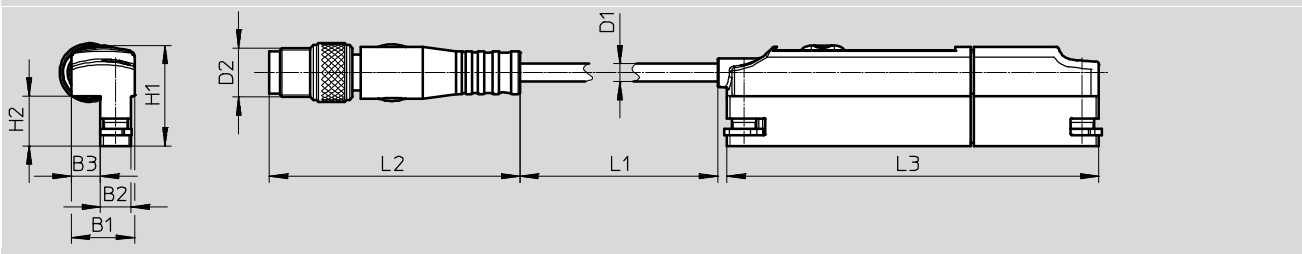

Type	B1	B2	B3	D1 Ø	D2	H1	H2	L1	L2	L3
SDAT-MHS-M50-1L-SA-E-0,3-M8	10.4	5	4.8	2.9	M8	16.5	8.2	300	41.1	61
SDAT-MHS-M80-1L-SA-E-0,3-M8										91
SDAT-MHS-M100-1L-SA-E-0,3-M8										111
SDAT-MHS-M125-1L-SA-E-0,3-M8										136
SDAT-MHS-M160-1L-SA-E-0,3-M8										171



Ordering data				
	Electrical connection	Cable length [m]	Part No.	Type
	4-pin, cable with plug, rotatable thread M8	0.3	1531265	SDAT-MHS-M50-1L-SA-E-0,3-M8
			1531266	SDAT-MHS-M80-1L-SA-E-0,3-M8
			1531267	SDAT-MHS-M100-1L-SA-E-0,3-M8
			1531268	SDAT-MHS-M125-1L-SA-E-0,3-M8
			1531269	SDAT-MHS-M160-1L-SA-E-0,3-M8

Position transmitters SDAT-MHS for T-slot

Accessories

FESTO

Ordering data – Mounting attachments			
	For piston diameter	Part No.	Type
Mounting kit SMBR			
	8	175091	SMBR-8-8
	10	175092	SMBR-8-10
	12	175093	SMBR-8-12
	16	175094	SMBR-8-16
	20	175095	SMBR-8-20
	25	175096	SMBR-8-25
	32	175097	SMBR-8-32
	40	175098	SMBR-8-40
	50	175099	SMBR-8-50
	63	175100	SMBR-8-63
Mounting SMBZ			
	32 ... 100	537806	SMBZ-8-32/100
	125 ... 320	537808	SMBZ-8-125/320
Sensor retainer DASP-M4-...			
	For DSBG-125	1451483	DASP-M4-125-A
	For DSBG-160 ... 200	1553813	DASP-M4-160-A
	For DSBG-250	1456781	DASP-M4-250-A
	For DSBG-320	3015256	DASP-M4-320-A

Ordering data – Connecting cables NEBU-M8				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541342	NEBU-M8G4-K-2.5-LE4
			5	541343	NEBU-M8G4-K-5-LE4
	Straight socket, M8x1, 4-pin	Straight socket, M8x1, 4-pin	2.5	554035	NEBU-M8G4-K-2.5-M8G4
	Angled socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541344	NEBU-M8W4-K-2.5-LE4
			5	541345	NEBU-M8W4-K-5-LE4

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center

Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalneptla,
Estado de México

Multinational Contact Center

01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center

1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us



www.festo.com/socialmedia



www.festo.com

Subject to change