

Pressure sensors SPAW with display

FESTO



Key features

At a glance



- | | | | |
|---|---|--|--|
| [1] 9 pressure ranges from
–1 ... +1 bar to 0 ... +100 bar | [6] Materials in contact with media:
CrNiMo: 316L, from a measuring
range of 10 bar the membrane
consists of 13-8-PH | [8] Display
– bar
– MPa
– kPa
– psi
– kgf/cm ² | [9] Simple operation, protected by
PIN code |
| [2] Protection class IP67 | [7] 4-digit LED display, easy to read,
robust | | [10] 320° rotatable housing |
| [3] 320° rotatable display | | | [11] Electrical connection M12 |
| [4] 1% accuracy, 0.15% repetition
accuracy | | | [12] G1/4 female thread or G1/2 male
thread |
| [5] Temperature of medium
–20 ... 85°C | | | |

Product description

The SPAW is an extremely robust pressure sensor with display used for measuring media pressures in 9 measuring ranges from as small as –1 ... 1 bar up to 0 ... 100 bar. It can measure all media which do not react aggressively with the stainless steel measuring cell and stainless steel housing. The switching outputs can be set quickly and easily using three buttons. The high-quality 14-segment LED display can be rotated 320° and the

orientation of the text can be rotated 180°. This ensures that the display is easily readable in every installation position. Different standard designs are available, e.g.:

- G1/4 female thread or G1/2 male thread
- 2 x PNP or 2 x NPN
- 4 ... 20 mA or 0 ... 10 V

The pressure sensor SPAW is suitable for standard pressure measurement at an increased mechanical load. It can


Main applications

be used in high pressure pneumatic systems and to monitor the pressure of liquid media (e.g. coolant/cooling circuits, etc.)


Key features

Application examples


Pressure measurement in air preparation units

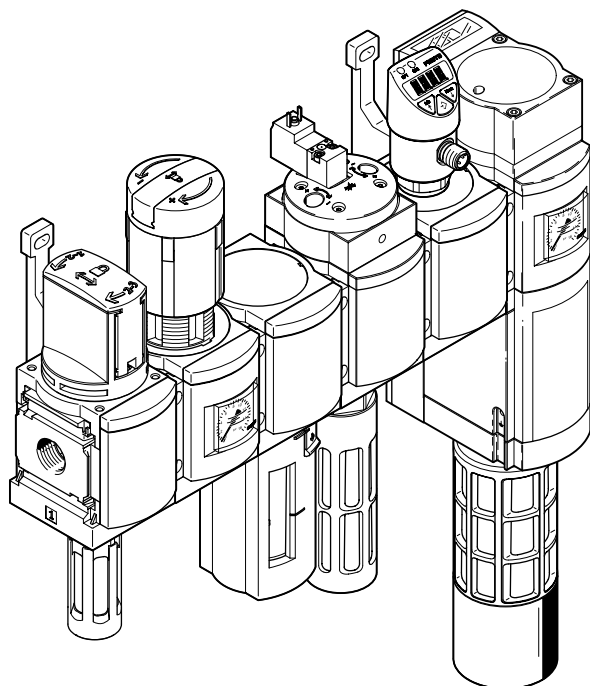


Pressure measurement in piping systems

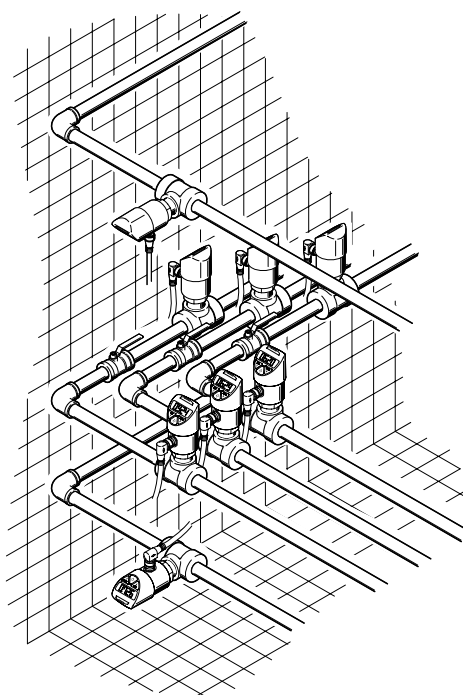


Pressure measurement in filter systems

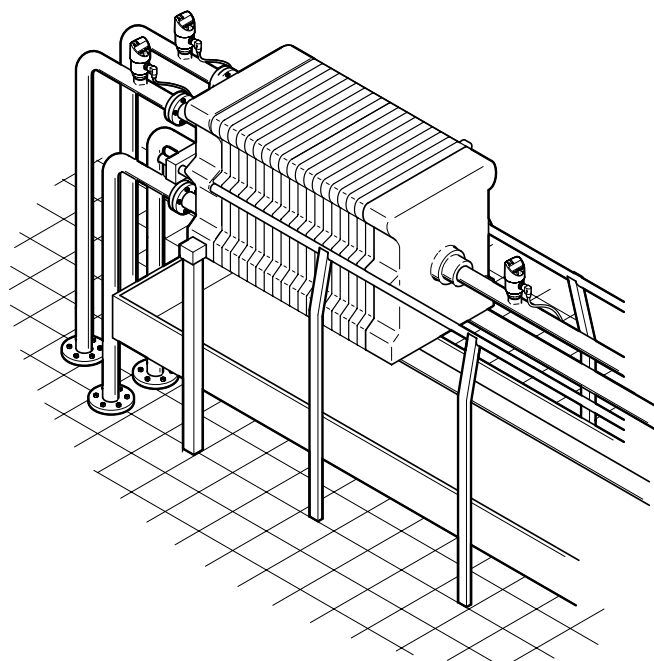

Pressure measurement for cutting oil supply and hydraulic applications

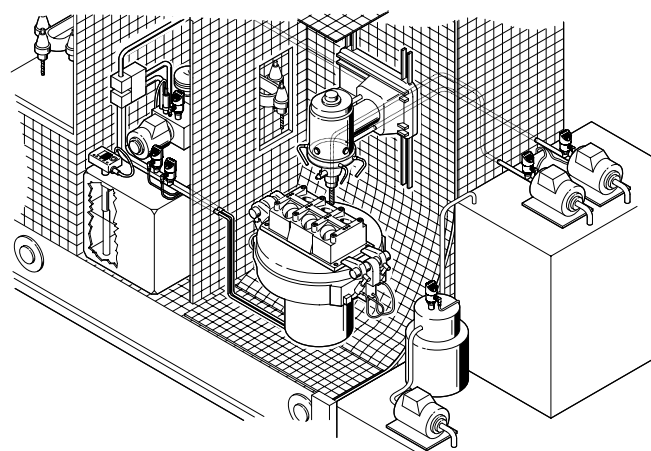

Peripherals overview

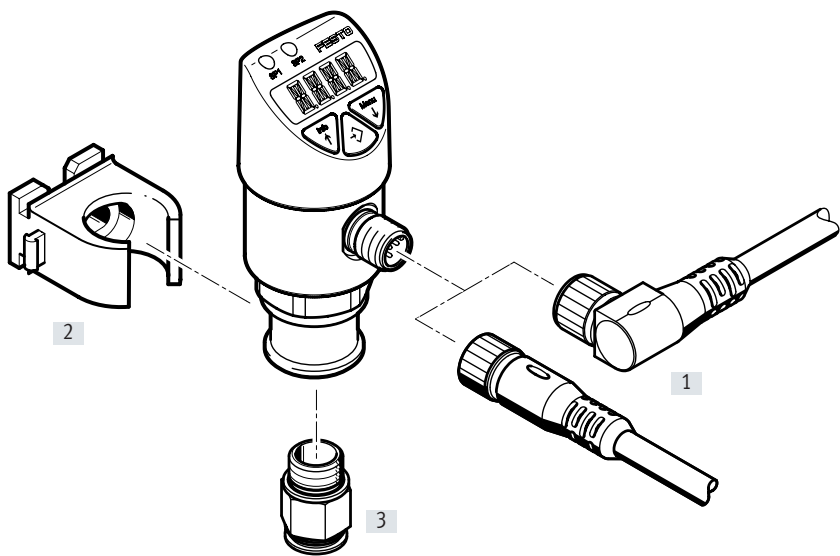


Mounting components and accessories		Brief description	→ Page
[1]	NEBU-M12	Connecting cable	12
[2]	PQ-RK-22-B	Pipe clamp, only for G1/4 with female thread	12
[3]	QS-1/4	Push-in fitting, only for G1/4 with female thread	12

Type codes

001	Series	
SPAW	Pressure sensor	
002	Pressure measuring range	
B2	-1 ... 1 bar	
B11	-1 ... 10 bar	
P2	0 ... 2 bar	
P6	0 ... 6 bar	
P10	0 ... 10 bar	
P16	0 ... 16 bar	
P25	0 ... 25 bar	
P50	0 ... 50 bar	
P100	0 ... 100 bar	
003	Pressure inlet	
R	Relative pressure	


004	Pneumatic connection	
G14	G1/4	
G12	G1/2	
005	Thread type	
F	Female	
M	Male	
006	Electrical output 1	
2P	2x PNP	
2N	2x NPN	
2PA	2x PNP, 1 analogue output 4 ... 20 mA	
2PV	2x PNP, 1 analogue output 0 ... 10 V	
2NA	2x NPN, 1 analogue output 4 ... 20 mA	
2NV	2x NPN, 1 analogue output 0 ... 10 V	
007	Electrical connection	
M12	Plug M12, A-coded	

e.g. switching output 2PV



-

e.g. switching output 2NA



General	
Certification	RCM
	c UL us listed (OL)
CE marking (see declaration of conformity) ¹⁾	To EU EMC Directive
Note on materials	Contains paint-wetting impairment substances, RoHS-compliant

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

[illegible]


2) Note media resistance of parts that come into contact with the media

Data sheet


Electrical data		
General output		
Accuracy	[±%FS]	1
Repetition accuracy	[±%FS]	0.15
Switching output		
Switching function		Freely programmable
Switching element function		Switchable
Max. output current	[mA]	250
Analogue output		
Rise time	[ms]	3
Output, additional data		
Short circuit current rating		Yes
Electronics		
Operating voltage range DC	[V]	15 ... 35
Reverse polarity protection		For operating voltage
Electromechanics		
Electrical connection		Plug, 4-pin, M12x1, plug, 5-pin, M12x1
		To EN 60947-5-2
		Round design

Pin allocation to EN 60947-5-2

Plug, 4-pin, only for sensors without analogue output

M12x1	Pin	Allocation
	1	Operating voltage U_B
	3	0V
	4	Switching output SP1
	2	Switching output SP2

Plug, 5-pin, only for sensors with analogue output

M12x1	Pin	Allocation
	1	Operating voltage U_B
	3	0V
	5	Analogue output A_{out}
	4	Switching output SP1
	2	Switching output SP2

Data sheet

Mechanics		G14F	G12M
Mounting position		Any	
Type of mounting		With female thread, with accessories	With male thread
Pneumatic connection		Female thread G1/4 (EN 837)	Male thread G1/2 (DIN 3852-E)
Product weight [g]		230	
Information on materials: housing		ABS, high-alloy stainless steel	
Materials in contact with the medium ¹⁾		High-alloy stainless steel	
Seals		–	NBR
Display/operation			
Display type		LED display, 4-character alphanumeric	
Displayable units		bar	
		kg/cm²	
		kPa	
		MPa	
		psi	
Switching status indication		Red LED	
Setting options		Via display and buttons	
Protection against tampering		PIN code	
Threshold value setting range [%]		0.5 ... 100	
Hysteresis setting range [%]		0.5 ... 99.5	
Immission/emission			
Degree of protection		IP65, IP67	
Corrosion resistance class CRC ²⁾		4	

1) CrNiMo group: Measuring range up to 6 bar 316L, from a measuring range of 10 bar the membrane consists of 13-8-PH

2) Corrosion resistance class CRC 4 to Festo standard FN 940070


Particularly high corrosion stress. Outdoor exposure under extreme corrosive conditions. Parts exposed to aggressive media, e.g. in the chemical or food industries. Such applications may need to be safeguarded by means of special testing (→ also FN 940082), using appropriate media.

Data sheet


Dimensions

Download CAD data → www.festo.com

SPAW- ... -G12M- ...

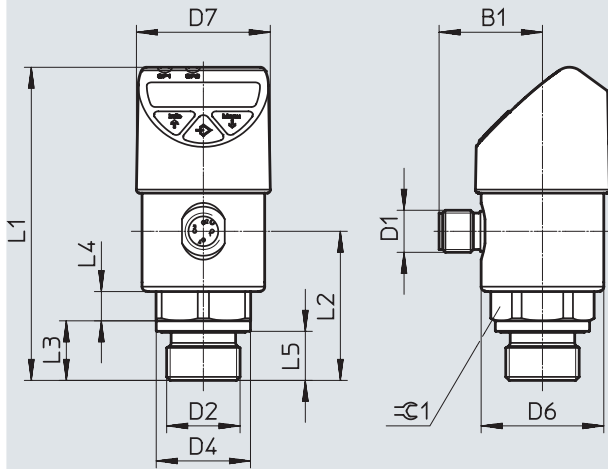

SPAW- ... -G14F- ...

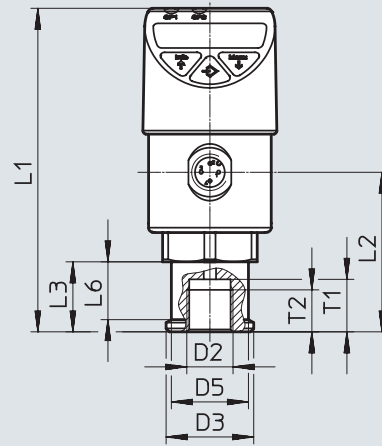

Type	B1	D1	D2	D3 Ø	D4 Ø	D5 Ø	D6 Ø	D7 Ø	L1	L2	L3	L4	L5	L6	T1	T2	≙
SPAW- ... -G12M- ...	29.5	M12x1	G1/2	–	26.9	–	35	38	89.4	42.5	17	8.3	14	–	–	–	27
SPAW- ... -G14F- ...	29.5	M12x1	G1/4	25	–	22	35	38	92.4	45.5	20	8.3	–	16.5	15	12	27

Data sheet

Ordering data, G1/4 female thread						
Pneumatic connection	Pressure measuring range [bar]	Switching output	Analogue output		Part no.	Type
			[mA]	[V]		
	-1 ... +1	2x PNP	-	-	8022740	SPAW-B2R-G14F-2P-M12
	-1 ... +10				8022741	SPAW-B11R-G14F-2P-M12
	0 ... +2				8022742	SPAW-P2R-G14F-2P-M12
	0 ... +6				8022743	SPAW-P6R-G14F-2P-M12
	0 ... +10				8022744	SPAW-P10R-G14F-2P-M12
	0 ... +16				8022745	SPAW-P16R-G14F-2P-M12
	0 ... +25				8022746	SPAW-P25R-G14F-2P-M12
	0 ... +50				8022747	SPAW-P50R-G14F-2P-M12
	0 ... +100				8022748	SPAW-P100R-G14F-2P-M12
	-1 ... +1	2x NPN	-	-	8022758	SPAW-B2R-G14F-2N-M12
	-1 ... +10				8022759	SPAW-B11R-G14F-2N-M12
	0 ... +2				8022760	SPAW-P2R-G14F-2N-M12
	0 ... +6				8022761	SPAW-P6R-G14F-2N-M12
	0 ... +10				8022762	SPAW-P10R-G14F-2N-M12
	0 ... +16				8022763	SPAW-P16R-G14F-2N-M12
	0 ... +25				8022764	SPAW-P25R-G14F-2N-M12
	0 ... +50				8022765	SPAW-P50R-G14F-2N-M12
	0 ... +100				8022766	SPAW-P100R-G14F-2N-M12
	-1 ... +1	2x PNP	4 ... 20	-	8022776	SPAW-B2R-G14F-2PA-M12
	-1 ... +10				8022777	SPAW-B11R-G14F-2PA-M12
	0 ... +2				8022778	SPAW-P2R-G14F-2PA-M12
	0 ... +6				8022779	SPAW-P6R-G14F-2PA-M12
	0 ... +10				8022780	SPAW-P10R-G14F-2PA-M12
	0 ... +16				8022781	SPAW-P16R-G14F-2PA-M12
	0 ... +25				8022782	SPAW-P25R-G14F-2PA-M12
	0 ... +50				8022783	SPAW-P50R-G14F-2PA-M12
	0 ... +100				8022784	SPAW-P100R-G14F-2PA-M12
	-1 ... +1	2x PNP	-	0 ... 10	8022794	SPAW-B2R-G14F-2PV-M12
	-1 ... +10				8022795	SPAW-B11R-G14F-2PV-M12
	0 ... +2				8022796	SPAW-P2R-G14F-2PV-M12
	0 ... +6				8022797	SPAW-P6R-G14F-2PV-M12
	0 ... +10				8022798	SPAW-P10R-G14F-2PV-M12
	0 ... +16				8022799	SPAW-P16R-G14F-2PV-M12
	0 ... +25				8022800	SPAW-P25R-G14F-2PV-M12
	0 ... +50				8022801	SPAW-P50R-G14F-2PV-M12
	0 ... +100				8022802	SPAW-P100R-G14F-2PV-M12
	-1 ... +1	2x NPN	4 ... 20	-	8022812	SPAW-B2R-G14F-2NA-M12
	-1 ... +10				8022813	SPAW-B11R-G14F-2NA-M12
	0 ... +2				8022814	SPAW-P2R-G14F-2NA-M12
	0 ... +6				8022815	SPAW-P6R-G14F-2NA-M12
	0 ... +10				8022816	SPAW-P10R-G14F-2NA-M12
	0 ... +16				8022817	SPAW-P16R-G14F-2NA-M12
	0 ... +25				8022818	SPAW-P25R-G14F-2NA-M12
	0 ... +50				8022819	SPAW-P50R-G14F-2NA-M12
	0 ... +100				8022820	SPAW-P100R-G14F-2NA-M12
	-1 ... +1	2x NPN	-	0 ... 10	8022830	SPAW-B2R-G14F-2NV-M12
	-1 ... +10				8022831	SPAW-B11R-G14F-2NV-M12
	0 ... +2				8022832	SPAW-P2R-G14F-2NV-M12
	0 ... +6				8022833	SPAW-P6R-G14F-2NV-M12
	0 ... +10				8022834	SPAW-P10R-G14F-2NV-M12
	0 ... +16				8022835	SPAW-P16R-G14F-2NV-M12
	0 ... +25				8022836	SPAW-P25R-G14F-2NV-M12
	0 ... +50				8022837	SPAW-P50R-G14F-2NV-M12
	0 ... +100				8022838	SPAW-P100R-G14F-2NV-M12



Data sheet

Ordering data, G1/2 male thread					
Pneumatic connection	Pressure measuring range [bar]	Switching output	Analogue output		Part no. Type
			[mA]	[V]	
	-1 ... +1	2x PNP	-	-	8022749 SPAW-B2R-G12M-2P-M12
	-1 ... +10				8022750 SPAW-B11R-G12M-2P-M12
	0 ... +2				8022751 SPAW-P2R-G12M-2P-M12
	0 ... +6				8022752 SPAW-P6R-G12M-2P-M12
	0 ... +10				8022753 SPAW-P10R-G12M-2P-M12
	0 ... +16				8022754 SPAW-P16R-G12M-2P-M12
	0 ... +25				8022755 SPAW-P25R-G12M-2P-M12
	0 ... +50				8022756 SPAW-P50R-G12M-2P-M12
	0 ... +100				8022757 SPAW-P100R-G12M-2P-M12
	-1 ... +1	2x NPN	-	-	8022767 SPAW-B2R-G12M-2N-M12
	-1 ... +10				8022768 SPAW-B11R-G12M-2N-M12
	0 ... +2				8022769 SPAW-P2R-G12M-2N-M12
	0 ... +6				8022770 SPAW-P6R-G12M-2N-M12
	0 ... +10				8022771 SPAW-P10R-G12M-2N-M12
	0 ... +16				8022772 SPAW-P16R-G12M-2N-M12
	0 ... +25				8022773 SPAW-P25R-G12M-2N-M12
	0 ... +50				8022774 SPAW-P50R-G12M-2N-M12
	0 ... +100				8022775 SPAW-P100R-G12M-2N-M12
	-1 ... +1	2xPNP	4 ... 20	-	8022785 SPAW-B2R-G12M-2PA-M12
	-1 ... +10				8022786 SPAW-B11R-G12M-2PA-M12
	0 ... +2				8022787 SPAW-P2R-G12M-2PA-M12
	0 ... +6				8022788 SPAW-P6R-G12M-2PA-M12
	0 ... +10				8022789 SPAW-P10R-G12M-2PA-M12
	0 ... +16				8022790 SPAW-P16R-G12M-2PA-M12
	0 ... +25				8022791 SPAW-P25R-G12M-2PA-M12
	0 ... +50				8022792 SPAW-P50R-G12M-2PA-M12
	0 ... +100				8022793 SPAW-P100R-G12M-2PA-M12
	-1 ... +1	2xPNP	-	0 ... 10	8022803 SPAW-B2R-G12M-2PV-M12
	-1 ... +10				8022804 SPAW-B11R-G12M-2PV-M12
	0 ... +2				8022805 SPAW-P2R-G12M-2PV-M12
	0 ... +6				8022806 SPAW-P6R-G12M-2PV-M12
	0 ... +10				8022807 SPAW-P10R-G12M-2PV-M12
	0 ... +16				8022808 SPAW-P16R-G12M-2PV-M12
	0 ... +25				8022809 SPAW-P25R-G12M-2PV-M12
	0 ... +50				8022810 SPAW-P50R-G12M-2PV-M12
	0 ... +100				8022811 SPAW-P100R-G12M-2PV-M12
	-1 ... +1	2xNPN	4 ... 20	-	8022821 SPAW-B2R-G12M-2NA-M12
	-1 ... +10				8022822 SPAW-B11R-G12M-2NA-M12
	0 ... +2				8022823 SPAW-P2R-G12M-2NA-M12
	0 ... +6				8022824 SPAW-P6R-G12M-2NA-M12
	0 ... +10				8022825 SPAW-P10R-G12M-2NA-M12
	0 ... +16				8022826 SPAW-P16R-G12M-2NA-M12
	0 ... +25				8022827 SPAW-P25R-G12M-2NA-M12
	0 ... +50				8022828 SPAW-P50R-G12M-2NA-M12
	0 ... +100				8022829 SPAW-P100R-G12M-2NA-M12
	-1 ... +1	2xNPN	-	0 ... 10	8022839 SPAW-B2R-G12M-2NV-M12
	-1 ... +10				8022840 SPAW-B11R-G12M-2NV-M12
	0 ... +2				8022841 SPAW-P2R-G12M-2NV-M12
	0 ... +6				8022842 SPAW-P6R-G12M-2NV-M12
	0 ... +10				8022843 SPAW-P10R-G12M-2NV-M12
	0 ... +16				8022844 SPAW-P16R-G12M-2NV-M12
	0 ... +25				8022845 SPAW-P25R-G12M-2NV-M12
	0 ... +50				8022846 SPAW-P50R-G12M-2NV-M12
	0 ... +100				8022847 SPAW-P100R-G12M-2NV-M12

Accessories

Ordering data – Connecting cables

Data sheets → Internet: nebu

	Number of wires/pins	Cable length [m]	Part no.	Type
M12x1, straight socket, open end				
	4	2.5	550326	NEBU-M12G5-K-2.5-LE4
		5	541328	NEBU-M12G5-K-5-LE4
	5	2.5	541330	NEBU-M12G5-K-2.5-LE5
		5	541331	NEBU-M12G5-K-5-LE5
M12x1, angled socket, open end				
	4	2.5	550325	NEBU-M12W5-K-2.5-LE4
		5	541329	NEBU-M12W5-K-5-LE4

Ordering data – Push-in fittings¹⁾

Data sheets → Internet: qs

	For tubing O.D.	Part no.	Type
	4 mm	190644	QS-1/4-4 ¹⁾
	6 mm	153003	QS-1/4-6 ¹⁾
	8 mm	153005	QS-1/4-8 ¹⁾

1) Temperature-dependent operating pressure –0.95 ... 14 bar

Ordering data – Pipe clamp

	Part no.	Type
	550598	PQ-RK-22-B

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalnepantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us

www.festo.com/socialmedia



www.festo.com

Subject to change