



Key features

General information

The USB IO-Link Master CDSU-1 allows Festo IO-Link products to be commissioned quickly and intuitively.



It is connected to a PC via a mini USB port. The M12 IO-Link connection and the USB interface are galvanically isolated to ensure safe and reliable operation.

IO-Link devices with a low current demand can be operated directly from the USB port of a PC via an integrated DC/DC converter (up to 80 mA).

Key features / highlights

- Universal solution for the parameterisation and visualisation of IO-Link devices
- For all Festo IO-Link devices (sensors and actuators)
- Universal connections
- Galvanic isolation
- For port class A and port class B (with accessories)
- Connecting cables available as accessories for nearly all Festo IO-Link devices
- For IO-Link devices with protocol version 1.1 and 1.0
- Supports data storage
- IODD Finder Interface
- Future-proof: new functions, e.g. firmware updates via IO-Link, will be available regularly
- Compact, cost-effective and powerful

CDSU-1



For commissioning IO-Link devices with a higher output, a standardised 24 V industrial input port is available on the master (up to 2.5 A).

Port Class B IO-Link devices up to 3.5 A (e.g. valve terminals) can be operated using the new NEDU distributor.


The USB IO-Link Master Tool software acts as the user interface for visualising and editing the parameters of IO-Link devices.

This software can be downloaded for free from the Support Portal.

Peripherals overview

Connection example up to 80 mA:

Devices with a low current demand can be operated directly from the USB port of a PC via an integrated DC/DC converter.

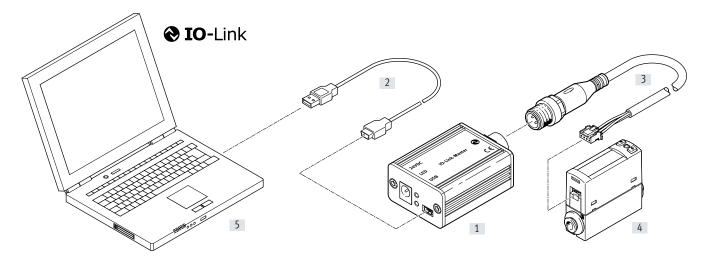


| Produ | Product overview | | |
|-------|---|--|-----------------|
| | | Brief description | → Page/Internet |
| [1] | Controller CDSU-1 | For quick and intuitive commissioning of products with IO-Link | 6 |
| [2] | Connecting cable ¹⁾ | Mini USB cable type A | - |
| [3] | Connecting cable NEBS-L1G4-K-1-N-M12G4 | 4 x 0.25 mm², M12x1, A-coded, to EN 61076-2-101 | 11 |
| [4] | Flow sensors SFAH | For monitoring compressed air and non-corrosive gases. | sfah |
| [5] | Laptop | - | - |

1) Mini USB cable is included in the scope of delivery of the CDSU-1

Peripherals overview

Connection example up to 2.5 A:

For commissioning IO-Link devices with a higher output, a standardised 24 V industrial input port is available on the master for connecting an external power supply unit.

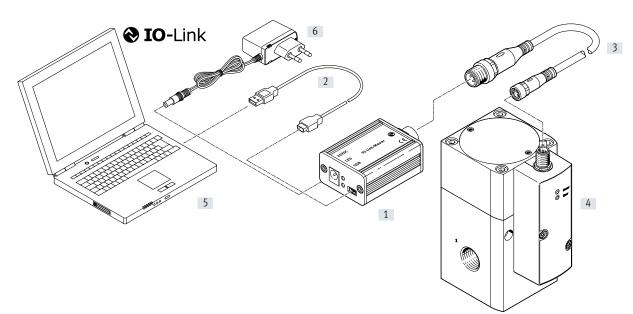

| Prod | Product overview | | |
|------|---|--|-----------------|
| | | Brief description | → Page/Internet |
| [1] | Controller CDSU-1 | For quick and intuitive commissioning of products with IO-Link | 6 |
| [2] | Connecting cable ¹⁾ | Mini USB cable type A | - |
| [3] | Connecting cable NEBU-M8G4-K-1-N-M12G4 | 4 x 0.25 mm ² , M8x1, A-coded, to EN 61076-2-104 | 12 |
| [4] | Proportional valves VPPM | Proportional-pressure regulators | vppm |
| [5] | Laptop | - | - |
| [6] | Power supply unit ²⁾ | For supplying power | - |


Mini USB cable is included in the scope of delivery of the CDSU-1 1)

2) Power supply plug is not included in the scope of delivery of the CDSU-1

Peripherals overview

Connection example up to 3.5 A:

Port Class B IO-Link devices can be operated using the new distributor.

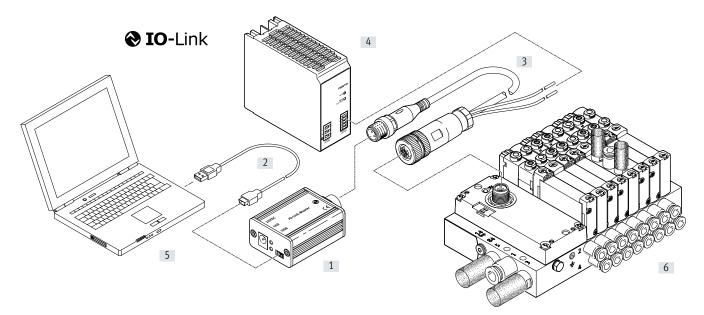

Product overview

| | | Brief description | → Page/Internet |
|-----|---|--|-----------------|
| [1] | Controller CDSU-1 | For quick and intuitive commissioning of products with IO-Link | 6 |
| [2] | Connecting cable ¹⁾ | Mini USB cable type A | - |
| [3] | Distributor NEDU-L1R2-M12G5-M12LE-1R | 3 x 0.25 mm ² , 2 x 0.5 mm ² | 9 |
| [4] | Power supply unit ²⁾ CACN | For supplying power | - |
| [5] | Laptop | - | - |
| [6] | Valve terminal VTUG | Valve terminal with IO-Link interface | vtug |

1) Mini USB cable is included in the scope of delivery of the CDSU-1

2) Power supply unit is not included in the scope of delivery of the CDSU-1

T

Data sheet

IO-Link



| General technical data | |
|----------------------------|---|
| Туре | CDSU-1 |
| Conforms to standard | EN 61131-9 |
| Certification | RCM compliance mark |
| CE marking (see | To EU EMC Directive |
| declaration of conformity) | To EU RoHS Directive |
| Note regarding use | For use with the USB IO-Link Master Tool software (available from the Support Portal) for Windows version 7 or higher (32/64-bit) |
| | |
| Electronics | |

| Electronics | |
|-----------------------------|---|
| Input voltage | 5 V DC at the USB connection |
| | 24 V DC ± 6 V via external supply |
| Input current | Max. 600 mA at the USB connection |
| | Max. 2.5 A via external supply |
| Output voltage | 24 V DC ± 10% with USB operation |
| | 24 V DC ± 6 V with external supply (max. input voltage) |
| IO-Link, output current | 80 mA with USB operation |
| | Max. input current with external supply |
| Reverse polarity protection | For operating voltage connections |
| Short circuit protection | Yes |
| Overload protection | Not present |

| Amplent conditions | | |
|----------------------|------|----------------|
| Ambient temperature | [°C] | 0 55 |
| Storage temperature | [°C] | -10 75 |
| Degree of protection | | IP20 |
| Note on materials | | RoHS-compliant |

Mechanical components

| Mechanical components | | |
|-----------------------|-----|----------------------------------|
| Product weight | [g] | 106 |
| Housing material | | Anodised wrought aluminium alloy |

Data sheet

| Communication interface for IO-Link | | |
|-------------------------------------|------|-----------------------------------|
| Protocol | | IO-Link |
| Protocol version | | Master V 1.0 |
| | | Master V 1.1 |
| Communication mode | | COM1 (4.8 kBd) |
| | | COM2 (38.4 kBd) |
| | | COM3 (230.4 kBd) |
| Port class | | A |
| | | B with accessories |
| Number of ports | | 1 |
| Process data width OUT | | Can be parameterised 0 - 32 bytes |
| Process data width IN | | Can be parameterised 0 - 32 bytes |
| Minimum cycle time | [ms] | 1.5 |
| Data memory available | | 2 kB/port |

Power supply

| i ower suppry | |
|-------------------------------|----------------------------------|
| Function | Additional power supply |
| Connection technology | Coaxial |
| Number of pins/wires | 2 |
| Note on connection technology | For plugs with an O.D. of 5.5 mm |
| | For plugs with an I.D. of 2.1 mm |
| USB interface | |
| Connection type | Socket |
| Connection technology | USB 2.0 type B mini |
| Galvanic isolation | Yes |

Electrical connection of IO-Link

| Number of pins/wires | 5 |
|-----------------------|-----------------------------------|
| Assigned pins/wires | 3 |
| Connection technology | M12x1, A-coded, to EN 61076-2-101 |

Pin allocation

| | Pin | Meaning |
|-----------|-----|---------------|
| | 1 | + 24 V |
| | 2 | Not assigned |
| 1(0,0,0)3 | 3 | GND |
| | 4 | IO-Link (C/Q) |
| 4 | 5 | Not assigned |
| | | |
| 12345 | 1 | + 5 V |
| | 2 | D- |
| | 3 | D+ |
| | 4 | Not assigned |
| | 5 | GND |


Data sheet

| Dimensions | _ L1 _ , | | l | Download CAD data → <u>www.festo.com</u> |
|---------------|---|---|-------------------|--|
| | | | | |
| Туре | B1 | H1 | L1 | L2 |
| CDSU-1 | 24 | 41.3 | 65.8 | 11.8 |
| Ordering data | | | | |
| Controllers | Brief description | | Part no. | Туре |
| 00: 00 | The USB IO-Link Master CDSU-1 allows produ intuitively ¹⁾ | ucts with IO-Link to be commissioned qu | ickly and 8091509 | CDSU-1 |

Power supply plug is not included in the scope of delivery of the CDSU-1

Accessories

Distributor NEDU

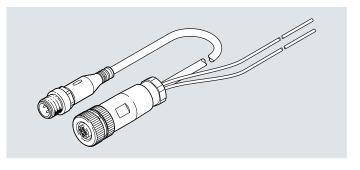

General technical data

| Connecting cable 4x 0.25 mm ² | - | Electrical connection 1 | Electrical connection 2 | Electrical connection 3 | | | | |
|--|--------------------|---|--|-------------------------|--|--|--|--|
| Design | | Y distributor with cable on controller side | | | | | | |
| Distributor type | | 1 to 2 | 1 to 2 | | | | | |
| Based on standard | | EN 61076-2-101 | | | | | | |
| Function | | Field device side | Communication, IO-Link | Additional supply | | | | |
| Design type | | Round | Round | - | | | | |
| Connection type | | Socket | Plug | 2x single wires | | | | |
| Cable outlet | | Straight | Straight | - | | | | |
| Connection technology | | M12x1, A-coded, to EN 61076-2-101 | M12x1, A-coded, to EN 61076-2-101 | Open end | | | | |
| Number of pins/wires | | 5 | 3 | 2 | | | | |
| Assigned pins/wires | | 5 | 3 | 2 | | | | |
| Cable characteristic | | For static applications | | | | | | |
| Cable length | [m] | 1 | | | | | | |
| Cable composition | [mm ²] | 3 x 0.25 | 3 x 0.25 | 2 x 0.5 | | | | |
| Conductor nominal cross section | [mm ²] | 0.25 | 0.25 | 0.5 | | | | |
| Bending radius, fixed cable installat | ion | ≥ 13.5 mm | | | | | | |
| Bending radius, flexible cable instal | lation | ≥6 mm | | | | | | |
| Cable diameter | [mm] | 4.5 and 1.75 | 4.5 | 1.75 | | | | |
| Type of mounting | | Screw-type lock with 18 mm hexagon and | Screw-type lock with hexagon A/F 13 mm | - | | | | |
| | | longitudinal knurl | and longitudinal knurl | | | | | |
| Plug pattern | | $ \begin{array}{c} 2 \\ 1 \\ \bigcirc \\ 5 \\ 4 \end{array} $ | 3 + + + + 1 + 4 | - | | | | |

Accessories

Operating and environmental conditions

| Operating and environmental conditions | | | | | |
|--|------|---------------------|--|--|--|
| Ambient temperature | [°C] | -30 80 | | | |
| Nominal operating voltage DC | [V] | 24 | | | |
| Operating voltage range DC | [V] | 0 30 | | | |
| Current rating at 40°C | [A] | 4 | | | |
| Surge resistance | [kV] | 0.8 | | | |
| Degree of protection | | IP65, IP68, IP69K | | | |
| Note on degree of protection | | When mounted | | | |
| | | IP40 for M12 socket | | | |
| Pollution degree | | 3 | | | |
| Corrosion resistance class CRC ¹⁾ | | 1 | | | |

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. Dry indoor application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).


Materials

| Housing material | TPE-U(PUR), PA |
|-----------------------------|--|
| Housing colour | Black |
| Cable sheath material | TPE-U(PUR) |
| Cable sheath colour | Grey |
| Material of screw-type lock | Nickel-plated brass, nickel-plated die-cast zinc |
| Material of pin contacts | Nickel-plated and gold-plated bronze |
| Insulating sheath material | PVC |
| Note on materials | RoHS-compliant |

Dimensions

Distributor

Download CAD data \rightarrow <u>www.festo.com</u>

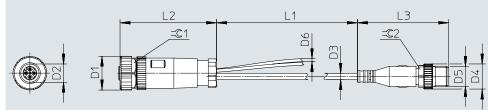

| Туре | D1 Ø | D2 | D3 Ø | D4 Ø | D5 |
|--------------------------|---------|-------|---------|---------|--------------|
| NEDU-L1R2-M12G5-M12LE-1R | 20.2 | M12x1 | 4.5 | 15 | M12x1 |
| Туре | L1 | L2 | L3 | =© 1 | - © 2 |
| NEDU-L1R2-M12G5-M12LE-1R | 1000 | 54 | 54.5 | 18 | 13 |

| Ordering data – Cor | Ordering data – Connecting cables | | | | | | | | |
|---------------------|-----------------------------------|-------------------------|-------------------------|--------|--------|----------|--------------------------|--|--|
| | Electrical connection 1 | Electrical connection 2 | Electrical connection 3 | Length | Weight | Part no. | Туре | | |
| | [mm ²] | [mm ²] | [mm ²] | [m] | [g] | | | | |
| | | | | | | | | | |
| ATT DA | 3 x 0.25 | 3 x 0.25 | 3 x 0.5 | 1 | 78 | 8091516 | NEDU-L1R2-M12G5-M12LE-1R | | |

Accessories

Connecting cables NEBS

e.g. for SPAN, SCDN and SFAH

General technical data

| Connecting cable 4x 0.25 mm ² | | Electrical connection 1 | Electrical connection 2 |
|--|--------------------|-------------------------|--|
| Function | | Field device side | Controller side |
| Design type | | Rectangular | Round |
| Connection type | | Socket | Plug |
| Cable outlet | | Straight | Straight |
| Connection technology | | Plug pattern L1J | M12x1, A-coded, to EN 61076-2-101 |
| Number of pins/wires | | 4 | 4 |
| Assigned pins/wires | | 4 | 4 |
| Cable characteristic | | Standard | · |
| Bending radius, fixed cable installation | | ≥ 14 mm | |
| Bending radius, flexible cable installation | | ≥ 46 mm | |
| Cable diameter | [mm] | 4.5 | |
| Conductor nominal cross section | [mm ²] | 0.25 | |
| Type of mounting | | Snap-locking | Screw-type lock with hexagon A/F 13 mm and longitudinal knurl |
| Plug pattern | | 4321 | $3 \begin{pmatrix} 2 \\ + \\ + \\ + \\ + \\ 4 \end{pmatrix} 1$ |

Operating and environmental conditions

| [°C] | -20 60 |
|------|----------------------------|
| [°C] | -560 |
| | |
| [°C] | -2060 |
| [V] | 030 |
| [A] | 1 |
| [kV] | 0.8 |
| | IP65, IP67, IP69K |
| | When mounted |
| | IP40 for plug pattern L1J |
| | 2 |
| | 2 |
| | [°C] [°C] [V] [A] |

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

Accessories


Materials

| Materials | |
|-----------------------------|--------------------------------------|
| Housing material | PA, TPE-U(PUR) |
| Housing colour | Black, white |
| Cable sheath material | TPE-U(PUR) |
| Material of screw-type lock | Nickel-plated brass |
| Material of pin contacts | Tin-plated bronze, gold-plated brass |
| Insulating sheath material | PP |
| Cable sheath colour | Grey |
| Note on materials | RoHS-compliant, halogen-free |

Dimensions

Plug

B4

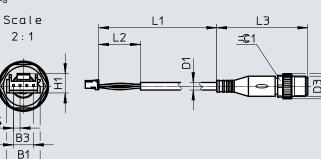

| Туре | B1 | B3 | B4 | D1 Ø | D پ | 2 ð |
|-----------------------|-------|-----|------|---------|--------|--------|
| NEBS-L1G4-K-1-N-M12G4 | 10 | 6 | 2 | 4.5 | 1 | 5 |
| Туре | D3 | H1 | L1 | L2 | L3 | =© 1 |
| NEBS-L1G4-K-1-N-M12G4 | M12x1 | 5.8 | 1000 | 25 | 54.5 | 13 |

02

| Ordering data – Con | Ordering data – Connecting cable | | | | | | | | |
|--|----------------------------------|--------------------|--------|--------------------|--------|----------|-----------------------|--|--|
| | Electrical | Electrical | Length | Cable | Weight | Part no. | Туре | | |
| | connection 1 | connection 2 | | composition | | | | | |
| | | | [m] | [mm ²] | [g] | | | | |
| Connecting cables N | EBS | | | | | | | | |
| | Plug pattern L1J | M12x1, A-coded, to | 1 | 4 x 0.25 | 40 | 8091514 | NEBS-L1G4-K-1-N-M12G4 | | |
| WE THE SE | | EN 61076-2-101 | | | | | | | |
| and the second s | | | | | | | | | |

| Ordering data | | | | | | | |
|--|--------------------------|-----------------------------------|----------|------------------------|--|--|--|
| | Cable composition | Electrical connection | Part no. | Туре | | | |
| Connecting cables N | IEBU | | | | | | |
| | 3 x 0.25 mm ² | M12x1, A-coded, to EN 61076-2-101 | 8091511 | NEBU-M12G5-K-1-N-M12G3 | | | |
| MIT IN THE T | | M8x1, A-coded, to EN 61076-2-104 | 8091512 | NEBU-M8G3-K-1-N-M12G3 | | | |
| Statistics of the second secon | | Open end | 8091515 | NEBU-LE3-K-1-N-M12G3 | | | |
| MITTER AL | 4 x 0.25 mm ² | M8x1, A-coded, to EN 61076-2-104 | 8091513 | NEBU-M8G4-K-1-N-M12G4 | | | |

Download CAD data \rightarrow <u>www.festo.com</u>

Festo - Your Partner in Automation





1 Festo Inc.

5300 Explorer Drive Mississauga, ON L4W 5G4 Canada

Festo Customer Interaction Center Tel: 1 877 463 3786 Fax: 18773933786 Email: customer.service.ca@festo.com ventas.mexico@festo.com



2 Festo Pneumatic

Av. Ceylán 3, Col. Tequesquináhuac 54020 Tlalnepantla, Estado de México

Multinational Contact Center 01 800 337 8669



3 Festo Corporation 1377 Motor Parkway Suite 310 Islandia, NY 11749



4 **Regional Service Center** 7777 Columbia Road Mason, OH 45040

Festo Customer Interaction Center 1 800 993 3786 1 800 963 3786 customer.service.us@festo.com

Subject to change

f 🗾 in 🛗 www.festo.com/socialmedia

Connect with us



www.festo.com