

Linear modules HMP

FESTO



Linear modules HMP

Key features

FESTO

At a glance




- Sturdier
- Optimised end stop system
- Optimised intermediate position module
- Minimised susceptibility to wear
- One-way flow control valves that can be externally adjusted
- Integrated sensor strip

- Diameters of 16 ... 32 mm
- Stroke lengths of 50 ... 400 mm
- Extremely rigid basic profile
- Infinitely adjustable end stops
- Rotatable yoke plate
- Integrated clamping unit
- Precision backlash-free guide system
- Freely adjustable intermediate position
- Adjustable end-position cushioning

- Integrated sensors:
 - Sensor strip for proximity sensors for end-position sensing
 - Mounting slot for proximity sensors for position sensing
- Functional end cap:
 - Pneumatic interface
 - Electrical interface

- Highly flexible thanks to various mounting and assembly options:
 - Basic profile
 - Yoke plate
- Large selection of adapters for:
 - Drives
 - Grippers
- Innovative and user-friendly installation system

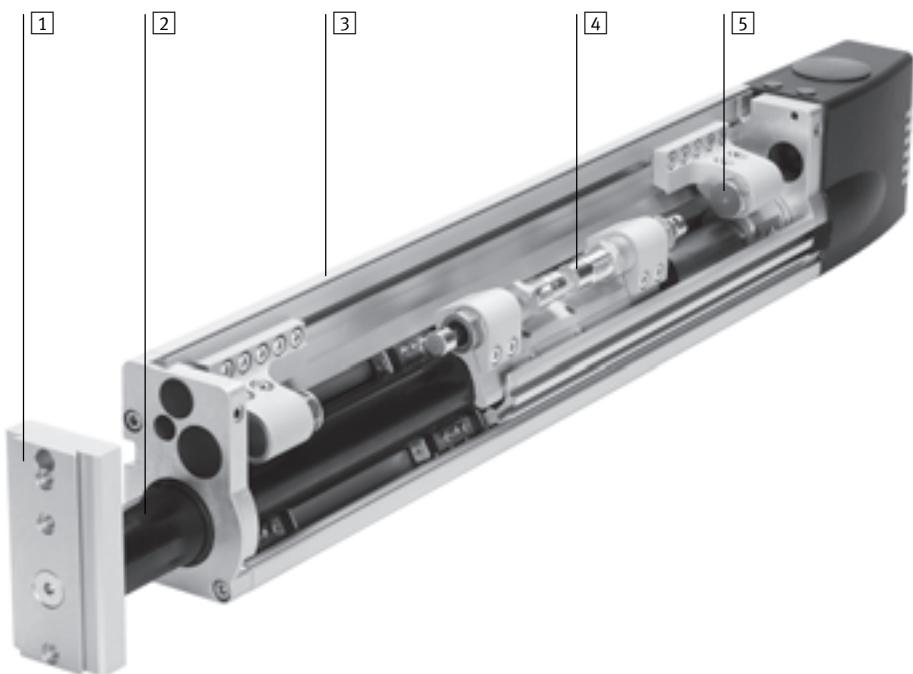

[1] Yoke plate

Can be turned to any angle from 0 to 360°. The yoke plate cannot be turned if combined with the clamping unit. Drives and grippers can be mounted on the yoke plate by means of adapter kits (direct mounting or dovetail connections).

[2] Guide system

Extremely high rigidity thanks to the hardened steel guide barrel which is supported in pre-loaded and backlash-free recirculating ball bearing guides guaranteeing the utmost precision.

[3] Basic profile

Drives and basic components can be attached to the rigid light alloy profile using adapter, connector and component kits.

[4] End-position cushioning.

Extremely dynamic operation thanks to hydraulic shock absorbers which cushion the piston sleeve at the end positions.

[5] End stop

Any desired intermediate position can be set between minimum and maximum stroke (plus the strokes of the shock absorbers).

Linear modules HMP

FESTO

Key features

Wide choice of variants


End stop

The optimised end stop system is practically wear-free. Rough adjustment is performed by moving the stop into the profile groove. Fine adjustment is performed using compressed air via a rotatable sleeve.



Clamping unit


The pneumatically-powered clamping unit can be used to hold loads at any end position and with the module installed at any angle. In the case of a pressure drop or pressure failure, the clamping unit acts like an EMERGENCY STOP device. The clamping unit can be released by means of the manual override.

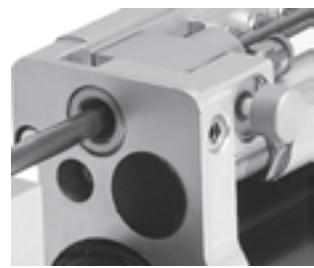

End cap

Connections can be made on the top and bottom of the end cap. Pneumatic tubing and electrical cables can be bundled and routed through the end cap via conduits.

Max. 6 proximity sensors can be connected to the integral terminal strip. The switching states of the proximity sensors are indicated via a display window in the end cap.

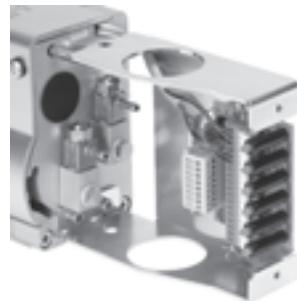

Intermediate position module

The intermediate position module permits advancing to an additional position between the two end positions. This is done by swivelling a lever into the traversing range of the moving stop on the guide tube.

The intermediate position can be activated during the advancing stroke or retracting stroke, depending on the type of design. Multiple intermediate position modules can be installed on request.












Linear modules HMP

Key features

FESTO

Mounting and assembly options

Mounting options


| | | | |
|---------------------------------------|--|---|--|
| | Dovetail mounting using connecting kit HAVB  | Direct mounting using screws and slot nuts NST  | Direct mounting using screws and centring sleeves ZBH  |
| Mounting surfaces | | | |
| On the side of the basic profile | HMP-16/-20/-25/-32  | HMP-16/-20/-25/-32  | |
| On the underside of the basic profile | HMP-16/-20/-25/-32  | HMP-25/-32  | HMP-16/-20  |
| On the yoke plate | HMP-16/-20/-25/-32  | HMP-25/-32  | HMP-16/-20/-25/-32  |

Linear modules HMP

FESTO

System example

System product for handling and assembly technology

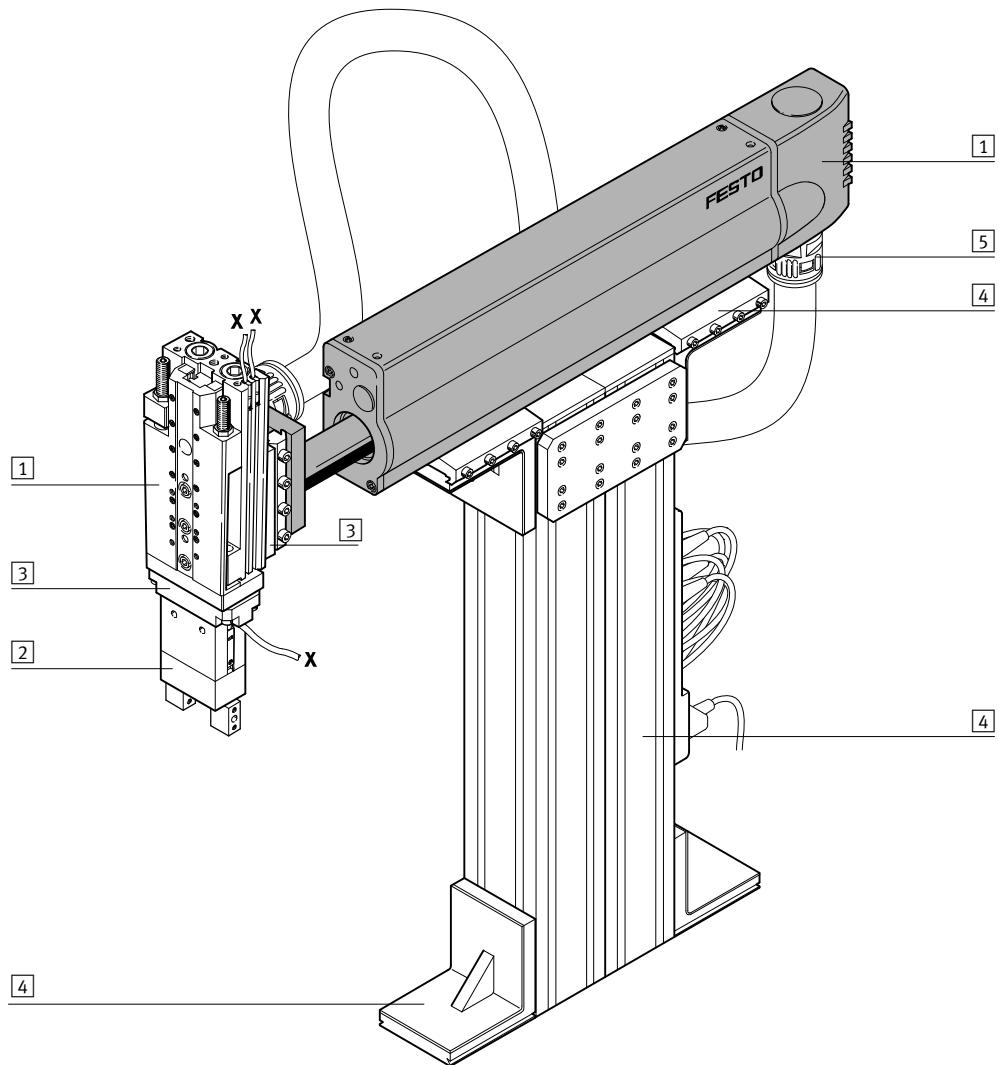

System elements and accessories


| | Brief description | → Page/Internet |
|-----------------------------|---|------------------------|
| [1] Drives | Wide range of combination options within handling and assembly technology | drive |
| [2] Grippers | Wide range of optional variants within handling and assembly technology | gripper |
| [3] Adapters | For drive/drive combinations For drive/gripper combinations | 29 gripper |
| [4] Basic components | Profiles and profile combinations as well as profile/drive combinations | basic component |
| [5] Installation components | For achieving a clear-cut, safe layout of electrical cables and tubing | installation component |
| - Axes | Wide range of combination options within handling and assembly technology | axes |
| - Motors | Servo and stepper motors, with or without gearing | motor |

Linear modules HMP

Peripherals overview

FESTO

With clamping unit KP

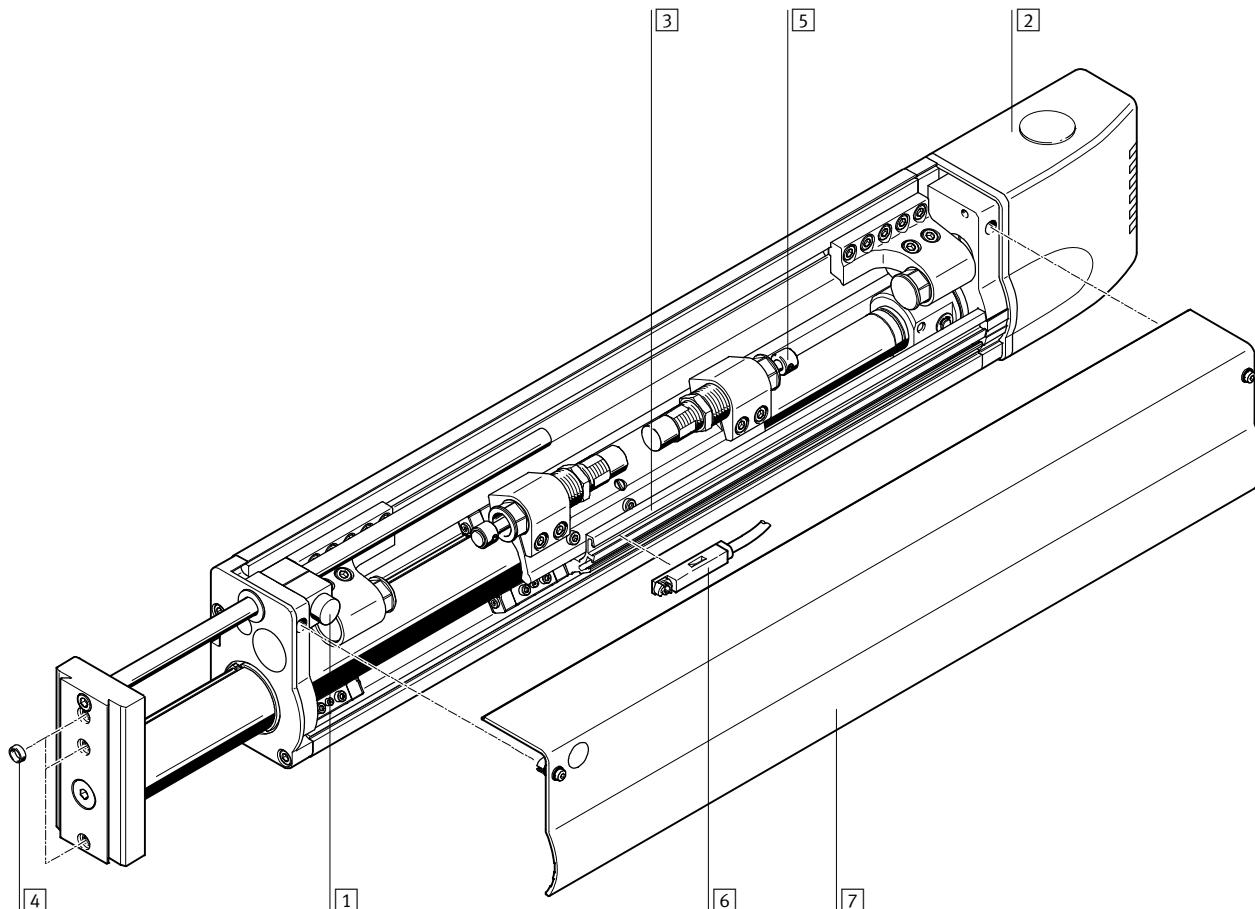


| Accessories | Brief description | ➔ Page/Internet |
|---------------------------|---|-----------------|
| [1] Clamping unit KP | For holding loads in all mounting and end positions in the event of a drop in pressure | 24 |
| [2] End cap AD/EL | The end cap (EL) houses an integrated electrical interface | 24 |
| [3] Sensor strip SL | For mounting proximity sensors and flexible sensing of any desired end positions. Included in the scope of delivery of the linear module. | 24 |
| [4] Centring sleeve Z | For centring loads and attachments on the yoke plate | 26 |
| [5] Shock absorber | Included in the scope of delivery of the linear module | 26 |
| [6] Proximity sensor A... | For position sensing via the sensor strip | 27 |
| [7] Housing cover | Included in the scope of delivery of the linear module | - |
| - Cable with socket V | For proximity sensor | 27 |
| - Slot cover A | For protecting the proximity sensor cable | 26 |

Linear modules HMP

FESTO

Peripherals overview

With intermediate position module Z1A

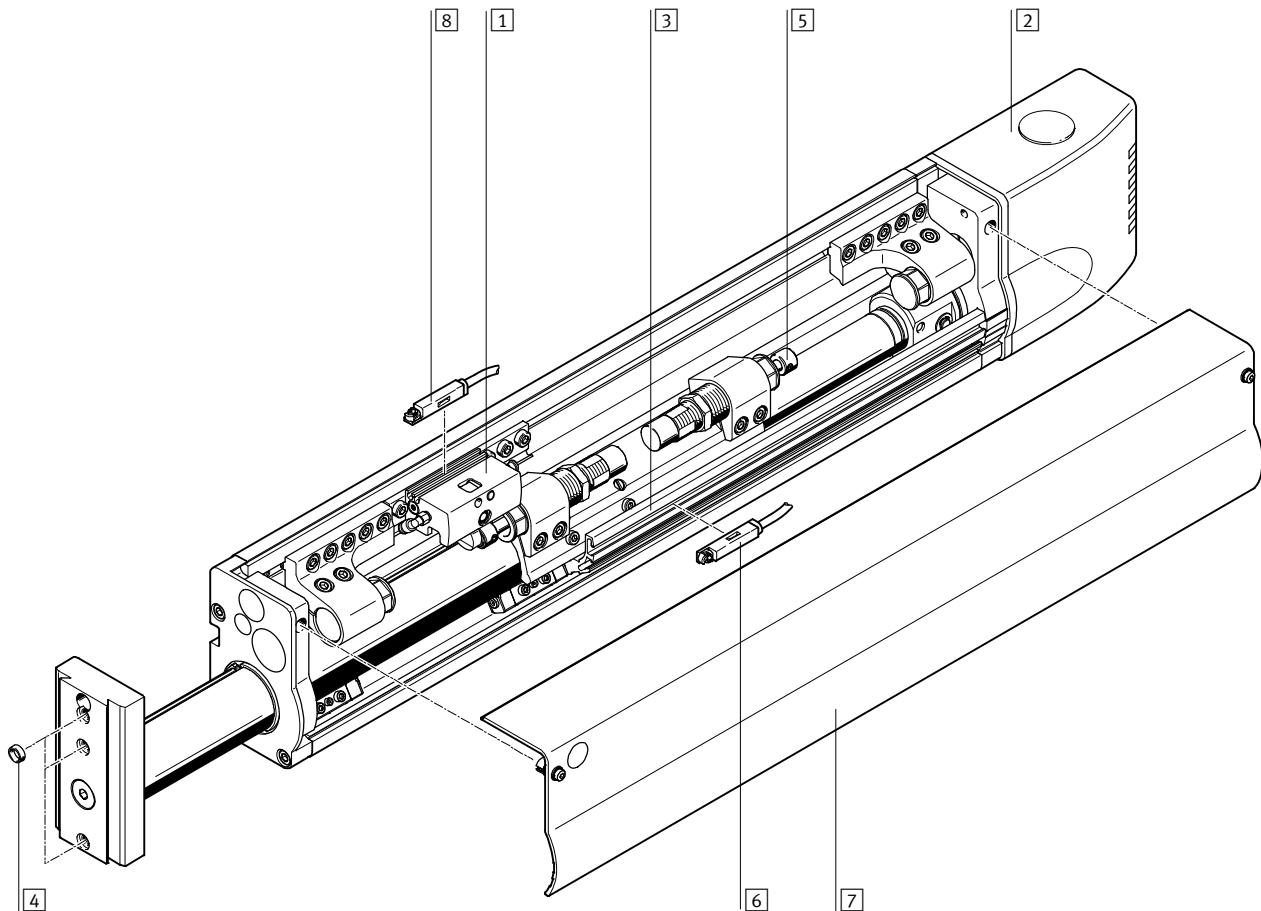

| Accessories | Brief description | ➔ Page/Internet |
|--------------------------------------|---|-----------------|
| [1] Intermediate position module Z1A | For approaching an intermediate position during the advance stroke. The intermediate position module Z1E is used to approach an intermediate position during the return stroke. | 18 |
| [2] End cap AD/EL | The end cap (EL) houses an integrated electrical interface | 24 |
| [3] Sensor strip SL | For mounting proximity sensors and flexible sensing of any desired end positions. Included in the scope of delivery of the linear module. | 24 |
| [4] Centring sleeve Z | For centring loads and attachments on the yoke plate | 26 |
| [5] Shock absorber | Included in the scope of delivery of the linear module | 26 |
| [6] Proximity sensor A... | For position sensing via the sensor strip | 27 |
| [7] Housing cover | Included in the scope of delivery of the linear module | - |
| [8] Proximity sensor A... | For sensing the position of the lever at the intermediate position module (intermediate position active/not active) | 28 |
| - Cable with socket V | For proximity sensor | 27 |
| - Slot cover A | For protecting the proximity sensor cable | 26 |

Linear modules HMP

Type codes

FESTO

| | | | | | | | | | | |
|---|----|-----|---|----|-----|----|--|----|----|---|
| HMP | 16 | 150 | B | SL | 2G3 | KP | | EL | A1 | E |
| Type | | | | | | | | | | |
| HMP Linear module | | | | | | | | | | |
| Piston Ø [mm] | | | | | | | | | | |
| | | | | | | | | | | |
| Stroke [mm] | | | | | | | | | | |
| | | | | | | | | | | |
| Generation | | | | | | | | | | |
| B B series | | | | | | | | | | |
| Sensing | | | | | | | | | | |
| SL Sensor strip | | | | | | | | | | |
| Pneumatic connection | | | | | | | | | | |
| 2G3 For 3 mm I.D. tubing | | | | | | | | | | |
| 2G4 For 4 mm I.D. tubing | | | | | | | | | | |
| 2G6 For 6 mm I.D. tubing | | | | | | | | | | |
| Clamping unit | | | | | | | | | | |
| KP Attached | | | | | | | | | | |
| Intermediate position module | | | | | | | | | | |
| Z1A For advance stroke | | | | | | | | | | |
| Z1E For return stroke | | | | | | | | | | |
| Interface | | | | | | | | | | |
| AD End cap | | | | | | | | | | |
| EL End cap with electrical interface | | | | | | | | | | |
| Proximity sensor | | | | | | | | | | |
| A1 With cable, 2.5 m | | | | | | | | | | |
| A2 Contactless with cable, 2.5 m, NPN | | | | | | | | | | |
| A3 Contactless with cable, 2.5 m, PNP | | | | | | | | | | |
| A4 With plug | | | | | | | | | | |
| A5 Contactless with plug, NPN | | | | | | | | | | |
| A6 Contactless with plug, PNP | | | | | | | | | | |
| User documentation | | | | | | | | | | |
| E English | | | | | | | | | | |
| S Spanish | | | | | | | | | | |
| F French | | | | | | | | | | |
| I Italian | | | | | | | | | | |
| V Swedish | | | | | | | | | | |
| B Express waiver – no manual to be included (already available) | | | | | | | | | | |

Linear modules HMP

FESTO

Type codes


| | | | | |
|--------------------------|----------------------------|---|---|---|
| → | + ZUB | - | A | Z |
| Accessories | | | | |
| ZUB | Accessories supplied loose | | | |
| Cable with socket | | | | |
| ...V | 2.5 m | | | |
| Slot cover | | | | |
| A | Slot cover | | | |
| Centring sleeve | | | | |
| ...Z | For yoke plate | | | |

Linear modules HMP

Technical data

Function

Standard version



with clamping unit



- Ø - Piston Ø
16 ... 32 mm

- | - Stroke length
50 ... 400 mm

- T - www.festo.com



General technical data

| | | | | |
|--|-----------------------|-------------------------------|-------------------------------|-------------------------------|
| Piston Ø | 16 | 20 | 25 | 32 |
| System mode | Yoke | | | |
| Mode of operation | Double-acting | | | |
| Protection against torsion | Guide | | | |
| Connection type | Female thread | | | |
| Pneumatic connection, linear module | M5 | G ¹ / ₈ | G ¹ / ₈ | G ¹ / ₄ |
| Pneumatic connection, intermediate position module | M3 | | | |
| Assembly position | Any | | | |
| Effective stroke [mm] | 16 ... 320 | 24 ... 400 | 24 ... 400 | 40 ... 400 |
| Position sensing | For proximity sensing | | | |
| Max. repetition accuracy ¹⁾ [mm] | 0.01 | | | |
| Max. speed | advancing [m/s] | 0.8 | 1.1 | 1.1 |
| | returning [m/s] | 0.8 | 1.1 | 1.1 |
| Swivel time of lever at intermediate position module | advancing [s] | 0.04 | 0.04 | 0.072 |
| | returning [s] | 0.04 | 0.036 | 0.065 |

1) Variation of end position and intermediate position for 100 successive strokes under constant operating conditions

Operating and environmental conditions

| | | | | |
|--|---|----|----|----|
| Piston Ø | 16 | 20 | 25 | 32 |
| Operating pressure [bar] | 4 ... 8 | | | |
| Operating medium | Compressed air in accordance with ISO 8573-1:2010 [7:4:4] | | | |
| Note on operating/pilot medium | Operation with lubricated medium possible (in which case lubricated operation will always be required) | | | |
| Ambient temperature ¹⁾ [°C] | 0 ... +60 | | | |
| Protection class to EN 60 529 | IP 40 | | | |
| Noise level F _{LEQ} [dB(A)] | 62 | 65 | 68 | 69 |
| Corrosion resistance class CRC ²⁾ | 2 | | | |

1) Note operating range of proximity sensors

2) Corrosion resistance class 2 according to Festo standard 940 070

Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Forces [N]

| | | | | |
|---|-----|-----|-----|-----|
| Piston Ø | 16 | 20 | 25 | 32 |
| Theoretical force at 6 bar, advancing ¹⁾ | 121 | 188 | 295 | 483 |
| Theoretical force at 6 bar, returning ¹⁾ | 104 | 158 | 247 | 415 |

1) Theoretical values, please note: Degree of efficiency: approx. 90%

Linear modules HMP


FESTO

Technical data

| Weight [g] | | | | |
|--|------------------|------|------|------|
| Piston Ø | 16 | 20 | 25 | 32 |
| Product weight | with 0 mm stroke | 2100 | 4700 | 6300 |
| | per 10 mm stroke | 88 | 110 | 150 |
| Moving load | with 0 mm stroke | 900 | 1500 | 2300 |
| | per 10 mm stroke | 28 | 37 | 55 |
| End cap | HMP-...-AD | 180 | 270 | 300 |
| | HMP-...-EL | 210 | 300 | 330 |
| Clamping unit HMP-...-KP for effective stroke | 50 mm | 109 | 114 | - |
| | 100 mm | 120 | 125 | - |
| | 150 mm | 131 | 136 | - |
| | 200 mm | 142 | 147 | - |
| | 250 mm | 153 | 158 | - |
| | 320 mm | 168 | 173 | - |
| | 400 mm | - | 191 | - |
| Intermediate position module | HMP-...-Z1A/Z1E | 165 | 206 | 227 |
| | | | | 321 |

Materials

Sectional view

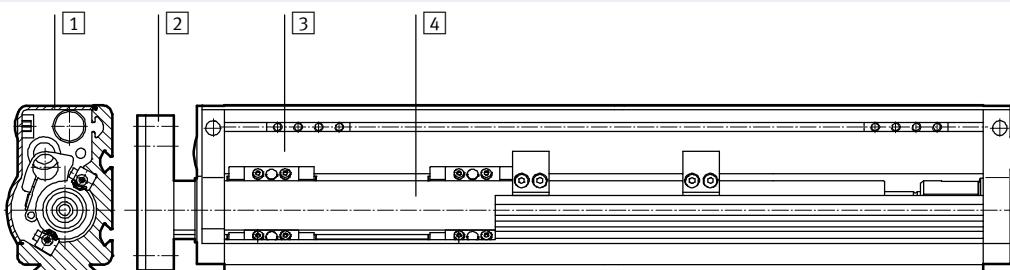

Linear module


| | |
|-------------------|------------------------------|
| [1] Housing cover | Anodised aluminium |
| [2] Yoke plate | Anodised aluminium |
| [3] Profile | Anodised aluminium |
| [4] Guide barrel | Tool steel |
| - Seals | Nitrile rubber, polyurethane |

Linear modules HMP


Technical data

FESTO

Permissible torque M as a function of the stroke length l (at the yoke plate)

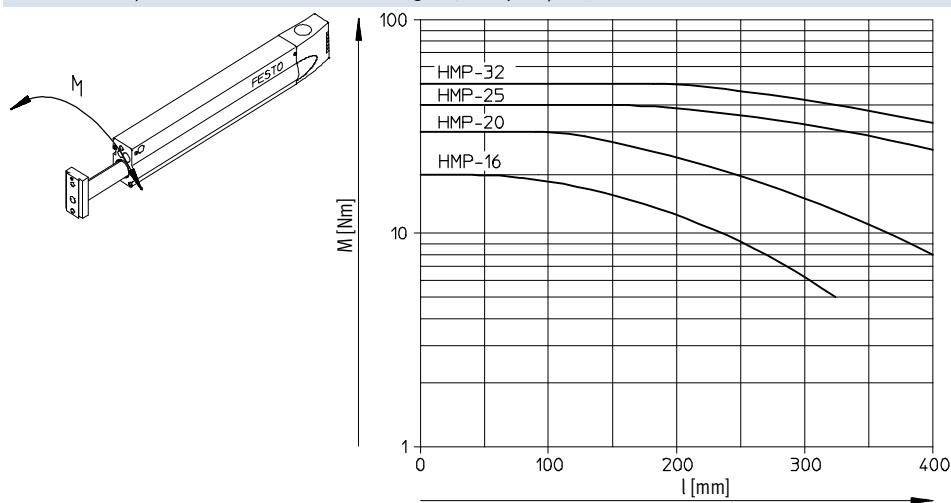

Permissible effective load Fq as a function of the stroke length l (at the yoke plate)


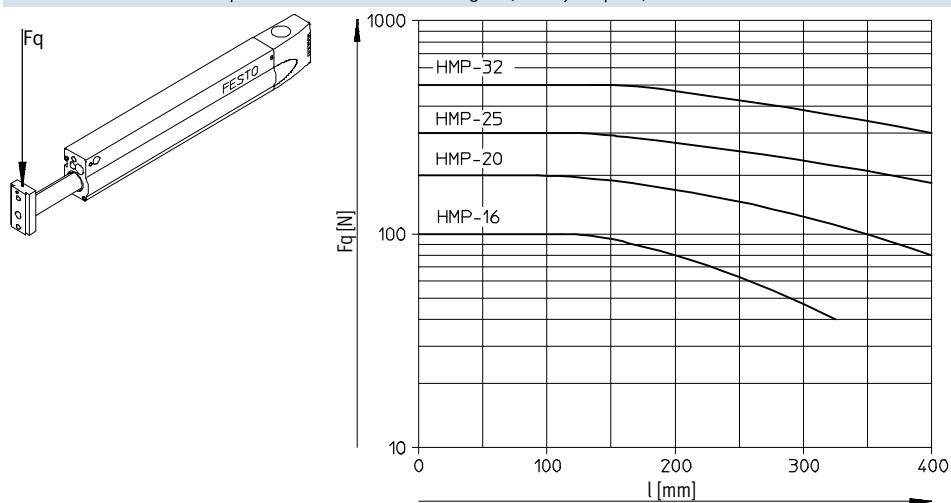


Linear modules HMP

FESTO

Technical data

Deflection/deformation f as a function of the effective load m and the position l (stroke)

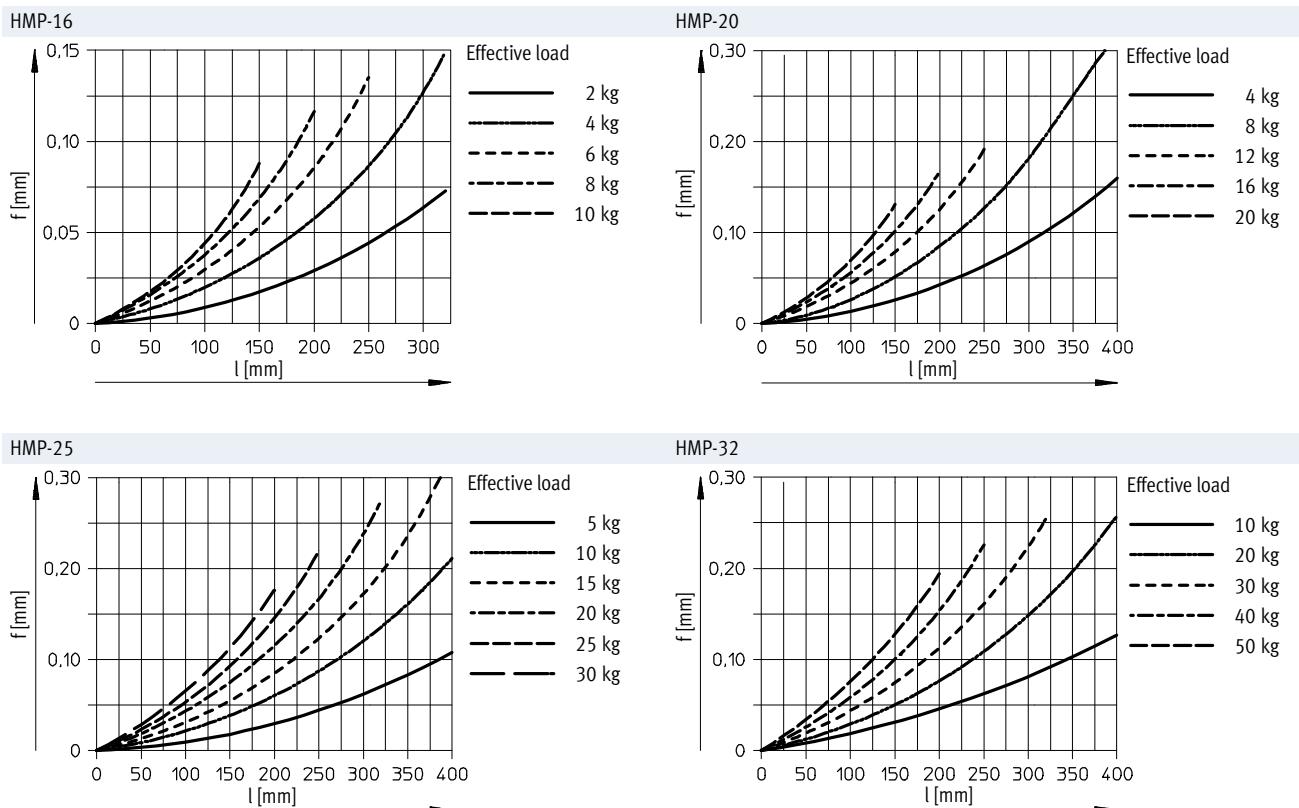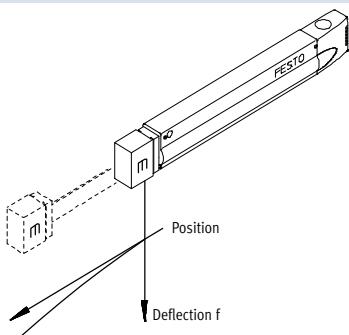

Linear modules HMP

Technical data

FESTO

Max. permissible horizontal effective load at 6 bar


HMP-16: 10 kg

HMP-20: 20 kg


HMP-25: 30 kg

HMP-32: 50 kg


Permissible horizontal advancing time t as a function of the stroke length and the effective load m with optimum shock absorber stroke

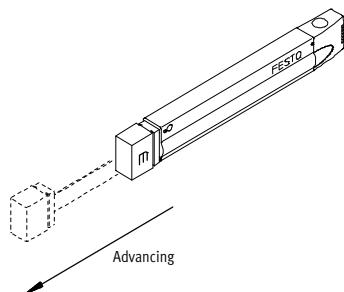


HMP-16¹⁾

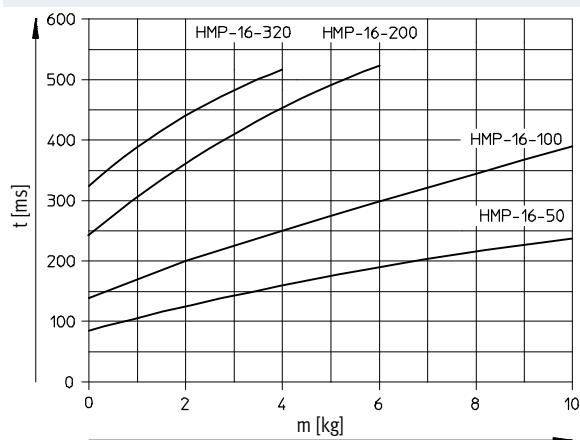


HMP-20¹⁾

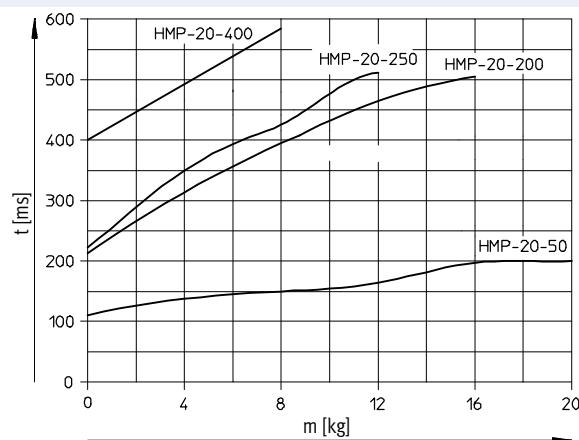

HMP-25¹⁾

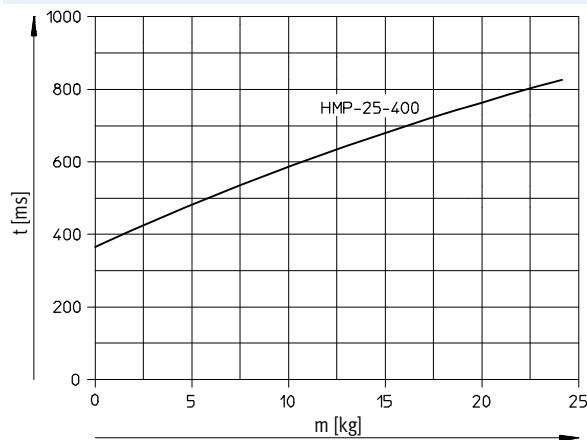

HMP-32¹⁾

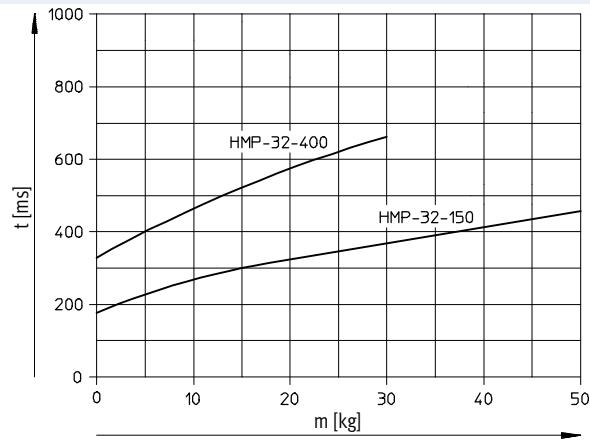

1) Further nominal strokes in preparation

Linear modules HMP

FESTO

Technical data

Max. permissible horizontal effective load at 6 bar


HMP-16: 10 kg

HMP-20: 20 kg


HMP-25: 30 kg

HMP-32: 50 kg


Permissible horizontal returning time t as a function of the stroke length and the effective load m with optimum shock absorber stroke

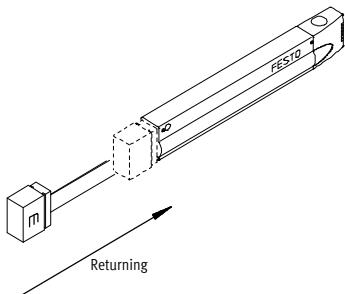


HMP-16¹⁾

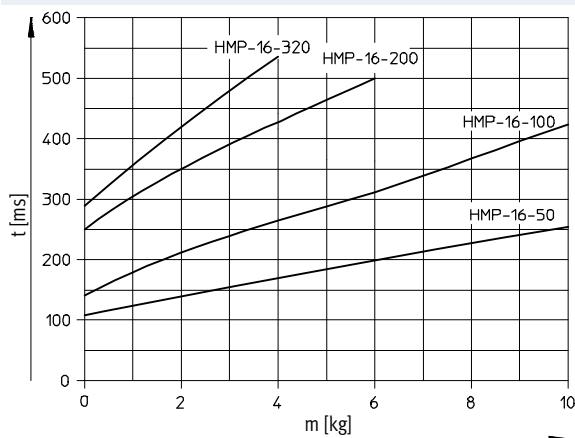


HMP-20¹⁾

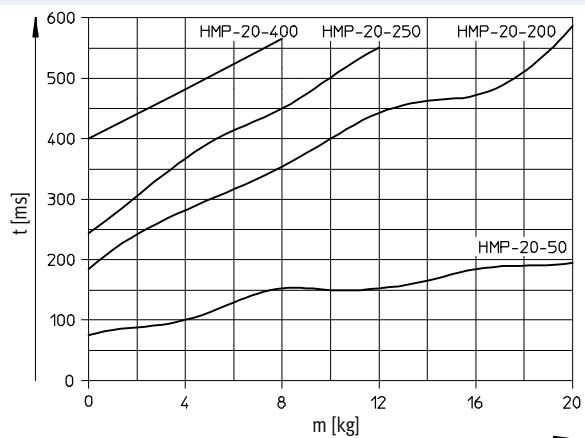

HMP-25¹⁾

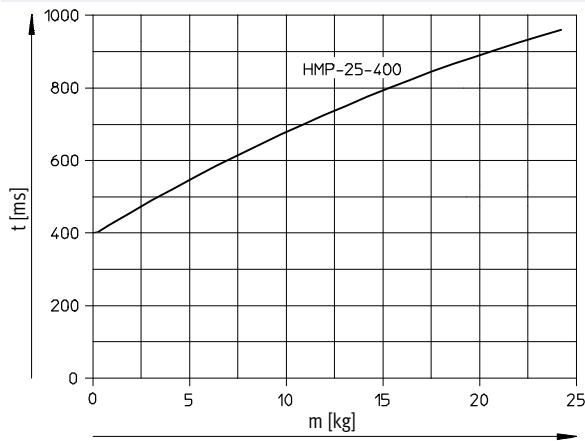

HMP-32¹⁾

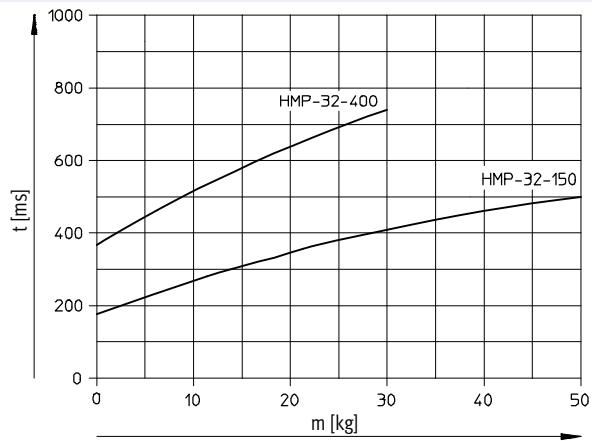

1) Further nominal strokes in preparation



Linear modules HMP

Technical data



FESTO

| Max. permissible vertical effective load at 6 bar without clamping cartridge | with clamping cartridge |
|---|-------------------------|
| HMP-16: 5 kg | HMP-16: 4 kg |
| HMP-20: 10 kg | HMP-20: 7.5 kg |
| HMP-25: 15 kg | |
| HMP-32: 25 kg | |

Permissible vertical advancing time t as a function of the stroke length and the effective load m with optimum shock absorber stroke
HMP-16/-20/-25/-32¹⁾

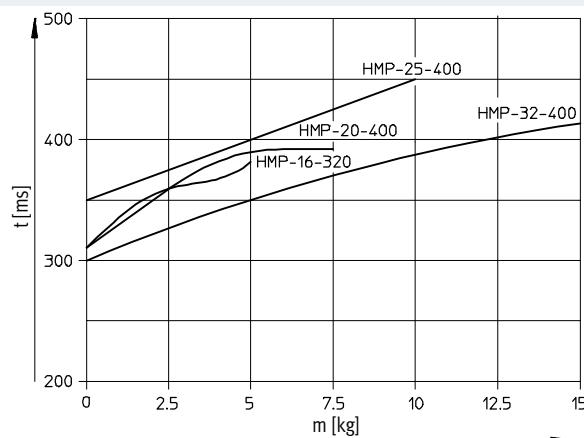

Permissible vertical returning time t as a function of the stroke length and the effective load m with optimum shock absorber stroke
HMP-16/-20/-25/-32¹⁾

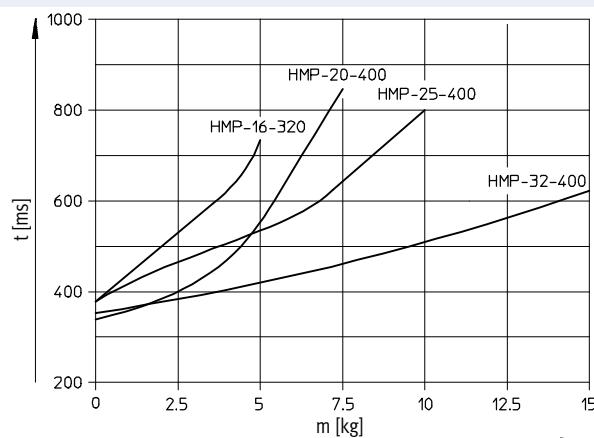

1) Further nominal strokes in preparation


Linear modules HMP

FESTO


Technical data

Advancing/returning time t as a function of the optimum length L to which the shock absorber should be screwed out


In order to obtain the shortest possible travel time with a linear module HMP, it is essential to adjust the shock absorbers to match the advancing/returning time t .

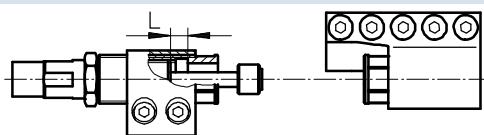

The optimum length L to which the shock absorbers should be screwed out is shown in the adjacent graph.

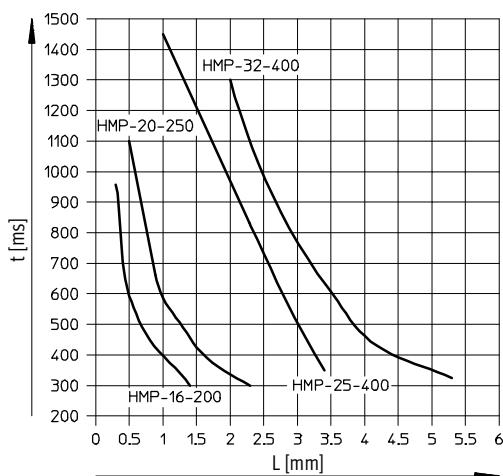


Determining the permissible effective load

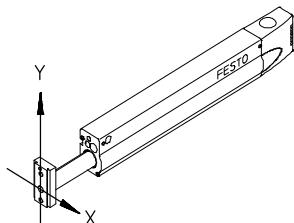

As long as the centre of gravity of the effective load on the yoke plate lies within the outline of this plate, it is impossible to overload the linear module.

Centre of gravity



When dovetail mounting components are used, the centre of gravity should be within this area.


Recommended position of centre of gravity for low-vibration operation.

Linear modules HMP


Technical data

Intermediate position module Z1A/Z1E

Intermediate position with advancing with Z1A

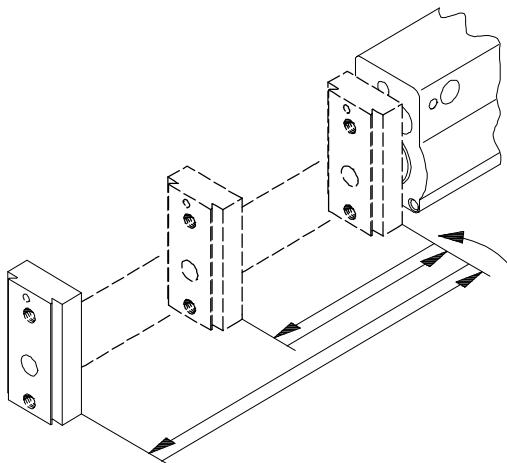

Range for possible intermediate positions when advancing

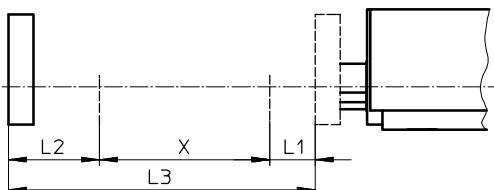

L_1 = Rear non-operational zone X = Zone for possible
 L_2 = Front non-operational zone intermediate positions
 L_3 = Effective stroke $X = L_3 - L_1 - L_2$

Non-operational zones [mm]

| Piston Ø | 16 | 20 | 25 | 32 |
|----------|----|------|------|------|
| L_1 | 33 | 42 | 42 | 55.5 |
| L_2 | 66 | 68.5 | 54.5 | 56 |

Calculation example

Given:

Linear module

HMP-16-200-...-Z1A-...

To be found:

In which zone of the effective stroke are intermediate positions possible?

Calculation:

The piston Ø of the linear module (16 mm) determines the following non-operational zones which do not permit intermediate positions:

$L_1 = 33 \text{ mm}$

$L_2 = 66 \text{ mm}$

$$X = L_3 - L_1 - L_2 = 101 \text{ mm}$$

This means:

The lower limit of the effective stroke range for permissible intermediate positions is:

$$L_1 = 33 \text{ mm}$$

The upper limit of the effective stroke range for permissible intermediate positions is:

$$L_1 + X = 134 \text{ mm}$$

- Note

Ordering data in the:


- Modular products → 24
- Accessories → 26

Linear modules HMP


FESTO

Technical data

Intermediate position when returning with Z1E

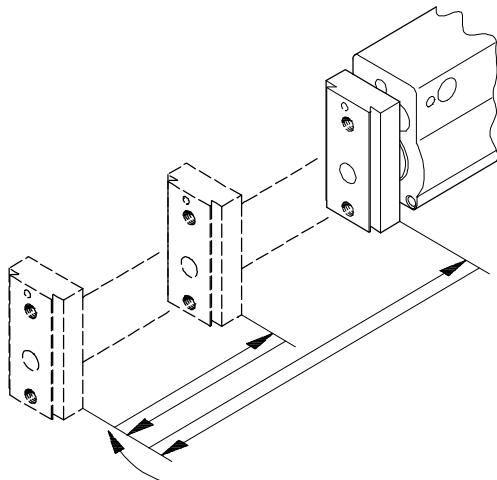

Range for possible intermediate positions when returning

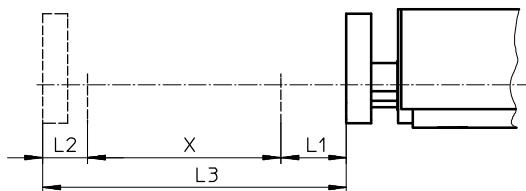

L1 = Rear non-operational zone

L2 = Front non-operational zone

L3 = Effective stroke

X = Zone for possible

intermediate positions

X = L3 - L1 - L2

Non-operational zones [mm]

| Piston Ø | 16 | 20 | 25 | 32 |
|----------|------|----|------|------|
| L1 | 47.5 | 62 | 54.5 | 56 |
| L2 | 33 | 42 | 42 | 55.5 |

Calculation example

Given:

Linear module

HMP-16-200-...-Z1E-...

To be found:

In which zone of the effective stroke
are intermediate positions possible?

Calculation:

The piston Ø of the linear module
(16 mm) determines the following
non-operational zones which do not
permit intermediate positions:

L1 = 47.5 mm

L2 = 33 mm

X = L3 - L1 - L2 = 119.5 mm

This means:

The lower limit of the effective stroke
range for permissible intermediate
positions is:

L1 = 47.5 mm

The upper limit of the effective stroke
range for permissible intermediate
positions is:

L1 + X = 167 mm



Ordering data in the:

- Modular products → 24
- Accessories → 26

Linear modules HMP


Technical data

FESTO

Dimensions

Piston Ø 16/20 mm

Download CAD data → www.festo.com

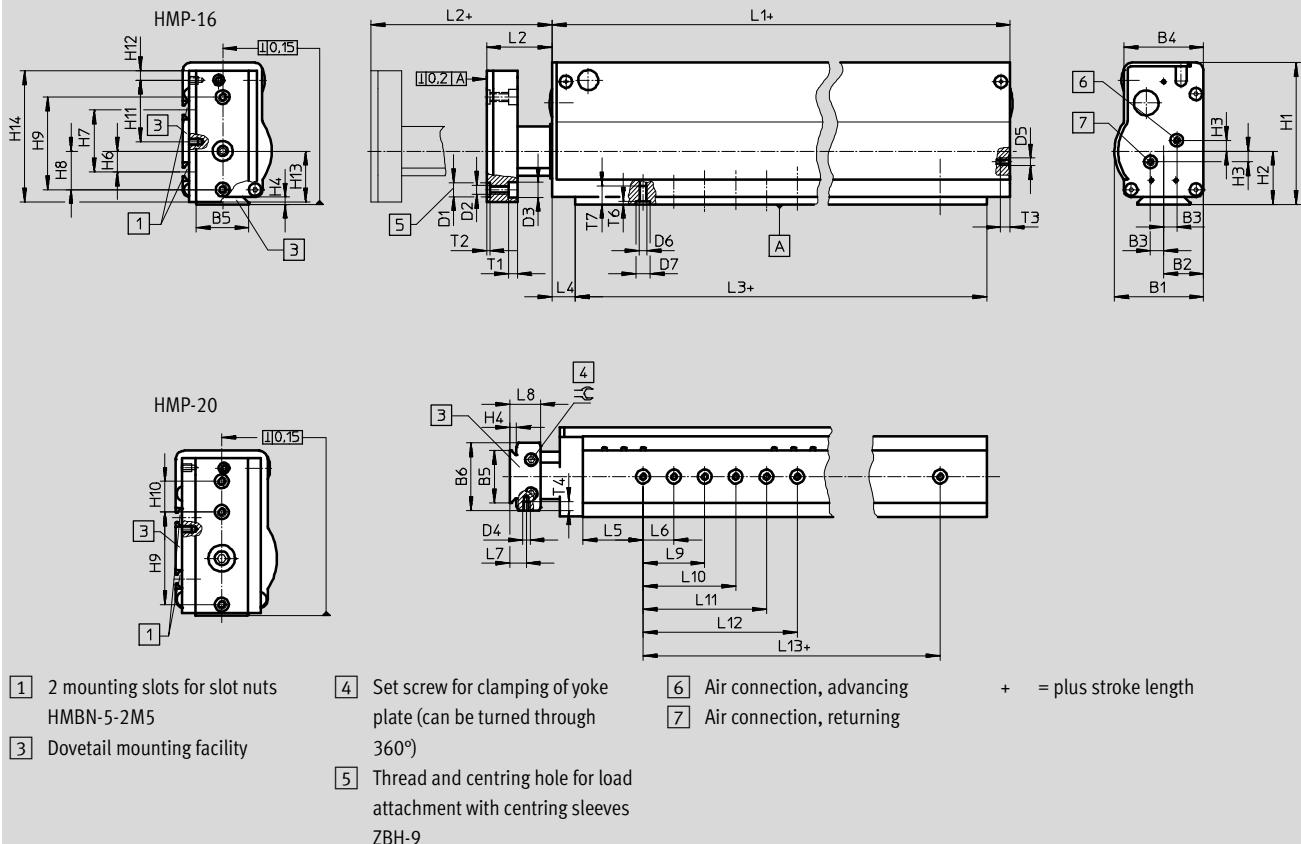

| Type | B1 | B2 | B3 | B4 | B5 | B6 | D1 ∅ H7 | D2 ∅ H13 | D3 ∅ H13 | D4 | D5 | D6 | D7 ∅ H7 | H1 | H2 | H3 ±0.1 |
|--------|------|----|-----|------|----|----|---------------|----------------|----------------|----|----|----|---------------|-----|------|------------|
| HMP-16 | 57.8 | 26 | 8.5 | 51.7 | 34 | 44 | 9 | M6 | 10 | M5 | M5 | M5 | 9 | 92 | 34.5 | 7 |
| HMP-20 | 65.8 | 30 | 10 | 59.8 | | 51 | | | | | | | G1/8 | 107 | 37 | |

| Type | H4 | H6 | H7 | H8 | H9 ±0.03 ¹⁾ | H10 ±0.03 ¹⁾ | H11 | H12 | H13 | H14 | H17 | L1 | L2 | L3 | L4 +0.2 |
|--------|-----|------|----|----|---------------------------|----------------------------|-----|-----|------|-------|-----|-----|----|-----|------------|
| HMP-16 | 4.5 | 13.5 | 40 | 25 | 60 | - | 40 | 6 | 33 | 85 | 38 | 247 | 23 | 217 | 15 |
| HMP-20 | | | | 30 | | 20 | | | 35.5 | 100.4 | 40 | 320 | | 290 | |

| Type | L5 ±0.03 | L6 +0.2 | L7 ±0.03 | L8 ±0.03 | L9 ±0.03 | L10 ±0.03 | L11 ±0.03 | L12 ±0.03 | L13 ±0.03 | T1 +0.1 | T2 +0.1 | T3 +0.1 | T4 +0.1 | T6 +0.1 | T7 +0.1 | =C |
|--------|-------------|------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|------------|------------|------------|------------|------------|------------|----|
| HMP-16 | 39 | 20 | 10.75 | 20 | 40 | 60 | 80 | 100 | 140 200 | 5.7 | 2.1 | 6.4 9 | 6 | 2.1 | 12 | 4 |
| HMP-20 | 45 | | | | | | | | | | | | | | | |

1) Tolerance specification applies to countersink D1; tolerance for thread D2: ±0.2

Linear modules HMP


FESTO

Technical data

Dimensions

Piston Ø 25/32 mm

Download CAD data → www.festo.com

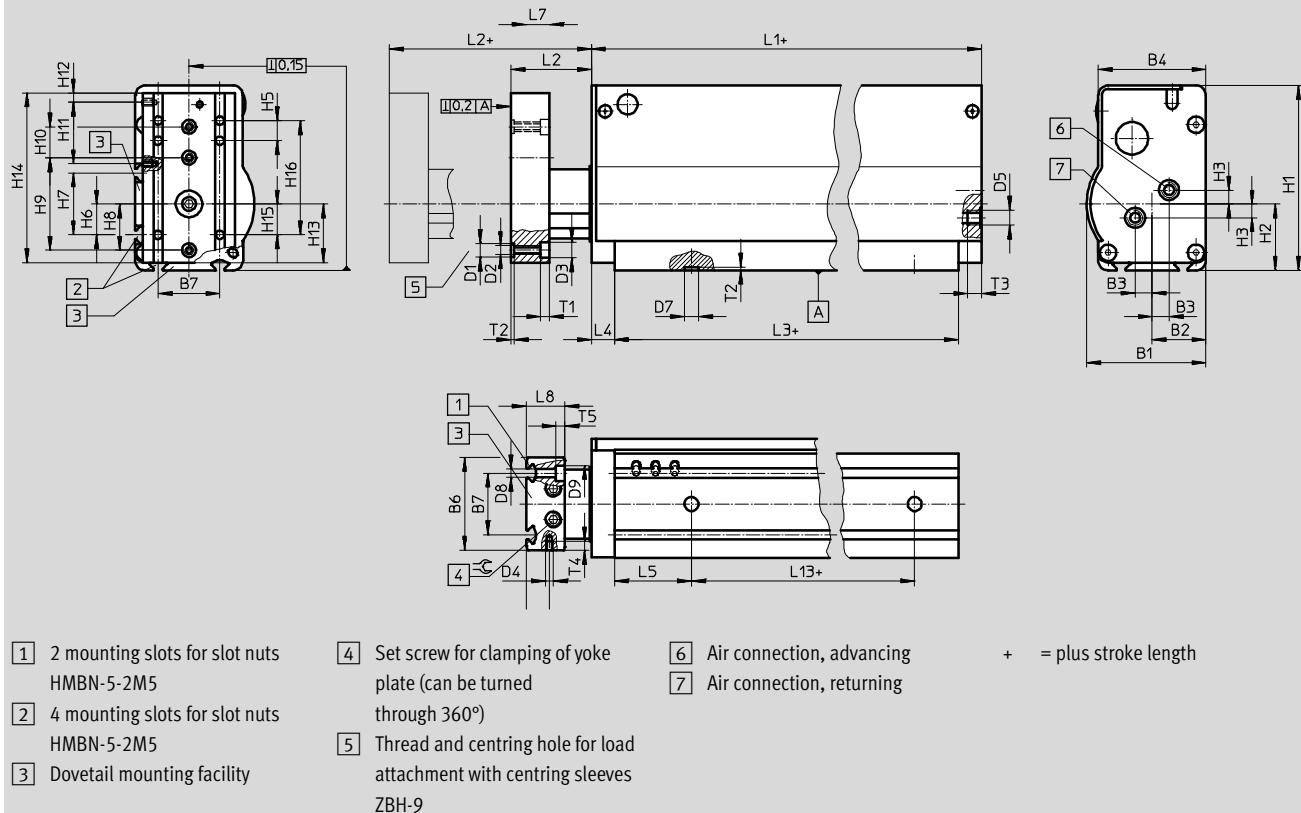

| Type | B1 | B2 | B3 | B4 | B6 | B7 | D1 ∅ H7 | D2 | D3 ∅ H13 | D4 | D5 | D7 ∅ H7 | D8 ∅ H13 | D9 ∅ |
|--------|------|----|----|------|----|----|---------------|----|----------------|----|----|---------------|----------------|---------|
| HMP-25 | 77.3 | 35 | | 69.8 | 60 | | 40 | 9 | M6 | 10 | M5 | G1/8 | 9 | 5.5 |
| HMP-32 | 90.8 | 40 | | 79.8 | 70 | | 40 | 9 | M6 | 10 | M5 | G1/4 | | 10 |

| Type | H1 | H2 | H3 | H5 | H6 | H7 | H8 | H9 | H10 | H11 | H12 | H13 | H14 | H15 | H16 |
|--------|-----|----|------|----|----|----|----|---------------------|---------------------|-----|-----|-----|-----|-----|-----|
| | | | ±0.1 | | | | | ±0.03 ¹⁾ | ±0.03 ¹⁾ | | | | | | |
| HMP-25 | 120 | 43 | | 9 | 13 | 20 | 40 | 30 | 60 | 20 | 40 | 6 | 38 | 110 | 20 |
| HMP-32 | 143 | 53 | | | | | | 40 | 80 | | | | 48 | 133 | 30 |

| Type | H17 | L1 | L2 | L3 | L4 | L5 | L7 | L8 | L13 | T1 | T2 | T3 | T4 | T5 | |
|--------|-----|-----|----|----|------|----|----|------|-------|-----|-----|------|----|----|-----|
| | | | | | +0.2 | | | ±0.2 | ±0.03 | | | ±0.1 | | | =C |
| HMP-25 | 40 | 320 | | 28 | 290 | 15 | 50 | 15 | 25 | 190 | 5.7 | 2.1 | 9 | 6 | 5.7 |
| HMP-32 | | 427 | | | 392 | | | | 290 | | | 12 | | | 5 |

1) Tolerance specification applies to countersink D1; tolerance for thread D2: ±0.2


Linear modules HMP

Technical data

FESTO

Dimensions – Pneumatic connections


(code 2G3/2G4/2G6)

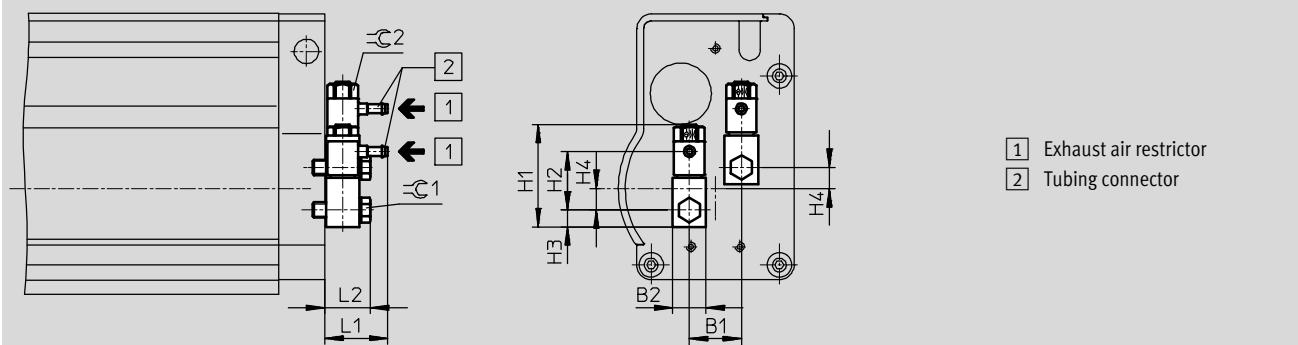

| Type | B1 | B2 | H1 | H2 | H3 | H4 | L1 | L2 | =C1 | =C2 | | |
|---------------|----|------|------|------|------|------|------|----|-----|-----|--|--|
| HMP-16...-2G3 | 17 | 11 | 33.6 | 19 | 5.5 | 7 | 20.6 | 15 | 7 | 9 | | |
| HMP-16...-2G4 | | | | | | | 22.6 | | | | | |
| HMP-20...-2G4 | 20 | 16 | 48.7 | 28.9 | 8 | 31.3 | 22.2 | 13 | 14 | 14 | | |
| HMP-20...-2G6 | | | | 27.5 | | 31.4 | | | | | | |
| HMP-25...-2G4 | 22 | | | 28.9 | | 31.3 | | | | | | |
| HMP-25...-2G6 | | | | 27.5 | | 31.4 | | | | | | |
| HMP-32...-2G4 | 20 | 61.8 | 37.9 | 10 | 35.8 | 28.2 | 17 | 17 | 17 | | | |
| HMP-32...-2G6 | | | 38.2 | | 35.9 | | | | | | | |

Dimensions – Clamping unit

(code KP)

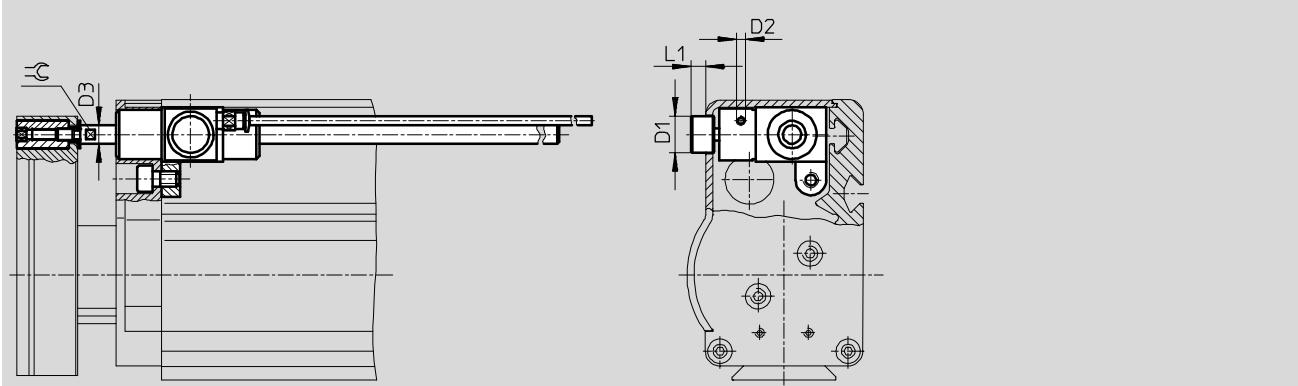

| Type | D1 Ø | D2 1) | D3 Ø | L1 | =C | Holding force [N] | Effective load | |
|--------|---------|----------|---------|-----|----|----------------------|--------------------|------------------|
| | | | | | | | horizontal [kg] | vertical [kg] |
| HMP-16 | 11.4 | M3 | 6 | 5 | 5 | 100 | 10 | 4 |
| | | | | 3.8 | | | 20 | 7.5 |

1) Air connection is supplied ready-fitted with QS connector QSM-M3-4

Note

The clamping unit must only be operated when the rod is stationary (end position). Dynamic braking operations can result in severe damage to the clamping device.

Precision positioning cannot be guaranteed with the clamping unit since slippage of approx. 1 – 2 mm can occur.

When using the linear module HMP-20 together with the clamping unit, the max. possible stroke is reduced by 12.5 mm.

Linear modules HMP


FESTO

Technical data

Dimensions – Intermediate position modules

(code Z1A/Z1E)

Download CAD data ➔ www.festo.com

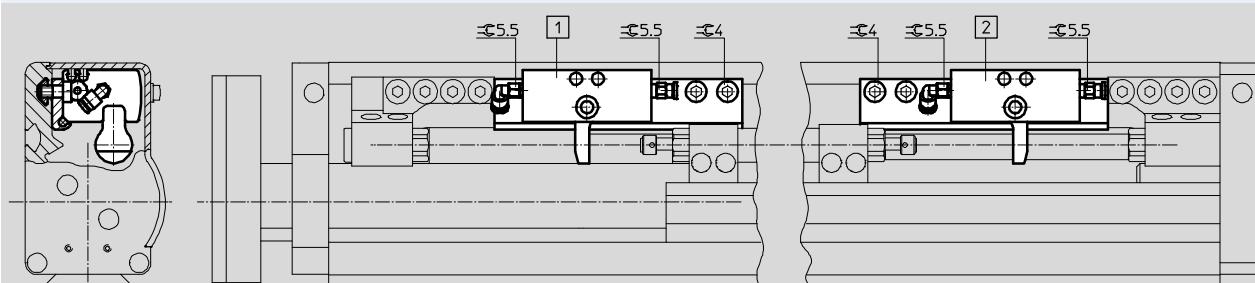


[1] Intermediate position module Z1A for advance stroke

[2] Intermediate position module Z1E for return stroke

Dimensions – End cap

(code AD/EL)

Download CAD data ➔ www.festo.com

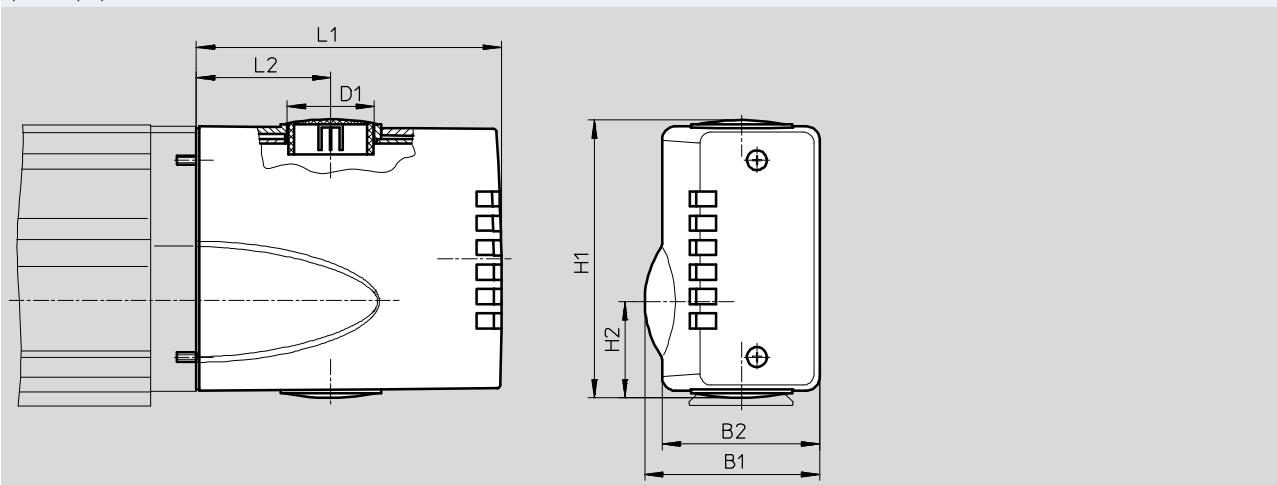

| Type | B1 | B2 | D1 ∅ | H1 | H2 | L1 | L2 |
|--------|------|------|--------------|-------|------|-----|----|
| HMP-16 | 57.4 | 51.2 | 28.5 (PG 21) | 91.3 | 31.5 | 100 | 44 |
| HMP-20 | 65.4 | 59.2 | 37.2 (PG 29) | 106.3 | 34.4 | 120 | 55 |
| HMP-25 | 76.9 | 69.2 | | 119 | 40.1 | | |
| HMP-32 | 90.4 | 79.2 | | 141.6 | 49.9 | | |

Linear modules HMP

Ordering data – Modular products

FESTO

| M Mandatory data → | | | | | | |
|-------------------------|------------|-----------|--------------------------|------------|------------------|----------------------|
| Module No. | Function | Piston Ø | Stroke | Generation | Position sensing | Pneumatic connection |
| 537 940 | HMP | 16 | 50 | B | SL | 2G3 |
| 537 941 | | 20 | 100 | | | 2G4 |
| 537 942 | | 25 | 150 | | | 2G6 |
| 537 943 | | 32 | 200 250 320 400 | | | |
| Ordering example | HMP | 16 | 150 | B | SL | 2G3 |

| Ordering table | | | | | | | |
|----------------------|---|---|---------|---------|-------------|------|------------|
| Size | 16 | 20 | 25 | 32 | Condi-tions | Code | Enter code |
| M Module No. | 537 940 | 537 941 | 537 942 | 537 943 | | | |
| Function | Linear module with ball bearing guide | | | | | HMP | |
| Piston Ø [mm] | 16 | 20 | 25 | 32 | | -... | |
| Stroke [mm] | 50 | 50 | – | – | | -50 | |
| | 100 | 100 | 100 | 100 | | -100 | |
| | 150 | 150 | 150 | 150 | | -150 | |
| | 200 | 200 | 200 | 200 | | -200 | |
| | 250 | 250 | 250 | 250 | | -250 | |
| | 320 | 320 | 320 | 320 | | -320 | |
| | – | 400 | 400 | 400 | | -400 | |
| Generation | B series | | | | | -B | |
| Position sensing | Sensor strip | | | | | -SL | |
| Pneumatic connection | One-way flow control valve, 3 mm barbed connector | – | – | – | | -2G3 | |
| | One-way flow control valve, 4 mm barbed connector | | | | | -2G4 | |
| | – | One-way flow control valve, 6 mm barbed connector | | | | -2G6 | |

Transfer order code

[] - HMP - [] - [] - B - SL - []

Linear modules HMP

FESTO

Ordering data – Modular products

0 Options

| Clamping unit | Intermediate position | Interface | Proximity sensor set | User documentation | Accessories | Cable with socket | Slot cover | Centring sleeves |
|---------------|-----------------------|-----------|----------------------------------|----------------------------|-------------|-------------------|------------|------------------|
| KP | Z1A Z1E | AD EL | A1 A2 A3 A4 A5 A6 | E S F I V B | ZUB | ...V | A | ...Z |
| - | Z1A | EL | A1 | B | ZUB | 2V | | |

Ordering table

| Size | 16 | 20 | 25 | 32 | Conditions | Code | Enter code |
|--|---|----|----|-----|------------|------|------------|
| 0 Clamping unit | Attached | - | - | [1] | -KP | | |
| Intermediate position | 1 intermediate position, advancing | | | [2] | -Z1A | | |
| | 1 intermediate position, returning | | | [2] | -Z1E | | |
| Interface | End cap | | | | -AD | | |
| | End cap with electrical interface | | | | -EL | | |
| Proximity sensor, assembled | Proximity sensor with cable, 2.5 m | | | | -A1 | | |
| | Proximity sensor, contactless, NPN with cable, 2.5 m | | | | -A2 | | |
| | Proximity sensor, contactless, PNP with cable, 2.5 m | | | | -A3 | | |
| | Proximity sensor with plug M8 | | | [3] | -A4 | | |
| | Proximity sensor, contactless, NPN with plug M8 | | | [3] | -A5 | | |
| | Proximity sensor, contactless, PNP with plug M8 | | | [3] | -A6 | | |
| Alternative user documentation (standard is German/English) | User documentation, English | | | | -E | | |
| | User documentation, Spanish | | | | -S | | |
| | User documentation, French | | | | -F | | |
| | User documentation, Italian | | | | -I | | |
| | User documentation, Swedish | | | | -V | | |
| | Express waiver - no manual to be included (already available) | | | | -B | | |
| Accessories | Supplied separately | | | | ZUB- | | ZUB- |
| Cable with socket, 2.5 m | 1 ... 10 | | | | ...V | | |
| Slot cover | Slot cover | | | | A | | |
| Centring sleeves (pack of 10) | 10, 20, 30, 40, 50, 60, 70, 80, 90 | | | | ...Z | | |

[1] KP Not with intermediate position Z1A, Z1E.

[2] Z1A, Z1E Min. stroke: 150 mm.

[3] A4, A5, A6 Not with interface EL

Max. stroke: Piston Ø 16, 20, 25 mm: 200 mm

Piston Ø 32 mm: 150 mm


Transfer order code

- [] - [] - [] - [] - [] - [] - [] - [] - []

Linear modules HMP

Accessories

FESTO



| Ordering data | | For piston Ø [mm] | Remarks | Order code | Part No. | Type | PU ¹⁾ |
|---|-----------|---------------------------------|---------|------------|------------------|------|------------------|
| Intermediate position module BZ1-HMP | | | | | | | |
|  | 16 | For advance movement | Z1A | 538904 | BZ1-HMP-16-B-Z1A | | 1 |
| | 20 | | | 538905 | BZ1-HMP-20-B-Z1A | | |
| | 25 | | | 538906 | BZ1-HMP-25-B-Z1A | | |
| | 32 | | | 538907 | BZ1-HMP-32-B-Z1A | | |
| | 16 | For return movement | Z1E | 538908 | BZ1-HMP-16-B-Z1E | | |
| | 20 | | | 539909 | BZ1-HMP-20-B-Z1E | | |
| | 25 | | | 538910 | BZ1-HMP-25-B-Z1E | | |
| | 32 | | | 538911 | BZ1-HMP-32-B-Z1E | | |
| Centring sleeve ZBH | | | | | | | |
|  | 16 ... 32 | For yoke plate | Z | 150927 | ZBH-9 | | 10 |
| Slot cover ABP | | | | | | | |
|  | 16 ... 32 | For sensor strip every 0.5 m | A | 151681 | ABP-5 | | 2 |
| Shock absorber YSRW | | | | | | | |
|  | 16 | - | - | 191194 | YSRW-8-14 | | 1 |
| 20 | 191196 | | | YSRW-12-20 | | | |
| 25 | 191196 | | | YSRW-12-20 | | | |
| 32 | 191197 | | | YSRW-16-26 | | | |


1) Packaging unit quantity

Linear modules HMP

FESTO

Accessories

| Ordering data – Proximity sensors for T-slot, magneto-resistive | | | | | | Technical data → Internet: smt |
|---|--|---------------|-----------------------|------------------|---------------|--------------------------------|
| | Type of mounting | Switch output | Electrical connection | Cable length [m] | Part No. | Type |
| N/O contact | | | | | | |
|  | Insertable in the slot from above, flush with cylinder profile, short design | PNP | Cable, 3-wire | 2.5 | 574335 | SMT-8M-A-PS-24V-E-2,5-OE |
| | | | Plug M8x1, 3-pin | 0.3 | 574334 | SMT-8M-A-PS-24V-E-0,3-M8D |
| | | | Plug M12x1, 3-pin | 0.3 | 574337 | SMT-8M-A-PS-24V-E-0,3-M12 |
| | | NPN | Cable, 3-wire | 2.5 | 574338 | SMT-8M-A-NS-24V-E-2,5-OE |
| | | | Plug M8x1, 3-pin | 0.3 | 574339 | SMT-8M-A-NS-24V-E-0,3-M8D |
| N/C contact | | | | | | |
|  | Insertable in the slot from above, flush with cylinder profile, short design | PNP | Cable, 3-wire | 7.5 | 574340 | SMT-8M-A-PO-24V-E-7,5-OE |

| Ordering data – Proximity sensors for T-slot, magnetic reed | | | | | | Technical data → Internet: sme |
|---|---|---------------|-----------------------|------------------|---------------|--------------------------------|
| | Type of mounting | Switch output | Electrical connection | Cable length [m] | Part No. | Type |
| N/O contact | | | | | | |
|  | Insertable in the slot from above, flush with cylinder profile | Contacting | Cable, 3-wire | 2.5 | 543862 | SME-8M-DS-24V-K-2,5-OE |
| | | | | 5.0 | 543863 | SME-8M-DS-24V-K-5,0-OE |
| | | | Cable, 2-wire | 2.5 | 543872 | SME-8M-ZS-24V-K-2,5-OE |
| | | | Plug M8x1, 3-pin | 0.3 | 543861 | SME-8M-DS-24V-K-0,3-M8D |
| |  | Contacting | Cable, 3-wire | 2.5 | 150855 | SME-8-K-LED-24 |
| | | | Plug M8x1, 3-pin | 0.3 | 150857 | SME-8-S-LED-24 |
| N/C contact | | | | | | |
|  | Insertable in the slot lengthwise, flush with the cylinder profile | Contacting | Cable, 3-wire | 7.5 | 160251 | SME-8-O-K-LED-24 |

Linear modules HMP

Accessories

FESTO

| Ordering data – Proximity sensors for C-slot, magneto-resistive | | | | | Technical data → Internet: smt | |
|---|-----------------------------------|---------------|---|------------------|--------------------------------|----------------------------|
| | Type of mounting | Switch output | Electrical connection, connection direction | Cable length [m] | Part No. | Type |
| N/O contact | | | | | | |
|  | Insertable in the slot from above | PNP | Cable, 3-wire, in-line | 2.5 | 551373 | SMT-10M-PS-24V-E-2,5-L-OE |
| | | | Plug M8x1, 3-pin, in-line | 0.3 | 551375 | SMT-10M-PS-24V-E-0,3-L-M8D |
| | | | Plug M8x1, 3-pin, lateral | 0.3 | 551376 | SMT-10M-PS-24V-E-0,3-Q-M8D |

| Ordering data – Proximity sensors for C-slot, magnetic reed | | | | | Technical data → Internet: sme | |
|---|-----------------------------------|---------------|---|------------------|--------------------------------|----------------------------|
| | Type of mounting | Switch output | Electrical connection, connection direction | Cable length [m] | Part No. | Type |
| N/O contact | | | | | | |
|  | Insertable in the slot from above | Contacting | Plug M8x1, 3-pin, in-line | 0.3 | 551367 | SME-10M-DS-24V-E-0,3-L-M8D |
| | | | Cable, 3-wire, in-line | 2.5 | 551365 | SME-10M-DS-24V-E-2,5-L-OE |
| | | | Cable, 2-wire, in-line | 2.5 | 551369 | SME-10M-ZS-24V-E-2,5-L-OE |
|  | Insertable in the slot lengthwise | Contacting | Plug M8x1, 3-pin, in-line | 0.3 | 173212 | SME-10-SL-LED-24 |
| | | | Cable, 3-wire, in-line | 2.5 | 173210 | SME-10-KL-LED-24 |

| Ordering data – Connecting cables | | | | Technical data → Internet: nebu | | |
|---|-------------------------------|------------------------------|------------------|---------------------------------|----------------------|--|
| | Electrical connection, left | Electrical connection, right | Cable length [m] | Part No. | Type | |
|  | Straight socket, M8x1, 3-pin | Cable, open end, 3-wire | 2.5 | 541333 | NEBU-M8G3-K-2.5-LE3 | |
| | | | 5 | 541334 | NEBU-M8G3-K-5-LE3 | |
| | Straight socket, M12x1, 5-pin | Cable, open end, 3-wire | 2.5 | 541363 | NEBU-M12G5-K-2.5-LE3 | |
| | | | 5 | 541364 | NEBU-M12G5-K-5-LE3 | |
|  | Angled socket, M8x1, 3-pin | Cable, open end, 3-wire | 2.5 | 541338 | NEBU-M8W3-K-2.5-LE3 | |
| | | | 5 | 541341 | NEBU-M8W3-K-5-LE3 | |
| | Angled socket, M12x1, 5-pin | Cable, open end, 3-wire | 2.5 | 541367 | NEBU-M12W5-K-2.5-LE3 | |
| | | | 5 | 541370 | NEBU-M12W5-K-5-LE3 | |

Linear modules HMP

FESTO

Accessories

Adapter kit

DHAA, HMAV, HMSV

Material:

Wrought aluminium alloy

Free of copper and PTFE

RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/drive combinations with adapter kit

Download CAD data → www.festo.com

| Combination | [1] Drive | [2] Drive | Adapter kit | | | | |
|--------------------------|------------|---------------------|-------------------|----------|-----------------------------|-------------------|------------------|
| | Size | Size | CRC ¹⁾ | Part No. | Type | Required quantity | PU ²⁾ |
| HMP/HMP | HMP | HMP | HMSV | | | | |
| Direct mounting | | | | | | | |
| | 16 | 16 | 2 | - | M5x25 DIN 912 ³⁾ | 2 | - |
| | 150927 | ZBH-9 ³⁾ | | 2 | 2 | 10 | |
| | 20 | 16, 20 | | - | M5x25 DIN 912 ³⁾ | 3 | - |
| | 150927 | ZBH-9 ³⁾ | | 3 | 3 | 10 | |
| | 25, 32 | 16, 20 | | - | M5x30 DIN 912 ³⁾ | 3 | - |
| | 150927 | ZBH-9 ³⁾ | | 3 | 3 | 10 | |
| | 25 | 25 | 177652 | HMSV-6 | - | - | |
| | 32 | 25, 32 | | 177652 | HMSV-6 | - | - |
| Dovetail mounting | | | | | | | |
| | 16, 20, 25 | 16 | 2 | 177647 | HMSV-1 | 1 | 1 |
| | 20 | 20 | | 177649 | HMSV-3 | 1 | 1 |
| | 25 | 20, 25 | | 177649 | HMSV-3 | 1 | 1 |
| | 32 | 16 | | 177649 | HMSV-3 | 1 | 1 |
| | 32 | 20, 25, 32 | | 177653 | HMSV-7 | 1 | 1 |
| DGC/HMP | DGC | HMP | DHAA, HMAV | | | | |
| | 25 | 16, 20 | 2 | 176005 | HMAV-DL25 | 1 | 1 |
| | 32 | 16, 20 | | 562150 | DHAA-D-L-32-H2 | 1 | 1 |
| | 40 | 20, 25, 32 | | 562151 | DHAA-D-L-40-H2 | 1 | 1 |
| DGP(I)L, DGE/HMP | DG... | HMP | HMAV | | | | |
| | 25 | 16, 20 | 2 | 176005 | HMAV-DL25 | 1 | 1 |
| | 32 | 16, 20, 25 | | 176006 | HMAV-DL32 | 1 | 1 |
| | 40 | 20, 25, 32 | | 176007 | HMAV-DL40 | 1 | 1 |

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

2) Packaging unit quantity

3) The screws and centring sleeves listed are not included in the scope of delivery of the drives

Linear modules HMP

Accessories

FESTO

Adapter kit

DHAA, HMAV, HMSV

Material:

Wrought aluminium alloy

Free of copper and PTFE

RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

| Permissible drive/drive combinations with adapter kit | | | | | | Download CAD data → www.festo.com | |
|---|-----------|------------|-------------------|----------|----------------|--|------------------|
| Combination | [1] Drive | [2] Drive | Adapter kit | | | | |
| | Size | Size | CRC ¹⁾ | Part No. | Type | Required quantity | PU ²⁾ |
| EGC/HMP | EGC | HMP | DHAA, HMAV | | | | |
| | 80 | 16, 20 | 2 | 176005 | HMAV-DL25 | 1 | 1 |
| | 120 | 20, 25, 32 | | 562151 | DHAA-D-L-40-H2 | 1 | 1 |

1) Corrosion resistance class CRC 2 to Festo standard FN 940070


Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

2) Packaging unit quantity

Product Range and Company Overview

A Complete Suite and Company Overview

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.

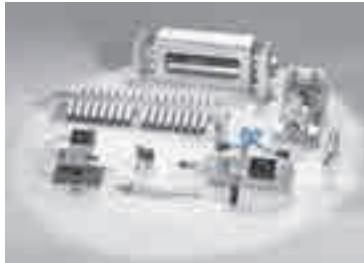

Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drivers



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 16,000 employees in 60 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2013, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmental friendly printing plant.

Festo North America



[1] Festo Canada Headquarters
Festo Inc.
5300 Explorer Drive
Mississauga, ON
L4W 5G4

[2] Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

[3] Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



[4] Festo United States Headquarters
Festo Corporation
395 Moreland Road
Hauppauge, NY
11788

[5] Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

[7] Detroit
1441 West Long Lake Road
Troy, MI
48098

[6] Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

[8] Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com