



Characteristics

At a glance

- Driveless linear guide units with guide and freely movable slide
- The guide axis is designed to support force and torque capacity in multi-axis applications

Associated drive axis Toothed belt axis ELGR



- Higher torsional resistanceReduced vibrations with dynamic
- loadsDrive axis and guide axis can be arranged adjacent to or above one
- Plain-bearing guide
 For small loads
 - Restricted operating behaviour with torque load
 - Guide not backlash-free
- Recirculating ball bearing guide


 For medium loads
 - Very good operating behaviour with torque load
 - Backlash-free guide (preloaded guide elements)

• For size 35, 45, 55

another

- Load capacity up to max. 300 N or 124 Nm
- Max. feed force of 350 N

System product for handling and assembly technology



System components and accessories

-		Description	→ Page/Internet
[1]	Axes	Wide range of combinations possible within handling and assembly technology	axis
[2]	Guide axes	To support force and torque capacity in multi-axis applications	guide axis
[3]	Drives	Wide range of combinations possible within handling and assembly technology	drive
[4]	Motors	Servo and stepper motors, with or without gear unit	motor
[5]	Grippers	Wide range of variations possible within handling and assembly technology	gripper
[6]	Adapters	For drive/drive and drive/gripper connections	adapter kit

L


Type codes

001	Series	007	Additional slide		
ELFR	Guide axis, without drive		None		
		ZR	1 slide right		
002	Guide	ZL	1 slide left		
GF	Plain bearing	ZB	Additional slide 1x left, 1x right		
	Recirculating ball bearing guide	008	Proximity sensor, inductive, slot 8, N/O contact, cable 7.5 m		
003	Size		Without		
35	35	SA	1 6 units		
45	45	009			
55			Proximity sensor, inductive, slot 8, N/C contact, cable 7.5 m		
			Without		
004	Stroke	SB	1 6 units		
•••	50 1500	010	Mounting slot covering		
005	Stroke reserve		None		
OH	None	NC	1 50 units		
Н	0 999 mm				
		011	Slot nut for mounting slot		
006	Slide design		Without		
	Standard	NM	1 99 units		
L	Slide, long	012	Profile mounting		
			None		

...MA

1 ... 2 units


Peripherals overview

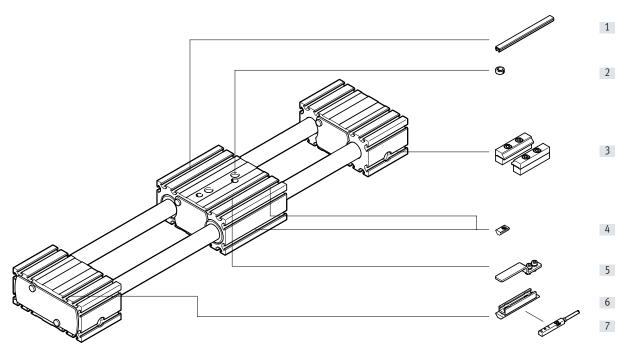

Variants and accessories

	Type/order code	Description	→ Page/Internet
[1]	Slot cover NC	For protection against contamination	13
[2]	Centring sleeve ZBH	 For centring loads and attachments on the slide 2 centring sleeves included in the scope of delivery of the axis 	13
[3]	Profile mounting MA	For mounting the axis on the bearing cap	12
[4]	Slot nut NM	For mounting attachments	13
[5]	Switch lug SA, SB	For sensing the slide position	12
[6]	Sensor bracket SA, SB	Adapter for mounting the inductive proximity switches on the axis	12
[7]	Proximity switch, T-slot SA, SB	 Inductive proximity switch, for T-slot 1 switch lug and 1 sensor bracket are included in the scope of delivery with the order code SA, SB 	13
-	Connecting cable NEBU	For proximity switch (order code SA and SB)	13

Data sheet

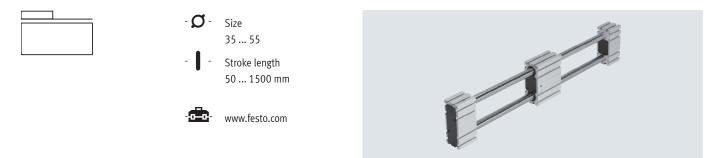

General technical data

Size		35	45	55				
Design		Guide axis without drive		55				
Guide		Recirculating ball bearing	a guide					
Guide		Plain-bearing guide	s suide					
Mounting position		Any						
Working stroke	[mm]	50 800	50 1000	50 1500				
Max. no-load resistance to shifting	[N]	3	6	10				
Max. speed	[IN]	3	6	10				
	[2						
Recirculating ball bearing guide	[m/s]	3						
Plain-bearing guide	[m/s]	1						
Max. acceleration	[m/s ²]	50						
Operating and environmental conditions								
Ambient temperature								
Recirculating ball bearing guide	[°C]	-10 +50						
Plain-bearing guide	[°C]	0 +40						
Degree of protection		IP20						
Weight [kg]								
Size		35	45	55				
Recirculating ball bearing guide								
Basic weight with 0 mm stroke ¹⁾								
Standard slide		1.2	2.7	4.6				
Long slide		1.6	3.8	6.5				
Additional weight per 1000 mm stroke		2.4	5.0	7.7				
Moving mass		0.4	0.9	1.7				
Slide				ł				
Standard slide		0.4	0.9	1.7				
Long slide		0.7	1.5	2.8				
Additional slide		0.4	0.9	1.7				

1) Including slide


Data sheet

Weight [kg]				
Size	35	45	55	
Plain-bearing guide				
Basic weight with 0 mm stroke ¹⁾				
Standard slide	1.1	2.5	4.2	
Long slide	1.6	3.7	6.4	
Additional weight per 1000 mm stroke	2.3	5.0	7.7	
Moving mass	0.3	0.7	1.3	
Slide				
Standard slide	0.3	0.7	1.3	
Long slide	0.6	1.5	2.6	
Additional slide	0.3	0.7	1.3	

1) Including slide

Materials

Sectional view




Axis		
[1]	Bearing cap, profile	Anodised wrought aluminium alloy
[2]	Guide rods	Steel
[3]	Slide, profile	Anodised wrought aluminium alloy
	Note on materials	RoHS-compliant
		Contains paint-wetting impairment substances

Data sheet

Characteristic load values

The indicated forces and torques refer to the centre of the guide. The point of application of force is the point where the centre of the guide and the longitudinal centre of the slide intersect. These values must not be exceeded during dynamic operation. Special attention must be paid to the deceleration phase.

If the axis is subjected to two or more of the indicated forces and torques simultaneously, the following equation must be satisfied in addition to the indicated maximum loads:



Front - Front

 F_2/M_2 = maximum value


Permissible forces and torques for a service life of 5000 km


Guide		Plain-bearir	Plain-bearing guide			Recirculating ball bearing guide		
Size		35	45	55	35	45	55	
y _{max.} , Fz _{max}	[N]	50	100	300	50	100	300	
Standard slide						·		
Mx _{max.}	[Nm]	1	2.5	5	2.5	5	15	
My _{max.}	[Nm]	4	8	16	8	16	48	
Mz _{max.}	[Nm]	4	8	16	8	16	48	
ong slide								
Mx _{max.}	[Nm]	1	2.5	5	2.5	5	15	
My _{max.}	[Nm]	10	20	40	20	40	124	
Mz _{max.}	[Nm]	10	20	40	20	40	124	

Service life

The service life of the guide depends on the load. To provide a rough indication of the service life of the guide, the graph below plots the load comparison factor $f_{\rm v}$ against the service life.

These values are only theoretical. You must consult your local contact person at Festo for load comparison factors f_v greater than 1.5.





- 📲 - Note

Engineering software

Electric Motion Sizing

www.festo.com/x/electric-motion-sizing

Example:

A user wants to move an X kg load. Using the above formula gives a value of 1.5 for the load comparison factor f_v. According to the graph, the guide would have a service life of approx. 1500 km. Reducing the acceleration reduces the Mz and My values. A load comparison factor of 1 now gives a service life of 5000 km.


Data sheet

Minimum nominal stroke

With standard slide or long slide L with additional slide ZR/ZL/ZB

Size		35			45			55		
Variant		-/L	ZR/ZL	ZB	-/L	ZR/ZL	ZB	-/L	ZR/ZL	ZB
Min. nominal stroke	[mm]	50	126	202	50	146	242	50	166	282

Stroke reserve



- The stroke reserve is a safety distance from the mechanical end position and is not used in normal operation
- The sum of the nominal stroke and 2x stroke reserve must not exceed the maximum permissible working stroke
- The stroke reserve length can be freely selected

L18 = L19 = Nominal stroke

Stroke reserve

• The stroke reserve is defined via the "stroke reserve" characteristic in the modular product system.


Example:

Type ELFR-45-500-20H	ł
Nominal stroke	= 500 mm
2x stroke reserve	= 40 mm

Working stroke = 540 mm (540 mm = 500 mm + 2x 20 mm)

Working stroke reduction

With standard slide or long slide L with additional slide ZR/ZL/ZB $\,$



- For a toothed belt axis with additional slide, the working stroke is reduced by the length of the additional slide and the distance between the two slides
- If the variant long slide L is ordered, the additional slide is not extended

L7 = Length of slide

L16 = Distance between the two slides

L17 = Length of additional slide


Example:	
Type ELFR-35-50	00ZR
Working stroke	= 500 mm
L16	= 10 mm
L7, L17	= 76 mm

Working stroke with additional slide = 414 mm (500 mm - 10 mm - 76 mm)

Dimensions – Additional slide

Size		35	45	55
Length L17	[mm]	76	96	116
Distance between the slides L16	[mm]	≥0		

2nd moments of area




Size		35	45	55	
ly	[mm ⁴]	4.19x10 ³	17.95x10 ³	41.18x10 ³	
lz	[mm ⁴]	3.77x10 ³	15.71x10 ³	38.35x10 ³	


Recommended deflection limits


Adherence to a maximum deflection of 0.5 mm is recommended so as not to impair the functionality of the axes. Greater deformation can result in increased friction, greater wear and reduced service life.


Data sheet

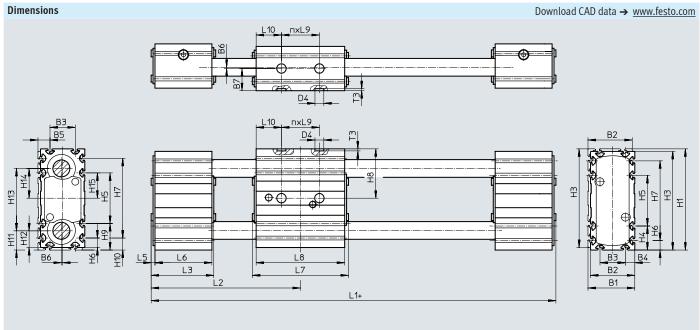

+ = plus stroke + 2x stroke reserve









Size	B1	B2	B3	B4	B5	B6	B7	D4 Ø H7	H1	H3	H4	H5	H6	H7	H8	н	9
ELFR-35 ELFR-35-L	37	35	20	7.5	9.5		17.5		80	78	19	40	7.5	63	39	2	1
ELFR-45 ELFR-45-L	47	45	20	12.5	14.5	1	22.5	7	117	115	32.5	50	12.5	90	57.5	34	.5
ELFR-55 ELFR-55-L	57	55	30	12.5	14.5		27.5		137	135	32.5	70	12.5	110	67.5	34	1.5
Size	H10	H11	H12	H13	H14	H15	L1	L2	L3	L5	L6	L7	L8	L9	L10	n	T3
																	+0.1
ELFR-35 ELFR-35-L	9.5	15.5	13.5	49	23.5	20	178 248	89 124	51		45	76 146	70 140	30	20 40	1 2	
ELFR-45 ELFR-45-L	14.5	23	21	71	34.5	25	219 309	108 153	60	3	54	96 186	90 180	40	25 50	1	1.6
ELFR-55 ELFR-55-L	14.5	25.5	23.5	86	42	35	243 353	120 175	62		56	116 226	110 220	40	35 70	1 2	

Ordering data – Modular product system

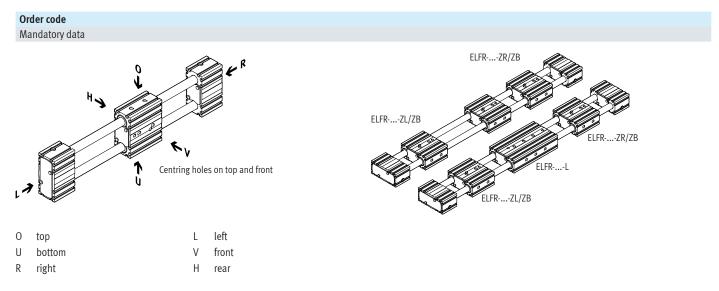

Accessories

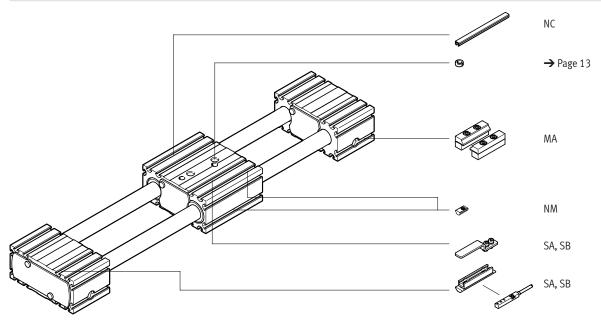

Ordering data – Modular product system

Ordering table							
Size		35	45	55	Conditions	Code	Enter coo
Module no.		571435	571436	571437			
Design		Guide axis				ELFR	ELFR
Guide		Recirculating ball bear	ing guide				
		Plain-bearing guide				-GF	
Size		35	45	55			
Stroke length	[mm]	1 800	1 1000	1 1500			
Stroke reserve	[mm]	0 999 (0 = no stroke	e reserve)		[1]	H	
Slide design		Standard slide					
		Long slide				-L	
Additional slide		No additional slide					
		1 slide on right			[2]	-ZR	
		1 slide on left			[2]	-ZL	
		1 slide on right, 1 slide	e on left		[2]	-ZB	
Accessories		Accessories enclosed s	separately			+	+
Proximity switch (SIES), inductive,	N/O contact, 7.5 m cable	1 6				SA	
slot type 8, PNP, including switch lu	N/C contact, 7.5 m cable	1 6				SB	
and sensor bracket							
Mounting slot cover		-	1 50 (1 = 2 un	its, 500 mm length)		NC	
Slot nut for mounting slot		1 99				NM	
Profile mounting		1 2				MA	

The sum of nominal stroke and 2x stroke reserve must not exceed the maximum stroke length.
 ZR, ZL, ZB working stroke reduction → page 8


Size		35			45			55		
Variant		-/L	ZR/ZL	ZB	-/L	ZR/ZL	ZB	-/L	ZR/ZL	ZB
Min. nominal stroke	[mm]	50	126	202	50	146	242	50	166	282

Accessories

Profile mounting MUE (order code MA)



Material: Anodised aluminium RoHS-compliant

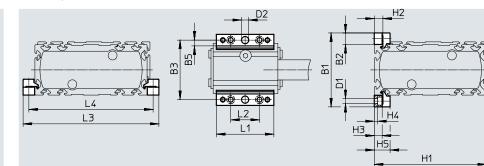


Dimensions and ordering data

2										
For size	B1	B2	B3	B5	D1	D2	H1	H2	H3	H4
					ø	ø				
						H7				
35	51	8	43	4	3.4	5	78	6	5.5	2.3
45	69	12	57	4	5.5	5	115	10	9	3.2
55	79	12	67	4	5.5	5	135	10	9	3.2
										·
For size	H5	L1		L2	L3	L4	Weight	Part no.	Туре	
							[g]			
35	11	40		20	94	86	20	558042	MUE-50	
45	17.5	52		40	139	127	32	562238	MUE-45	
55	17.5	52		40	159	147	32	562238	MUE-45	

Sensor bracket EAPM-...-SHS, switch lug EAPM-...-SLS (order code SA/SB) Material: Switch lug: galvanised steel Sensor bracket: anodised wrought aluminium alloy RoHS-compliant







Dimensions and ord	ering data					
For size	B1	H1	L1	Weight	Part no.	Туре
				[g]		
Sensor bracket						
35, 45, 55	9	6.5	44	20	567537	EAPM-L4-SHS
Switch lug						
35, 45, 55	10	11	57.5	15	567538	EAPM-L4-SLS

Accessories

Ordering dat	a					
	For size	Comment	Order code	Part no.	Туре	PU ¹⁾
Slot nut NST						
	35	For mounting slot	NM	558045	ABAN-3-1 M3-4-M-P1	1
	45,55			150914	NST-5-M5	
	70113)					
Centring sleev						
\bigcirc	35, 45, 55	For slide	-	8146544	ZBH-7-B	10
Slot cover AB	Р					
	45,55	For mounting slot Each 0.5 m	NC	151681	ABP-5	2

Packaging unit
 2 centring sleeves included in the scope of delivery of the axis

Ordering data – Proximity switches for T-slot, inductive

Ordering data –	Proximity switches for T-slo	ot, inductive					Data sheets → Internet: sie
	Type of mounting	Electrical connection	Switching output	Cable length [m]	Order code	Part no.	Туре
N/O contact							
1	Insertable in the slot from	Cable, 3-wire	PNP	7.5	SA	551386	SIES-8M-PS-24V-K-7.5-0E
1 Section of the sect	above, flush with the	Plug M8x1, 3-pin		0.3	-	551387	SIES-8M-PS-24V-K-0.3-M8D
e l	cylinder profile	Cable, 3-wire	NPN	7.5	-	551396	SIES-8M-NS-24V-K-7.5-0E
		Plug M8x1, 3-pin		0.3	-	551397	SIES-8M-NS-24V-K-0.3-M8D
N/C contact							
1	Insertable in the slot from	Cable, 3-wire	PNP	7.5	SB	551391	SIES-8M-PO-24V-K-7.5-OE
Ser la construction de la constr	above, flush with the	Plug M8x1, 3-pin		0.3	-	551392	SIES-8M-PO-24V-K-0.3-M8D
¢/	cylinder profile	Cable, 3-wire	NPN	7.5	-	551401	SIES-8M-NO-24V-K-7.5-0E
		Plug M8x1, 3-pin		0.3	-	551402	SIES-8M-NO-24V-K-0.3-M8D
Ordering data –	Connecting cables						Data sheets → Internet: nebi

	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Туре
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
OT IN			5	541334	NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3