

## Ball screw axes ELGT-BS

FESTO



## Key features


### At a glance

- Compact design
- Optimised for use in the electronics and automotive industry: materials include less than 1% copper and zinc
- Optimal ratio between installation space and working space due to the optimised axis design
- Simple integration of motors with motor mounting kits
- Position detection with inductive proximity switches SIES-8M and magnetic proximity switches SME/SMT-8M

### Characteristic values of the axes

The specifications shown in the table are maximum values.

The precise values for each of the variants can be found in the relevant data sheet in the catalogue.

Version	Size	Screw pitch [mm/rev]	Working stroke [mm]	Max. speed [m/s]	Repetition accuracy [mm]	Max. feed force Fx [N]	Guide characteristics				
							Forces and torques				
							Fy [N]	Fz [N]	Mx [Nm]	My [Nm]	Mz [Nm]
<b>Recirculating ball bearing guide</b>											
	90	10	50 ... 1000	0.5	±0.02	1054	4710	5600	65	51	51
		20	50 ... 1000	1	±0.02	810	4710	5600	65	51	51
	120	10	100 ... 1100	0.5	±0.02	1265	6800	8090	300	310	310
		20	100 ... 1100	1	±0.02	805	6800	8090	300	310	310
	160	10	100 ... 1400	0.5	±0.02	1575	9550	11370	600	560	560
		20	100 ... 1400	1	±0.02	1045	9550	11370	600	560	560

### Note

Engineering software  
→ [www.festo.com](http://www.festo.com)

### Complete system comprising ball screw axis, motor, motor controller and motor mounting kit

Ball screw axis with recirculating ball bearing guide



Motor



Servo motor:  
EMMT-AS, EMME-AS


Stepper motor:  
EMMS-ST  
Integrated drive:  
EMCA-EC

Servo drive



Servo drive:  
CMMT-AS  
Servo drive for extra-low voltage:  
CMMT-ST

Motor mounting kit

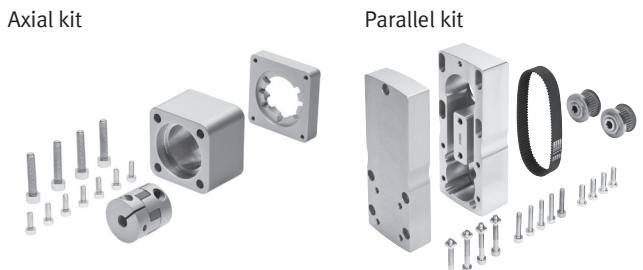

Axial kit


Parallel kit

## Type codes

001	Series
ELGT	Gantry axis
002	Drive system
BS	Ball screw drive
003	Size
90	90
120	120
160	160
004	Stroke [mm]
50	50
100	100
150	150
200	200
250	250
300	300
350	350
400	400
450	450
500	500
550	550
600	600
650	650
700	700
750	750
800	800
900	900
1000	1000
1100	1100
1200	1200
1300	1300
1400	1400

005	Spindle pitch
10P	10 mm
20P	20 mm
006	Additional slide
	None
ZL	1 slide left
ZR	1 slide right
007	Anti-reflection coating
	None
AR	Outer surfaces


## Peripherals overview

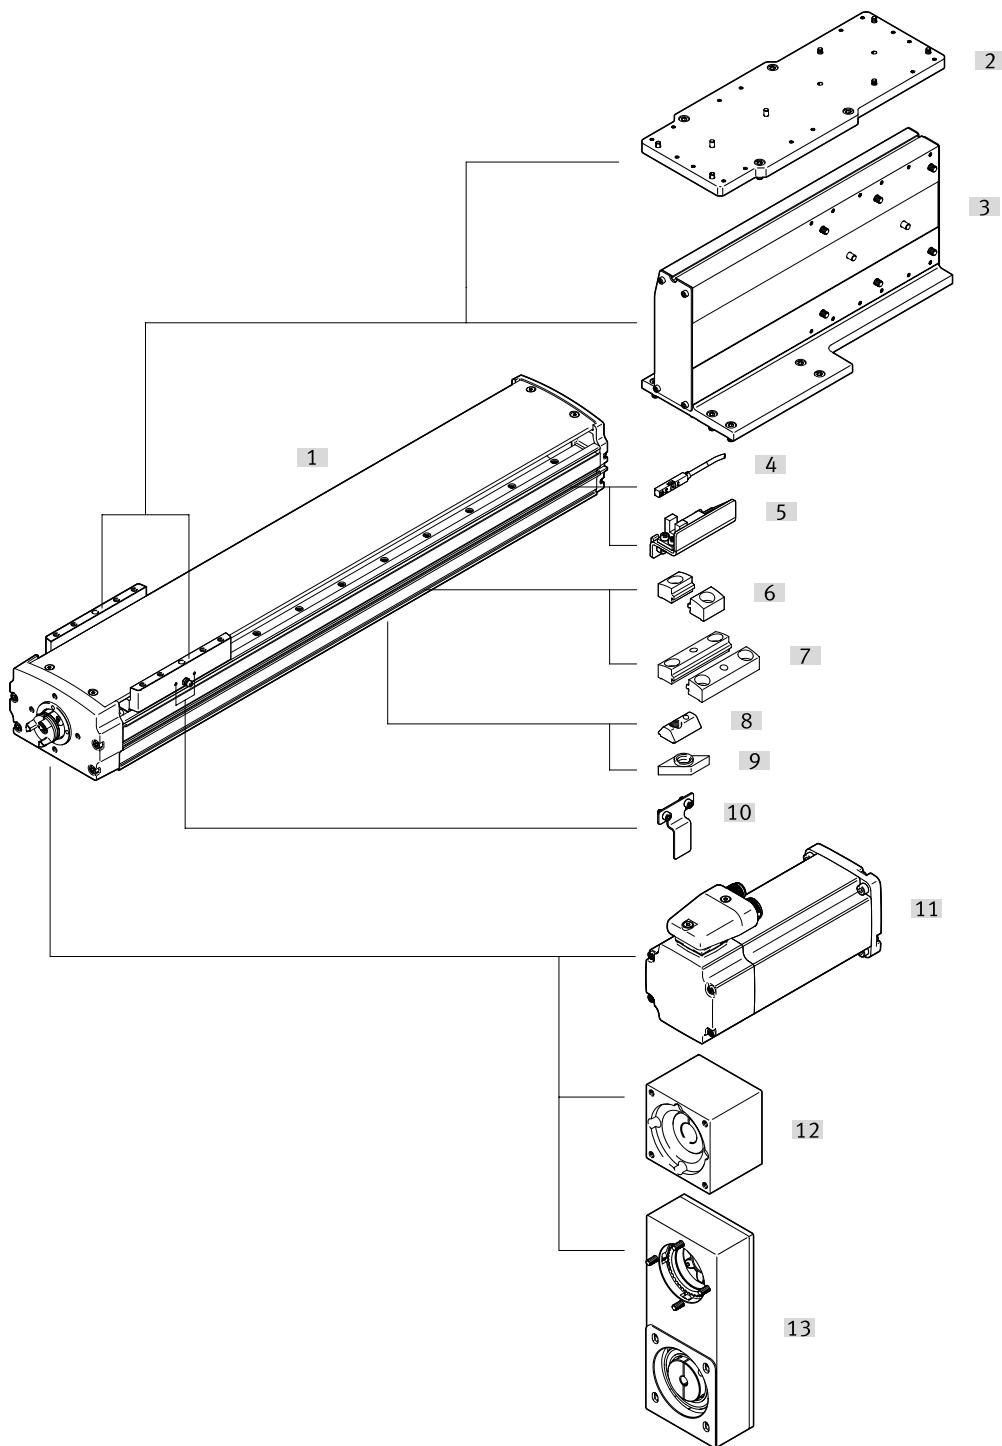

## Peripherals overview

<b>Accessories</b>		
Type/order code	Description	→ Page/Internet
[1] Ball screw axis ELGT-BS	Electric drive	6
[2] Adapter kit EHAM-MA-L9	<ul style="list-style-type: none"> <li>• For axis/axis mounting</li> <li>• When motors are mounted using parallel kits, this may lead to interfering contours. In this case, the adapter plate is required for height compensation. (Download CAD data → <a href="http://www.festo.com">www.festo.com</a>)</li> </ul>	34
[3] Angle kit EHAM-AK-L9	For axis/axis mounting	30
[4] Proximity switch SIES-8M	Inductive proximity switches, for T-slot	48
Proximity switch SME/SMT-8M	Magnetic proximity switches, for T-slot	48
[5] Sensor bracket EAPM-L9-SHE	For mounting third-party sensors on the axis	47
[6] Profile mounting EAHF-L2-...-P	For mounting the axis on the side of the profile	44
[7] Profile mounting EAHF-L2-...-P-S	For mounting the axis on the side of the profile	45
[8] Slot nut NST	For mounting attachments	49
[9] Slot nut ABAN	For mounting attachments	49
[10] Switch lug EAPM-L9	For sensing the slide position in conjunction with inductive proximity switches SIES-8M	46
[11] Motor EMMT	Motors specially matched to the axis, with or without brake	<a href="#">emmt</a>
[12] Axial kit EAMM-A	For axial motor mounting	<a href="#">eamm-a</a>
[13] Parallel kit EAMM-U	For parallel motor mounting	<a href="#">eamm-u</a>

## Datasheet



- - Size  
90 ... 160 mm
- - Stroke length  
50 ... 1400 mm
- www.festo.com



<b>General technical data</b>				
Size	90	120	160	
Design	Electromechanical linear axis With ball screw			
Mounting position	Any			
Motor type	Stepper motor Servo motor			
Guide	Recirculating ball bearing guide			
Screw type	Ball screw			
Working stroke [mm]	50 ... 1000	100 ... 1100	100 ... 1400	
Stroke reserve [mm]	0			
Max. feed force Fx				
[10P] [N]	1054	1265	1575	
[20P] [N]	810	805	1045	
Feed constant				
[10P] [mm/rev]	10			
[20P] [mm/rev]	20			
No-load torque at low travel speed				
[10P] [Nm]	0.08	0.08	0.2	
[20P] [Nm]	0.04	0.08	0.14	
No-load torque at max. travel speed				
[10P] [Nm]	0.3	0.3	0.4	
[20P] [Nm]	0.2	0.3	0.4	
Max. radial force on drive shaft				
[10P] [N]	290		340	
[20P] [N]	290		290	
Max. rotational speed <sup>1)</sup> [rpm]	3000			
Max. speed				
[10P] [m/s]	0.5			
[20P] [m/s]	1			
Max. acceleration	[m/s <sup>2</sup> ]	15		
Repetition accuracy	[mm]	±0.02		
Reversing backlash	[mm]	≤ 0.15		

1) Rotational speed and speed are stroke-dependent

<b>Operating and environmental conditions</b>				
	90	120	160	
Ambient temperature <sup>1)</sup> [°C]	0 ... +50			
Degree of protection	IP20			
Duty cycle [%]	100			
Maintenance interval	Lifetime lubrication			

1) Note operating range of proximity switches

## Datasheet

<b>Weight [g]</b>					
Size	90	120	160		
Screw pitch [mm/rev]	10	20	10	20	10
Basic weight with 0 mm stroke	4380	4353	5259	5235	9564
Additional weight per 10 mm stroke	104	102	124	122	188
Moving mass	1628	1645	2019	2036	3835
Additional slide weight	1416	1416	1770	1770	3142

<b>Spindle</b>					
Size	90	120	160		
Screw pitch [mm/rev]	10	20	10	20	10
Diameter [mm]	16	15	16	15	20

<b>Mass moment of inertia</b>					
Size	90	120	160		
Screw pitch [mm/rev]	10	20	10	20	10
$J_0$ [kg mm <sup>2</sup> ]	12.52	22.91	13.06	26.54	31.75
$J_H$ per metre stroke [kg mm <sup>2</sup> ]	34.53	25.22	34.53	25.22	80.9
$J_L$ per kg payload [kg mm <sup>2</sup> ]	2.53	10.13	2.53	10.13	2.53
$J_W$ Slide [kg mm <sup>2</sup> ]	3.58	14.35	4.48	17.93	8.2

The mass moment of inertia  $J_A$  of the entire axis is calculated as follows:  $J_A = J_0 + J_W + J_H \times \text{working stroke [m]} + J_L \times m_{\text{payload}} [\text{kg}]$

### Homing

Homing can be carried out in two ways:


- Against a fixed stop
- Using a reference switch

The following values must be observed:

Size	90	120	160		
Max. impact energy [mJ]	2				
At max. speed of the homing travel [m/s]	0.01				
With max. payload [kg]	40				

### Materials

#### Sectional view

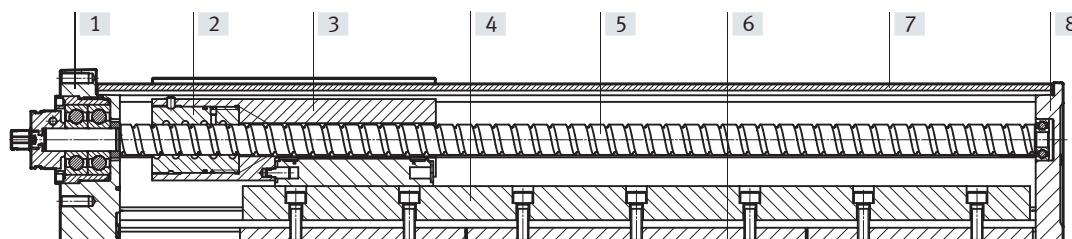

Axis	90	120	160		
[1] Drive cover	Painted die cast aluminium				
[2] Ball screw nut	Steel				
[3] Slide	Anodised wrought aluminium alloy				
[4] Slide guide	Steel				
[5] Spindle	Steel				
[6] Profile	Anodised wrought aluminium alloy				
[7] Housing	Painted die cast aluminium				
[8] End cap	Painted die cast aluminium				
– Note on materials	Contains paint-wetting impairment substances LABS (PWIS) conformity: VDMA24364-Zone III RoHS-compliant Cleanroom class 6 to ISO 14644-1	Cleanroom class 8 to ISO 14644-1			
	Metals with more than 1% by mass of copper, zinc or nickel are excluded from use. Exceptions are nickel in steel, chemically nickel-plated surfaces, printed circuit boards, cables, electrical plug connectors and coils				

## Datasheet


## Characteristic load values

The indicated forces and torques refer to the centre of the guide.


The point of application of force is the point where the centre of the guide and the longitudinal centre of the slide intersect.

These values must not be exceeded during dynamic operation.

Special attention must be paid to the deceleration phase.

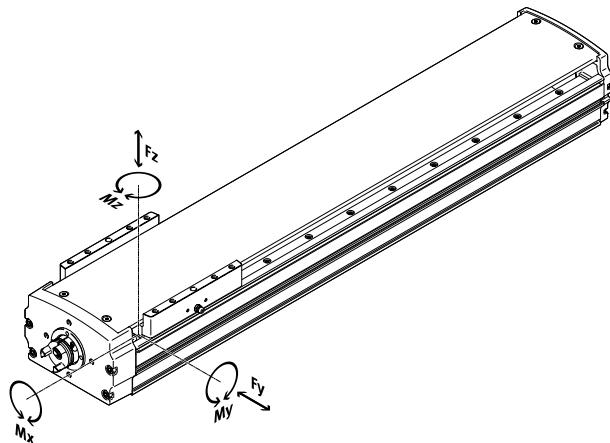

Distance from the slide surface to the centre of the guide

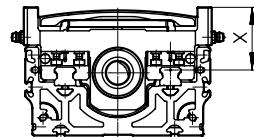

## Distance from the slide surface to the centre of the guide

Size	90	120	160
Dimension x [mm]	66	48	57.5

## Max. permissible forces and torques for a service life of 5000 km

Size	90	120	160
Fy <sub>max.</sub> [N]	4710	6800	9550
Fz <sub>max.</sub> [N]	5600	8090	11370
Mx <sub>max.</sub> [Nm]	65	300	600
My <sub>max.</sub> [Nm]	51	310	560
Mz <sub>max.</sub> [Nm]	51	310	560

## Basic load ratings

Size	90	120	160			
Screw pitch [mm/rev]	10	20	10	20	10	20

## Ball screw

Dynamic c <sub>dyn</sub> [N]	10700	7100	10700	7100	19400	8200
Static C <sub>0</sub>	22700	14700	22700	14700	50100	18600

- - Note

For a guide system to have a service life of 5000 km, the load comparison factor must have a value of  $f_v \leq 1$ , based on the maximum permissible forces and torques for a service life of 5000 km.

If the axis is subjected to several of the indicated forces and torques at the same time, the following equation must be satisfied in addition to the indicated maximum loads:

Calculating the load comparison factor:

$$f_v = \frac{|F_{y1}|}{F_{y2}} + \frac{|F_{z1}|}{F_{z2}} + \frac{|M_{x1}|}{M_{x2}} + \frac{|M_{y1}|}{M_{y2}} + \frac{|M_{z1}|}{M_{z2}} \leq 1$$

$F_1/M_1$  = dynamic value

$F_2/M_2$  = maximum value

## Datasheet

### Calculating the service life


The service life of the guide depends on the load. To be able to make a statement as to the service life of the guide, the graph below plots the load comparison factor  $f_v$  against the service life.

#### Load comparison factor $f_v$ as a function of service life $l$

Example:

A user wants to move an  $x$  kg load. Using the formula (→ page 8) gives a value of 1.5 for the load comparison factor  $f_v$ . According to the graph, the guide would have a service life of approx. 1500 km. Reducing the acceleration reduces the  $M_y$  and  $M_z$  values. A load comparison factor  $f_v$  of 1 now gives a service life of 5000 km.

These values are only theoretical. You must consult your local Festo contact for a load comparison factor  $f_v$  greater than 1.

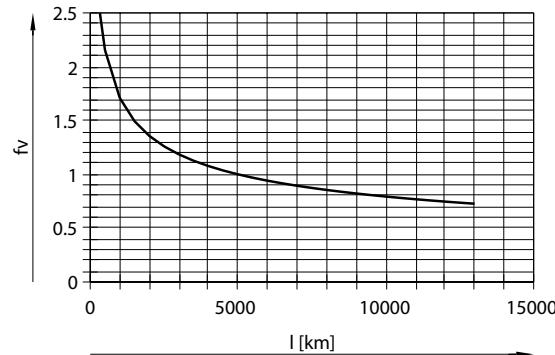

### Comparison of the characteristic load values for 5000 km with dynamic forces and torques of recirculating ball bearing guides

The characteristic load values of the bearing guides are standardised to ISO and JIS using dynamic and static forces and torques. These forces and torques are based on an expected service life of the guide system of 100 km to ISO or 50 km to JIS.

As the characteristic load values are dependent on the service life, the maximum permissible forces and torques for a 5000 km service life cannot be compared with the dynamic forces and torques of bearing guides to ISO/JIS.

To make it easier to compare the guide capacity of linear axes ELGT with bearing guides, the table below lists the theoretically permissible forces and torques for a calculated service life of 100 km. This corresponds to the dynamic forces and torques to ISO.

These 100 km values have been calculated mathematically and are only to be used for comparing with dynamic forces and torques to ISO. The drives must not be loaded with these characteristic values as this could damage the axes.


**Max. permissible forces and torques for a theoretical service life of 100 km (from a guide perspective only)**

Size	90	120	160
$F_{y_{\max.}}$ [N]	17352	25051	35183
$F_{z_{\max.}}$ [N]	20631	29804	41887
$M_{x_{\max.}}$ [Nm]	239	1105	2210
$M_{y_{\max.}}$ [Nm]	188	1142	2063
$M_{z_{\max.}}$ [Nm]	188	1142	2063


## Datasheet

### Max. acceleration a as a function of payload m


Size: 90

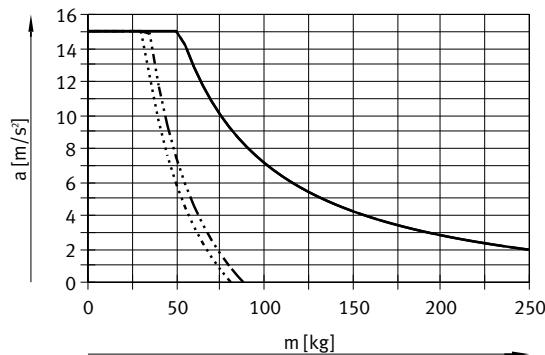

Size 120

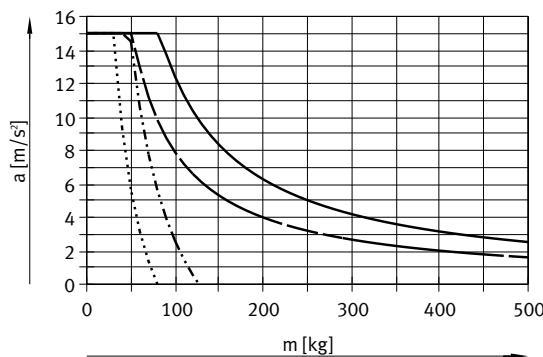

Size 160

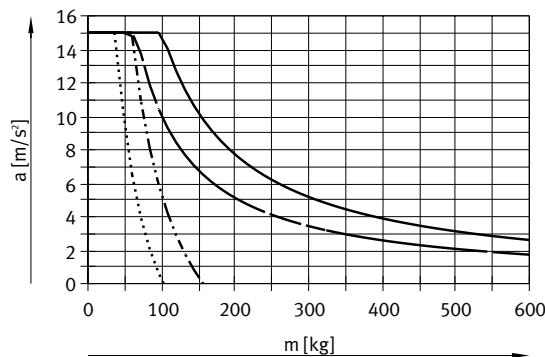


- [1OP] and horizontal mounting position
- - - [2OP] and horizontal mounting position
- · - - [1OP] and vertical mounting position
- · · · [2OP] and vertical mounting position

## Datasheet


**Speed v as a function of working stroke l**

Size: 90

[10P]

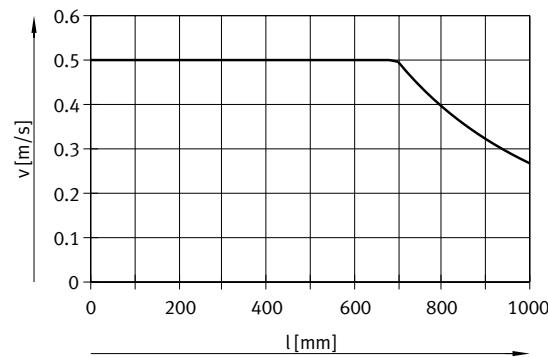


[20P]

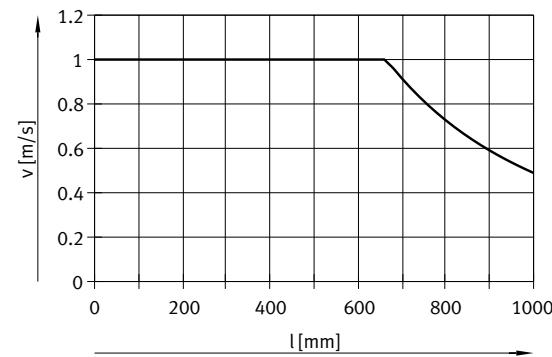


Size: 120

[10P]

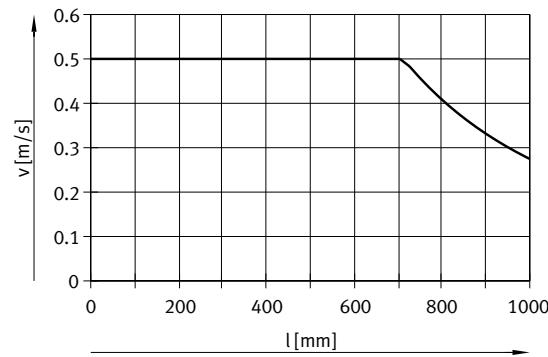


[20P]

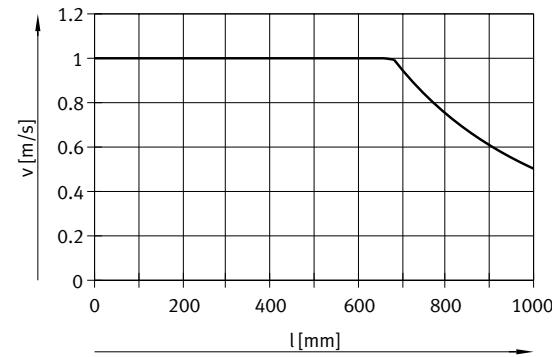


Size 160

[10P]

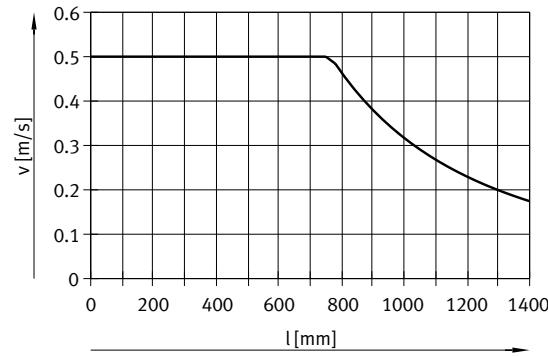

[20P]

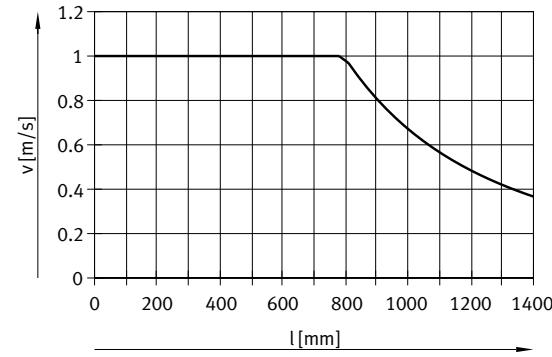



## Datasheet

### Rotational speed n as a function of working stroke l

Size: 90

[10P]



[20P]

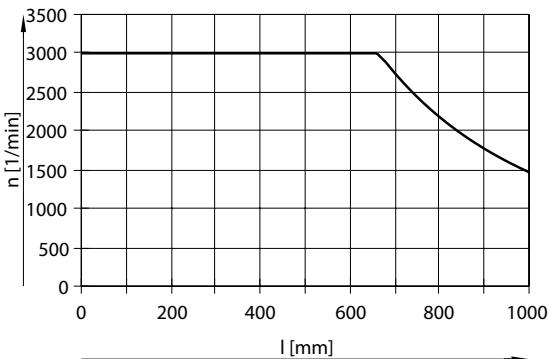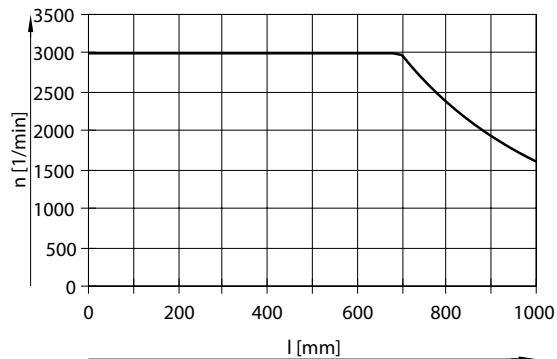

Size: 120

[10P]



[20P]

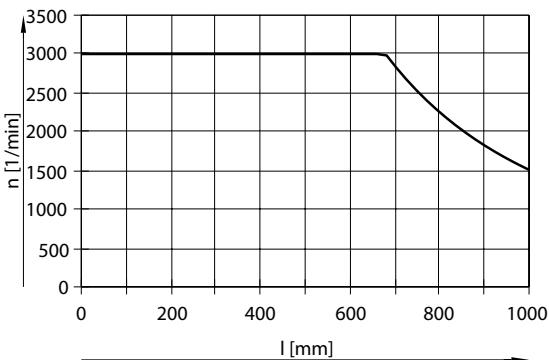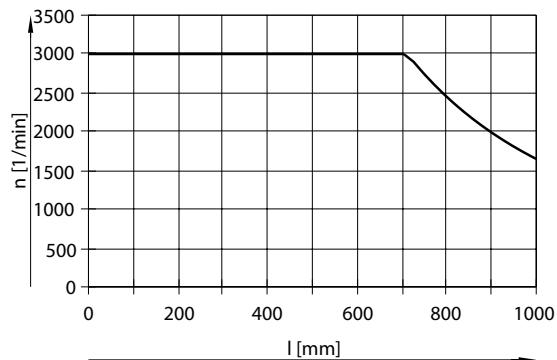

Size 160

[10P]

[20P]

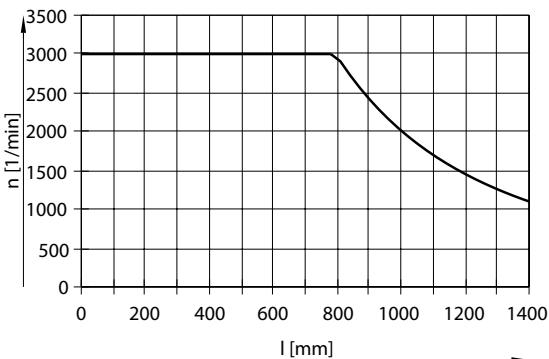
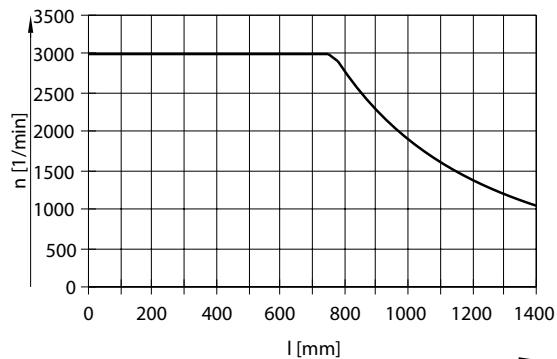


## Datasheet


**Theoretical feed force F as a function of the input torque M**

Size: 90

Size: 120

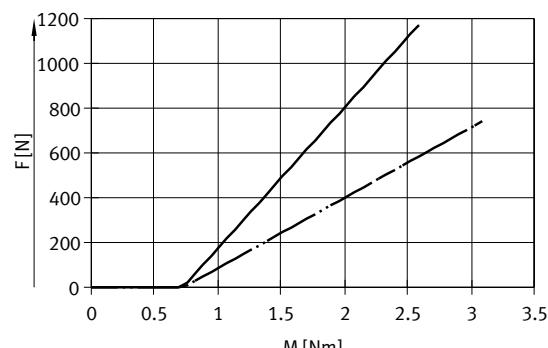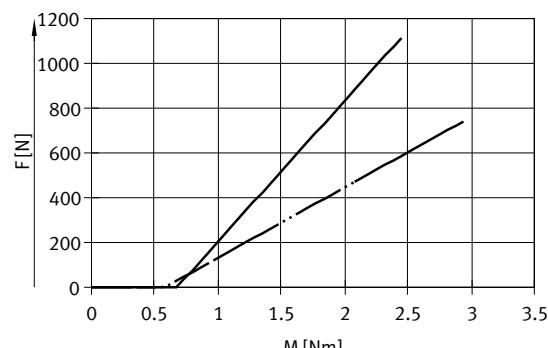

Size 160

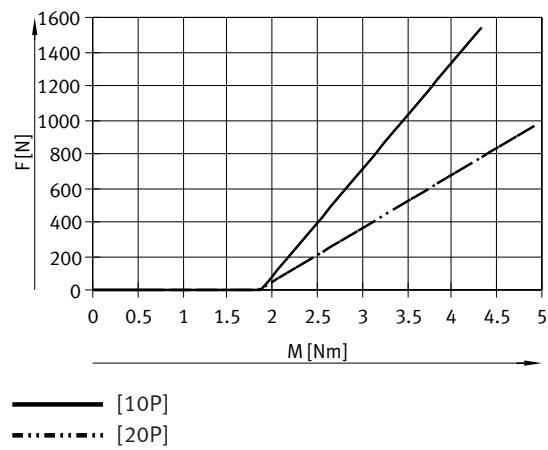


## Datasheet


### Feed force F as a function of service life l

Size: 90

[10P]

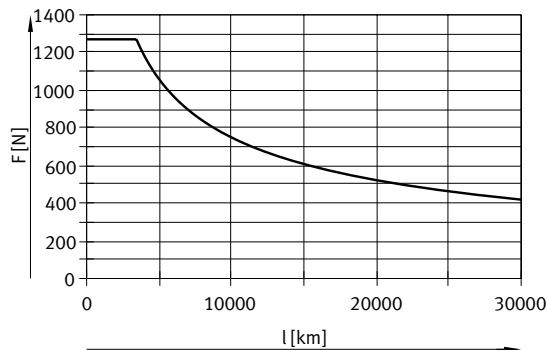


[20P]

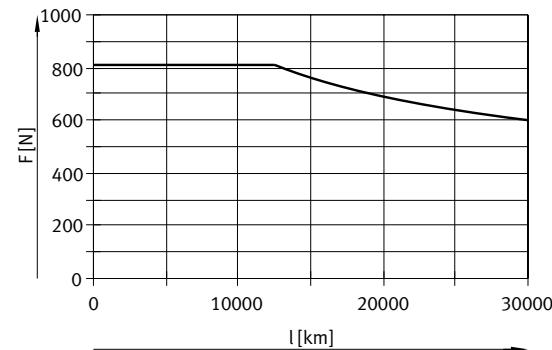


Size: 120

[10P]

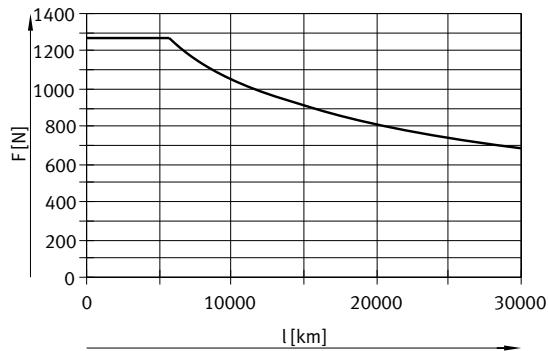


[20P]

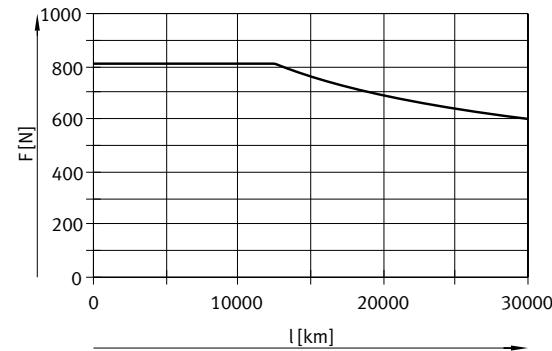


Size 160

[10P]

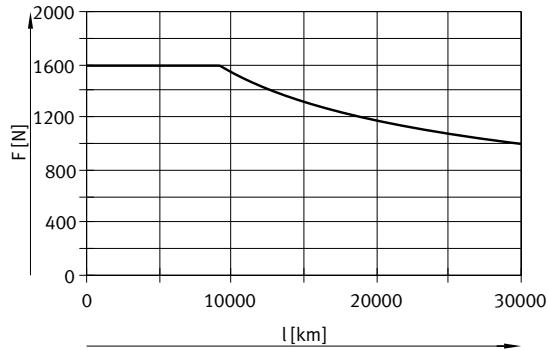

[20P]

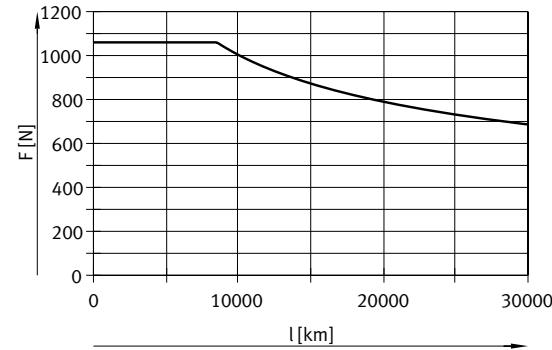


## Datasheet

### Working stroke reduction

For axis ELGT with additional slide ZL/ZR

For a ball screw axis with additional slide, the working stroke is reduced by the length of the additional slide and the distance between both slides.

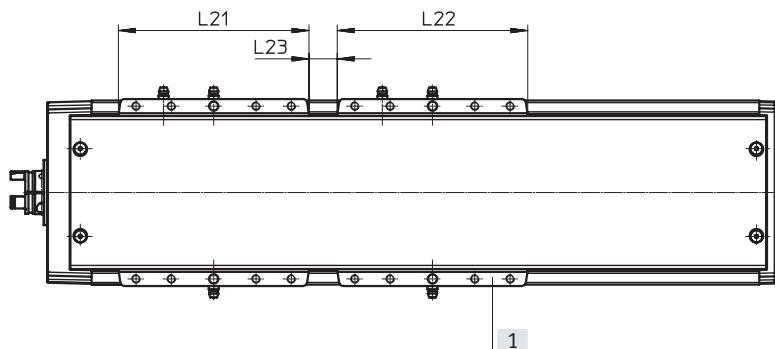

L21 = Slide length

L22 = Additional slide length

L23 = Distance between the  
two slides

[1] Additional slide

#### Example:

Type ELGT-BS-120-600-10P-ZR

Working stroke without additional slide	= 600 mm
L23	= 5 mm
L21, L22	= 135 mm
Working stroke with additional slide (600 mm – 5 mm – 135 mm)	= 460 mm

#### Dimensions – Additional slide

Size	90	120	160
Length L22 [mm]	150	135	175
Min. distance between the slides L23	≥ 5	≥ 5	≥ 5

#### Note

Additional slides are available  
from a stroke ≥ 200 mm


## Datasheet

## Torsional moment of inertia



Size	90	120	160
$I_t$ [mm $^4$ ]	151000	506000	726000

## Second moment of area




Size	90	120	160
$I_y$ [mm $^4$ ]	631000	966000	1411000
$I_z$ [mm $^4$ ]	1948000	6011000	15257000

## Datasheet


### Maximum permissible support spacing L (without profile mounting EAHF) as a function of force F

The axis may need to be supported in order to limit deflection in the case of long strokes.


The following graphs can be used to determine the maximum permissible support spacing  $L$  as a function of force  $F$  acting on the axis. The deflection is  $f = 0.5 \text{ mm}$ .

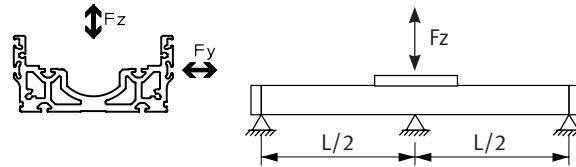


Size: 90

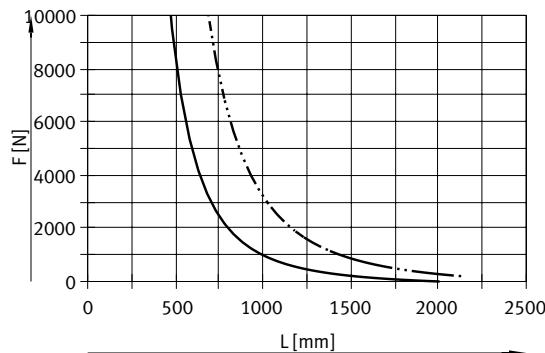

Size 120

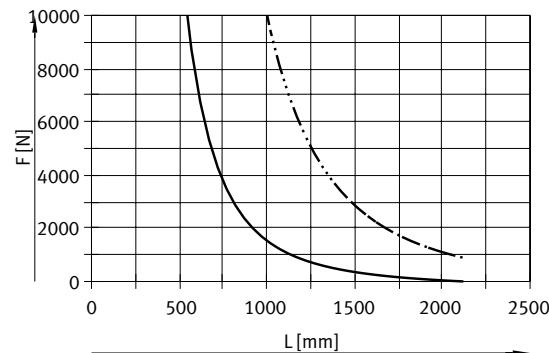

Size 160

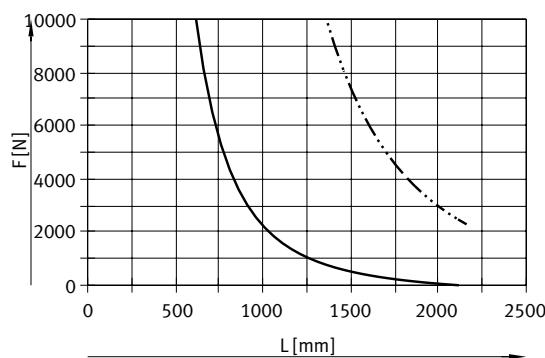

— · — Fy  
— Fz

### Recommended deflection limits

Adherence to the following deflection limits is recommended so as not to impair the functionality of the axes.

Greater deformation can result in increased friction, greater wear and reduced service life.


Size	Dynamic deflection (load moves)	Static deflection (stationary load)
90 ... 160	0.05% of the axis length, max. 0.5 mm	0.1% of the axis length

## Datasheet

## Dimensions

Size: 90

Download CAD data → [www.festo.com](http://www.festo.com)

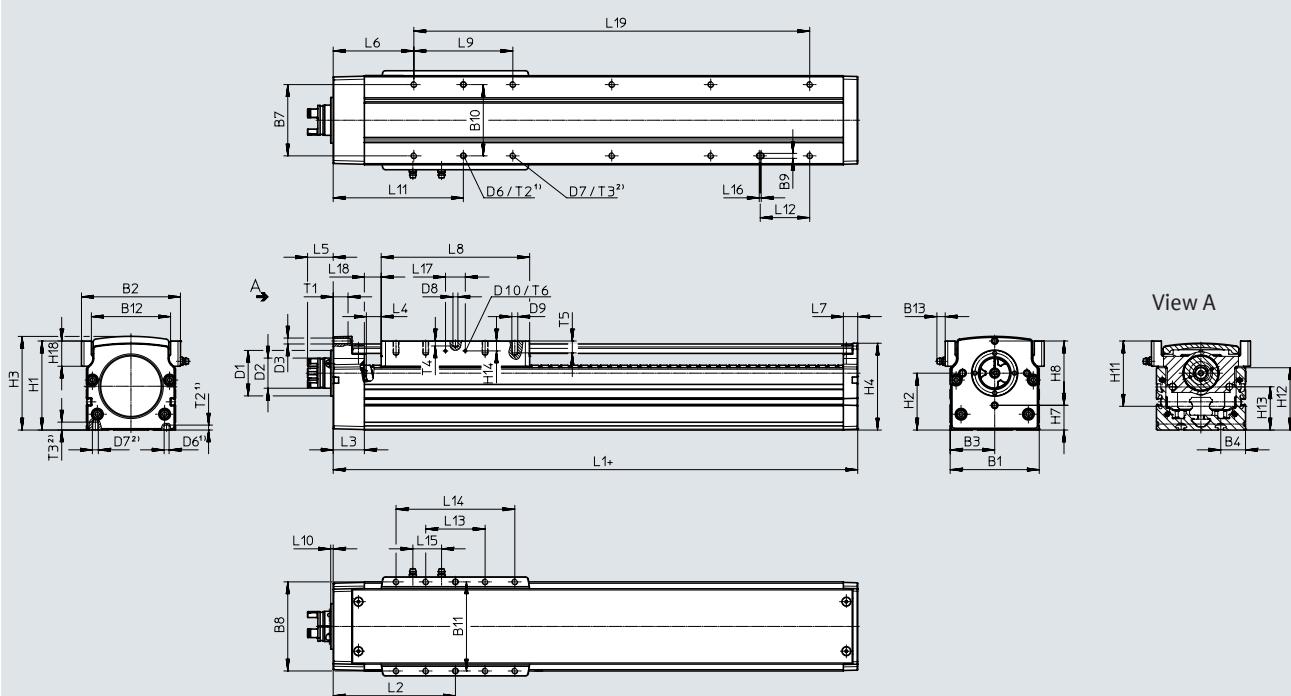

+ = plus stroke length

- 1) There are always 2 centring holes per axis
  - 2) The number of threaded holes depends on the stroke → page 19



## Note

To avoid distortion in the slide, the bearing surfaces of the attachments must maintain a flatness of at least 0.03 mm over 200 mm.

## Datasheet


Size [mm]	B1	B2	B3	B4	B7	B8	B9	B10	B11	B12	B13	D1	D2	D3	D6 <sup>1)</sup>	D7 <sup>2)</sup>	D8	D9
90	90	100	45	25	72	90	5	72	90	80	8.4	46	30.5	M6	5	M6	5	M6
Size [mm]	D10	H1	H2	H3	H4	H7	H8	H11	H12	H13	H14	H18	L1	L2	L3	L4	L5	L6
90	M3	90	57.5	95	88	25	65	66	63	43.7	10	25.5	230	123.5	31.5	15	25.9	81.5
Size [mm]	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	T1	T2 <sup>1)</sup>	T3 <sup>2)</sup>	T4	T5	T6
90	14.5	150	100	2.5	131.5	50	60	120	29	2	20	17	15	5	8	5	12	6
Size [mm]	Stroke [mm]				Number of threaded holes					Number of spacings L9					L19			
90	50				4					1					100			
	100				6					2					200			
	150				6					2					200			
	200				8					3					300			
	250				8					3					300			
	300				10					4					400			
	350				10					4					400			
	400				12					5					500			
	450				12					5					500			
	500				14					6					600			
	550				14					6					600			
	600				16					7					700			
	650				16					7					700			
	700				18					8					800			
	750				18					8					800			
	800				20					9					900			
	900				22					10					1000			
	1000				24					11					1100			

## Datasheet

### Dimensions

Size 120 ... 160

Download CAD data → [www.festo.com](http://www.festo.com)

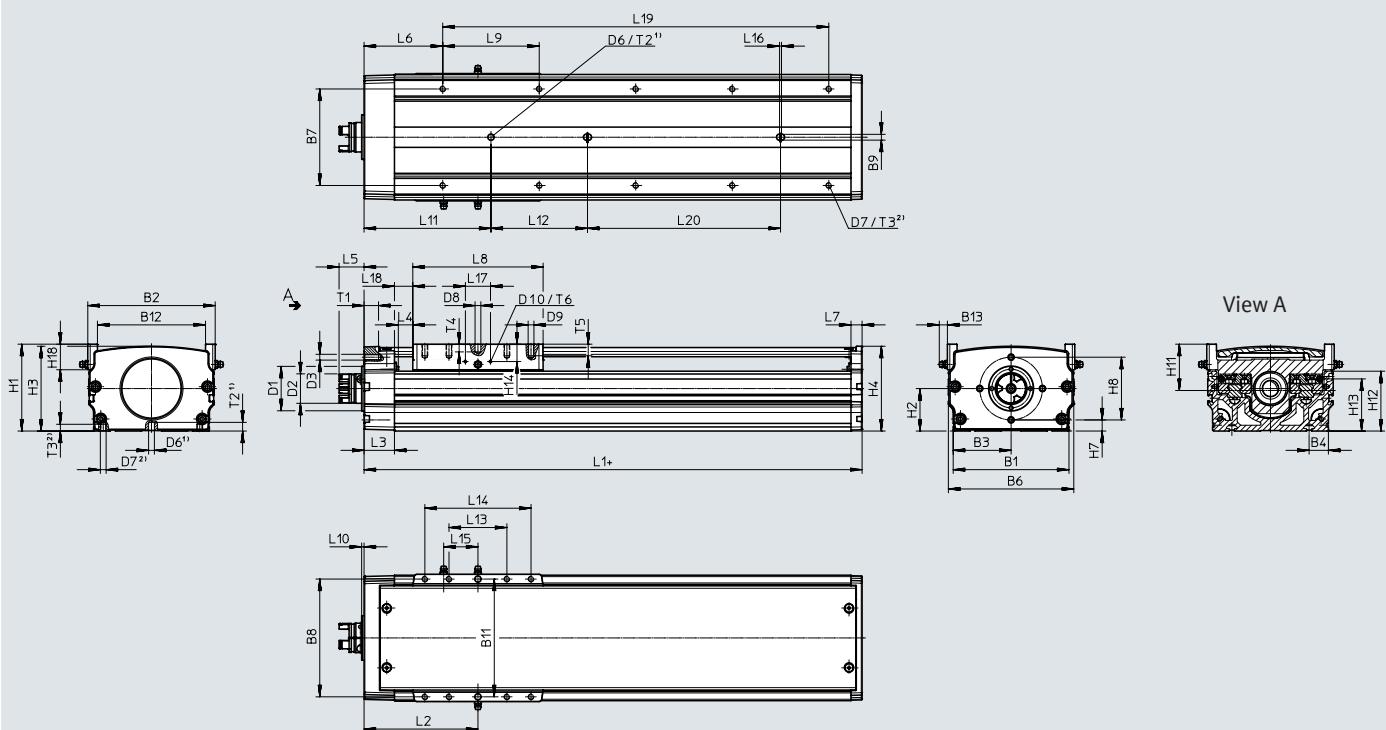

+ = plus stroke length

- 1) There are always 2 centring holes per axis
- 2) The number of threaded holes depends on the stroke → page 21

### Note

To avoid distortion in the slide, the bearing surfaces of the attachments must maintain a flatness of at least 0.03 mm over 200 mm.

## Datasheet


Size [mm]	B1	B2	B3	B4	B6	B7	B8	B9	B11 ±0.03	B12	B13	D1 Ø	D2 Ø	D3	D6 Ø H7	D7	D8 Ø H7	D9
120	120	132	60	20	130	100	122	6	122	112	8.4	46	30.5	M6	6	M6	6	M6
160	160	178	80	30	170	134	164	8	164	150	8.4	46	31.8	M6	8	M8	8	M8
Size [mm]	D10	H1	H2	H3	H4	H7	H8	H11	H12	H13	H14	H18	L1	L2	L3	L4	L5	L6
120	M3	90	44	88	88	11.5	65	48	62	54	18	26.5	216	118	31.5	15	25.9	81.5
160	M3	100	50	97	97	17.5	65	57.5	65	57.3	25	33	261	141	34.5	15	25.9	84.5
Size [mm]	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	T1	T2	T3	T4	T5	T6
120	11.5	135	100	2.5	131.5	100	60	110	35.5	2	26	19	15	9	7	8	12	6
160	13.5	175	100	2.5	134.5	100	70	140	51.5	2	26	19	15	10	9	8	15	6
Size [mm]	Stroke [mm]		Number of threaded holes				Number of spacings L9				L19				L20			
120	300		10				4				400				200			
	350		10				4				400				250			
	400		12				5				500				300			
	450		12				5				500				350			
	500		14				6				600				400			
	550		14				6				600				450			
	600		16				7				700				500			
	650		16				7				700				550			
	700		18				8				800				600			
	750		18				8				800				650			
	800		20				9				900				700			
	900		22				10				1000				800			
	1000		24				11				1100				900			
	1100		26				12				1200				1000			
160	300		10				4				400				200			
	350		12				5				500				250			
	400		12				5				500				300			
	450		14				6				600				350			
	500		14				6				600				400			
	550		16				7				700				450			
	600		16				7				700				500			
	650		18				8				800				550			
	700		18				8				800				600			
	750		20				9				900				650			
	800		20				9				900				700			
	900		22				10				1000				800			
	1000		24				11				1100				900			
	1100		26				12				1200				1000			
	1200		28				13				1300				1100			
	1300		30				14				1400				1200			
	1400		32				15				1500				1300			

## Datasheet


## Dimensions

## Profile


Size: 90



Size 120

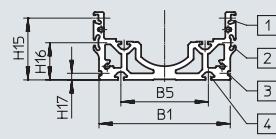

Size 160

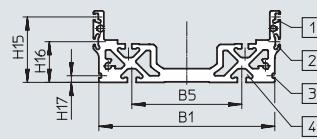

[1] Slot for proximity switch

[2] Slot for sensor bracket and proximity switch

[3] Slot for profile mounting

[4] Slot for retaining nut

Download CAD data → [www.festo.com](http://www.festo.com)

Size [mm]	B1	B5	H15	H16	H17
90	90	40	43.5	28.5	6.1
120	120	80	56.5	34	6.1
160	160	100	59.5	37	6.1

## Datasheet

<b>Ordering data</b>				
Size	Screw pitch	Stroke	Part no.	Type
90	10	50	<b>8124410</b>	ELGT-BS-90-50-10P
		100	<b>8124401</b>	ELGT-BS-90-100-10P
		150	<b>8124402</b>	ELGT-BS-90-150-10P
		200	<b>8124403</b>	ELGT-BS-90-200-10P
		250	<b>8124404</b>	ELGT-BS-90-250-10P
		300	<b>8124405</b>	ELGT-BS-90-300-10P
		350	<b>8124406</b>	ELGT-BS-90-350-10P
		400	<b>8124407</b>	ELGT-BS-90-400-10P
		450	<b>8124408</b>	ELGT-BS-90-450-10P
		500	<b>8124409</b>	ELGT-BS-90-500-10P
		550	<b>8124411</b>	ELGT-BS-90-550-10P
		600	<b>8124412</b>	ELGT-BS-90-600-10P
		650	<b>8124413</b>	ELGT-BS-90-650-10P
		700	<b>8124414</b>	ELGT-BS-90-700-10P
		750	<b>8124415</b>	ELGT-BS-90-750-10P
		800	<b>8124416</b>	ELGT-BS-90-800-10P
		900	<b>8124417</b>	ELGT-BS-90-900-10P
		1000	<b>8124400</b>	ELGT-BS-90-1000-10P
20	20	50	<b>8124418</b>	ELGT-BS-90-50-20P
		100	<b>8124419</b>	ELGT-BS-90-100-20P
		150	<b>8124420</b>	ELGT-BS-90-150-20P
		200	<b>8124421</b>	ELGT-BS-90-200-20P
		250	<b>8124422</b>	ELGT-BS-90-250-20P
		300	<b>8124423</b>	ELGT-BS-90-300-20P
		350	<b>8124424</b>	ELGT-BS-90-350-20P
		400	<b>8124425</b>	ELGT-BS-90-400-20P
		450	<b>8124426</b>	ELGT-BS-90-450-20P
		500	<b>8124427</b>	ELGT-BS-90-500-20P
		550	<b>8124428</b>	ELGT-BS-90-550-20P
		600	<b>8124429</b>	ELGT-BS-90-600-20P
		650	<b>8124430</b>	ELGT-BS-90-650-20P
		700	<b>8124431</b>	ELGT-BS-90-700-20P
		750	<b>8124432</b>	ELGT-BS-90-750-20P
		800	<b>8124433</b>	ELGT-BS-90-800-20P
		900	<b>8124434</b>	ELGT-BS-90-900-20P
		1000	<b>8124435</b>	ELGT-BS-90-1000-20P

## Datasheet


<b>Ordering data</b>				
Size	Screw pitch	Stroke	Part no.	Type
120	10	300	<b>8124451</b>	ELGT-BS-120-300-10P
		350	<b>8124452</b>	ELGT-BS-120-350-10P
		400	<b>8124453</b>	ELGT-BS-120-400-10P
		450	<b>8124454</b>	ELGT-BS-120-450-10P
		500	<b>8124455</b>	ELGT-BS-120-500-10P
		550	<b>8124456</b>	ELGT-BS-120-550-10P
		600	<b>8124457</b>	ELGT-BS-120-600-10P
		650	<b>8124458</b>	ELGT-BS-120-650-10P
		700	<b>8124459</b>	ELGT-BS-120-700-10P
		750	<b>8124460</b>	ELGT-BS-120-750-10P
		800	<b>8124461</b>	ELGT-BS-120-800-10P
20	20	300	<b>8124496</b>	ELGT-BS-120-300-20P
		350	<b>8124497</b>	ELGT-BS-120-350-20P
		400	<b>8124498</b>	ELGT-BS-120-400-20P
		450	<b>8124499</b>	ELGT-BS-120-450-20P
		500	<b>8124500</b>	ELGT-BS-120-500-20P
		550	<b>8124501</b>	ELGT-BS-120-550-20P
		600	<b>8124502</b>	ELGT-BS-120-600-20P
		650	<b>8124503</b>	ELGT-BS-120-650-20P
		700	<b>8124504</b>	ELGT-BS-120-700-20P
		750	<b>8124505</b>	ELGT-BS-120-750-20P
		800	<b>8124506</b>	ELGT-BS-120-800-20P
		900	<b>8124507</b>	ELGT-BS-120-900-20P
		1000	<b>8124508</b>	ELGT-BS-120-1000-20P

## Datasheet

<b>Ordering data</b>				
Size	Screw pitch	Stroke	Part no.	Type
160	10	300	<b>8124513</b>	ELGT-BS-160-300-10P
		350	<b>8124514</b>	ELGT-BS-160-350-10P
		400	<b>8124515</b>	ELGT-BS-160-400-10P
		450	<b>8124516</b>	ELGT-BS-160-450-10P
		500	<b>8124517</b>	ELGT-BS-160-500-10P
		550	<b>8124518</b>	ELGT-BS-160-550-10P
		600	<b>8124519</b>	ELGT-BS-160-600-10P
		650	<b>8124520</b>	ELGT-BS-160-650-10P
		700	<b>8124521</b>	ELGT-BS-160-700-10P
		750	<b>8124522</b>	ELGT-BS-160-750-10P
		800	<b>8124523</b>	ELGT-BS-160-800-10P
		900	<b>8124524</b>	ELGT-BS-160-900-10P
		1000	<b>8124525</b>	ELGT-BS-160-1000-10P
20	20	300	<b>8124526</b>	ELGT-BS-160-300-20P
		350	<b>8124527</b>	ELGT-BS-160-350-20P
		400	<b>8124528</b>	ELGT-BS-160-400-20P
		450	<b>8124529</b>	ELGT-BS-160-450-20P
		500	<b>8124530</b>	ELGT-BS-160-500-20P
		550	<b>8124531</b>	ELGT-BS-160-550-20P
		600	<b>8124532</b>	ELGT-BS-160-600-20P
		650	<b>8124533</b>	ELGT-BS-160-650-20P
		700	<b>8124534</b>	ELGT-BS-160-700-20P
		750	<b>8124535</b>	ELGT-BS-160-750-20P
		800	<b>8124536</b>	ELGT-BS-160-800-20P
		900	<b>8124537</b>	ELGT-BS-160-900-20P
		1000	<b>8124538</b>	ELGT-BS-160-1000-20P

## Ordering data – Modular product system

### Orientation guide

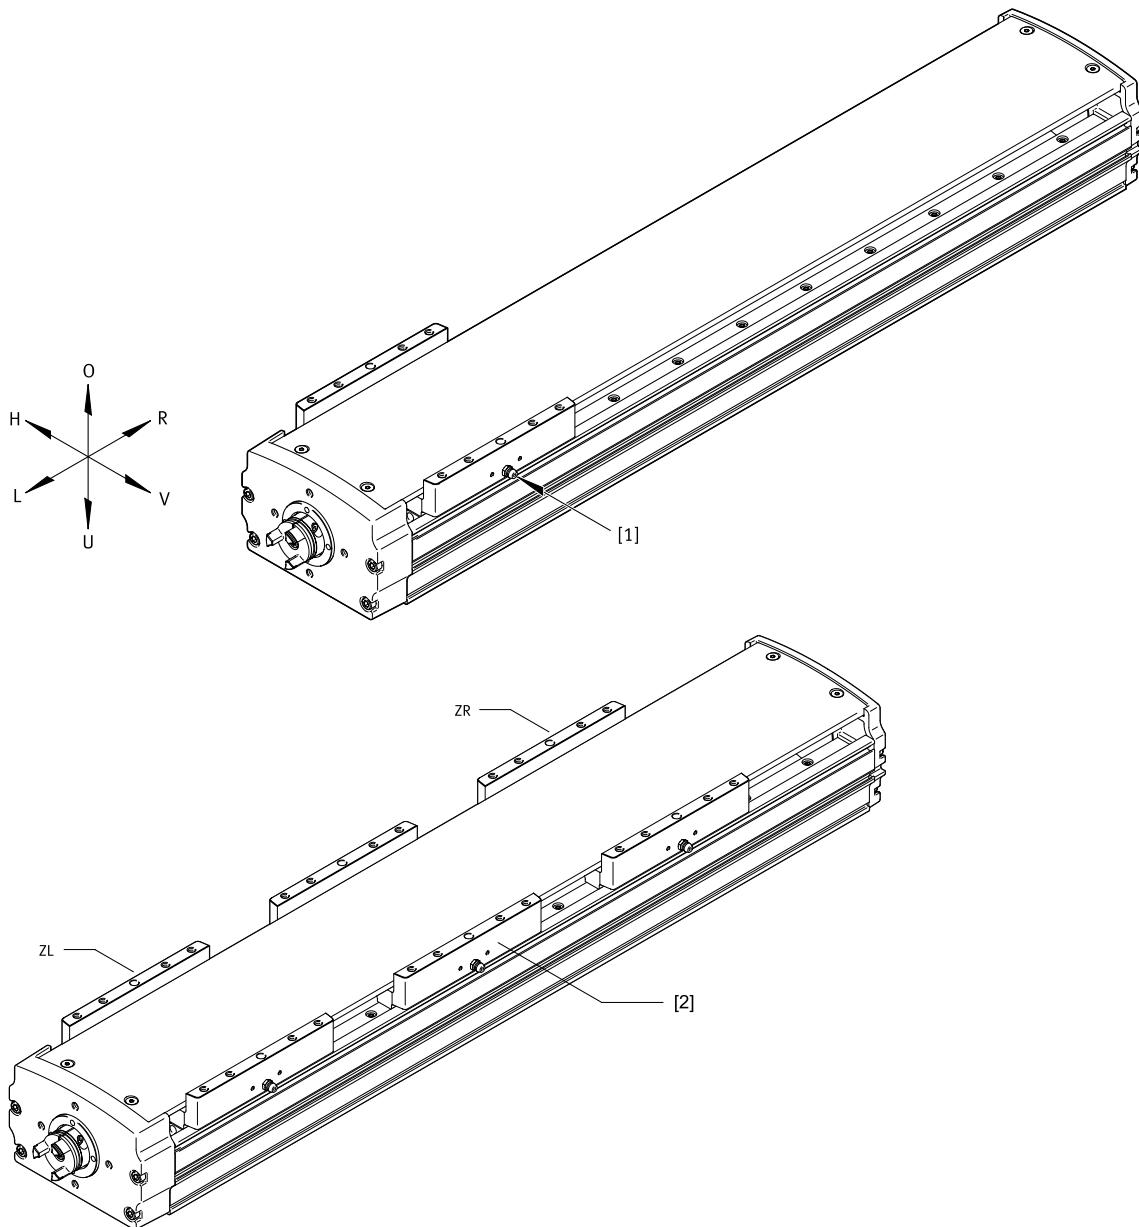

O Top  
U Bottom  
R Right  
L Left  
V Front  
H Rear

[1] Lubrication connection  
Slide:  
[2] Standard slide  
ZL 1 additional slide on left  
ZR 1 additional slide on right

## Ordering data – Modular product system

<b>Ordering table</b>						
Size	90	120	160	Conditions	Code	Enter code
Module no.	8121224	8121225	8121226			
Series	ELGT				<b>ELGT</b>	ELGT
Drive system	Ball screw				<b>-BS</b>	-BS
Size	90	120	160		<b>-...</b>	
Stroke	50	–			<b>-50</b>	
	100	100	100		<b>-100</b>	
	150	150	150		<b>-150</b>	
	200	200	200		<b>-200</b>	
	250	250	250		<b>-250</b>	
	300	300	300		<b>-300</b>	
	350	350	350		<b>-350</b>	
	400	400	400		<b>-400</b>	
	450	450	450		<b>-450</b>	
	500	500	500		<b>-500</b>	
	550	550	550		<b>-550</b>	
	600	600	600		<b>-600</b>	
	650	650	650		<b>-650</b>	
	700	700	700		<b>-700</b>	
	750	750	750		<b>-750</b>	
	800	800	800		<b>-800</b>	
	900	900	900		<b>-900</b>	
	1000	1000	1000		<b>-1000</b>	
	–	1100	1100		<b>-1100</b>	
			1200		<b>-1200</b>	
			1300		<b>-1300</b>	
			1400		<b>-1400</b>	
Screw pitch	10 mm				<b>-10P</b>	
	20 mm				<b>-20P</b>	
Additional slide	None					
	1 slide on left			[1]	<b>-ZL</b>	
	1 slide on right			[1]	<b>-ZR</b>	
Anti-reflection coating	None					
	Outer surfaces				<b>-AR</b>	


[1] ZL, ZR Only with stroke ≥ 200 mm

# Ball screw axes ELGT-BS

## Accessories

### Overview of mounting options


Mounting of ball screw axes ELGT-BS and axes EGSC/mini slide EGSC

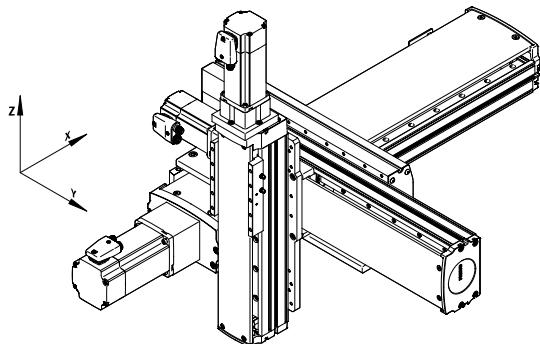

### Angle and adapter kits


#### Type A

X-Y: Angle kit for maximum stroke  
700 mm in Y direction

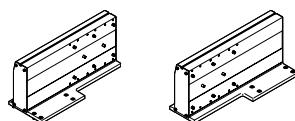

#### Type B

Y-Z: Adapter kit for maximum  
stroke 500 mm in Z direction




#### Type C

Y-Z: Adapter kit for maximum  
stroke 250 mm in Z direction





#### Type D

Y-Z: Adapter kit for ELGT/ELGC in Z  
direction




#### Type A

ELGT with ELGT

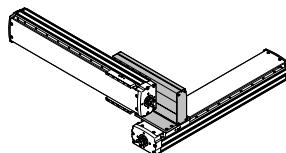


#### Type B

ELGT with ELGT




#### Type C

ELGT with ELGT



#### Type D

ELGT with EGSC



Angle kit		Y-axis ELGT-BS					
		Size	90	120	160		
X-axis/ ELGT-BS	90	■	-	-			
	120	■	■	-			
	160	-	■	■			

Adapter kit		Z-axis ELGT-BS					EGSC
		Size	90	120	160	60	
Y-axis/ ELGT-BS	90	-	-	-	■	■	■
	120	■	-	-	-	■	-
	160	-	■	-	-	-	-


Angle kit		Y-axis Working stroke [mm]						
		Size	100	200	300	400	500	600
X-axis/ Y-axis	90/90	A	A	A	A	A	A	-
	120/90	A	A	A	A	A	A	-
	120/120	A	A	A	A	A	A	-
	160/120	A	A	A	A	A	A	-
	160/160	A	A	A	A	A	A	A

Adapter kit		Z-axis Working stroke [mm]				
		Size	100	200	300	400
Y-axis/ Z-axis	90/60	D	D	D	D	D
	90/80	D	D	D	D	D
	120/80	D	D	D	D	D
	120/90	C	B	B	B	B
	160/120	C	C	B	B	B

## Accessories

**Angle kit EHAM-AK-L9----ML**

Combination matrix – Type A  
X-Y




Y-axis:  
Assembly axis ELGT-BS

X-axis: Base axis EL- GT-BS	Size	Y-axis: Assembly axis ELGT-BS		
		90	120	160
90	8128210	–	–	–
120	8128209	8128208	–	–
160	–	8128207	8128206	–

**Angle kit EHAM-AK-L9----MR**

Combination matrix – Type A  
X-Y




Y-axis:  
Assembly axis ELGT-BS

X-axis: Base axis ELGT-BS	Size	Y-axis: Assembly axis ELGT-BS		
		90	120	160
90	8128215	–	–	–
120	8128214	8128213	–	–
160	–	8128212	8128211	–

**Adapter kit EHAM-MA-L9...**

Combination matrix – Type B/C/D  
Y-Z



Z-axis:  
Assembly axis ELGT-BS

Y-axis: Base axis ELGT-BS	Size	Z-axis: Assembly axis ELGT-BS		Assembly axis ELGC		Assembly axis EGSC	
		Type B	Type C	Type D	60	80	60
90	–	–	–	–	8128230	8128229	8128230
120	8128227	–	8128232	–	–	8128228	–
160	–	8128226	–	8128231	–	–	–

## Accessories

### Angle kit EHAK-AK-L9-....-ML

Material:


Anodised wrought aluminium alloy

RoHS-compliant


- Mounting option: base axis with the same size or one-size-down assembly axis
- Overview of mounting options → page 28

**Combination matrix – Type A**

X-Y



X-axis: Base axis EL- GT-BS	Size	Y-axis: Assembly axis ELGT-BS		
		90	120	160
90	8128210	—	—	—
120	8128209	8128208	—	—
160	—	8128207	8128206	—

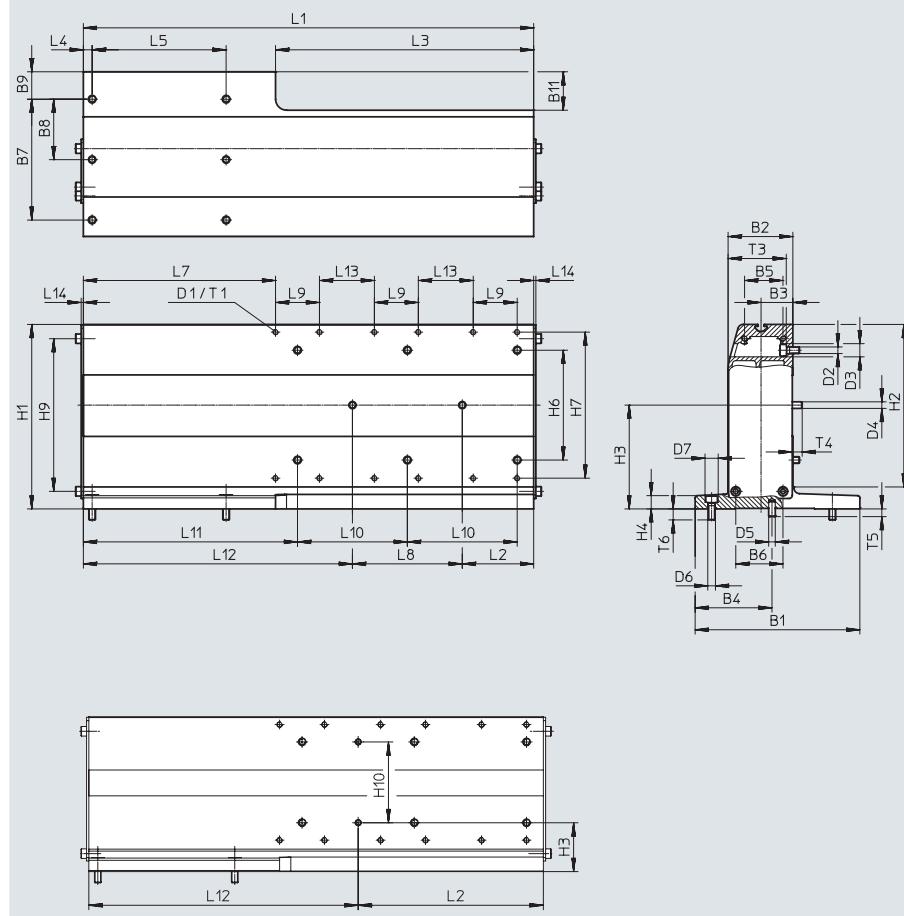

## Accessories

Dimensions and ordering data																	
For combination (size)	B1	B2	B3	B4	B5	B6	B7	B8	B9	B11	D1	D2	D3	D4	D5	D6	D7
90/90	150	44	19	75	22	27	120	60	15	55	M5	7	12	5	5	7	12
120/90	150	44	19	70	22	27	110	55	25	55	M5	7	12	5	6	7	12
120/120	150	59	29	70	35	43	110	55	25	35	M5	7	12	6	6	7	12
160/120	150	59	29	85	35	43	105	35	30	35	M5	7	12	6	8	9	14
160/160	170	69	34	85	43	52	140	70	15	50	M5	9	14	8	8	9	14
For combination (size)	D8	H1	H2	H3	H4	H6	H7	H9	H10	L1	L2	L3	L4	L5	L6	L7	L8
									±0.02								±0.02
90/90	10	138	118	43.5	12	72	103	109	72	360	165	235	8	90	90	125	-
120/90	10	138	118	43.5	12	72	103	109	72	405	165	235	8	122	122	170	-
120/120	10	168	148	94.5	12	100	133	139	-	410	65	235	8	122	122	175	100
160/120	10	168	148	94.5	12	100	133	139	-	460	65	235	10	164	164	225	100
160/160	10	208	188	114.5	13	134	173	178	-	455	65	235	10	164	164	220	100
For combination (size)	L9	L10	L11	L12	L13	L14	T1	T3	T4	T5	T6	Weight	Part no.	Type			
												[g]					
90/90	40	100	145	195	50	2	12	39	5	5	10	3623	8128210	EHAM-AK-L9-90-L9-90-ML			
120/90	40	100	190	240	50	2	12	39	5	7	10	4120	8128209	EHAM-AK-L9-120-L9-90-ML			
120/120	40	100	195	245	50	2	12	53	8.5	7	10	5313	8128208	EHAM-AK-L9-120-L9-120-ML			
160/120	40	100	245	295	50	2	12	53	8.5	7	11	6005	8128207	EHAM-AK-L9-160-L9-120-ML			
160/160	40	100	240	290	50	2	12	61.5	9	7	11	7794	8128206	EHAM-AK-L9-160-L9-160-ML			

## Accessories

### Angle kit EHAM-AK-L9....-MR

Material:


Anodised wrought aluminium alloy

RoHS-compliant



- Mounting option: base axis with the same size or one-size-down assembly axis
- Overview of mounting options → page 28

**Combination matrix – Type A**

X-Y



	Size	Y-axis: Assembly axis ELGT-BS		
		90	120	160
X-axis:	90	8128215	–	–
Base axis	120	8128214	8128213	–
ELGT-BS	160	–	8128212	8128211

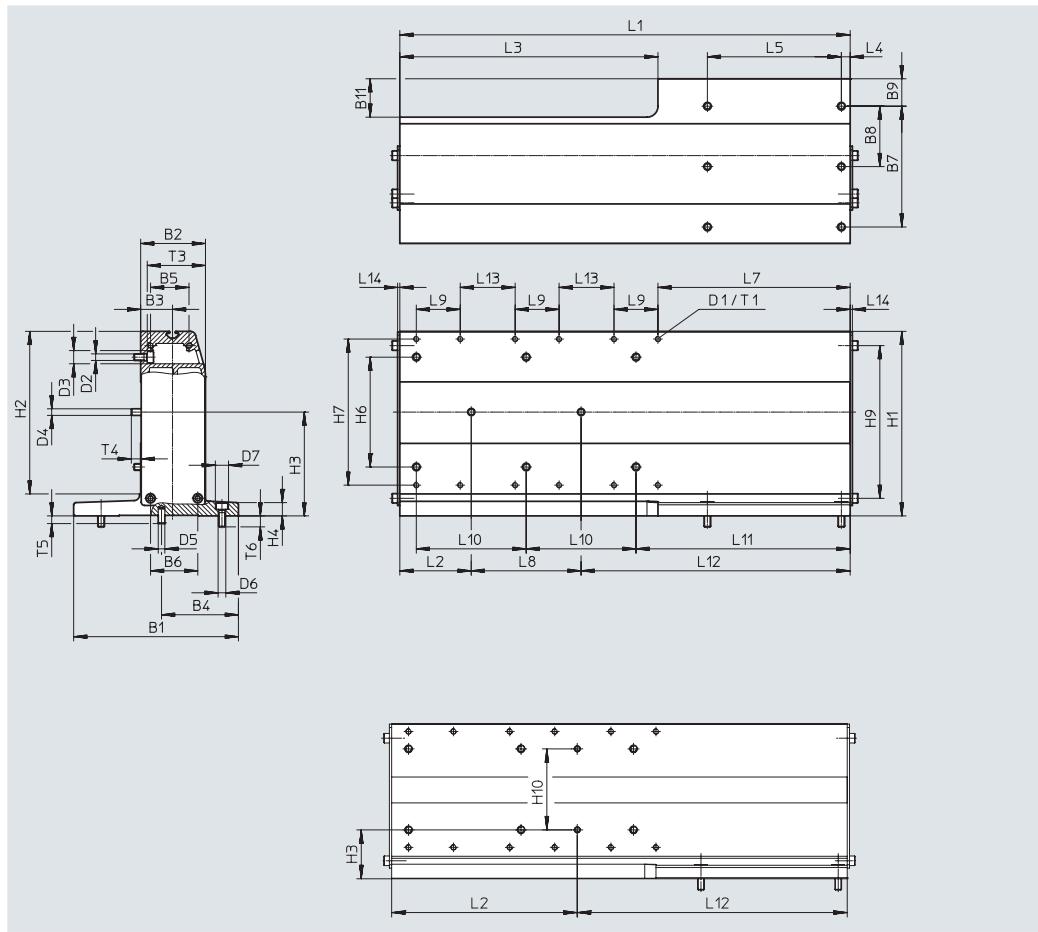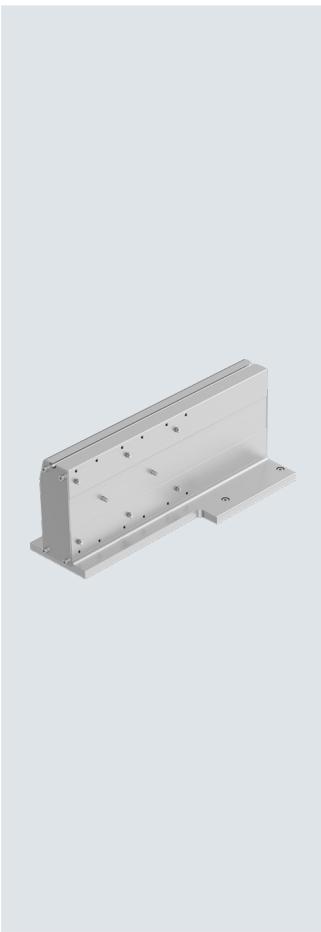

## Accessories

Dimensions and ordering data																		
For combination (size)	B1	B2	B3	B4	B5	B6	B7	B8	B9	B11	D1	D2	D3	D4	D5	D6	D7	
90/90	150	44	19	75	22	27	120	60	15	55	M5	7	12	5	5	7	12	
120/90	150	44	19	70	22	27	110	55	25	55	M5	7	12	5	6	7	12	
120/120	150	59	29	70	35	43	110	55	25	35	M5	7	12	6	6	7	12	
160/120	150	59	29	85	35	43	105	35	30	35	M5	7	12	6	8	9	14	
160/160	170	69	34	85	43	52	140	70	15	50	M5	9	14	8	8	9	14	
For combination (size)	D8	H1	H2	H3	H4	H6	H7	H9	H10	L1	L2	L3	L4	L5	L6	L7	L8	
									±0.02								±0.02	
90/90	10	138	118	43.5	12	72	103	109	72	360	165	235	8	90	90	125	-	
120/90	10	138	118	43.5	12	72	103	109	72	405	165	235	8	122	122	170	-	
120/120	10	168	148	94.5	12	100	133	139	-	410	65	235	8	122	122	175	100	
160/120	10	168	148	94.5	12	100	133	139	-	460	65	235	10	164	164	225	100	
160/160	10	208	188	114.5	13	134	173	178	-	455	65	235	10	164	164	220	100	
For combination (size)	L9	L10	L11	L12	L13	L14	T1	T3	T4	T5	T6	Weight	Part no.	Type				
												[g]						
90/90	40	100	145	195	50	2	12	39	5	5	10	3623	8128215	EHAM-AK-L9-90-L9-90-MR				
120/90	40	100	190	240	50	2	12	39	5	7	10	4120	8128214	EHAM-AK-L9-120-L9-90-MR				
120/120	40	100	195	245	50	2	12	53	8.5	7	10	5313	8128213	EHAM-AK-L9-120-L9-120-MR				
160/120	40	100	245	295	50	2	12	53	8.5	7	11	6005	8128212	EHAM-AK-L9-160-L9-120-MR				
160/160	40	100	240	290	50	2	12	61.5	9	7	11	7794	8128211	EHAM-AK-L9-160-L9-160-MR				

## Accessories

### Adapter kit EHAM-MA-L9....


Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For axis/axis mounting with adapter plate
- Mounting option: base axis with one-size-down assembly axis
- When motors are mounted using parallel kits, this may lead to interfering contours. In this case, the adapter plate is required for height compensation (download CAD data → [www.festo.com](http://www.festo.com))
- Overview of mounting options → page 28

Combination matrix – Type B		
Y-Z	Size	Z-axis: Assembly axis ELGT-BS
Y-axis: Base axis ELGT-BS	120	8128227

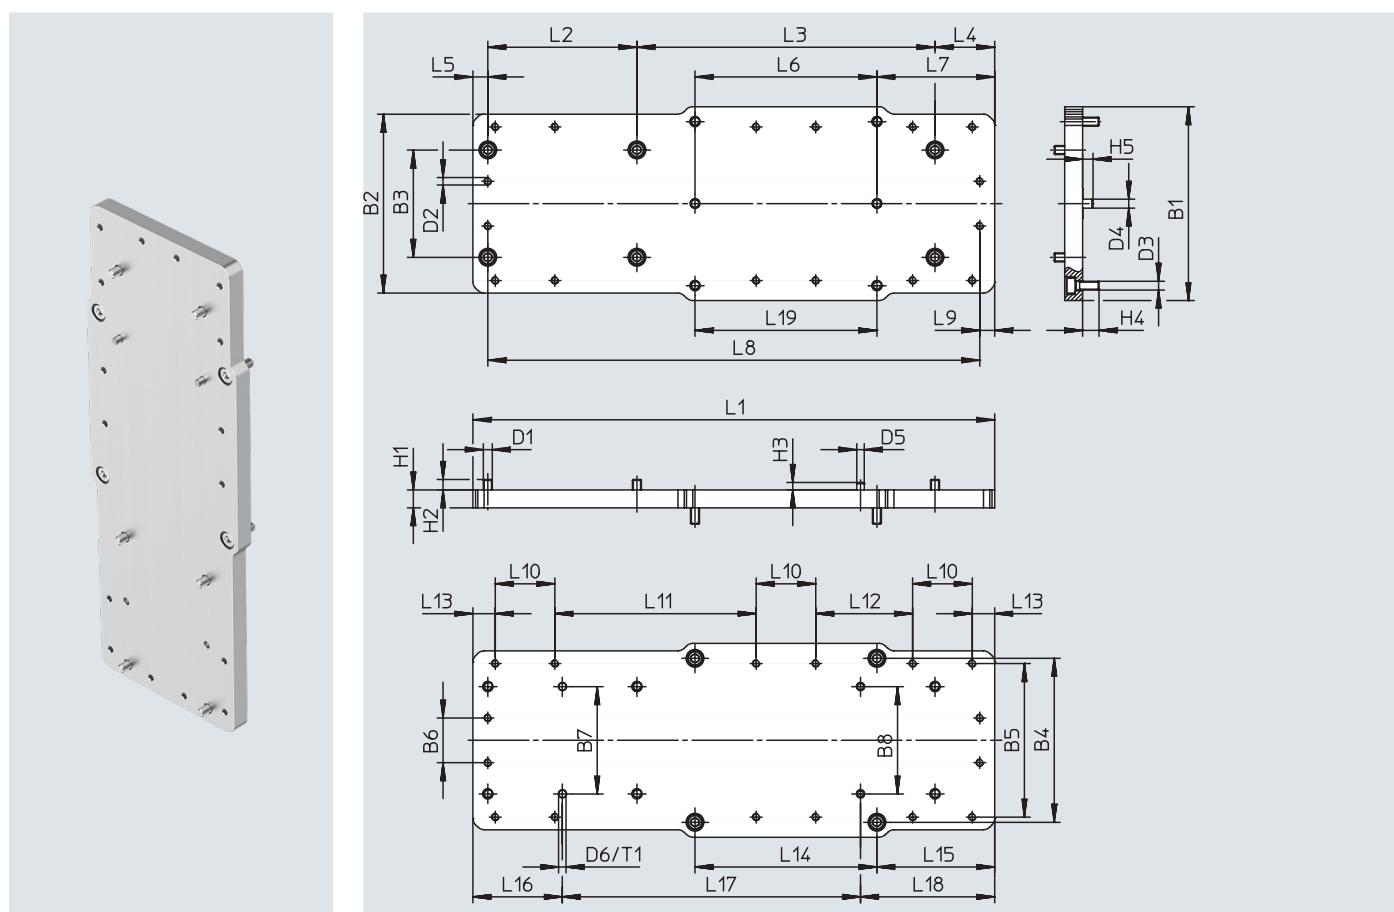

## Accessories

Dimensions and ordering data															
For combination (size)	B1	B2	B3	B4	B5	B6	B7	B8	D1	D2	D3	D4 Ø h7	D5 Ø h7	D6 Ø h7	H1
120/90	130	120	72	110	103	30	72	72	M6	M5	M6	6	5	5	12
For combination (size)	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11
120/90	7	5	11	7	350	100	200	40	10	122	79	330	10	40	135
For combination (size)	L12	L13	L14	L15	L16	L17	L18	L19	T1	Weight [g]	Part no.	Type			
120/90	65	15	122	79	60	200	90	122	5.5	1437	8128227	EHAM-MA-L9-120-L9-90			

## Accessories

### Adapter kit EHAM-MA-L9....


Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For axis/axis mounting with adapter plate
- Mounting option: base axis with one-size-down assembly axis
- When motors are mounted using parallel kits, this may lead to interfering contours. In this case, the adapter plate is required for height compensation (download CAD data → [www.festo.com](http://www.festo.com))
- Overview of mounting options → page 28

Combination matrix – Type B		
Y-Z	Size	Z-axis: Assembly axis ELGT-BS
Y-axis: Base axis ELGT-BS	160	8128226

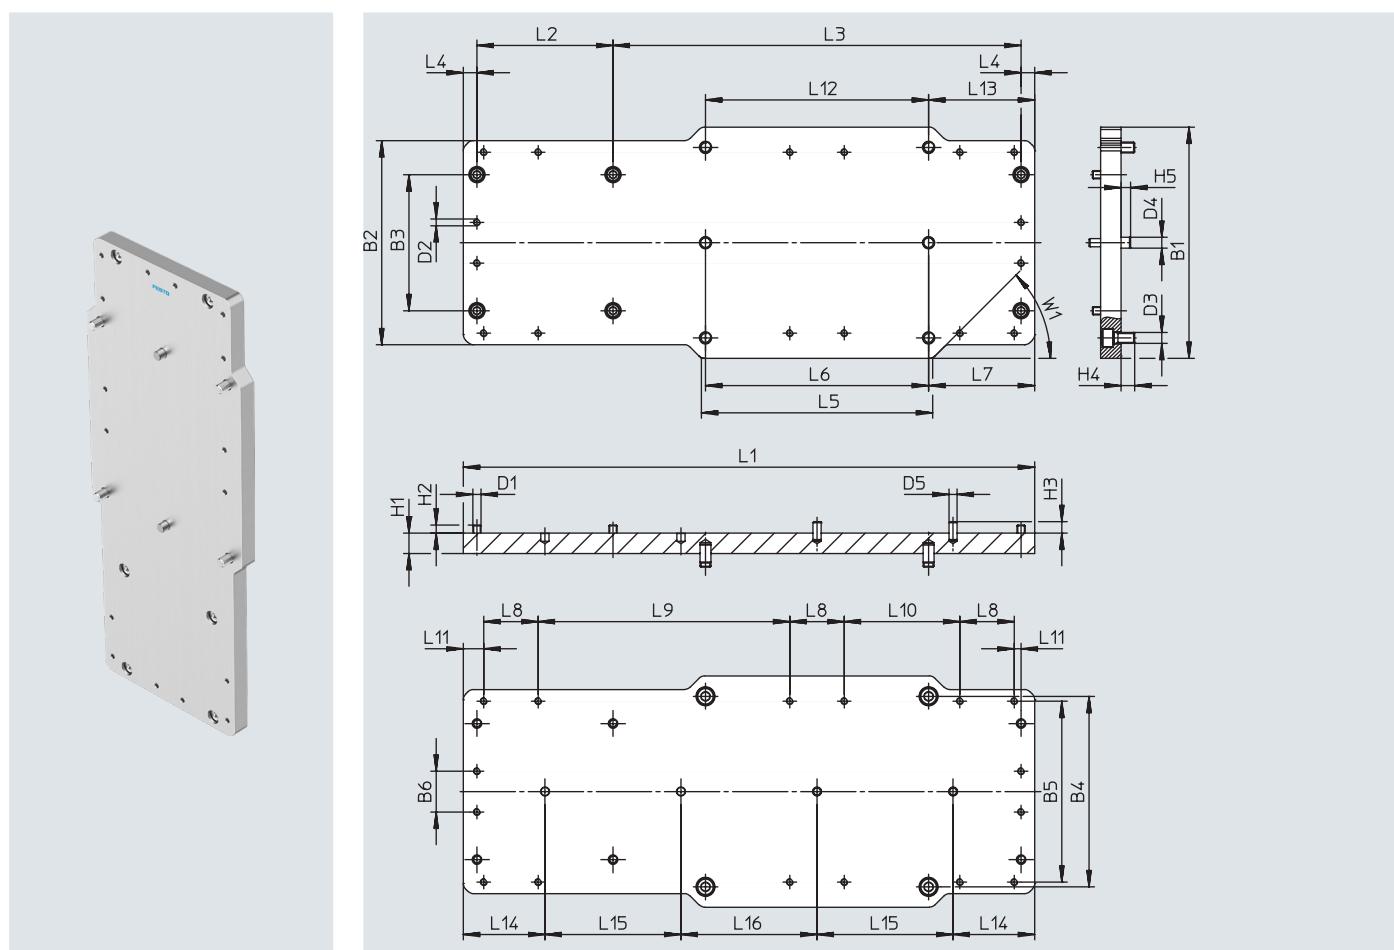

## Accessories

<b>Dimensions and ordering data</b>													
For combination (size)	B1	B2	B3	B4	B5	B6	D1	D2	D3	D4 Ø h7	D5 Ø h7	H1	H2
160/120	170	150	100	140	133	30	M6	M5	M8	8	6	15	6
<b>Dimensions and ordering data</b>													
For combination (size)	H3	H4	H5	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
160/120	8.5	10	7	420	100	300	10	170	164	78	40	185	85
±0.02													
For combination (size)	L11	L12	L13	L14	L15	L16	W1	Weight [g]	Part no.	Type			
160/120	15	164	78	60	100	100	45°	2748	8128226	EHAM-MA-L9-160-L9-120			

## Accessories

### Adapter kit EHAM-MA-L9---S


Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For axis/axis mounting with adapter plate
- Mounting option: base axis with one-size-down assembly axis
- When motors are mounted using parallel kits, this may lead to interfering contours. In this case, the adapter plate is required for height compensation (download CAD data → [www.festo.com](http://www.festo.com))
- Overview of mounting options → page 28

Combination matrix – Type C		
Y-Z	Size	Z-axis: Assembly axis ELGT-BS
Y-axis: Base axis ELGT-BS	120	8128232

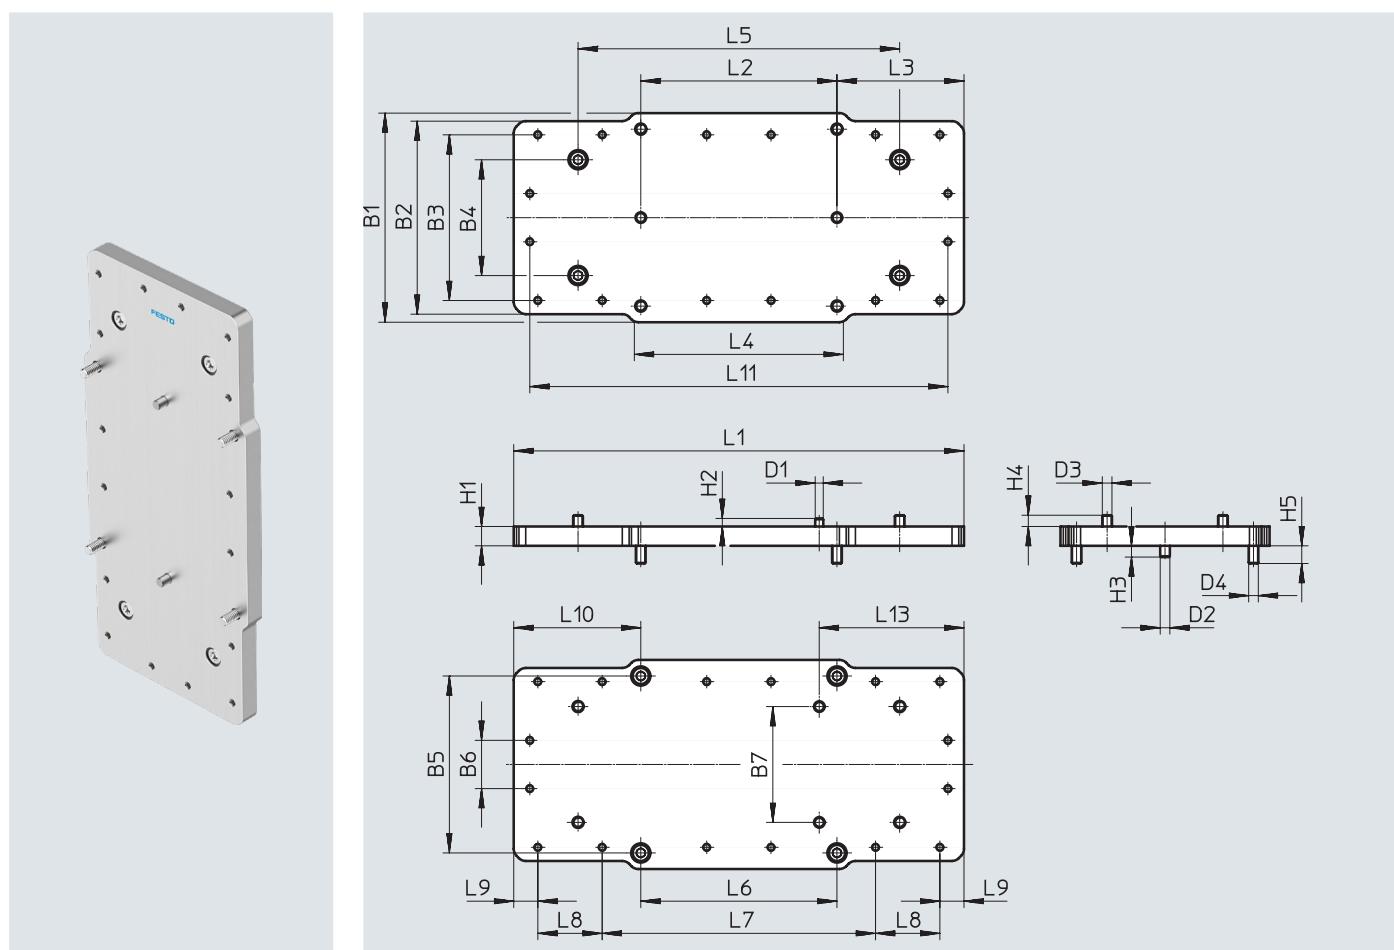

## Accessories

Dimensions and ordering data																		
For combination (size)	B1	B2	B3	B4	B5	B6	B7	D1 Ø h7	D2 Ø h7	D3	D4	H1	H2	H3	H4	H5	L1	L2
120/90	130	120	103	72	110	30	72	5	6	M6	M6	12	7	5	7	11	280	122
For combination (size)	L3	L4	L5	L6	L7	L8	L9	L10	L11	L13	Weight [g]	Part no.		Type				
120/90	79	135	200	122	170	40	15	79	260	90	1159	8128232	EHAM-MA-L9-120-L9-90-S					

## Accessories

### Adapter kit EHAM-MA-L9---S



Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For axis/axis mounting with adapter plate
- Mounting option: base axis with one-size-down assembly axis
- When motors are mounted using parallel kits, this may lead to interfering contours. In this case, the adapter plate is required for height compensation (download CAD data → [www.festo.com](http://www.festo.com))
- Overview of mounting options → page 28

Combination matrix – Type C		
Y-Z	Size	Z-axis: Assembly axis ELGT-BS
Y-axis: Base axis ELGT-BS	160	8128231

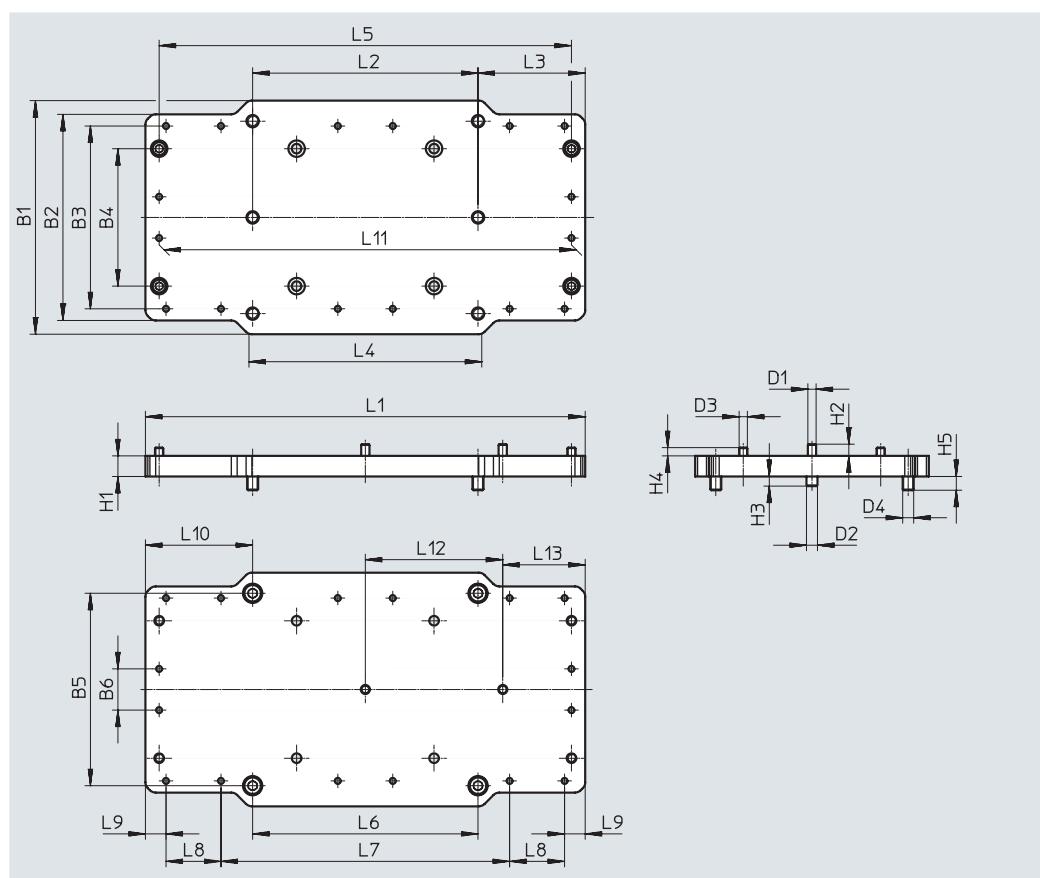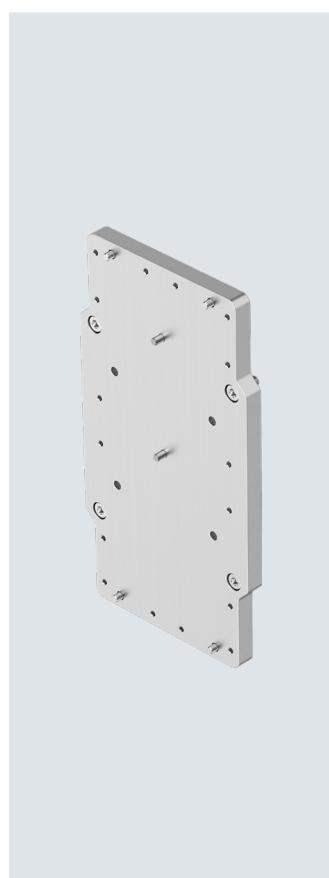

## Accessories

Dimensions and ordering data																		
For combination (size)	B1	B2	B3	B4	B5	B6	D1 Ø h7	D2 Ø h7	D3	D4	H1	H2	H3	H4	H5	L1	L2	L3
160/120	170	150	133	100	140	30	6	8	M6	M8	15	8.5	7	6	10	320	164	78
For combination (size)	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	Weight	Part no.	Type					
160/120	173.5	300	164	210	40	15	78	300	100	60	2136	8128231	EHAM-MA-L9-160-L9-120-S					

## Accessories

### Adapter kit EHAM-MA-L9....-L2....


Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For axis/axis mounting with adapter plate
- Mounting option: base axis with one-size-down assembly axis
- When motors are mounted using parallel kits, this may lead to interfering contours. In this case, the adapter plate is required for height compensation (download CAD data → [www.festo.com](http://www.festo.com))
- Overview of mounting options → page 28

Combination matrix – Type D				
		Z-axis:		
		Assembly axis ELGC		Assembly axis EGSC
Y-axis:		60	80	60
Base axis ELGT-BS		90	8128230	8128229
120		–	8128228	–

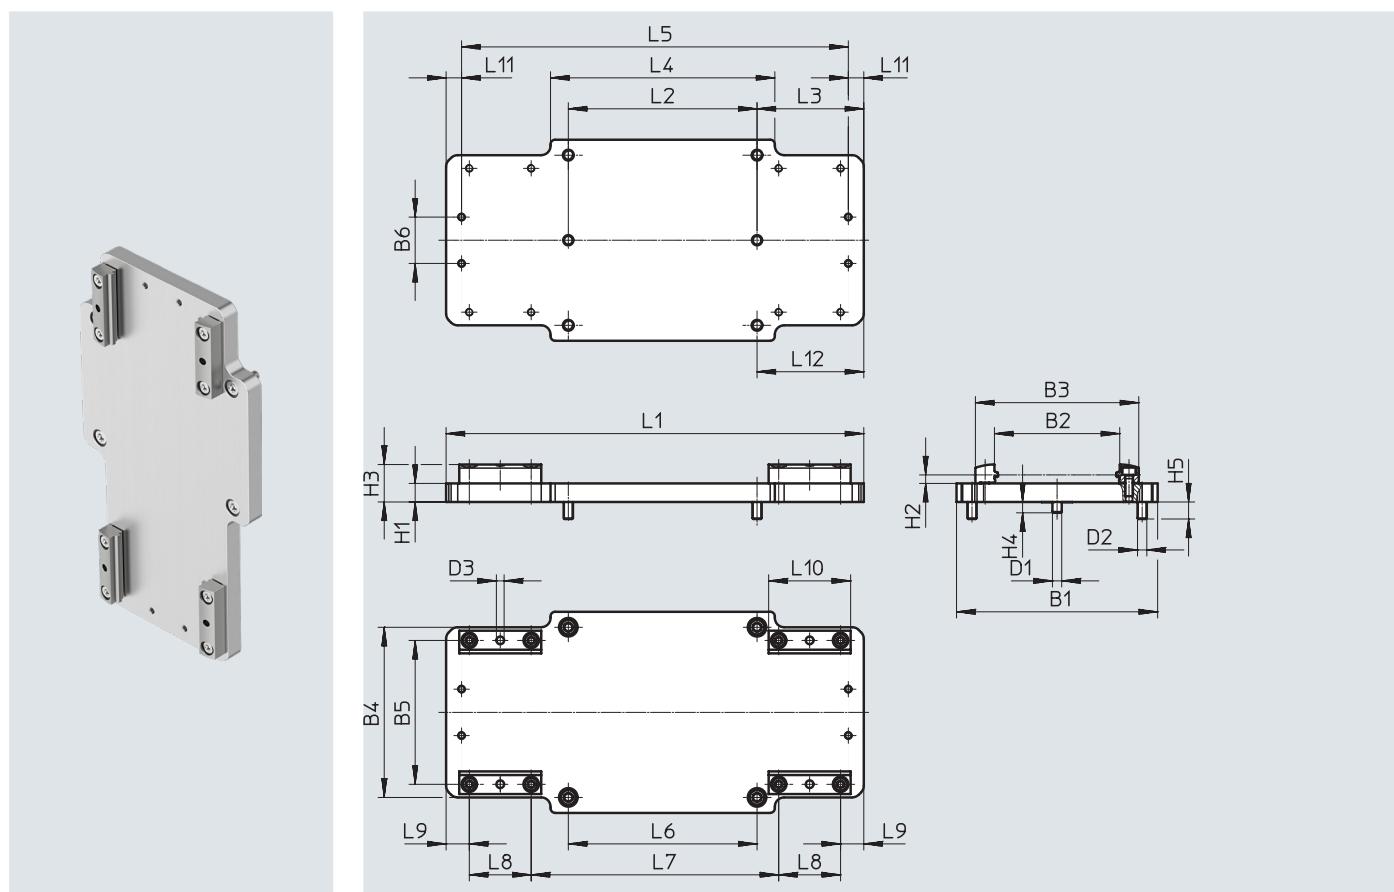

## Accessories


Dimensions and ordering data																	
For combination (size)	B1	B2	B3	B4	B5	B6	D1 Ø h7	D2	D3 Ø	H1	H2	H3	H4	H5	L1	L2	L3
90/60	150	61	85.6	90	73	30	5	M6	5	12	5.5	24.2	5	11	250	90	55
90/80	150	81	105.6	110	93	30	5	M6	5	12	5.5	24.2	5	11	270	90	55
120/80	130	81	105.6	110	93	30	6	M6	5	12	5.5	24.2	7	11	270	122	69

For combination (size)	L4	L5	L6	L7	L8	L9	L10	L11	L12	Weight [g]	Part no.	Type
90/60	110	230	90	140	40	15	53	10	55	1053	8128230	EHAM-MA-L9-90-L2-60
90/80	110	250	90	160	40	15	53	10	55	1215	8128229	EHAM-MA-L9-90-L2-80
120/80	145	250	122	160	40	15	53	10	69	1170	8128228	EHAM-MA-L9-120-L2-80

## Accessories

### Permissible axis/motor combinations for axial and parallel kits



All information can be found by following these links:

- Axis/motor combinations
- Permitted third-party motors
- Technical data
- Dimensions

For axial kits → Internet: [eamm-a](#)

For parallel kits → Internet: [eamm-u](#)

### Profile mounting EAHF-L2-...-P


Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For mounting the axis on the side of the profile.

The profile mounting can be attached to the mounting surface using the drilled hole in the centre.

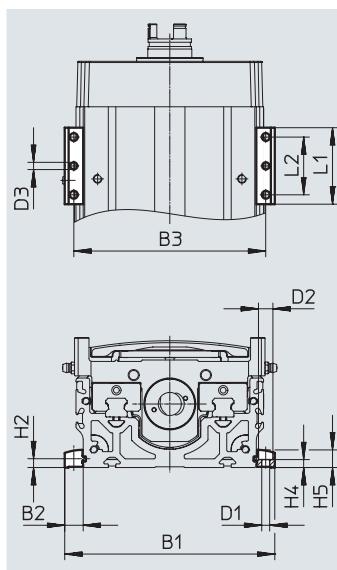

#### Dimensions and ordering data

For size	B1	B2	B3	D1 Ø H13	D2 Ø H13	D3 Ø	H2	H4
90	115.6	12.8	103	5.5	10	5	6.1	5.5
120	145.6	12.8	133	5.5	10	5	6.1	5.5
160	185.6	12.8	173	5.5	10	5	6.1	5.5

For size	H5	L1	L2	Weight [g]	Part no.	Type
90	12.2	53	40	35	<b>4835728</b>	EAHF-L2-45-P
120	12.2	53	40	35	<b>4835728</b>	EAHF-L2-45-P
160	12.2	53	40	35	<b>4835728</b>	EAHF-L2-45-P

## Accessories


### Profile mounting EAHF-L2-...-P-S

Material:

Anodised wrought aluminium alloy

RoHS-compliant

- For mounting the axis on the side of the profile

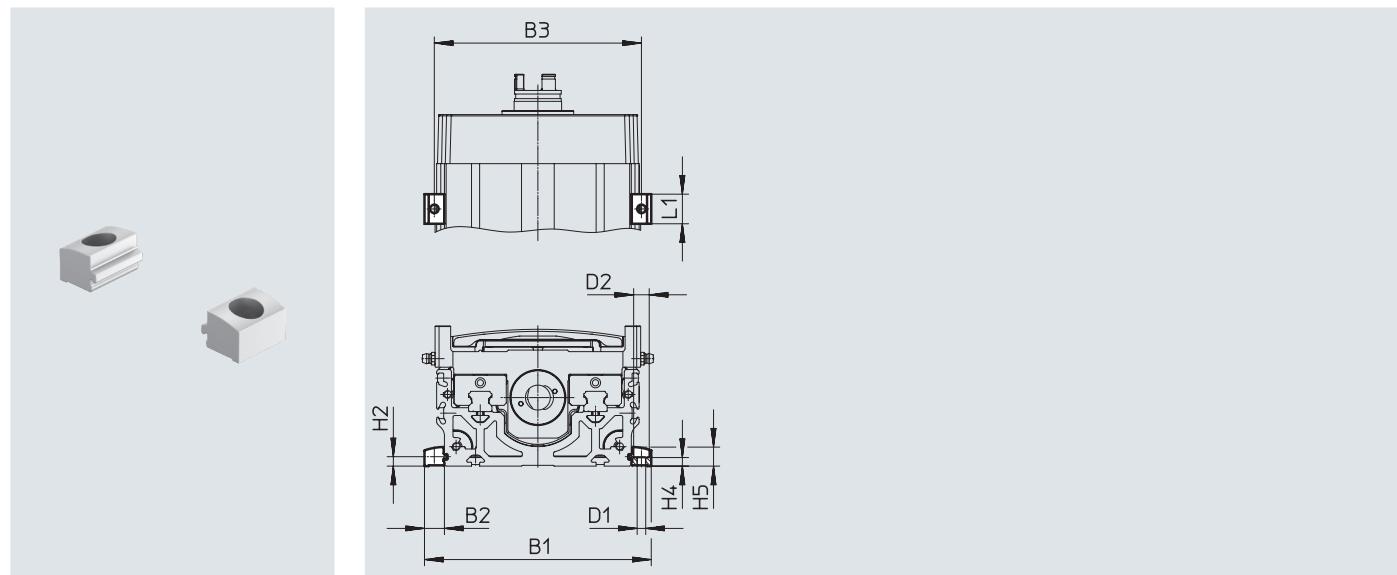

#### Dimensions and ordering data

For size	B1	B2	B3	D1 Ø H13	D2 Ø H13	H2
90	115.6	12.8	103	5.5	10	6.1
120	145.6	12.8	133	5.5	10	6.1
160	185.6	12.8	173	5.5	10	6.1

For size	H4	H5	L1	Weight [g]	Part no.	Type
90	5.5	12.2	19	6	5184133	EAHF-L2-45-P-S
120	5.5	12.2	19	6	5184133	EAHF-L2-45-P-S
160	5.5	12.2	19	6	5184133	EAHF-L2-45-P-S

## Accessories


### Switch lug EAPM-L9-....-SLS

For sensing using inductive proximity switches SIES-8M

#### Material:

High-alloy steel

RoHS-compliant

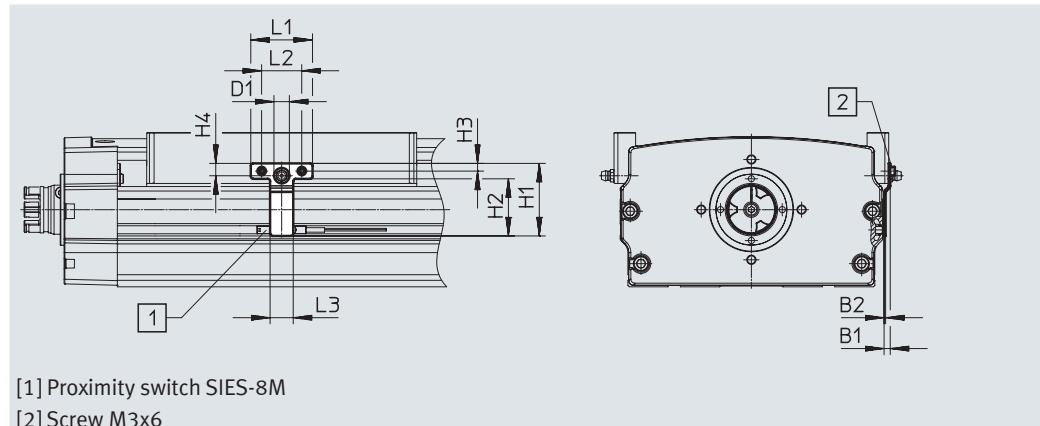

[1] Proximity switch SIES-8M

[2] Screw M3x6

#### Dimensions and ordering data

For size	B1	B2	B3	D1	H1	H2	H3
90	5	1	5	–	61	51	5
120	–	1	5	10	48	38	5
160	4	1	5	10	47	37	5

For size	H4	L1	L2	L3	Weight [g]	Part no.	Type
90	–	32	20	15	6	<b>8119853</b>	<b>EAPM-L9-90-SLS</b>
120	8	40	26	15	10	<b>8119854</b>	<b>EAPM-L9-120-SLS</b>
160	8	40	26	15	10	<b>8119855</b>	<b>EAPM-L9-160-SLS</b>

## Accessories

### Switch lug EAPM-L9-...-SLE

### Sensor bracket EAPM-L9-SHE

For sensing with third-party sensors

(OMRON, series EE-SX674)

Material:




High-alloy steel

RoHS-compliant

EAPM-L9-...-SLE



EAPM-L9-SHE

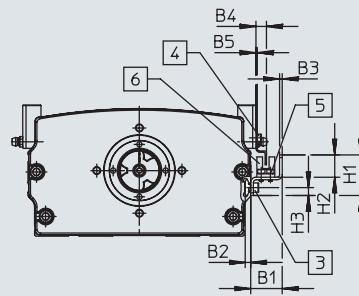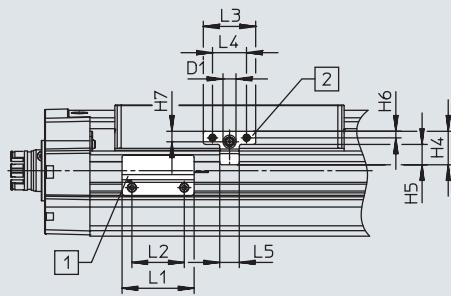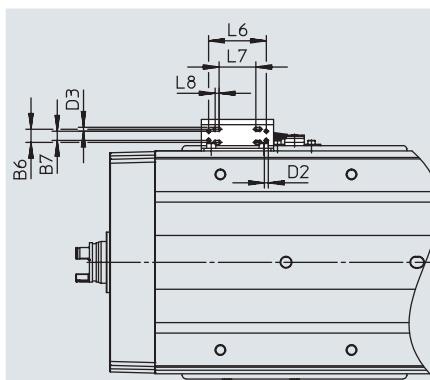

[1] Sensor bracket EAPM-L9-SHE

[2] Switch lug EAPM-L9-...-SLE

[3] Screw M4x6

[4] Screw M3x6

[5] Screw M3x6

[6] Opto-electrical sensor OMRON, EE-SX674 series (not included in the scope of delivery)


### Dimensions and ordering data


For size	B1	B2	B3	B4	B5	B6	B7	D1 Ø	D2 Ø	D3 Ø	H1	H2	H3	H4	H5	H6
90	24	4.2	2	7	1	10	7	—	M3	3	31	17	6	39	29	5
120	24	4.2	2	11	1	40	7	10	M3	3	31	17	6	25.5	15.5	5
160	24	4.2	2	8	1	40	7	10	M3	3	31	17	6	25.5	15.5	5
90 ... 160	24	4.2	2	—	1	—	7	—	M3	3	31	17	6	—	—	5

For size	H7	L1	L2	L3	L4	L5	L6	L7	L8	Weight	Part no.	Type
90	—	55	40	32	20	15	44	28	3	10	8120123	EAPM-L9-90-SLE
120	8	55	40	40	26	15	44	28	3	9	8120124	EAPM-L9-120-SLE
160	8	55	40	40	26	15	44	28	3	8	8120125	EAPM-L9-160-SLE
90 ... 160	—	55	40	—	—	15	44	28	3	55	8119255	EAPM-L9-SHE


## Accessories


Ordering data – Proximity switches for T-slot, inductive						Datasheets → Internet: sies
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type

<b>N/O</b>	 Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core	7.5	551386	SIES-8M-PS-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551387	SIES-8M-PS-24V-K-0.3-M8D
		NPN	Cable, 3-core	7.5	551396	SIES-8M-NS-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551397	SIES-8M-NS-24V-K-0.3-M8D


<b>N/C</b>	 Inserted in the slot from above, flush with the cylinder profile	PNP	Cable, 3-core	7.5	551391	SIES-8M-PO-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551392	SIES-8M-PO-24V-K-0.3-M8D
		NPN	Cable, 3-core	7.5	551401	SIES-8M-NO-24V-K-7.5-OE
			Plug M8x1, 3-pin	0.3	551402	SIES-8M-NO-24V-K-0.3-M8D


Ordering data – Proximity switch for T-slot, magnetic reed						Datasheets → Internet: sme
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type

<b>N/O</b>	 Inserted in the slot from above, flush with the cylinder profile	Contacting	Cable, 3-core	2.5	543862	SME-8M-DS-24V-K-2.5-OE
			5.0	543863	SME-8M-DS-24V-K-5.0-OE	
			Cable, 2-core	2.5	543872	SME-8M-ZS-24V-K-2.5-OE
			Plug M8x1, 3-pin	0.3	543861	SME-8M-DS-24V-K-0.3-M8D

<b>N/C</b>	 Inserted in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-core	7.5	160251	SME-8-O-K-LED-24

Ordering data – Proximity switch for T-slot, magneto-resistive						Datasheets → Internet: smt
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type

<b>N/O</b>	 Inserted in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-core	2.5	574335	SMT-8M-A-PS-24V-E-2.5-OE
			Plug M8x1, 3-pin	0.3	574334	SMT-8M-A-PS-24V-E-0.3-M8D
<b>N/C</b>		PNP	Cable, 3-core	7.5	574340	SMT-8M-A-PO-24V-E-7.5-OE

Ordering data – Connecting cables							Datasheets → Internet: neba
	Electrical connection 1, connection technology	Electrical connection 1, cable outlet	Electrical connection 2, connection technology	Electrical connection 2, number of pins/cores	Cable length [m]	Part no.	Type
	M8x1 A-coded to EN 61076-2-104	Straight	Open end	3	2.5	8078223	NEBA-M8G3-U-2.5-N-LE3
					5.0	8078224	NEBA-M8G3-U-5-N-LE3
	M8x1 A-coded to EN 61076-2-104	Angled	Open end	3	2.5	8078230	NEBA-M8W3-U-2.5-N-LE3
					5.0	8078231	NEBA-M8W3-U-5-N-LE3

## Accessories

Ordering data – Slot nuts		Description	Part no.	Type	PU <sup>1)</sup>
<b>Slot nut NST</b>					
	90 ... 120	For mounting slot	<b>150914</b>	<b>NST-5-M5</b>	1
	160	For mounting slot	<b>8047843</b>	<b>NST-5-M5-10</b>	10
			<b>8047878</b>	<b>NST-5-M5-50</b>	50
	90 ... 160	Inserted in the slot from above, thread M4	<b>150915</b>	<b>NST-8-M6</b>	1
			<b>8047868</b>	<b>NST-8-M6-10</b>	10
			<b>8047869</b>	<b>NST-8-M6-50</b>	50
			<b>8028500</b>	<b>ABAN-8-1M4-5-P2</b>	2
			<b>8028501</b>	<b>ABAN-8-1M4-5-P100</b>	100

1) Packaging unit