


Key features

#### High functionality

## The integrated inspection units in detail

The Checkbox Compact consists of a housing which comprises all the necessary components. In addition to the user interface (keys, LEDs, displays), the connectors for the electrical connection of actuators, buffer zone sensors, diagnostics PC, voltage supply, encoder and master PLC, there is the entire imaging sensor system (optics, lighting and camera).

The optical channel underneath the Checkbox Compact is open towards the rear side, thus it can be easily integrated in the material flow.

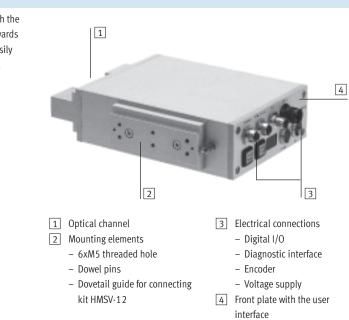

The Checkbox Compact Flex has the same structure and functionality, but is equipped with a C-mount lens and has no lighting.

### FESTO

- 1 2 3 4 1 Lens in protective tube 3 Electrical connections
- 2 Mounting elements
- 6xM5 threaded hole
  - Dowel pins
  - Dovetail guide for connecting kit HMSV-12
- Digital I/O

- Buttons - Control LEDs - Display

- Diagnostic interface
- Encoder - Voltage supply
- 4 Front plate with the user interface
  - Buttons
  - Control LEDs
  - Display

Key features

### **Optimum inspection of parts** Economical, variable, reliable

Components are scanned as they pass through the "optical channel". Compared with recognition by means of an area scan camera, this image detection concept has major advantages: A mixture of any number of parts as well as objects of considerable length (up to 1 000 mm) can be recognized and processed without the need to observe minimum distances. In order to obtain a reliable and reproducible inspection result, the speed of the parts to be checked must be constant and their position stable. A fluctuating object speed can be compensated by means of connecting an encoder (PLC-/Plus-/Flex-version).


The vertical arrangement of the lens in the Checkbox Compact Flex permits the inspection of flat parts such as gearwheels, flat plates and rubber seals, for example in combination with a transparent conveyor belt or in top light mode.





*\_* 

Key features

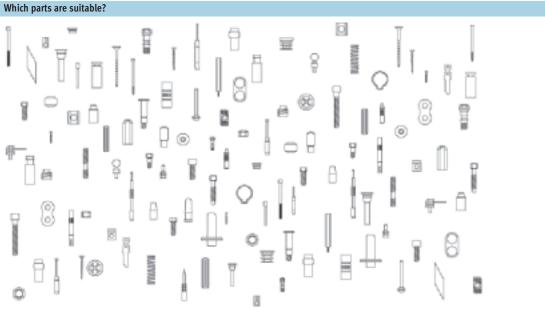

#### Here is a small selection of the many possibilities:

- Axes
- Bolts
- Brushes
- Buttons
- Ceramic seals
- Curtain hangers
- Drill bits
- Drills
- Fuses
- Game pieces • Glass ampoules
- Inserts
- Insulating terminals
- Lever stoppers
- Link plates

- Lipstick casings • Lock nuts
- Mouldings
- Mountings
- Needles
- 0-rings
- Pen tops
- Plastic housings
- Plug connectors
- Screws
- Self-locking nuts
- Sensor housings
- Shafts
- Sleeves
- Small wares

- Sockets • Spring washers
- Springs
- Stampings
- Switch contacts
- Tablets
- Threaded pins
- Toothbrush components
- Turned parts
- Wall plugs
- Washers
- Wooden dowels
- Zip-fastener components

#### In which branches of industry is the Checkbox Compact used?

- Metalworking industry
- Electrical engineering industry
- Woodworking industry
- Electroplating industry
- Injection moulding industry
- Packaging industry
- Pharmaceutical industry
- Jewellery industry • Textile and clothing industry

Cosmetics industry

- Assembly-systems industry
- Food industry
- Precision engineering industry

- Subject to change 2008/06

4


# Checkbox Compact CHB-C Key features

## What does the camera see?

Part to be checked Insulating terminal insert



Camera image Insulating terminal insert



Part to be checked Glass ampoule



Camera image Glass ampoule



Part to be checked 0-ring




Camera image 0-ring



Part to be checked Valve spring



Camera image Valve spring



Part to be checked Glow bar




Camera image



Camera image

Part to be checked

Aroma valve






Checkbox Compact Classic CHB-C-C


Checkbox Compact PLC CHB-C-P

Checkbox Compact Plus CHB-C-X

Checkbox Compact Flex CHB-C-F

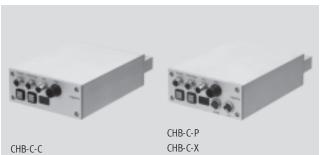



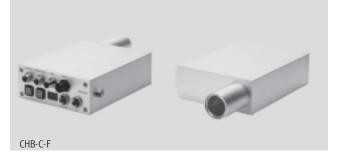

General technical data CHB-C-C CHB-C-P CHB-C-X CHB-C-F Туре  $\operatorname{Component} \varnothing$ [mm] 0.5 ... 25 0.5 ... 45 Component length [mm] Depending on belt speed and required resolution Part range Flat and rotationally symmetrical parts and pre-oriented parts of any shape Operating distance [mm] 95 ... 99 Field of vision [mm] 42 ... 45 \_ Internal passage of optical channel [mm] 60 Internal height of optical channel [mm] 40 Camera resolution [mm] 0.06 0.04 Exposure time [µs] 128 ... 1 024 Number of part memories 4 16 1 Counting function Yes Quantity pre-selection Desired quantities of good parts can be preselected via the diagnostic interface Counting range 1 ... 2 billion Orientation Max. 8 different orientations per part type Part orientation function within checking and counting process can be switched off via diagnostic interface


| Electrical connection technology |      |               |         |         |         |  |
|----------------------------------|------|---------------|---------|---------|---------|--|
| Туре                             |      | CHB-C-C       | CHB-C-P | CHB-C-X | CHB-C-F |  |
| Operating voltage                |      | 24 V DC ±15%  |         |         |         |  |
| Current consumption              | [mA] | Typically 750 |         |         |         |  |
| at load-free outputs             |      |               |         |         |         |  |
| Internal fuse protection         |      | 8 A fuse      |         |         |         |  |

| Operating and environmental conditions  |     |         |         |         |         |  |
|---|-----|---------|---------|---------|---------|--|
| Туре  |     | CHB-C-C | CHB-C-P | CHB-C-X | CHB-C-F |  |
| Temperature range [°  | °C] | -10 +50 |         |         |         |  |
| Protection class IP 64  |     |         |         |         |         |  |
| nstallation site Dry, screened from extreme external light sources, cleanest possible ambient air |     |         |         |         |         |  |

| Туре                   | CHB-C-C   | CHB-C-P                                 | CHB-C-X                 | CHB-C-F |  |  |  |
|------------------------|---|---|-------------------------|---------|--|--|--|
| Outputs                | Part acceptable and correctly oriented            |   |                         |         |  |  |  |
|                        | Part acceptable but incorrectly oriented          |   |                         |         |  |  |  |
|                        | Wrong part  |   |                         |         |  |  |  |
|                        | Feeder control                                    |   |                         |         |  |  |  |
|                        | Conveyor belt cont                                | rol/ready for operation                 |                         |         |  |  |  |
|                        | -   | "Warning" status                        | "Warning" status signal |         |  |  |  |
|                        |   | Error output                            |                         |         |  |  |  |
|                        |   | Preselect counter reached               |                         |         |  |  |  |
|                        | All outputs electronically limited to max. 700 mA |   |                         |         |  |  |  |
|                        | -   | Max. sum current at "PLC" connection 1A |                         |         |  |  |  |
| Inputs                 | Buffer sensor 1                                   |   |                         |         |  |  |  |
|                        | -   | – Buffer sensor 2                       |                         |         |  |  |  |
|                        |   | Camera enable                           |                         |         |  |  |  |
|                        |   | External error                          |                         |         |  |  |  |
|                        |   | Counter reset                           |                         |         |  |  |  |
|                        |   | External start                          |                         |         |  |  |  |
|                        |   | External sensor                         |                         |         |  |  |  |
|                        |   | Key lock                                |                         |         |  |  |  |
|                        |   | Type select 0                           |                         |         |  |  |  |
|                        |   | Type select 1                           |                         |         |  |  |  |
| Connection for encoder | -   | To RS 485 specifi                       | cation                  |         |  |  |  |



Technical data

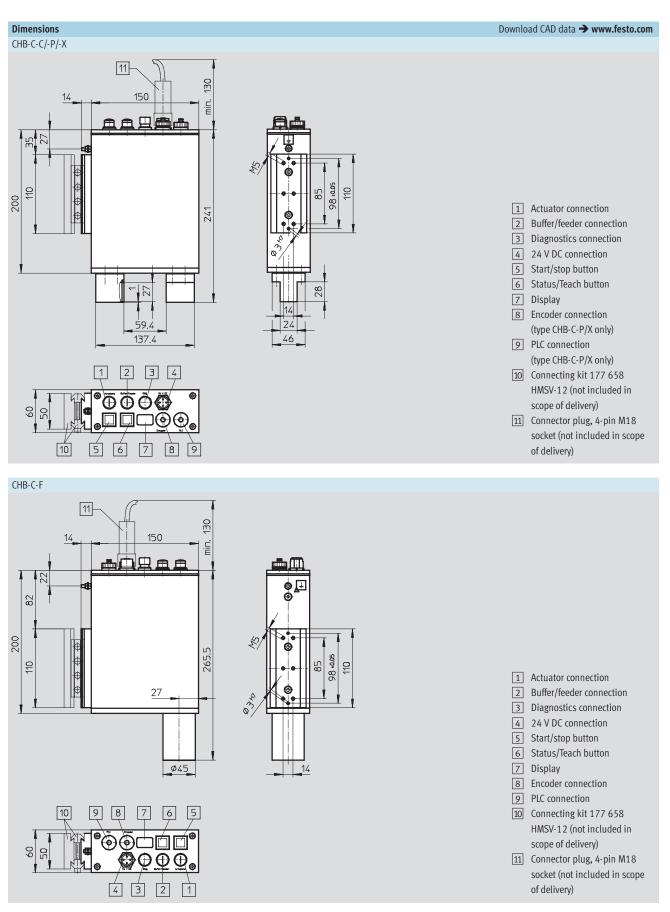


| Ordering data        |  |  |  |  |  |         |         |
|----------------------|--|--|--|--|--|---------|---------|
| Version F            |  |  |  |  |  |         |         |
| Checkbox Compact PLC |  |  |  |  |  |         |         |
|                      |  |  |  |  |  | 539 076 | CHB-C-F |
|                      |  |  |  |  |  |         |         |
|                      | Part No.   | Туре   |  |  |  |         |         |
|                      | 533 411  | P.BE-CB-COMP-DE                                      |  |  |  |         |         |
|                      | 533 412  | P.BE-CB-COMP-EN                                      |  |  |  |         |         |
|                      | User documentation included in scope of delivery | 532 270<br>536 084<br>539 076<br>Part No.<br>533 411 |  |  |  |         |         |

## Connecting kit HMSV-12

Material:


Adapter plate, dovetail clamps: Wrought aluminium alloy Centring sleeves: High-alloy steel Screws: Galvanised steel

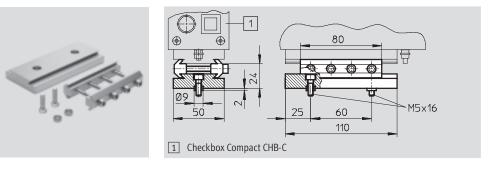

| Ordering data    |        |          |         |  |  |  |  |
|------------------|--------|----------|---------|--|--|--|--|
| Type of mounting | Weight | Part No. | Туре    |  |  |  |  |
|                  | [g]    |          |         |  |  |  |  |
| Dovetail         | 283    | 177 658  | HMSV-12 |  |  |  |  |

## Programming cable KDI

Material: Cable sheath: Polyvinyl chloride Round connector: Polybutylenterephthalate Socket: Steel

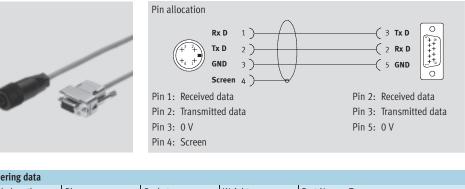

| Ordering data |           |        |        |          |               |
|---------------|-----------|--------|--------|----------|---------------|
| Cable length  | Plug      | Socket | Weight | Part No. | Туре          |
| [m]           |           |        | [g]    |          |               |
| 5             | M12,4-pin | 9-pin  | 181    | 150 268  | KDI-SB202-BU9 |

### Software to meet individual requirements

CheckKon



## Performance characteristics

Using this software the processes within the Checkbox Compact can be displayed, logged and adapted from the camera image evaluation through to the I/O parameters.


#### This means:

• Transfer of new programs to the Checkbox Compact

**FESTO** 

- Display and editing of system parameters
- Display of the evaluation of the last inspected parts recorded
- Display and logging of part contour and characteristics derived
- Display and print-out of system configuration

#### CheckOpti



#### Software program

"CheckOpti" is used in cases where the standard Checkbox Compact learning program reaches its limits due to the fact that contour differences are too small, meaning that part orientation or quality features cannot be reliably recognised. "CheckOpti" enables a complete analysis of the Checkbox Compact recognition processes based on the contour data of the parts to be inspected.

Additional, high performance test features can be defined and optimised if necessary. The new configuration can subsequently be transferred to the Checkbox Compact.

| Ordering data – Software |                                |          |          |                 |  |  |  |
|--------------------------|--------------------------------|----------|----------|-----------------|--|--|--|
|                          | Version                        | Language | Part No. | Туре            |  |  |  |
| (S)                      | CheckKon software with manual  | German,  | 194 496  | P.SW-CB-KON     |  |  |  |
|                          |                                | english  |          |                 |  |  |  |
|                          | CheckOpti software with manual | German   | 192 144  | P.SW-CB-OPTI-DE |  |  |  |
|                          |                                | English  | 192 145  | P.SW-CB-OPTI-EN |  |  |  |

# Checkbox Compact CHB-C Application examples


## Application examples

## Orientation detection and quality inspection of electrocoils

The Checkbox Compact checks the electrocoils and controls the complete supply process, e.g. a following turning station for turning incorrectly orientated good parts and a reject nozzle for sorting out bad parts.

The following features are checked:

- Orientation
- Diameter
- Length

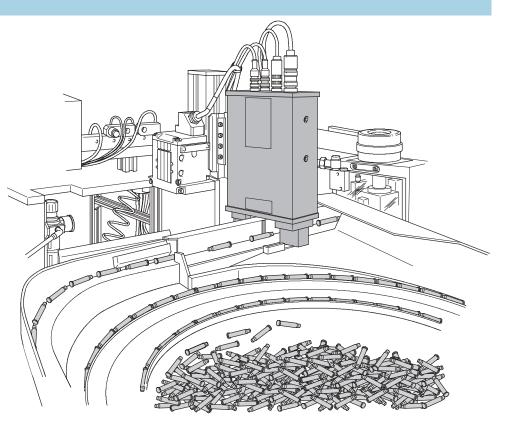

## Position and quality check of fibre optic parts

The Checkbox Compact checks the transparent display elements, controls the parts flow and removes incorrectly orientated or faulty parts reliably by means of reject nozzles.

The following features are checked:

- Orientation
- Form
- Diameter

