


Connecting cables NEBV, for valves

FESTO

Technical data

Connecting cable KMEB

- For valves with EB solenoid coil
- Pre-assembled
- Cable lengths 2.5 m, 5 m and 10 m
- 24 V DC:
with LEDs and protective circuit
- Not suitable for energy chains
- KMEB-1 with PVC cable
- KMEB-2 with PUR cable
- KMEB-3 with PVC cable

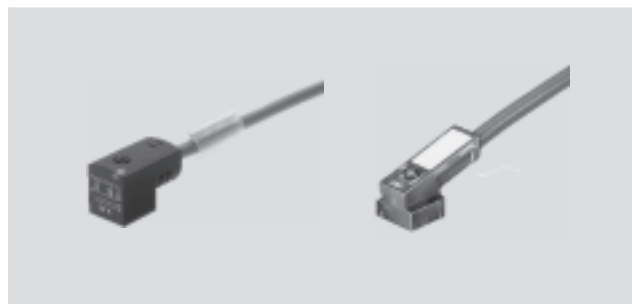

General technical data				
Type	KMEB-1	KMEB-2	KMEB-2-24-M12	KMEB-3
Electrical connection	Angled socket	Angled socket	Angled socket	Angled socket
	3-pin	4-pin	5-pin	2-pin
	Type C	Type C	Type C	Type C
	To EN 175301-803	To EN 175301-803	To EN 175301-803	To EN 175301-803
Reverse polarity protection	–	–	–	For all electrical connections
Cable Ø [mm]	5.2	6.2	4.6	5.2
Cable composition	3 x 0.5 mm ²	3 x 0.75 mm ²	3 x 0.5 mm ²	2 x 0.75 mm ²
Protective earth connection	Yes	Yes	Yes	No
Type of mounting	M2.5 central screw	M2.5 central screw	M2.5 central screw	M2.5 central screw
Mounting position	Any	Any	Any	Any
Cable properties	–	–	–	Standard
Protection class to EN 60529	IP65 (assembled)	IP65 (assembled)	IP65 (assembled)	IP65 (assembled)

Materials				
Type	KMEB-1	KMEB-2	KMEB-2-24-M12	KMEB-3
Housing	PA	PA, POM	PA, POM	PC
Pin contact	Bronze	Bronze	Bronze	Silver-plated bronze
Cable sheath	PVC	PUR	TPE-U (PU)	PVC

Operating and environmental conditions					
Type	KMEB-1-24	KMEB-1-230	KMEB-2	KMEB-2-24-M12	KMEB-3
Ambient temperature [°C]	–20 ... +80	–20 ... +80	–20 ... +80	–5 ... +50	–20 ... +80
CE mark (see declaration of conformity)	–	To EU Low Voltage Directive	–	–	To EU Low Voltage Directive

Connecting cables NEBV, for valves


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad


KMEB-1

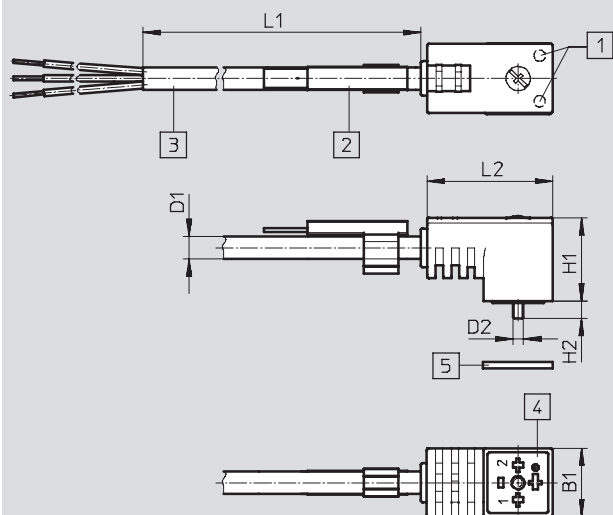

- 1 LED illuminated area (only with 24 V)
- 2 Inscription label holder ASCF with label ASLR-L-432 (scope of delivery)
- 3 3-wire cable (3x 0.5 mm²)
- 4 Plug pattern to EN 175301-803, type C
- 5 Seal


Type	D1	D2	L1	L2	H1	H2	B1
KMEB-1-...-2,5	5.2	2.5	2,500	29.1	19.3	4	16
KMEB-1-...-5	5.2	2.5	5,000	29.1	19.3	4	16
KMEB-1-...-10	5.2	2.5	10,000	29.1	19.3	4	16

KMEB-2

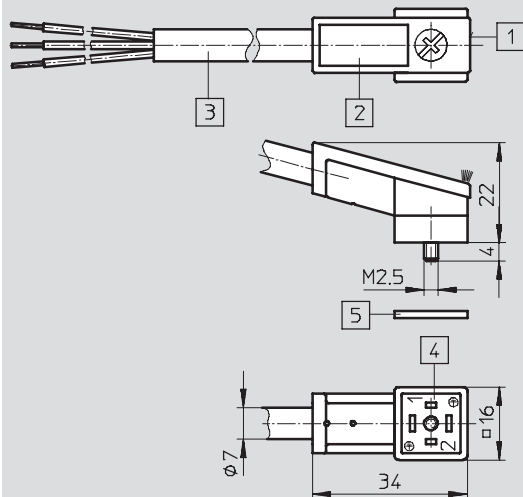

- 1 LED illuminated area (integrated)
- 2 Inscription label
- 3 3-wire cable 2.5 m or 5 m (3x 0.75 mm²)
- 4 Connections to EN 175301-803, type C
- 5 Seal

KMEB-2-24-M12

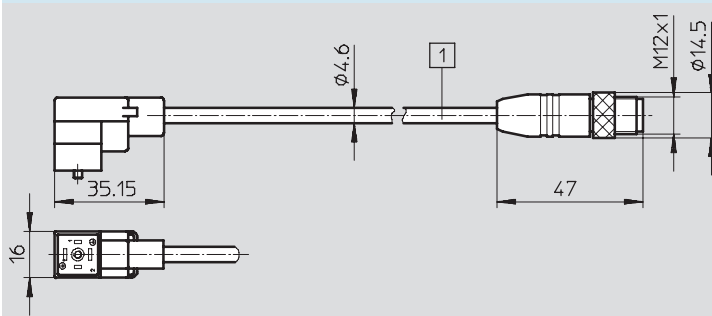

- 1 3-wire cable 0.5 m (3x 0.5 mm²)

Connecting cables NEBV, for valves


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad


KMEB-3

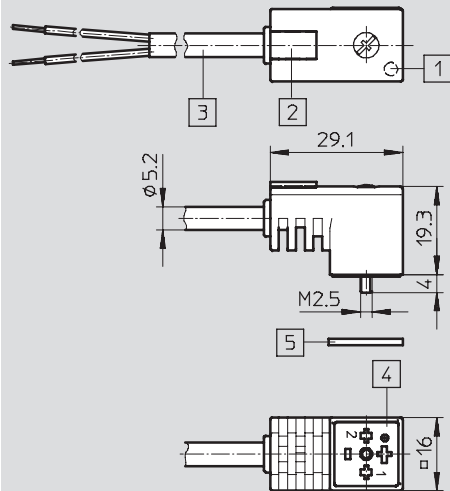

- 1 LED illuminated area
- 2 Location for inscription label
- 3 2-wire cable
- 4 Connections to EN 175301-803, type C
- 5 Seal


Circuitry

KMEB-1/KMEB-3 with integrated signal status display




The 24 V DC version is reverse polarity protected and has a protective circuit for peak voltages of up to 100 V DC as well as an operating status indicator with yellow LED.
(No gn/ye connection with KMEB-3.)

KMEB-2-24-M12




KMEB-1/KMEB-3 without integrated signal status display



For KMEB-3
– No gn/ye connection
– Operating voltage 24 V DC






KMEB-2



Connecting cables NEBV, for valves

Technical data

FESTO

Ordering data							
	Signal status display	Cable sheath material	Operating voltage [V]	Cable length [m]	Weight [g]	Part No.	Type
KMEB-1							
	LED	PVC	24 DC	2.5	125	151688	KMEB-1-24-2,5-LED
				5	230	151689	KMEB-1-24-5-LED
				10	460	193457	KMEB-1-24-10-LED
	–	PVC	230 AC	2.5	125	151690	KMEB-1-230AC-2,5
				5	230	151691	KMEB-1-230AC-5
KMEB-2							
	LED	PUR	24 DC	2.5	200	174844	KMEB-2-24-2,5-LED
				5	400	174845	KMEB-2-24-5-LED
	–	PUR	230 AC	2.5	200	174846	KMEB-2-230-2,5
				5	400	174847	KMEB-2-230-5
KMEB-2-24-M12							
	LED	TPE-U (PU)	24 DC	0.5	54	177677	KMEB-2-24-M12-0,5-LED
KMEB-3							
	LED	PVC	24 DC	2.5	120	547268	KMEB-3-24-2,5-LED
				5	230	547269	KMEB-3-24-5-LED
	–	PVC	24 DC	2.5	120	547270	KMEB-3-24-2,5
				5	230	547271	KMEB-3-24-5
Ordering data – Accessories							
	Description			Use		Part No.	Type
	Inscription labels 6x10 mm, 64 pieces, in frames			KMEB-3		18576	IBS-6x10
	Inscription labels 9x20 mm, 20 pieces, in frames			KMEB-2		18182	IBS-9x20

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com